



BE PAYMENT READY

Java - Moneris Gateway API - Integration Guide

Version: 1.1.2

Copyright © Moneris Solutions, 2017

All rights reserved. No part of this publication may be reproduced, stored in retrieval systems, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of Moneris Solutions Corporation.

Security and Compliance

Your solution may be required to demonstrate compliance with the card associations' PCI/CISP/PABP requirements. For more information on how to make your application PCI-DSS compliant, contact the Moneris Sales Center and visit <https://developer.moneris.com> to download the PCI_DSS Implementation Guide.

All Merchants and Service Providers that store, process, or transmit cardholder data must comply with PCI DSS and the Card Association Compliance Programs. However, certification requirements vary by business and are contingent upon your "Merchant Level" or "Service Provider Level".

The card association has some data security standards that define specific requirements for all organizations that store, process, or transmit cardholder data. As a Moneris client or partner using this method of integration, your solution must demonstrate compliance to the Payment Card Industry Data Security Standard (PCI DSS) and/or the Payment Application Data Security Standard (PA DSS). These standards are designed to help the cardholders and merchants in such ways as they ensure credit card numbers are encrypted when transmitted/stored in a database and that merchants have strong access control measures.

Non-compliant solutions may prevent merchant boarding with Moneris. A non-compliant merchant can also be subject to fines, fees, assessments or termination of processing services.

For further information on PCI DSS & PA DSS requirements, visit <http://www.pcisecuritystandards.org>.

Confidentiality

You have a responsibility to protect cardholder and merchant related confidential account information. Under no circumstances should ANY confidential information be sent via email while attempting to diagnose integration or production issues. When sending sample files or code for analysis by Moneris staff, all references to valid card numbers, merchant accounts and transaction tokens should be removed and or obscured. Under no circumstances should live cardholder accounts be used in the test environment.

Table of Contents

| | |
|---|-----------|
| Security and Compliance | 2 |
| Confidentiality | 2 |
| 1 About This Documentation | 8 |
| 1.1 Purpose | 8 |
| 1.2 Who Is This Guide For? | 8 |
| 2 Basic Transaction Set | 10 |
| 2.1 Basic Transaction Type Definitions | 10 |
| 2.2 Purchase | 12 |
| 2.3 Pre-Authorization | 15 |
| 2.4 Pre-Authorization Completion | 18 |
| 2.5 Re-Authorization | 21 |
| 2.6 Force Post | 23 |
| 2.7 Purchase Correction | 26 |
| 2.8 Refund | 28 |
| 2.9 Independent Refund | 30 |
| 2.10 Card Verification with AVS and CVD | 32 |
| 2.11 Batch Close | 34 |
| 2.12 Open Totals | 36 |
| 3 MPI | 40 |
| 3.1 About MPI Transactions | 40 |
| 3.2 3-D Secure Implementations (VbV, MCSC, SafeKey) | 40 |
| 3.3 Activating VbV and MCSC | 41 |
| 3.4 Activating Amex SafeKey | 41 |
| 3.5 Transaction Flow | 41 |
| 3.6 MPI Transactions | 42 |
| 3.6.1 VbV, MCSC and SafeKey Responses | 43 |
| 3.6.2 MpiTxn Request Transaction | 45 |
| 3.6.2.1 TXN Response and Creating the Popup | 47 |
| 3.6.3 Vault MPI Transaction - ResMpiTxn | 47 |
| 3.6.4 MPI ACS Request Transaction | 49 |
| 3.6.4.1 ACS Response and Forming a Transaction | 51 |
| 3.6.5 Cavv Purchase | 51 |
| 3.6.6 Cavv Pre-Authorization | 55 |
| 3.6.7 Cavv Result Codes for Verified by Visa | 59 |
| 3.6.8 Vault Cavv Purchase | 61 |
| 3.6.9 Vault Cavv Pre-Authorization | 63 |
| 4 INTERAC® Online Payment | 66 |
| 4.1 About INTERAC® Online Payment Transactions | 66 |
| 4.2 Other Documents and References | 66 |
| 4.3 Website and Certification Requirements | 67 |
| 4.3.1 Things to provide to Moneris | 67 |
| 4.3.2 Certification process | 67 |
| 4.3.3 Client Requirements | 68 |
| 4.3.4 Delays | 68 |
| 4.4 Transaction Flow for INTERAC® Online Payment | 69 |
| 4.5 Sending an INTERAC® Online Payment Purchase Transaction | 70 |
| 4.5.1 Fund-Guarantee Request | 70 |
| 4.5.2 Online Banking Response and Fund-Confirmation Request | 71 |
| 4.6 INTERAC® Online Payment Purchase | 71 |

| | |
|--|------------|
| 4.7 INTERAC® Online Payment Refund | 74 |
| 4.8 INTERAC® Online Payment Field Definitions | 77 |
| 5 Vault | 80 |
| 5.1 About the Vault Transaction Set | 80 |
| 5.2 Vault Transaction Types | 80 |
| 5.2.1 Administrative Vault Transaction types | 80 |
| 5.2.2 Financial Vault Transaction types | 82 |
| 5.2.3 Charging a Temporary Token | 82 |
| 5.3 Administrative Transactions | 82 |
| 5.3.1 Vault Add Credit Card- ResAddCC | 83 |
| 5.3.1.1 Vault Data Key | 85 |
| 5.3.1.2 Vault Encrypted Add Credit Card - EncResAddCC | 86 |
| 5.3.2 Vault Temporary Token Add - ResTempAdd | 88 |
| 5.3.3 Vault Update Credit Card - ResUpdateCC | 90 |
| 5.3.3.1 Vault Encrypted Update CC - EncResUpdateCC | 94 |
| 5.3.4 Vault Delete - ResDelete | 96 |
| 5.3.5 Vault Lookup Full - ResLookupFull | 98 |
| 5.3.6 Vault Lookup Masked - ResLookupMasked | 99 |
| 5.3.7 Vault Get Expiring - ResGetExpiring | 101 |
| 5.3.8 Vault Is Corporate Card - ResIsCorporateCard | 102 |
| 5.3.9 Vault Add Token - ResAddToken | 104 |
| 5.3.10 Vault Tokenize Credit Card - ResTokenizeCC | 106 |
| 5.4 Financial Transactions | 108 |
| 5.4.1 Customer ID Changes | 108 |
| 5.4.2 Purchase with Vault - ResPurchaseCC | 109 |
| 5.4.3 Pre-Authorization with Vault - ResPreauthCC | 111 |
| 5.4.4 Vault Independent Refund CC - ResIndRefundCC | 114 |
| 5.4.5 Force Post with Vault - ResForcePostCC | 116 |
| 5.4.6 Card Verification with Vault - ResCardVerificationCC | 119 |
| 5.5 Hosted Tokenization | 121 |
| 5.6 Mag Swipe Transaction Definitions | 121 |
| 5.6.1 Encrypted Mag Swipe Transactions | 122 |
| 5.6.2 Encrypted Mag Swipe Purchase | 123 |
| 5.6.3 Encrypted Mag Swipe Pre-Authorization | 125 |
| 5.6.4 Encrypted Mag Swipe Force Post | 127 |
| 5.6.5 Encrypted Mag Swipe Independent Refund | 130 |
| 6 Transaction Risk Management Tool | 134 |
| 6.1 About the Transaction Risk Management Tool | 134 |
| 6.2 Introduction to Queries | 134 |
| 6.3 Session Query | 135 |
| 6.3.1 Session Query Transaction Flow | 141 |
| 6.4 Attribute Query | 142 |
| 6.4.1 Attribute Query Transaction Flow | 145 |
| 6.5 Handling Response Information | 146 |
| 6.5.1 TRMT Response Fields | 146 |
| 6.5.2 Understanding the Risk Score | 149 |
| 6.5.3 Understanding the Rule Codes, Rule Names and Rule Messages | 150 |
| 6.5.4 Examples of Risk Response | 157 |
| 6.5.4.1 Session Query | 157 |
| 6.5.4.2 Attribute Query | 158 |
| 6.6 Inserting the Profiling Tags Into Your Website | 159 |
| 7 Convenience Fee | 160 |
| 7.1 About Convenience Fee | 160 |
| 7.2 Purchase - Convenience Fee | 160 |

| | |
|---|------------|
| 7.3 Convenience Fee Purchase w/ Customer Information | 163 |
| 7.4 Purchase with VbV, MCSC and Amex SafeKey | 167 |
| 8 Apple Pay and Android Pay In-App Integration | 171 |
| 8.1 About Apple Pay and Android Pay In-App Integration | 171 |
| 8.2 About API Integration of Apple Pay & Android Pay | 171 |
| 8.2.1 Transaction Types That Use Apple Pay or Android Pay | 171 |
| 8.3 Apple Pay and Android Pay In-App Process Flows | 172 |
| 8.4 Cavv Purchase - Apple Pay and Android Pay In-App | 173 |
| 8.5 Cavv Pre-Authorization - Apple Pay and Android Pay | 176 |
| 9 Visa Checkout | 180 |
| 9.1 About Visa Checkout | 180 |
| 9.2 Transaction Types - Visa Checkout | 180 |
| 9.3 Integrating Visa Checkout Lightbox | 181 |
| 9.4 Transaction Flow for Visa Checkout | 182 |
| 9.5 Visa Checkout Purchase | 183 |
| 9.6 Visa Checkout Pre-Authorization | 184 |
| 9.7 Visa Checkout Completion | 186 |
| 9.8 Visa Checkout Purchase Correction | 188 |
| 9.9 Visa Checkout Refund | 190 |
| 9.10 Visa Checkout Information | 192 |
| 10 Level 2/3 Transactions | 196 |
| 10.1 About Level 2/3 Transactions | 196 |
| 10.2 Level 2/3 Visa Transactions | 196 |
| 10.2.1 Level 2/3 Transaction Types for Visa | 196 |
| 10.2.2 Level 2/3 Transaction Flow for Visa | 198 |
| 10.2.3 VS Completion | 200 |
| 10.2.4 VS Force Post | 204 |
| 10.2.5 VS Purchase Correction | 209 |
| 10.2.6 VS Refund | 211 |
| 10.2.7 VS Independent Refund | 216 |
| 10.2.8 VS Corpais | 220 |
| 10.3 Level 2/3 MasterCard Transactions | 230 |
| 10.3.1 Level 2/3 Transaction Types for MasterCard | 230 |
| 10.3.2 Level 2/3 Transaction Flow for MasterCard | 233 |
| 10.3.3 MC Completion | 235 |
| 10.3.4 MC Force Post | 236 |
| 10.3.5 MC Purchase Correction | 238 |
| 10.3.6 MC Refund | 240 |
| 10.3.7 MC Independent Refund | 242 |
| 10.3.8 MC Corpais - Corporate Card Common Data with Line Item Details | 244 |
| 10.4 Level 2/3 American Express Transactions | 253 |
| 10.4.1 Level 2/3 Transaction Types for Amex | 254 |
| 10.4.2 Level 2/3 Transaction Flow for Amex | 256 |
| 10.4.3 AX Completion | 256 |
| 10.4.4 AX Force Post | 261 |
| 10.4.5 AX Purchase Correction | 265 |
| 10.4.6 AX Refund | 267 |
| 10.4.7 AX Independent Refund | 272 |
| 11 Testing a Solution | 278 |
| 11.1 About the Merchant Resource Center | 278 |
| 11.2 Logging In to the QA Merchant Resource Center | 278 |
| 11.3 Test Credentials for Merchant Resource Center | 278 |
| 11.4 Getting a Unique Test Store ID and API Token | 280 |

| | |
|--|------------|
| 11.5 Processing a Transaction | 282 |
| 11.5.1 Overview | 282 |
| 11.5.2 HttpsPostRequest Object | 283 |
| 11.5.3 Receipt Object | 285 |
| 11.6 Testing INTERAC® Online Payment Solutions | 285 |
| 11.7 Testing MPI Solutions | 286 |
| 11.8 Testing Visa Checkout | 288 |
| 11.8.1 Creating a Visa Checkout Configuration for Testing | 288 |
| 11.9 Test Cards | 288 |
| 11.9.1 Test Cards for Visa Checkout | 289 |
| 11.10 Simulator Host | 289 |
| 12 Moving to Production | 292 |
| 12.1 Activating a Production Store Account | 292 |
| 12.2 Configuring a Store for Production | 292 |
| 12.2.1 Configuring an INTERAC® Online Payment Store for Production | 293 |
| 12.2.1.1 Completing the Certification Registration - Merchants | 294 |
| 12.2.1.2 Third-Party Service/Shopping Cart Provider | 294 |
| 12.3 Receipt Requirements | 295 |
| 12.3.1 Certification Requirements | 295 |
| 12.4 Getting Help | 295 |
| 13 Incorporating All Available Fraud Tools | 298 |
| 13.1 Implementation Options for TRMT | 298 |
| 13.2 Implementation Checklist | 298 |
| 13.3 Making a Decision | 300 |
| Appendix A Definition of Request Fields | 302 |
| Appendix B Definition of Response Fields | 312 |
| Appendix C Status Check | 324 |
| C.1 Using Status Check Response Fields | 324 |
| Appendix D Customer Information | 326 |
| D.1 Using the CustInfo object | 326 |
| D.1.1 Miscellaneous Properties | 327 |
| D.1.2 Billing/Shipping information | 327 |
| D.1.2.1 Set Methods | 328 |
| D.1.2.2 Hash Tables | 328 |
| D.1.3 Item Information | 329 |
| D.1.3.1 Set Methods | 329 |
| D.1.3.2 Hash Tables | 329 |
| D.2 Customer Information Sample Code | 330 |
| Appendix E Address Verification Service | 334 |
| E.1 Using AVS | 334 |
| E.2 AVS Request Fields | 335 |
| E.3 AVS Result Codes | 336 |
| E.4 AVS Sample Code | 339 |
| Appendix F Card Validation Digits | 340 |
| F.1 Using CVD | 340 |
| F.2 CVD Request Fields | 341 |
| F.3 CVD Result Definitions | 342 |
| F.4 CVD Sample Code | 342 |
| Appendix G Recurring Billing | 343 |
| G.1 Setting Up a New Recurring Payment | 343 |
| G.2 Updating a Recurring Payment | 346 |

| | |
|---|------------|
| G.3 Recurring Billing Response Fields and Codes | 349 |
| Appendix H Convenience Fee | 352 |
| H.1 Using Convenience Fee | 352 |
| H.2 Convenience Fee Request Fields | 353 |
| H.3 Convenience Fee Sample Code | 353 |
| Appendix I Definition of Request Fields for Level 2/3 - MasterCard | 354 |
| Appendix J Definition of Request Fields for Level 2/3 - Visa | 365 |
| Appendix K Definition of Request Fields for Level 2/3 - Amex | 375 |
| Appendix L Error Messages | 382 |
| Appendix M Process Flow for Basic PreAuth, ReAuth and Completion Transactions | 384 |
| Appendix N Merchant Checklists for INTERAC® Online Payment Certification Testing | 385 |
| Appendix O Third-Party Service Provider Checklists for INTERAC® Online Payment Cer- tification Testing | 389 |
| Appendix P Merchant Checklists for INTERAC® Online Payment Certification | 394 |
| Appendix Q INTERAC® Online Payment Certification Test Case Detail | 397 |
| Q.1 Common Validations | 397 |
| Q.2 Test Cases | 397 |
| Q.3 Merchant front-end test case values | 401 |
| Copyright Notice | 406 |
| Trademarks | 406 |

1 About This Documentation

1.1 Purpose

This document describes the transaction information for using the Java API for sending credit card transactions. In particular, it describes the format for sending transactions and the corresponding responses you will receive.

This document contains information about the following features:

- Basic transactions
- MPI – Verified by Visa, MasterCard Secure Code and American Express SafeKey
- INTERAC® Online Payment
- Vault
- MSR (Magnetic Swipe Reader) and Encrypted MSR
- Apple Pay and Android Pay In-App
- Transaction Risk Management Tool
- Convenience fee
- Visa Checkout
- MasterCard MasterPass
- Level 2/3 Transactions

1.2 Who Is This Guide For?

The Moneris Gateway API - Integration Guide is intended for developers integrating with the Moneris Gateway.

This guide assumes that the system you are trying to integrate meets the requirements outlined below and that you have some familiarity with the Java programming language.

System Requirements

- Java 1.6 or above
- Port 443 open for bi-directional communication
- Web server with a SSL certificate

2 Basic Transaction Set

- 2.1 Basic Transaction Type Definitions
- 2.2 Purchase
- 2.3 Pre-Authorization
- 2.4 Pre-Authorization Completion
- 2.5 Re-Authorization
- 2.6 Force Post
- 2.7 Purchase Correction
- 2.8 Refund
- 2.9 Independent Refund
- 2.10 Card Verification with AVS and CVD
- 2.11 Batch Close
- 2.12 Open Totals

2.1 Basic Transaction Type Definitions

The following is a list of basic transactions that are supported by the Java API.

Purchase

Verifies funds on the customer's card, removes the funds and prepares them for deposit into the merchant's account.

Pre-Authorization

Verifies and locks funds on the customer's credit card. The funds are locked for a specified amount of time based on the card issuer.

To retrieve the funds that have been locked by a Pre-Authorization transaction so that they may be settled in the merchant's account, a Completion transaction must be performed. A Pre-Authorization transaction may only be "completed" once.

Completion

Retrieves funds that have been locked (by either a Pre-Authorization or a Re-Authorization transaction), and prepares them for settlement into the merchant's account.

Re-Authorization

If a Pre-Authorization transaction has already taken place, and not all the locked funds were released by a Completion transaction, a Re-Authorization allows you to lock the remaining funds so that they can be released by another Completion transaction in the future.

Re-Authorization is necessary because funds that have been locked by a Pre-Authorization transaction can only be released by a Completion transaction **one** time. If the Completion amount is less than the Pre-Authorization amount, the remaining money cannot be "completed".

Force Post

Retrieves the locked funds and prepares them for settlement into the merchant's account.

This is used when a merchant obtains the authorization number directly from the issuer by a third-party authorization method (such as by phone).

Purchase Correction

Restores the full amount of a previous Purchase, Completion or Force Post transaction to the cardholder's card, and removes any record of it from the cardholder's statement.

This transaction is sometimes referred to as "void".

This transaction can be used against a Purchase or Completion transaction that occurred same day provided that the batch containing the original transaction remains open. When using the automated closing feature, Batch Close occurs daily between 10 and 11pm Eastern Time.

Refund

Restores all or part of the funds from a Purchase, Completion or Force Post transaction to the cardholder's card. Unlike a Purchase Correction, there is a record of both the initial charge and the refund on the cardholder's statement.

Independent Refund

Credits a specified amount to the cardholder's credit card. The credit card number and expiry date are mandatory.

It is not necessary for the transaction that you are refunding to have been processed via the Moneris Gateway

Card Verification

Verifies the validity of the credit card, expiry date and any additional details (such as the Card Verification Digits or Address Verification details). It does not verify the available amount or lock any funds on the credit card.

Recur Update

Alters characteristics of a previously registered Recurring Billing transaction.

This transaction is commonly used to update a customer's credit card information and the number of recurs to the account.

Recurring billing is explained in more detail in Section 1 (page 1). The Recur Update transaction is specifically discussed in Section 1.2 (page 1).

Batch Close

Takes the funds from all Purchase, Completion, Refund and Force Post transactions so that they will be deposited or debited the following business day.

For funds to be deposited the following business day, the batch must close before 11pm Eastern Time.

Open Totals

Returns the details about the currently open batch.

This transaction is similar to the Batch Close. The difference is that it does not close the batch for settlement.

2.2 Purchase

Purchase transaction object definition

```
Purchase purchase = new Purchase();
```

HttpPostRequest object for Purchase transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

```
mpgReq.setTransaction(purchase);
```

Purchase transaction values

Table 1: Purchase transaction object mandatory values

| Value | Type | Limits | Set method |
|----------------------|--------|--|---|
| Order ID | String | 50-character alpha-numeric | <code>purchase.setOrderId(order_id);</code> |
| Amount | String | 9-character decimal | <code>purchase.setAmount(amount);</code> |
| Credit card number | String | 20-character alpha-numeric | <code>purchase.setPan(pan);</code> |
| Expiry date | String | 4-character alpha-numeric (YYMM format) | <code>purchase.setExpDate(expdate);</code> |
| E-commerce indicator | String | 1-character alpha-numeric | <code>purchase.setCryptType(crypt_type);</code> |

Table 2: Purchase transaction object optional values

| Value | Type | Limits | Set method |
|----------------------|---------|---|---|
| Status Check | Boolean | true/false | <code>mpgReq.setStatusCheck(status_check);</code> |
| Customer information | Object | Not applicable. Click here See Section Appendix D (page 326). | <code>purchase.setCustInfo(customer);</code> |
| AVS | Object | Not applicable. Click here | <code>purchase.setAvsInfo(avsCheck);</code> |

Table 2: Purchase transaction object optional values

| Value | Type | Limits | Set method |
|---|--------|---|---|
| | | here See Appendix E (page 334). | |
| CVD | Object | Not applicable. Click here See Appendix F (page 340). | <code>purchase.setCvdInfo(cvdCheck);</code> |
| Convenience fee | Object | Not applicable. Click here See Appendix H (page 352). | <code>purchase.setConvFeeInfo(convFeeInfo);</code> |
| Recurring billing | Object | Not applicable. Click here See Section Appendix A (page 1). | <code>purchase.setRecurInfo(recurInfo);</code> |
| Dynamic descriptor | String | 20-character alphanumeric | <code>purchase.setDynamicDescriptor(dynamic_descriptor);</code> |
| Wallet indicator ¹ <div> NOTE: For basic Purchase and Preauthorization, the wallet indicator applies to Visa Checkout and MasterCard MasterPass only. For more, see Appendix A Definition of Request Fields </div> | String | 3-character alphanumeric | <code>purchase.setWalletIndicator(wallet_indicator);</code> |

Sample Purchase - CA

```

package Canada;
import JavaAPI.*;
public class TestCanadaPurchase
{
    public static void main(String[] args)
    {
        java.util.Date createDate = new java.util.Date();
        String order_id = "Test"+createDate.getTime();
        String store_id = "store5";
    }
}

```

¹Available to Canadian integrations only.

Sample Purchase - CA

```

String api_token = "yesguy";
String amount = "5.00";
String pan = "4242424242424242";
String expdate = "1901"; //YYMM format
String crypt = "7";
String processing_country_code = "CA";
boolean status_check = false;
Purchase purchase = new Purchase();
purchase.setOrderId(order_id);
purchase.setAmount(amount);
purchase.setPan(pan);
purchase.setExpdate(expdate);
purchase.setCryptType(crypt);
purchase.setDynamicDescriptor("123456");
//purchase.setWalletIndicator(""); //Refer documentation for possible values

//Optional - Set for Multi-Currency only
//setAmount must be 0.00 when using multi-currency
//purchase.setMCPAmount("500"); //penny value amount 1.25 = 125
//purchase.setMCPCurrencyCode("840"); //ISO-4217 country currency number
HttpPostRequest mpgReq = new HttpPostRequest();
mpgReq.setProcCountryCode(processing_country_code);
mpgReq.setTestMode(true); //false or comment out this line for production transactions
mpgReq.setStoreId(store_id);
mpgReq.setApiToken(api_token);
mpgReq.setTransaction(purchase);
mpgReq.setStatusCheck(status_check);

//Optional - Proxy
mpgReq.setProxy(false); //true to use proxy
mpgReq.setProxyHost("proxyURL");
mpgReq.setProxyPort("proxyPort");
mpgReq.setProxyUser("proxyUser"); //optional - domainName\User
mpgReq.setProxyPassword("proxyPassword"); //optional

mpgReq.send();
try
{
    Receipt receipt = mpgReq.getReceipt();
    System.out.println("CardType = " + receipt.getCardType());
    System.out.println("TransAmount = " + receipt.getTransAmount());
    System.out.println("TxnNumber = " + receipt.getTxnNumber());
    System.out.println("ReceiptId = " + receipt.getReceiptId());
    System.out.println("TransType = " + receipt.getTransType());
    System.out.println("ReferenceNum = " + receipt.getReferenceNum());
    System.out.println("ResponseCode = " + receipt.getResponseCode());
    System.out.println("ISO = " + receipt.getISO());
    System.out.println("BankTotals = " + receipt.getBankTotals());
    System.out.println("Message = " + receipt.getMessage());
    System.out.println("AuthCode = " + receipt.getAuthCode());
    System.out.println("Complete = " + receipt.getComplete());
    System.out.println("TransDate = " + receipt.getTransDate());
    System.out.println("TransTime = " + receipt.getTransTime());
    System.out.println("Ticket = " + receipt.getTicket());
    System.out.println("TimedOut = " + receipt.getTimedOut());
    System.out.println("IsVisaDebit = " + receipt.getIsVisaDebit());
    System.out.println("MCPAmount = " + receipt.getMCPAmount());
    System.out.println("MCPCurrencyCode = " + receipt.getMCPCurrencyCode());
}
catch (Exception e)
{

```

Sample Purchase - CA

```
e.printStackTrace();
}
}
}
```

2.3 Pre-Authorization

Things to Consider:

- If a Pre-Authorization transaction is not followed by a Completion transaction, it must be reversed via a Completion transaction for 0.00. See "Pre-Authorization Completion" on page 18
- A Pre-Authorization transaction may only be "completed" once . If the Completion transaction is for less than the original amount, a Re-Authorization transaction is required to collect the remaining funds by another Completion transaction. See Re-Authorization (page 21).
- For a process flow, see "Process Flow for Basic PreAuth, ReAuth and Completion Transactions" on page 384

Pre-Authorization transaction object definition

```
PreAuth preauth = new PreAuth();
```

HttpPostRequest object for Pre-Authorization transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
mpgReq.setTransaction(preauth);
```

Pre-Authorization transaction values

For a full description of mandatory and optional values, see "Definition of Request Fields" on page 302

Table 3: Pre-Authorization object mandatory values

| Value | Type | Limits | Set method |
|--------------------|--------|----------------------------|--|
| Order ID | String | 50-character alpha-numeric | <code>preauth.setOrderId(order_id);</code> |
| Amount | String | 9-character decimal | <code>preauth.setAmount(amount);</code> |
| Credit card number | String | 20-character numeric | <code>preauth.setPan(pan);</code> |

Table 3: Pre-Authorization object mandatory values (continued)

| Value | Type | Limits | Set method |
|----------------------|--------|---------------------------|--|
| Expiry date | String | 4-character numeric | <code>preauth.setExpDate(expdate);</code> |
| E-Commerce indicator | String | 1-character alpha-numeric | <code>preauth.setCryptType(crypt_type);</code> |

Table 1: Pre-Authorization object optional values

| Value | Type | Limits | Set method |
|----------------------|---------|---|--|
| Status Check | Boolean | true/false | <code>mpgReq.setStatusCheck(status_check);</code> |
| Dynamic descriptor | String | 20-character alpha-numeric | <code>preauth.setDynamicDescriptor(dynamic_descriptor);</code> |
| Customer information | Object | Not applicable. Click here See Section Appendix D (page 326). | <code>preauth.setCustInfo(customer);</code> |
| AVS | Object | Not applicable. Click here See Appendix E (page 334). | <code>preauth.setAvsInfo(avsCheck);</code> |

| Value | Type | Limits | Set method |
|---|--------|---|--|
| CVD | Object | Not applicable. Click here See Appendix F (page 340). | <code>preauth.setCvdInfo(cvdCheck);</code> |
| Customer ID | String | 50-character alpha-numeric | <code>preauth.setCustId(custid);</code> |
| Wallet indicator ¹ <div> NOTE: For basic Purchase and Preauthorization, the wallet indicator applies to Visa Checkout and MasterCard MasterPass only. For more, see Appendix A Definition of Request Fields </div> | String | 3-character alpha-numeric | <code>preauth.setWalletIndicator(wallet_indicator);</code> |

Sample Pre-Authorization - CA

```

package Canada;
import JavaAPI.*;
public class TestCanadaPreauth
{
    public static void main(String[] args)
    {
        String store_id = "store5";
        String api_token = "yesguy";
        java.util.Date createDate = new java.util.Date();
        String order_id = "Test"+createDate.getTime();
        String amount = "5.00";
        String pan = "4242424242424242";
        String expdate = "1902";
        String crypt = "7";
        String processing_country_code = "CA";
        boolean status_check = false;
        PreAuth preauth = new PreAuth();
        preauth.setOrderId(order_id);
        preauth.setAmount(amount);
        preauth.setPan(pan);
        preauth.setExpdate(expdate);
        preauth.setCryptType(crypt);
        HttpsPostRequest mpgReq = new HttpsPostRequest();
        mpgReq.setProcCountryCode(processing_country_code);
        mpgReq.setTestMode(true); //false or comment out this line for production transactions
        mpgReq.setStoreId(store_id);
        mpgReq.setApiToken(api_token);
        mpgReq.setTransaction(preauth);
    }
}

```

¹Available to Canadian integrations only.

Sample Pre-Authorization - CA

```

mpgReq.setStatusCheck(status_check);
mpgReq.send();
try
{
    Receipt receipt = mpgReq.getReceipt();
    System.out.println("CardType = " + receipt.getCardType());
    System.out.println("TransAmount = " + receipt.getTransAmount());
    System.out.println("TxnNumber = " + receipt.getTxnNumber());
    System.out.println("ReceiptId = " + receipt.getReceiptId());
    System.out.println("TransType = " + receipt.getTransType());
    System.out.println("ReferenceNum = " + receipt.getReferenceNum());
    System.out.println("ResponseCode = " + receipt.getResponseCode());
    System.out.println("ISO = " + receipt.getISO());
    System.out.println("BankTotals = " + receipt.getBankTotals());
    System.out.println("Message = " + receipt.getMessage());
    System.out.println("AuthCode = " + receipt.getAuthCode());
    System.out.println("Complete = " + receipt.getComplete());
    System.out.println("TransDate = " + receipt.getTransDate());
    System.out.println("TransTime = " + receipt.getTransTime());
    System.out.println("Ticket = " + receipt.getTicket());
    System.out.println("TimedOut = " + receipt.getTimedOut());
    System.out.println("IsVisaDebit = " + receipt.getIsVisaDebit());
    //System.out.println("StatusCode = " + receipt.getStatusCode());
    //System.out.println("StatusMessage = " + receipt.getStatusMessage());
}
catch (Exception e)
{
    e.printStackTrace();
}
}
}

```

2.4 Pre-Authorization Completion

Things to Consider:

- Completion is also known as "capture" or "pre-authorization completion".
- A Pre-Authorization or Re-Authorization transaction can only be completed once. Refer to the Re-Authorization transaction (page 21 for more information on how to perform multiple Completion transactions).
- To reverse the full amount of a Pre-Authorization transaction, use the Completion transaction with the amount set to 0.00.
- To process this transaction, you need the order ID and transaction number from the original Pre-Authorization transaction.
- For a process flow, see "Process Flow for Basic PreAuth, ReAuth and Completion Transactions" on page 384

Completion transaction object

```
Completion completion = new Completion();
```

HttpPostRequest object for Completion transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
mpgReq.setTransaction(completion);
```

Completion transaction values

For a full description of mandatory and optional values, see "Definition of Request Fields" on page 302 "Definition of Request Fields" on page 302

Table 4: Completion transaction object mandatory values

| Value | Type | Limits | Set method |
|----------------------|--------|----------------------------|---|
| Order ID | String | 50-character alphanumeric | <code>completion.setOrderId(order_id);</code> |
| Completion Amount | String | 9-character decimal | <code>completion.setAmount(comp_amount);</code> |
| Transaction number | String | 255-character alphanumeric | <code>completion.setTxnNumber(txn_number);</code> |
| E-Commerce indicator | String | 1-character alphanumeric | <code>completion.setCryptType(crypt_type);</code> |

Table 5: Completion transaction optional values

| Value | Type | Limits | Set method |
|---------------------------------|---------|---------------------------|---|
| Status Check | Boolean | true/false | <code>mpgReq.setStatusCheck(status_check);</code> |
| Customer ID | String | 50-character alphanumeric | <code>completion.setCustId(custid);</code> |
| Dynamic descriptor | String | 20-character alphanumeric | <code>completion.setDynamicDescriptor(dynamic_descriptor);</code> |
| Shipping indicator ¹ | String | 1-character alphanumeric | <code>completion.setShipIndicator(ship_indicator);</code> |

¹Available to Canadian integrations only.

Sample Basic Pre-Authorization Completion

```

package Canada;
import JavaAPI.*;
public class TestCanadaCompletion
{
public static void main(String[] args)
{
String store_id = "store5";
String api_token = "yesguy";
String order_id = "Test1436981327037";
String amount = "1.00";
String txn_number = "152900-0_10";
String crypt = "7";
String cust_id = "my customer id";
String dynamic_descriptor = "my descriptor";
String processing_country_code = "CA";
boolean status_check = false;
Completion completion = new Completion();
completion.setOrderId(order_id);
completion.setCompAmount(amount);
completion.setTxnNumber(txn_number);
completion.setCryptType(crypt);
completion.setCustId(cust_id);
completion.setDynamicDescriptor(dynamic_descriptor);
completion.setShipIndicator("P");

HttpPostRequest mpgReq = new HttpPostRequest();
mpgReq.setProcCountryCode(processing_country_code);
mpgReq.setTestMode(true); //false or comment out this line for production transactions
mpgReq.setStoreId(store_id);
mpgReq.setApiToken(api_token);
mpgReq.setTransaction(completion);
mpgReq.setStatusCheck(status_check);
mpgReq.send();
try
{
Receipt receipt = mpgReq.getReceipt();
System.out.println("CardType = " + receipt.getCardType());
System.out.println("TransAmount = " + receipt.getTransAmount());
System.out.println("TxnNumber = " + receipt.getTxnNumber());
System.out.println("ReceiptId = " + receipt.getReceiptId());
System.out.println("TransType = " + receipt.getTransType());
System.out.println("ReferenceNum = " + receipt.getReferenceNum());
System.out.println("ResponseCode = " + receipt.getResponseCode());
System.out.println("ISO = " + receipt.getISO());
System.out.println("BankTotals = " + receipt.getBankTotals());
System.out.println("Message = " + receipt.getMessage());
System.out.println("AuthCode = " + receipt.getAuthCode());
System.out.println("Complete = " + receipt.getComplete());
System.out.println("TransDate = " + receipt.getTransDate());
System.out.println("TransTime = " + receipt.getTransTime());
System.out.println("Ticket = " + receipt.getTicket());
System.out.println("TimedOut = " + receipt.getTimedOut());
System.out.println("IsVisaDebit = " + receipt.getIsVisaDebit());
}
catch (Exception e)
{
e.printStackTrace();
}
}
}

```

2.5 Re-Authorization

For a process flow, Process Flow for Basic PreAuth, ReAuth and Completion Transactions (page 384).

Re-Authorization transaction object definition

```
ReAuth reauth = new ReAuth();
```

HttpPostRequest object for Re-Authorization transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();  
mpgReq.setTransaction(reauth);
```

Re-Authorization transaction values

For a full description of mandatory and optional values, see "Definition of Request Fields" on page 302 "Definition of Request Fields" on page 302

Table 6: Re-Authorization transaction object mandatory values

| Value | Type | Limits | Set method |
|----------------------|--------|----------------------------------|--|
| Order ID | String | 50-character alpha-numeric | <code>reauth.setOrderId(order_id);</code> |
| Original order ID | String | 50-character alpha-numeric | <code>reauth.setOrigOrderId(orig_order_id);</code> |
| Amount | String | 9-character decimal | <code>reauth.setAmount(amount);</code> |
| Transaction number | String | 255-character variable character | <code>reauth.setTxnNumber(txn_number);</code> |
| E-Commerce indicator | String | 1-character alpha-numeric | <code>reauth.setCryptType(crypt_type);</code> |

Table 1: Re-Authorization transaction optional values

| Value | Type | Limits | Set Method |
|----------------------|---------|----------------------------|---|
| Customer ID | String | 50-character alpha-numeric | <code>reauth.setCustId(custid);</code> |
| Status check | Boolean | true/false | <code>mpgReq.setStatusCheck(status_check);</code> |
| Dynamic descriptor | String | 20-character alpha-numeric | <code>reauth.setDynamicDescriptor(dynamic_descriptor);</code> |
| Customer information | Object | Not applicable. Click | <code>reauth.setCustInfo(cus-</code> |

Table 1: Re-Authorization transaction optional values

| Value | Type | Limits | Set Method |
|-------|--------|---|--------------------------------|
| | | here See Section Appendix D (page 326). | to mer) ; |
| AVS | Object | Not applicable. Click here See Appendix E (page 334). | reauth.setAvsInfo (avsCheck) ; |
| CVD | Object | Not applicable. Click here See Appendix F (page 340). | reauth.setCvdInfo (cvdCheck) ; |

Sample Re-Authorization

```

package Canada;
import JavaAPI.*;
public class TestCanadaReauth
{
    public static void main(String[] args)
    {
        String store_id = "moneris";
        String api_token = "hurgle";
        String order_id = "mvt271355ss7ssss839ssdfsdfsdf";
        String orig_order_id = "mvt3213820409";
        String amount = "4.00";
        String txn_number = "200069-0_10";
        String crypt = "8";
        String dynamic_descriptor = "123456";
        String cust_id = "my customer id";
        String processing_country_code = "CA";
        boolean status_check = false;
        ReAuth reauth = new ReAuth();
        reauth.setOrderId(order_id);
        reauth.setCustId(cust_id);
        reauth.setOrigOrderId(orig_order_id);
        reauth.setTxnNumber(txn_number);
        reauth.setAmount(amount);
        reauth.setCryptType(crypt);
        reauth.setDynamicDescriptor(dynamic_descriptor);
        HttpsPostRequest mpgReq = new HttpsPostRequest();
        mpgReq.setProcCountryCode(processing_country_code);
        mpgReq.setTestMode(true); //false or comment out this line for production transactions
        mpgReq.setStoreId(store_id);
        mpgReq.setApiToken(api_token);
        mpgReq.setTransaction(reauth);
        mpgReq.setStatusCheck(status_check);
        mpgReq.send();
        try
        {
            Receipt receipt = mpgReq.getReceipt();
            System.out.println("CardType = " + receipt.getCardType());
        }
    }
}

```

Sample Re-Authorization

```

System.out.println("TransAmount = " + receipt.getTransAmount());
System.out.println("TxnNumber = " + receipt.getTxnNumber());
System.out.println("ReceiptId = " + receipt.getReceiptId());
System.out.println("TransType = " + receipt.getTransType());
System.out.println("ReferenceNum = " + receipt.getReferenceNum());
System.out.println("ResponseCode = " + receipt.getResponseCode());
System.out.println("ISO = " + receipt.getISO());
System.out.println("BankTotals = " + receipt.getBankTotals());
System.out.println("Message = " + receipt.getMessage());
System.out.println("AuthCode = " + receipt.getAuthCode());
System.out.println("Complete = " + receipt.getComplete());
System.out.println("TransDate = " + receipt.getTransDate());
System.out.println("TransTime = " + receipt.getTransTime());
System.out.println("Ticket = " + receipt.getTicket());
System.out.println("TimedOut = " + receipt.getTimedOut());
System.out.println("IsVisaDebit = " + receipt.getIsVisaDebit());
}
catch (Exception e)
{
    e.printStackTrace();
}
}
}

```

2.6 Force Post

Things to Consider:

- This transaction is an independent completion where the original Pre-Authorization transaction was not processed via the same Moneris Gateway merchant account.
- It is not required for the transaction that you are submitting to have been processed via the JavaMoneris Gateway. However, a credit card number, expiry date and original authorization number are required.

ForcePost transaction object definition

```
ForcePost forcepost = new ForcePost();
```

HttpPostRequest object for ForcePost transaction

```

HttpPostRequest mpgReq = new HttpPostRequest();

mpgReq.setTransaction(forcepost);

```

Force Post transaction values

For a full description of mandatory and optional values, see "Definition of Request Fields" on page 302

Table 7: Force Post transaction object mandatory values

| Value | Type | Limits | Set method |
|----------------------|--------|----------------------------|--|
| Order ID | String | 50-character alpha-numeric | <code>forcepost.setOrderId(order_id);</code> |
| Amount | String | 9-character decimal | <code>forcepost.setAmount(amount);</code> |
| Credit card number | String | 20-character numeric | <code>forcepost.setPan(pan);</code> |
| Expiry date | String | 4-character numeric | <code>forcepost.setExpDate(exp-date);</code> |
| Authorization code | String | 8-character alpha-numeric | <code>forcepost.setAuthCode(auth_code);</code> |
| E-Commerce indicator | String | 1-character alpha-numeric | <code>forcepost.setCryptType(crypt_type);</code> |

Table 8: Force Post transaction optional values

| Value | Type | Limits | Set method |
|--------------------|---------|----------------------------|--|
| Customer ID | String | 50-character alpha-numeric | <code>forcepost.setCustId(custid);</code> |
| Dynamic descriptor | String | 20-character alpha-numeric | <code>forcepost.setDynamicDescriptor(dynamic_descriptor);</code> |
| Status Check | Boolean | true/false | <code>mpgReq.setStatusCheck(status_check);</code> |

Sample Basic Force Post

```

package Canada;
import JavaAPI.*;
public class TestCanadaForcePost
{
    public static void main(String[] args)
    {
        java.util.Date createDate = new java.util.Date();
        String order_id = "Test"+createDate.getTime();
        String cust_id = "my customer id";
        String store_id = "moneris";
        String api_token = "hurgle";
        String amount = "1.00";
        String pan = "4242424242424242";
        String expdate = "1901"; //YYMM format
    }
}

```


Sample Basic Force Post

```
String auth_code = "88864";
String crypt = "7";
String dynamic_descriptor = "my descriptor";
String processing_country_code = "CA";
boolean status_check = false;
ForcePost forcepost = new ForcePost();
forcepost.setOrderId(order_id);
forcepost.setCustId(cust_id);
forcepost.setAmount(amount);
forcepost.setPan(pan);
forcepost.setExpdate(expdate);
forcepost.setAuthCode(auth_code);
forcepost.setCryptType(crypt);
forcepost.setDynamicDescriptor(dynamic_descriptor);
HttpPostRequest mpgReq = new HttpPostRequest();
mpgReq.setProcCountryCode(processing_country_code);
mpgReq.setTestMode(true); //false or comment out this line for production transactions
mpgReq.setStoreId(store_id);
mpgReq.setApiToken(api_token);
mpgReq.setTransaction(forcepost);
mpgReq.setStatusCheck(status_check);
mpgReq.send();
try
{
    Receipt receipt = mpgReq.getReceipt();
    System.out.println("CardType = " + receipt.getCardType());
    System.out.println("TransAmount = " + receipt.getTransAmount());
    System.out.println("TxnNumber = " + receipt.getTxnNumber());
    System.out.println("ReceiptId = " + receipt.getReceiptId());
    System.out.println("TransType = " + receipt.getTransType());
    System.out.println("ReferenceNum = " + receipt.getReferenceNum());
    System.out.println("ResponseCode = " + receipt.getResponseCode());
    System.out.println("ISO = " + receipt.getISO());
    System.out.println("BankTotals = " + receipt.getBankTotals());
    System.out.println("Message = " + receipt.getMessage());
    System.out.println("AuthCode = " + receipt.getAuthCode());
    System.out.println("Complete = " + receipt.getComplete());
    System.out.println("TransDate = " + receipt.getTransDate());
    System.out.println("TransTime = " + receipt.getTransTime());
    System.out.println("Ticket = " + receipt.getTicket());
    System.out.println("TimedOut = " + receipt.getTimedOut());
    System.out.println("CorporateCard = " + receipt.getCorporateCard());
    //System.out.println("MessageId = " + receipt.getMessageId());
}
catch (Exception e)
{
    e.printStackTrace();
}
}
```

2.7 Purchase Correction

Things to Consider:

- Purchase correction is also known as "void" or "correction".
- To process this transaction, you need the order ID and the transaction number from the original Completion, Purchase or Force Post transaction.

Purchase Correction transaction object definition

```
PurchaseCorrection purchasecorrection = new PurchaseCorrection();
```

HttpPostRequest object for Purchase Correction transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

```
mpgReq.setTransaction(purchasecorrection);
```

Purchase Correction transaction object values

For a full description of mandatory and optional values, see "Definition of Request Fields" on page 302 "Definition of Request Fields" on page 302

Table 9: Purchase Correction transaction object mandatory values

| Value | Type | Limits | Set method |
|----------------------|--------|----------------------------------|---|
| Order ID | String | 50-character alpha-numeric | <code>purchasecorrection.setOrderId(order_id);</code> |
| Transaction number | String | 255-character variable character | <code>purchasecorrection.setTxnNumber(txn_number);</code> |
| E-Commerce indicator | String | 1-character alpha-numeric | <code>purchasecorrection.setCryptType(crypt_type);</code> |

Table 10: Purchase Correction transaction optional values

| Value | Type | Limits | Set method |
|--------------------|---------|----------------------------|---|
| Status Check | Boolean | true/false | <code>mpgReq.setStatusCheck(status_check);</code> |
| Customer ID | String | 50-character alpha-numeric | <code>purchasecorrection.setCustId(custid);</code> |
| Dynamic descriptor | String | 20-character alpha-numeric | <code>purchasecorrection.setDynamicDescriptor(dynamic_descriptor);</code> |

Sample Purchase Correction

```
package Canada;
import JavaAPI.*;
public class TestCanadaPurchaseCorrection
{
    public static void main(String[] args)
    {
        String store_id = "store5";
        String api_token = "yesguy";
        String order_id = "Test1432065003686";
        String txn_number = "42014-0_10";
        String crypt = "7";
        String dynamic_descriptor = "123456";
        String processing_country_code = "CA";
        boolean status_check = false;
        PurchaseCorrection purchasecorrection = new PurchaseCorrection();
        purchasecorrection.setOrderId(order_id);
        purchasecorrection.setTxnNumber(txn_number);
        purchasecorrection.setCryptType(crypt);
        purchasecorrection.setDynamicDescriptor(dynamic_descriptor);
        purchasecorrection.setCustId("my customer id");
        HttpsPostRequest mpgReq = new HttpsPostRequest();
        mpgReq.setProcCountryCode(processing_country_code);
        mpgReq.setTestMode(true); //false or comment out this line for production transactions
        mpgReq.setStoreId(store_id);
        mpgReq.setApiToken(api_token);
        mpgReq.setTransaction(purchasecorrection);
        mpgReq.setStatusCheck(status_check);
        mpgReq.send();
        try
        {
            Receipt receipt = mpgReq.getReceipt();
            System.out.println("CardType = " + receipt.getCardType());
            System.out.println("TransAmount = " + receipt.getTransAmount());
            System.out.println("TxnNumber = " + receipt.getTxnNumber());
            System.out.println("ReceiptId = " + receipt.getReceiptId());
            System.out.println("TransType = " + receipt.getTransType());
            System.out.println("ReferenceNum = " + receipt.getReferenceNum());
            System.out.println("ResponseCode = " + receipt.getResponseCode());
            System.out.println("ISO = " + receipt.getISO());
            System.out.println("BankTotals = " + receipt.getBankTotals());
            System.out.println("Message = " + receipt.getMessage());
            System.out.println("AuthCode = " + receipt.getAuthCode());
            System.out.println("Complete = " + receipt.getComplete());
            System.out.println("TransDate = " + receipt.getTransDate());
            System.out.println("TransTime = " + receipt.getTransTime());
            System.out.println("Ticket = " + receipt.getTicket());
            System.out.println("TimedOut = " + receipt.getTimedOut());
            System.out.println("IsVisaDebit = " + receipt.getIsVisaDebit());
        }
        catch (Exception e)
        {
            e.printStackTrace();
        }
    }
}
```

2.8 Refund

To process this transaction, you need the order ID and transaction number from the original Completion, Purchase or Force Post transaction.

Refund transaction object definition

```
Refund refund = new Refund();
```

HttpPostRequest object for Refund transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

```
mpgReq.setTransaction(refund);
```

Refund transaction object values

For a full description of mandatory and optional values, see "Definition of Request Fields" on page 302."Definition of Request Fields" on page 302

Table 11: Refund transaction object mandatory values

| Value | Type | Limits | Set method |
|----------------------|--------|----------------------------------|---|
| Order ID | String | 50-character alphanumeric | <code>refund.setOrderId(order_id);</code> |
| Amount | String | 9-character decimal | <code>refund.setAmount(amount);</code> |
| Transaction number | String | 255-character variable character | <code>refund.setTxnNumber(txn_number);</code> |
| E-Commerce indicator | String | 1-character alphanumeric | <code>refund.setCryptType(crypt_type);</code> |

Table 12: Refund transaction optional values

| Value | Type | Limits | Set method |
|--------------|---------|------------|---|
| Status Check | Boolean | true/false | <code>mpgReq.setStatusCheck(status_check);</code> |

Sample Refund

```
package Canada;
import JavaAPI.*;
public class TestCanadaRefund
{
    public static void main(String[] args)
    {
```

Sample Refund

```
String store_id = "store1";
String api_token = "yesguy";
String amount = "1.00";
String crypt = "7";
String dynamic_descriptor = "123456";
String custid = "mycust9";
String order_id = "mvt2713618548";
String txn_number = "911464-0_10";
String processing_country_code = "CA";
boolean status_check = false;
Refund refund = new Refund();
refund.setTxnNumber(txn_number);
refund.setOrderId(order_id);
refund.setAmount(amount);
refund.setCryptType(crypt);
refund.setCustId(custid);
refund.setDynamicDescriptor(dynamic_descriptor);
HttpsPostRequest mpgReq = new HttpsPostRequest();
mpgReq.setProcCountryCode(processing_country_code);
mpgReq.setTestMode(true); //false or comment out this line for production transactions
mpgReq.setStoreId(store_id);
mpgReq.setApiToken(api_token);
mpgReq.setTransaction(refund);
mpgReq.setStatusCheck(status_check);
mpgReq.send();
try
{
    Receipt receipt = mpgReq.getReceipt();
    System.out.println("CardType = " + receipt.getCardType());
    System.out.println("TransAmount = " + receipt.getTransAmount());
    System.out.println("TxnNumber = " + receipt.getTxnNumber());
    System.out.println("ReceiptId = " + receipt.getReceiptId());
    System.out.println("TransType = " + receipt.getTransType());
    System.out.println("ReferenceNum = " + receipt.getReferenceNum());
    System.out.println("ResponseCode = " + receipt.getResponseCode());
    System.out.println("ISO = " + receipt.getISO());
    System.out.println("BankTotals = " + receipt.getBankTotals());
    System.out.println("Message = " + receipt.getMessage());
    System.out.println("AuthCode = " + receipt.getAuthCode());
    System.out.println("Complete = " + receipt.getComplete());
    System.out.println("TransDate = " + receipt.getTransDate());
    System.out.println("TransTime = " + receipt.getTransTime());
    System.out.println("Ticket = " + receipt.getTicket());
    System.out.println("TimedOut = " + receipt.getTimedOut());
}
catch (Exception e)
{
    e.printStackTrace();
}
}
```

2.9 Independent Refund

Things to Consider:

- Because of the potential for fraud, permission for this transaction is not granted to all accounts by default. If it is required for your business, it must be requested via your account manager.

Independent Refund transaction object definition

```
IndependentRefund indrefund = new IndependentRefund();
```

HttpPostRequest object for Independent Refund transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

```
mpgReq.setTransaction(indrefund);
```

Independent Refund transaction values

For a full description of mandatory and optional values, see "Definition of Request Fields" on page 302

Table 13: Independent Refund transaction object mandatory values

| Value | Type | Limits | Set method |
|----------------------|--------|--|--|
| Order ID | String | 50-character alpha-numeric | <code>indrefund.setOrderId(order_id);</code> |
| Amount | String | 9-character decimal | <code>indrefund.setAmount(amount);</code> |
| Credit card number | String | 20-character alpha-numeric | <code>indrefund.setPan(pan);</code> |
| Expiry date | String | 4-character alpha-numeric (YYMM format) | <code>indrefund.setExpDate(exp-date);</code> |
| E-Commerce indicator | String | 1-character alpha-numeric | <code>indrefund.setCryptType(crypt_type);</code> |

Table 14: Independent Refund transaction optional values

| Value | Type | Limits | Set method |
|--------------------|---------|----------------------------|--|
| Customer ID | String | 50-character alpha-numeric | <code>indrefund.setCustId(custid);</code> |
| Dynamic descriptor | String | 20-character alpha-numeric | <code>indrefund.setDynamicDescriptor(dynamic_descriptor);</code> |
| Status Check | Boolean | true/false | <code>mpgReq.setStatusCheck(status_check);</code> |

Sample Independent Refund

```

package Canada;
import JavaAPI.*;
public class TestCanadaIndependentRefund
{
    public static void main(String[] args)
    {
        java.util.Date createDate = new java.util.Date();
        String order_id = "Test"+createDate.getTime();
        String store_id = "store5";
        String api_token = "yesguy";
        String cust_id = "my customer id";
        String amount = "20.00";
        String pan = "4242424242424242";
        String expdate = "1901"; //YYMM
        String crypt = "7";
        String processing_country_code = "CA";
        boolean status_check = false;
        IndependentRefund indrefund = new IndependentRefund();
        indrefund.setOrderId(order_id);
        indrefund.setCustId(cust_id);
        indrefund.setAmount(amount);
        indrefund.setPan(pan);
        indrefund.setExpdate(expdate);
        indrefund.setCryptType(crypt);
        indrefund.setDynamicDescriptor("123456");
        HttpsPostRequest mpgReq = new HttpsPostRequest();
        mpgReq.setProcCountryCode(processing_country_code);
        mpgReq.setTestMode(true); //false or comment out this line for production transactions
        mpgReq.setStoreId(store_id);
        mpgReq.setApiToken(api_token);
        mpgReq.setTransaction(indrefund);
        mpgReq.setStatusCheck(status_check);
        mpgReq.send();
        try
        {
            Receipt receipt = mpgReq.getReceipt();
            System.out.println("CardType = " + receipt.getCardType());
            System.out.println("TransAmount = " + receipt.getTransAmount());
            System.out.println("TxnNumber = " + receipt.getTxnNumber());
            System.out.println("ReceiptId = " + receipt.getReceiptId());
            System.out.println("TransType = " + receipt.getTransType());
        }
    }
}

```

Sample Independent Refund

```

System.out.println("ReferenceNum = " + receipt.getReferenceNum());
System.out.println("ResponseCode = " + receipt.getResponseCode());
System.out.println("ISO = " + receipt.getISO());
System.out.println("BankTotals = " + receipt.getBankTotals());
System.out.println("Message = " + receipt.getMessage());
System.out.println("AuthCode = " + receipt.getAuthCode());
System.out.println("Complete = " + receipt.getComplete());
System.out.println("TransDate = " + receipt.getTransDate());
System.out.println("TransTime = " + receipt.getTransTime());
System.out.println("Ticket = " + receipt.getTicket());
System.out.println("TimedOut = " + receipt.getTimedOut());
System.out.println("IsVisaDebit = " + receipt.getIsVisaDebit());
}
catch (Exception e)
{
e.printStackTrace();
}
}
}

```

2.10 Card Verification with AVS and CVD

Things to Consider:

- The Card Verification transaction is only supported by Visa and MasterCard.
- For Card Verification, CVD is supported by Visa and MasterCard.
- For Card Verification, AVS is supported by Visa and MasterCard.
- When testing Card Verification, please use the Visa and MasterCard test card numbers provided in the MasterCard Card Verification and Visa Card Verification tables available in CVD & AVS (E-Fraud) Simulator.
- For a full list of possible AVS & CVD result codes refer to the CVD and AVS Result Code tables.

Card Verification object definition

```
CardVerification cardVerification = new CardVerification();
```

HttpPostRequest object for Card Verification transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

```
mpgReq.setTransaction(cardVerification );
```


Card Verification transaction values

For a full description of mandatory and optional values, see "Definition of Request Fields" on page 302 "Definition of Request Fields" on page 302

Table 15: Card Verification transaction object mandatory values

| Value | Type | Limits | Set method |
|----------------------|--------|---|---|
| Order ID | String | 50-character alpha-numeric | <code>cardVerification.setOrderId(order_id);</code> |
| Credit card number | String | 20-character alpha-numeric | <code>cardVerification.setPan(pan);</code> |
| Expiry date | String | 4-character alpha-numeric (YYMM format) | <code>cardVerification.setExpDate(expdate);</code> |
| E-commerce indicator | String | 1-character alpha-numeric | <code>cardVerification.setCryptType(crypt_type);</code> |
| AVS | Object | Not applicable. Click here See Appendix E (page 334). | <code>cardVerification.setAvsInfo(avsCheck);</code> |
| CVD | Object | Not applicable. Click here See Appendix F (page 340). | <code>cardVerification.setCvdInfo(cvdCheck);</code> |

Sample Card Verification

```
package Canada;
import JavaAPI.*;
public class TestCanadaCardVerification
{
    public static void main(String[] args)
    {
        String store_id = "store5";
        String api_token = "yesguy";
        java.util.Date createDate = new java.util.Date();
        String order_id = "Test"+createDate.getTime();
        String pan = "4242424242424242";
        String expdate = "1901"; //YYMM format
        String crypt = "7";
        String processing_country_code = "CA";
        boolean status_check = false;
        AvsInfo avsCheck = new AvsInfo();
        avsCheck.setAvsStreetNumber("212");
        avsCheck.setAvsStreetName("Payton Street");
```

Sample Card Verification

```

avsCheck.setAvsZipCode("M1M1M1");
CvdInfo cvdCheck = new CvdInfo();
cvdCheck.setCvdIndicator("1");
cvdCheck.setCvdValue("099");
CardVerification cardVerification = new CardVerification();
cardVerification.setOrderId(order_id);
cardVerification.setPan(pan);
cardVerification.setExpdate(expdate);
cardVerification.setCryptType(crypt);
cardVerification.setAvsInfo(avsCheck);
cardVerification.setCvdInfo(cvdCheck);
HttpPostRequest mpgReq = new HttpPostRequest();
mpgReq.setProcCountryCode(processing_country_code);
mpgReq.setTestMode(true); //false or comment out this line for production transactions
mpgReq.setStoreId(store_id);
mpgReq.setApiToken(api_token);
mpgReq.setTransaction(cardVerification);
mpgReq.setStatusCheck(status_check);
mpgReq.send();
try
{
    Receipt receipt = mpgReq.getReceipt();
    System.out.println("CardType = " + receipt.getCardType());
    System.out.println("TransAmount = " + receipt.getTransAmount());
    System.out.println("TxnNumber = " + receipt.getTxnNumber());
    System.out.println("ReceiptId = " + receipt.getReceiptId());
    System.out.println("TransType = " + receipt.getTransType());
    System.out.println("ReferenceNum = " + receipt.getReferenceNum());
    System.out.println("ResponseCode = " + receipt.getResponseCode());
    System.out.println("ISO = " + receipt.getISO());
    System.out.println("BankTotals = " + receipt.getBankTotals());
    System.out.println("Message = " + receipt.getMessage());
    System.out.println("AuthCode = " + receipt.getAuthCode());
    System.out.println("Complete = " + receipt.getComplete());
    System.out.println("TransDate = " + receipt.getTransDate());
    System.out.println("TransTime = " + receipt.getTransTime());
    System.out.println("Ticket = " + receipt.getTicket());
    System.out.println("TimedOut = " + receipt.getTimedOut());
    System.out.println("IsVisaDebit = " + receipt.getIsVisaDebit());
}
catch (Exception e)
{
    e.printStackTrace();
}
}

```

2.11 Batch Close

Batch Close transaction object definition

```
BatchClose batchclose = new BatchClose();
```

HttpPostRequest object for Batch Close transaction

```

HttpPostRequest mpgReq = new HttpPostRequest();

mpgReq.setTransaction(batchclose);

```

Batch Close transaction values

For a full description of mandatory and optional values, see "Definition of Request Fields" on page 302 "Definition of Request Fields" on page 302

Table 16: Batch Close transaction object mandatory values

| Value | Type | Limits | Set method |
|---------------------------------------|--------|--------------------------------------|---|
| ECR (electronic cash register) number | String | No limit (value provided by Moneris) | <code>batchclose.setEcrno(ecr_no);</code> |

Sample Batch Close

```
package Canada;
import JavaAPI.*;
public class TestCanadaBatchClose
{
    public static void main(String[] args)
    {
        String store_id = "store5";
        String api_token = "yesguy";
        String ecr_no = "66013455"; //ecr within store
        String processing_country_code = "CA";
        boolean status_check = false;
        BatchClose batchclose = new BatchClose();
        batchclose.setEcrno(ecr_no);
        HttpsPostRequest mpgReq = new HttpsPostRequest();
        mpgReq.setProcCountryCode(processing_country_code);
        mpgReq.setTestMode(true); //false or comment out this line for production transactions
        mpgReq.setStoreId(store_id);
        mpgReq.setApiToken(api_token);
        mpgReq.setTransaction(batchclose);
        mpgReq.setStatusCheck(status_check);
        mpgReq.send();
        try
        {
            Receipt receipt = mpgReq.getReceipt();
            if ((receipt.getReceiptId()).equals("Global Error Receipt") ||
                receipt.getReceiptId().equals("null") ||
                receipt.getReceiptId().equals(""))
            {
                System.out.println("CardType = " + receipt.getCardType());
                System.out.println("TransAmount = " + receipt.getTransAmount());
                System.out.println("TxnNumber = " + receipt.getTxnNumber());
                System.out.println("ReceiptId = " + receipt.getReceiptId());
                System.out.println("TransType = " + receipt.getTransType());
                System.out.println("ReferenceNum = " + receipt.getReferenceNum());
                System.out.println("ResponseCode = " + receipt.getResponseCode());
                System.out.println("ISO = " + receipt.getISO());
                System.out.println("BankTotals = null");
                System.out.println("Message = " + receipt.getMessage());
                System.out.println("AuthCode = " + receipt.getAuthCode());
                System.out.println("Complete = " + receipt.getComplete());
                System.out.println("TransDate = " + receipt.getTransDate());
                System.out.println("TransTime = " + receipt.getTransTime());
                System.out.println("Ticket = " + receipt.getTicket());
                System.out.println("TimedOut = " + receipt.getTimedOut());
            }
        }
    }
}
```

Sample Batch Close

```

    }
    else
    {
        for (String ecr : receipt.getTerminalIDs())
        {
            System.out.println("ECR: " + ecr);
            for (String cardType : receipt.getCreditCards(ecr))
            {
                System.out.println("\tCard Type: " + cardType);
                System.out.println("\t\tPurchase: Count = "
                    + receipt.getPurchaseCount(ecr, cardType)
                    + " Amount = "
                    + receipt.getPurchaseAmount(ecr,
                        cardType));
                System.out.println("\t\tRefund: Count = "
                    + receipt.getRefundCount(ecr, cardType)
                    + " Amount = "
                    + receipt.getRefundAmount(ecr, cardType));
                System.out.println("\t\tCorrection: Count = "
                    + receipt.getCorrectionCount(ecr, cardType)
                    + " Amount = "
                    + receipt.getCorrectionAmount(ecr,
                        cardType));
            }
        }
    }
    catch (Exception e)
    {
        e.printStackTrace();
    }
}

```

2.12 Open Totals

OpenTotals transaction object definition

```
OpenTotals opentotals = new OpenTotals();
```

HttpPostRequest object for Open Totals transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

```
mpgReq.setTransaction(opentotals);
```

Open Totals transaction values

For a full description of mandatory and optional values, see "Definition of Request Fields" on page 302 "Definition of Request Fields" on page 302

Table 17: Open Totals transaction object mandatory values

| Value | Type | Limits | Set method |
|---------------------------------------|--------|--------------------------------------|---|
| ECR (electronic cash register) number | String | No limit (value provided by Moneris) | <code>opentotals.setEcrno(ecr_no);</code> |

Sample Open Totals

```

package Canada;
import JavaAPI.*;
public class TestCanadaOpenTotals
{
    public static void main(String[] args)
    {
        String store_id = "store5";
        String api_token = "yesguy";
        String ecr_no = "66013455";
        //String ecr_no = "66011091";
        String processing_country_code = "CA";
        OpenTotals opentotals = new OpenTotals();
        opentotals.setEcrno(ecr_no);
        HttpsPostRequest mpgReq = new HttpsPostRequest();
        mpgReq.setProcCountryCode(processing_country_code);
        mpgReq.setTestMode(true); //false or comment out this line for production transactions
        mpgReq.setStoreId(store_id);
        mpgReq.setApiToken(api_token);
        mpgReq.setTransaction(opentotals);
        mpgReq.send();

        try
        {
            Receipt receipt = mpgReq.getReceipt();
            if ((receipt.getReceiptId()).equals("Global Error Receipt") ||
                receipt.getReceiptId().equals("null") ||
                receipt.getReceiptId().equals(""))
            {
                System.out.println("CardType = null");
                System.out.println("TransAmount = " + receipt.getTransAmount());
                System.out.println("TxnNumber = " + receipt.getTxnNumber());
                System.out.println("ReceiptId = " + receipt.getReceiptId());
                System.out.println("TransType = " + receipt.getTransType());
                System.out.println("ReferenceNum = " + receipt.getReferenceNum());
                System.out.println("ResponseCode = " + receipt.getResponseCode());
                System.out.println("ISO = " + receipt.getISO());
                System.out.println("BankTotals = null");
                System.out.println("Message = " + receipt.getMessage());
                System.out.println("AuthCode = " + receipt.getAuthCode());
                System.out.println("Complete = " + receipt.getComplete());
                System.out.println("TransDate = " + receipt.getTransDate());
                System.out.println("TransTime = " + receipt.getTransTime());
                System.out.println("Ticket = " + receipt.getTicket());
                System.out.println("TimedOut = " + receipt.getTimedOut());
            }
            else
            {
                for (String ecr : receipt.getTerminalIDs())
                {
                    System.out.println("ECR: " + ecr);
                }
            }
        }
    }
}

```

Sample Open Totals

```
for (String cardType : receipt.getCreditCards(ecr))
{
    System.out.println("\tCard Type: " + cardType);
    System.out.println("\t\tPurchase: Count = "
+ receipt.getPurchaseCount(ecr, cardType)
+ " Amount = "
+ receipt.getPurchaseAmount(ecr,
cardType));
    System.out.println("\t\tRefund: Count = "
+ receipt.getRefundCount(ecr, cardType)
+ " Amount = "
+ receipt.getRefundAmount(ecr, cardType));
    System.out.println("\t\tCorrection: Count = "
+ receipt.getCorrectionCount(ecr, cardType)
+ " Amount = "
+ receipt.getCorrectionAmount(ecr,
cardType));
}
}
}
}
catch (Exception e)
{
    e.printStackTrace();
}
}
```


3 MPI

- 3.1 About MPI Transactions
- 3.2 3-D Secure Implementations (VbV, MCSC, SafeKey)
- 3.3 Activating VbV and MCSC
- 3.4 Activating Amex SafeKey
- 3.5 Transaction Flow
- 3.6 MPI Transactions

3.1 About MPI Transactions

The Moneris Gateway can enable transactions using the 3-D Secure protocol via Merchant Plug-In (MPI) and Access Control Server (ACS) .

Moneris Gateway supports the following 3-D Secure implementations:

- Verified by Visa (VbV)
- Mastercard Secure Code (MCSC)
- American Express SafeKey (applies to Canadian integrations only)

3.2 3-D Secure Implementations (VbV, MCSC, SafeKey)

Verified by Visa (VbV), MasterCard Secure Code (MCSC) and American Express SafeKey are programs based on the 3-D Secure Protocol to improve the security of online transactions.

These programs involve authentication of the cardholder during an online e-commerce transaction. Authentication is based on the issuer's selected method of authentication.

The following are examples of authentication methods:

- Risk-based authentication
- Dynamic passwords
- Static passwords.

Some benefits of these programs are reduced risk of fraudulent transactions and protection against chargebacks for certain fraudulent transactions.

Additional eFraud features

To further decrease fraudulent activity, Moneris also recommends implementing the following features:

- AVS: Address Verification Service (page 334)
- CVD: Card Validation Digits (page 340).

3.3 Activating VbV and MCSC

To integrate Verified by Visa and/or MasterCard Secure Code transaction functionality in your system, call Moneris Sales Support to have Moneris enroll you in the program(s) and enable the functionality on your account.

3.4 Activating Amex SafeKey

To Activate Amex SafeKey transaction functionality with your system via the Moneris Gateway API:

1. Enroll in the SafeKey program with American Express
at: <https://network.americanexpress.com/ca/en/safekey/index.aspx>
2. Call your Moneris sales centre at 1-844-204-8626 to get Amex SafeKey functionality enabled on your account.

3.5 Transaction Flow

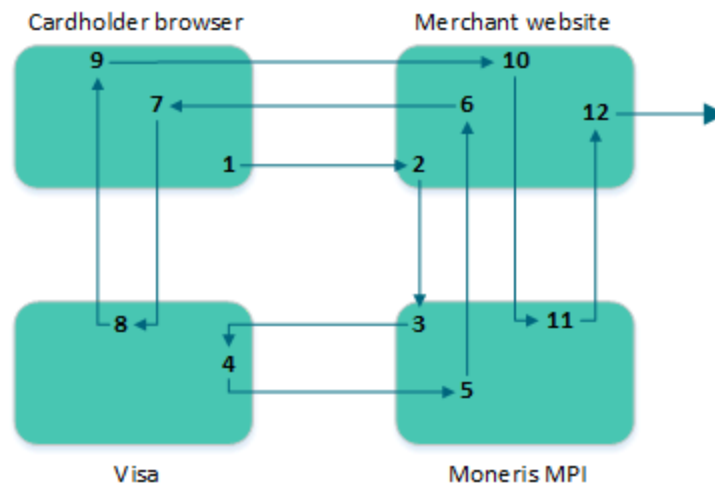


Figure 1: Transaction flow diagram

1. Cardholder enters the credit card number and submits the transaction information to the merchant.
2. Upon receiving the transaction request, the merchant calls the MonerisMPI API and passes a TXN type request. For sample code please refer to MpiTxn Request Transaction (page 45).
3. The Moneris MPI receives the request, authenticates the merchant and sends the transaction information to Visa, MasterCard or American Express.
4. Visa/MasterCard/Amex verifies that the card is enrolled and returns the issuer URL.
5. Moneris MPI receives the response from Visa, MasterCard or Amex and forwards the information to the merchant.
6. The MonerisMPI API installed at the merchant receives the response from the Moneris MPI.
If the response is "Y" for enrolled, the merchant makes a call to the API, which opens a popup/in-line window in the cardholder browser.
If the response is "N" for not enrolled, a transaction could be sent to the processor identifying it as VBV/MCSC/SafeKey attempted with an ECI value of 6.

If the response is “U” for unable to authenticate or the response times out, the transaction can be sent to the processor with an ECI value of 7. The merchant can then choose to continue with the transaction and be liable for a chargeback, or the merchant can choose to end the transaction.

7. The cardholder browser uses the URL that was returned from Visa/MasterCard/Amex via the merchant to communicate directly to the bank. The contents of the popup are loaded and the cardholder enters the PIN.
8. The information is submitted to the bank and authenticated. A response is then returned to the client browser.
9. The client browser receives the response from the bank, and forwards it to the merchant.
10. The merchant receives the response information from the cardholder browser, and passes an ACS request type to the Moneris MPI API.
11. Moneris MPI receives the ACS request and authenticates the information. The Moneris MPI then provides a CAVV value (getCavv()) and a crypt type (getMpiEciO) to the merchant.

If the getSuccess() of the response is “true”, the merchant may proceed with the cavv purchase or cavv preauth.

If the getSuccess() of the response is “false” **and** the getMessage() is “N”, the transaction must be cancelled because the cardholder failed to authenticate.

If the getSuccess() of the response is “false” **and** the getMessage is “U”, the transaction can be processed as a normal purchase or PreAuth; however in this case the merchant assumes liability of a chargeback.

If the response times out, the transaction can be processed as a normal purchase or PreAuth; however in this case the merchant assumes liability of a chargeback.

12. The merchant retrieves the CAVV value, and formats a cavv purchase or a cavv preauth request using the method that is normally used. As part of this transaction method, the merchant must pass the CAVV value and the crypt type.

3.6 MPI Transactions

Any of the transaction objects that are defined in this section can be passed to the HttpsPostRequest connection object defined in Section 11.5 (page 282)[here](#).

TXN

Sends the initial transaction data to the Moneris MPI to verify whether the card is enrolled.

The browser returns a PAREs as well as a success field.

ACS

Passes the PAREs (received in the response to the TXN transaction) to the Moneris MPI API.

Cavv Purchase

After receiving confirmation from the ACS transaction, this verifies funds on the customer’s card, removes the funds and prepares them for deposit into the merchant’s account.

Cavv Pre-Authorization

After receiving confirmation from the ACS transaction, this verifies and locks funds on the customer’s credit card. The funds are locked for a specified amount of time based on the card issuer.

To retrieve the funds that have been locked by a Pre-Authorization transaction so that they may be settled in the merchant's account, a basic Completion transaction (page 18) must be performed. A PreAuthorization transaction may only be "completed" once.

NOTE: Cavv Purchase and Cavv Pre-Authorization transactions are also used to process Apple Pay and Android Pay transactions. For further details on how to process these wallet transactions, please refer to 8 Apple Pay and Android Pay In-App Integration.

3.6.1 VbV, MCSC and SafeKey Responses

For each transaction, a crypt type is sent to identify whether it is a VbV-, MCSC- or SafeKey-authenticated transaction. Below are the tables defining the possible crypt types as well as the possible VARes and PARes responses.

Table 18: Crypt type definitions

| Crypt type | Visa definition | MasterCard definition | American Express Definition |
|------------|---|--|---|
| 5 | <ul style="list-style-type: none"> Fully authenticated There is a liability shift, and the merchant is protected from chargebacks | <ul style="list-style-type: none"> Fully authenticated There is a liability shift, and the merchant is protected from chargebacks. | <ul style="list-style-type: none"> Fully authenticated There is a liability shift, and the merchant is protected from chargebacks. |
| 6 | <ul style="list-style-type: none"> VbV has been attempted There is a liability shift, and the merchant is protected from certain chargebacks on fraudulent transactions | <ul style="list-style-type: none"> MCSC has been attempted There is a liability shift, and the merchant is protected from certain chargebacks on fraudulent transactions | <ul style="list-style-type: none"> SafeKey has been attempted There is a liability shift, and the merchant is protected from certain chargebacks on fraudulent transactions |
| 7 | <ul style="list-style-type: none"> Non-VbV transaction No liability shift Merchant is not protected from chargebacks | <ul style="list-style-type: none"> Non-MCSC transaction No liability shift Merchant is not protected from chargebacks | <ul style="list-style-type: none"> Non-SafeKey transaction No liability shift Merchant is not protected from chargebacks |

Table 19: VERes response definitions

| VERes Response | Response Definition |
|-----------------------|---|
| N | The card/issuer is not enrolled. Sent as a normal Purchase/PreAuth transaction with a crypt type of 6. |
| U | The card type is not participating in VbV/MCSC/SafeKey. It could be corporate card or another card plan that Visa/MasterCard/Amex excludes. Proceed with a regular transaction with a crypt type of 7 or cancel the transaction. |
| Y | The card is enrolled. Proceed to create the VbV/MCSC/SafeKey inline window for cardholder authentication. Proceed to PAREs for crypt type. |

Table 20: PAREs response definitions

| PAREs response | Response definition |
|-----------------------|---|
| A | Attempted to verify PIN, and will receive a CAVV. Send as a cavv_purchase/cavv_preAuth, which returns a crypt type of 6. |
| Y | Fully authenticated, and will receive a CAVV. Send as a cavv_purchase/cavv_preAuth which will return a crypt type of 5. |
| N | Failed to authenticate. No CAVV is returned. Cancel transaction. Merchant may proceed with a crypt type of 7 although this is strongly discouraged. |

Table 21: CAVV transaction handling

| Step 1: VERes Cardholder/issuer enrolled? | Step 2: PAREs VbV/MCSC InLine window response | Step 3: Transaction Are you protected? |
|--|--|---|
| Y | Y | Send a CAVV transaction |
| Y | N | Cancel transaction. Authentication failed or high-risk transaction. |
| Y | A | Send a CAVV transaction |
| U | n/a | Send a regular transaction with a crypt type of 7 |
| N | n/a | Send a regular transaction with a crypt type of 6 |

3.6.2 MpiTxn Request Transaction

MpiTxn transaction object definition

```
MpiTxn mpiTxn = new MpiTxn();
```

HttpPostRequest object for MpiTxn transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

```
mpgReq.setTransaction(mpiTxn);
```

MpiTxn transaction values

For a full description of mandatory and optional values, see "Definition of Request Fields" on page 302

Table 22: MpiTxn transaction object mandatory values

| Value | Type | Limits | Set method |
|--------------------|--------|---|--|
| XID | String | 20-character alpha-numeric | <code>mpiTxn.setXid(xid);</code> |
| Credit card number | String | 20-character numeric | <code>mpiTxn.setPan(pan);</code> |
| Expiry date | String | 4-character alpha-numeric (YYMM format) | <code>mpiTxn.setExpDate(expdate);</code> |
| Amount | String | 9-character decimal Must contain at least 3 digits including two penny values. | <code>mpiTxn.setAmount(amount);</code> |
| MD | String | 1024-character alpha-numeric | <code>mpiTxn.setMD(MD);</code> |
| Merchant URL | String | N/A | <code>mpiTxn.setMerchantUrl(merchantUrl);</code> |
| Accept | String | N/A | <code>mpiTxn.setAccept(accept);</code> |
| User Agent | String | N/A | <code>mpiTxn.setUserAgent(userAgent);</code> |

Sample MpiTXN Request

```

package Canada;
import JavaAPI.*;
public class TestCanadaMpiTxn
{
    public static void main(String[] args)
    {
        String store_id = "moneris";
        String api_token = "hurgle";
        String amount = "1.00";
        String xid = "12345678910111214037";
        String MD = xid + "mycardinfo" + amount;
        String merchantUrl = "www.mystoreurl.com";
        String accept = "true";
        String userAgent = "Mozilla";
        String processing_country_code = "CA";
        String pan = "4242424242424242";
        String expdate = "1905";
        boolean status_check = false;
        MpiTxn mpiTxn = new MpiTxn();
        mpiTxn.setXid(xid);
        mpiTxn.setPan(pan);
        mpiTxn.setExpDate(expdate);
        mpiTxn.setAmount(amount);
        mpiTxn.setMD(MD);
        mpiTxn.setMerchantUrl(merchantUrl);
        mpiTxn.setHttpAccept(accept);
        mpiTxn.setHttpUserAgent(userAgent);
        //*****OPTIONAL VARIABLES*****
        HttpsPostRequest mpgReq = new HttpsPostRequest();
        mpgReq.setProcCountryCode(processing_country_code);
        mpgReq.setTestMode(true); //false or comment out this line for production
        transactions
        mpgReq.setStoreId(store_id);
        mpgReq.setApiToken(api_token);
        mpgReq.setTransaction(mpiTxn);
        mpgReq.setStatusCheck(status_check);
        mpgReq.send();
        /***** REQUEST *****/
        try
        {
            Receipt receipt = mpgReq.getReceipt();
            System.out.println("MpiMessage = " + receipt.getMpiMessage());
            System.out.println("MpiSuccess = " + receipt.getMpiSuccess());
            if (receipt.getMpiSuccess().equals("true"))
            {
                System.out.println(receipt.getMpiInLineForm());
            }
            else
            {
                System.out.println(receipt.getMessage());
            }
        }
        catch (Exception e)
        {
            e.printStackTrace();
        }
    }
} // end TestResMpiTxn

```

3.6.2.1 TXN Response and Creating the Popup

The TXN request returns a response with one of several possible values. The get Message method of the response object returns "Y", "U", or "N".

N

Purchase or Pre-Authorization can be sent as a crypt type of 6 (attempted authentication).

Y

A call to the API to create the VBV form is made.

U

(Returned for non-participating cards such as corporate cards)

Merchant can send the transaction with crypt_type 7. However, the merchant is liable for chargebacks.

Below is the TXN response code. This code can be found from the store.java sample included in the download.

```
MpiResponse mpiRes = mpiReq.getResponse();
String crypt_type;

if (mpiRes.getMessage().equals("Y") )
{
    out.print(mpiRes.getInLineForm());
}
else {
    if (mpiRes.getMessage().equals("N") )
    {
        //send transaction using the mpg API
        // use crypt_type="6";
    }
    else // corporate cards, unable to authenticate or times out (eg. MPI is down)
    {
        //optional to send transaction using the mpg API in this case merchant
        //assumes liability, use crypt_type="7";
    }
}
```

3.6.3 Vault MPI Transaction - ResMpiTxn

Vault MPI Transaction transaction object definition

```
ResMpiTxn resMpiTxn = new ResMpiTxn();
```

HttpPostRequest object for Vault MPI Transaction transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
mpgReq.setTransaction(resMpiTxn);
```

Vault MPI Transaction transaction values

For a full description of mandatory and optional values, see "Definition of Request Fields" on page 302

Table 23: Vault MPI Transaction transaction object mandatory values

| Value | Type | Limits | Set method |
|--------------|--------|--|---|
| Data key | String | 25-character alpha-numeric | <code>resMpiTxn.setData(data_key);</code> |
| XID | String | 20-character alpha-numeric | <code>resMpiTxn.setXid(xid);</code> |
| Amount | String | 9-character decimal | <code>resMpiTxn.setAmount(amount);</code> |
| MD | String | 1024-character alpha-numeric | <code>resMpiTxn.setMD(MD);</code> |
| Merchant URL | String | n/a | <code>resMpiTxn.setMerchantUrl(merchantUrl);</code> |
| Accept | String | n/a | <code>resMpiTxn.setAccept(accept);</code> |
| User Agent | String | n/a | <code>resMpiTxn.setUserAgent(userAgent);</code> |
| Expiry date | String | 4-character alpha-numeric (YYMM format) | <code>resMpiTxn.setExpDate(expdate);</code> |

Sample Vault MPI Transaction

```

package Canada;
import java.util.HashMap;
import java.util.Map;
import JavaAPI.*;
public class TestCanadaResMpiTxn
{
    public static void main(String[] args)
    {
        String store_id = "store5";
        String api_token = "yesguy";
        String data_key = "ot-7hkuLdmybbHdUD0y2gCXQQx6J";
        String amount = "1.00";
        java.util.Date createDate = new java.util.Date();
        String xid = "TEMPXID"+ createDate.getTime();
        String MD = xid + "mycardinfo" + amount;
        String merchantUrl = "www.mystoreurl.com";
        String accept = "true";
        String userAgent = "Mozilla";
        String processing_country_code = "CA";
        String expdate = "1712";
        boolean status_check = false;

```


Sample Vault MPI Transaction

```

ResMpiTxn resMpiTxn = new ResMpiTxn();
resMpiTxn.setData(data_key);
resMpiTxn.setXid(xid);
resMpiTxn.setAmount(amount);
resMpiTxn.setMD(MD);
resMpiTxn.setMerchantUrl(merchantUrl);
resMpiTxn.setAccept(accept);
resMpiTxn.setUserAgent(userAgent);
resMpiTxn.setExpDate(expdate);
//*****OPTIONAL VARIABLES*****
HttpPostRequest mpgReq = new HttpPostRequest();
mpgReq.setProcCountryCode(processing_country_code);
mpgReq.setTestMode(true); //false or comment out this line for production transactions
mpgReq.setStoreId(store_id);
mpgReq.setApiToken(api_token);
mpgReq.setTransaction(resMpiTxn);
mpgReq.setStatusCheck(status_check);
mpgReq.send();
/***** REQUEST *****/
try
{
    Receipt receipt = mpgReq.getReceipt();
    System.out.println("MpiMessage = " + receipt.getMpiMessage());
    System.out.println("MpiSuccess = " + receipt.getMpiSuccess());
    if (receipt.getMpiSuccess().equals("true"))
    {
        System.out.println(receipt.getMpiInLineForm());
    }
}
catch (Exception e)
{
    e.printStackTrace();
}
} // end TestResMpiTxn

```

Vault response fields

For a list and explanation of (Receipt object) response fields that are available after sending this Vault transaction, see Definition of Response Fields (page 312).

3.6.4 MPI ACS Request Transaction

MPI ACS Request transaction object definition

```
MpiAcs mpiAcs = new MpiAcs();
```

HttpPostRequest object for MPI ACS Request transaction

```

HttpPostRequest mpgReq = new HttpPostRequest();

mpgReq.setTransaction(mpiAcs);

```

MPI ACS Request transaction values

For a full description of mandatory and optional values, see "Definition of Request Fields" on page 302 "Definition of Request Fields" on page 302

Table 24: MPI ACS Request transaction object mandatory values

| Value | Type | Limits | Set method |
|--------|--------|---|---|
| XID | String | 20-character alpha-numeric | NOTE: Is the concatenated 20-character prefix that forms part of the variable MD |
| Amount | String | 9-character decimal Must contain at least 3 digits including two penny values. | <code>mpiAcs.setAmount (amount) ;</code> |
| MD | String | 1024-character alpha-numeric | <code>mpiAcs.setMD (MD) ;</code> |
| PaRes | String | n/a | <code>mpiAcs.setPaRes (PaRes) ;</code> |

Sample MPI ACS Request - CA

```
package Canada;
import JavaAPI.*;
public class TestCanadaMpiAcs
{
    public static void main(String[] args)
    {
        String store_id = "moneris";
        String api_token = "hurgle";
        String amount = "1.00";
        String xid = "12345678910111214011";
        String MD = xid + "mycardinfo" + amount;
        String PaRes = "PaRes string";
        String processing_country_code = "CA";
        boolean status_check = false;
        MpiAcs mpiAcs = new MpiAcs();
        mpiAcs.setPaRes (PaRes);
        mpiAcs.setMD (MD);
        //*****OPTIONAL VARIABLES*****
        HttpsPostRequest mpgReq = new HttpsPostRequest();
        mpgReq.setProcCountryCode (processing_country_code);
        mpgReq.setTestMode(true); //false or comment out this line for production transactions
        mpgReq.setStoreId(store_id);
        mpgReq.setApiToken (api_token);
        mpgReq.setTransaction (mpiAcs);
        mpgReq.setStatusCheck (status_check);
        mpgReq.send();
        /***** REQUEST *****/
        try
```

Sample MPI ACS Request - CA

```
{
Receipt receipt = mpgReq.getReceipt();
System.out.println("MpiMessage = " + receipt.getMpiMessage());
System.out.println("MpiSuccess = " + receipt.getMpiSuccess());
if (receipt.getMpiSuccess().equals("true"))
{
System.out.println("CAVV = " + receipt.getMpiCavv());
System.out.println("Crypt Type = " + receipt.getMpiEci());
}
}
catch (Exception e)
{
e.printStackTrace();
}
}
} // end TestResMpiTxn
```

3.6.4.1 ACS Response and Forming a Transaction

The ACS response contains the CAVV value and the Electronic Commerce Indicator (ECI). These values are to be passed to the transaction engine using the Cavv Purchase or Cavv Pre-Authorization request. Please see the documentation provided by your payment solution.

Outlined below is how to send a transaction to Moneris Gateway.

```
if ( mpiRes.getSuccess().equals("true") )
{
//Send transaction to host using CAVV purchase or CAVV preauth, refer to sample
//code for Moneris Gateway. Call mpiRes.getCavv() to obtain the CAVV value.
//If you are using preauth/capture model, be sure to call getMessage() so the
//value can be stored and used in the capture transaction after on to protect
//your chargeback liability. (e.g. getMPIMessage()= A = crypt type of 6 for
//follow on transaction and getMPIMessage() = Y = crypt type of 5 for follow on
//transaction.
}
else
{
if (mpiRes.getMessage().equals("N"))
{
//Do not send transaction as the cardholder failed authentication.
}
else
{
//Optional to send transaction using the mpg API. In this case merchant
//assumes liability.
}
}
}
```

3.6.5 Cavv Purchase

The Cavv Purchase transaction follows a 3-D Secure MPI authentication. After receiving confirmation from the MPI ACS transaction, this Purchase verifies funds on the customer's card, removes the funds and prepares them for deposit into the merchant's account.

To perform the 3-D Secure authentication, the Moneris MPI (see MPI (page 40)) or any 3rd party MPI may be used.

This transaction can also be used to process an Apple Pay or Android Pay transaction. This transaction is applicable only if choosing to integrate directly to the Apple and Google wallets (if not using the Moneris Apple Pay or Android Pay SDK). Please refer to 8 Apple Pay and Android Pay In-App Integration for more details on your integration options.

Refer to Apple's and Google's developer portals, respectively, for details on integrating directly to their wallets to retrieve the payload data.

CavvPurchase transaction object definition

```
CavvPurchase cavvPurchase = new CavvPurchase();
```

HttpPostRequest object for Cavv Purchase transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

```
mpgReq.setTransaction(cavvPurchase);
```

Cavv Purchase transaction values

For a full description of mandatory and optional values, see "Definition of Request Fields" on page 302 "Definition of Request Fields" on page 302

Table 25: CavvPurchase transaction object mandatory values

| Value | Type | Limits | Set method |
|--------------------|--------|----------------------------|---|
| Order ID | String | 50-character alpha-numeric | <code>cavvPurchase.setOrderId(order_id);</code> |
| Amount | String | 9-character decimal | <code>cavvPurchase.setAmount(amount);</code> |
| Credit card number | String | 20-character alpha-numeric | <code>cavvPurchase.setPan(pan);</code> |

Table 25: CavvPurchase transaction object mandatory values

| Value | Type | Limits | Set method |
|---|--------|--|---|
| Expiry date | String | 4-character alpha-numeric (YYMM format) | <code>cavvPurchase.setExpDate (exp-date) ;</code> |
| CAVV <div> NOTE: For Apple Pay and Android Pay Cavv Purchase and Cavv Pre-Authorization transactions, CAVV field contains the decrypted cryptogram. For more, see Appendix A Definition of Request Fields. </div> | String | 50-character alpha-numeric | <code>cavvPurchase.setCavv (cavv) ;</code> |
| E-commerce indicator <div> NOTE: For Apple Pay and Android Pay Cavv Purchase and Cavv Pre-Authorization transactions, the E-commerce indicator is a mandatory field containing the value received from the decrypted payload or a default value of 7. For more, see Appendix A Definition of Request Fields. </div> | String | 1-character alpha-numeric | <code>cavvPurchase.setCryptType (crypt_type) ;</code> |

Table 1: CavvPurchase transaction object optional values

| Value | Type | Limits | Set Method |
|--------------------|---------|----------------------------|---|
| Status Check | Boolean | true/false | <code>mpgReq.setStatusCheck (status_check) ;</code> |
| Customer ID | String | 50-character alpha-numeric | <code>cavvPurchase.setCustId (custid) ;</code> |
| Dynamic descriptor | String | 20-character alpha-numeric | <code>cavvPurchase.setDynamicDescriptor (dynamic_descriptor) ;</code> |

| Value | Type | Limits | Set Method |
|---|--------|--|--|
| Customer information | Object | Not applicable. Click here See Appendix D (page 326) | <pre>CustInfo customer = new CustInfo(); cavvPurchase.setCustInfo(customer);</pre> |
| AVS | Object | Not applicable. Click here See Appendix E (page 334) | <pre>AvsInfo avsCheck = new AvsInfo(); cavvPurchase.setAvsInfo(avsCheck);</pre> |
| CVD | Object | Not applicable. Click here See Appendix F (page 340) . | <pre>CvdInfo cvdCheck = new CvdInfo(); cavvPurchase.setCvdInfo(cvdCheck);</pre> |
| Convenience fee | Object | Not applicable. Click here See Appendix H (page 352). | <pre>ConvFeeInfo convFeeInfo = new ConvFeeInfo(); cavvPurchase.setConvFeeInfo(convFeeInfo);</pre> |
| Wallet indicator NOTE: For Cavv Purchase and Cavv Pre-Authorization, wallet indicator applies to Apple Pay or Android Pay only. For more, see Appendix A Definition of Request Fields | String | 3-character alphanumeric | <pre>cavvPurchase.setWalletIndicator(wallet_indicator);</pre> |

Sample Cavv Purchase

```
package Canada;
import JavaAPI.*;
public class TestCanadaCavvPurchase
{
    public static void main(String[] args)
    {
        String store_id = "store5";
        String api_token = "yesguy";
        java.util.Date createDate = new java.util.Date();
        String order_id = "Test"+createDate.getTime();
        String cust_id = "CUS887H67";
        String amount = "10.42";
```

Sample Cavv Purchase

```

String pan = "4242424242424242";
String expdate = "1901"; //YYMM
String cavv = "AAABBJg0VhIOVniQEjRWAAAAA=";
String dynamic_descriptor = "123456";
String processing_country_code = "CA";
String crypt_type = "5";
boolean status_check = false;
CavvPurchase cavvPurchase = new CavvPurchase();
cavvPurchase.setOrderId(order_id);
cavvPurchase.setCustId(cust_id);
cavvPurchase.setAmount(amount);
cavvPurchase.setPan(pan);
cavvPurchase.setExpdate(expdate);
cavvPurchase.setCavv(cavv);
cavvPurchase.setCryptType(crypt_type); //Mandatory for AMEX only
cavvPurchase.setDynamicDescriptor(dynamic_descriptor);
//cavvPurchase.setWalletIndicator("APP"); //set only for wallet transactions. e.g APPLE PAY
HttpPostRequest mpgReq = new HttpPostRequest();
mpgReq.setProcCountryCode(processing_country_code);
mpgReq.setTestMode(true); //false or comment out this line for production transactions
mpgReq.setStoreId(store_id);
mpgReq.setApiToken(api_token);
mpgReq.setTransaction(cavvPurchase);
mpgReq.setStatusCheck(status_check);
mpgReq.send();
try
{
    Receipt receipt = mpgReq.getReceipt();
    System.out.println("CardType = " + receipt.getCardType());
    System.out.println("TransAmount = " + receipt.getTransAmount());
    System.out.println("TxnNumber = " + receipt.getTxnNumber());
    System.out.println("ReceiptId = " + receipt.getReceiptId());
    System.out.println("TransType = " + receipt.getTransType());
    System.out.println("ReferenceNum = " + receipt.getReferenceNum());
    System.out.println("ResponseCode = " + receipt.getResponseCode());
    System.out.println("ISO = " + receipt.getISO());
    System.out.println("BankTotals = " + receipt.getBankTotals());
    System.out.println("Message = " + receipt.getMessage());
    System.out.println("AuthCode = " + receipt.getAuthCode());
    System.out.println("Complete = " + receipt.getComplete());
    System.out.println("TransDate = " + receipt.getTransDate());
    System.out.println("TransTime = " + receipt.getTransTime());
    System.out.println("Ticket = " + receipt.getTicket());
    System.out.println("TimedOut = " + receipt.getTimedOut());
    System.out.println("CavvResultCode = " + receipt.getCavvResultCode());
}
catch (Exception e)
{
    e.printStackTrace();
}
}

```

3.6.6 Cavv Pre-Authorization

The Cavv Pre-Authorization transaction follows a 3-D Secure MPI authentication. After receiving confirmation from the MPI ACS transaction, this Pre-Authorization verifies funds on the customer's card, removes the funds and prepares them for deposit into the merchant's account.

To perform the 3-D Secure authentication, the Moneris MPI (see MPI (page 40)) or any 3rd party MPI may be used.

This transaction can also be used to process an Apple Pay or Android Pay transaction. This transaction is applicable only if choosing to integrate directly to the Apple and Google wallets (if not using the Moneris Apple Pay or Android Pay SDK). Please refer to 8 Apple Pay and Android Pay In-App Integration for more details on your integration options.

Refer to Apple's and Google's developer portals, respectively, for details on integrating directly to their wallets to retrieve the payload data.

Cavv Pre-Authorization transaction object definition

```
CavvPreAuth cavvPreauth = new CavvPreAuth();
```

HttpPostRequest object for Cavv Pre-Authorization transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

```
mpgReq.setTransaction(cavvPreauth);
```

Cavv Pre-Authorization transaction values

For a full description of mandatory and optional values, see "Definition of Request Fields" on page 302"Definition of Request Fields" on page 302

Table 26: Cavv Pre-Authorization object mandatory values

| Value | Type | Limits | Set method |
|--------------------|--------|----------------------------|--|
| Order ID | String | 50-character alpha-numeric | <code>cavvPreauth.setOrderId(order_id);</code> |
| Amount | String | 9-character decimal | <code>cavvPreauth.setAmount(amount);</code> |
| Credit card number | String | 20-character numeric | <code>cavvPreauth.setPan(pan);</code> |

| Value | Type | Limits | Set method |
|--|--------|---------------------------|--|
| Cardholder Authentication Verification Value (CAVV) NOTE: For Apple Pay and Android Pay Cavv Purchase and Cavv Pre-Authorization transactions, CAVV field contains the decrypted cryptogram. For more, see Appendix A Definition of Request Fields. | String | 50-character alphanumeric | <code>cavvPreauth.setCavv(cavv);</code> |
| Expiry date | String | 4-character numeric | <code>cavvPreauth.setExpDate(exp-date);</code> |
| E-commerce indicator NOTE: For Apple Pay and Android Pay Cavv Purchase and Cavv Pre-Authorization transactions, the E-commerce indicator is a mandatory field containing the value received from the decrypted payload or a default value of 7. For more, see Appendix A Definition of Request Fields. | String | 1-character alphanumeric | <code>cavvPreauth.setCryptType(crypt_type);</code> |

Table 1: Cavv Pre-Authorization object optional values

| Value | Type | Limits | Set method |
|--------------------|---------|---------------------------|--|
| Status Check | Boolean | true/false | <code>mpgReq.setStatusCheck(status_check);</code> |
| Customer ID | String | 50-character alphanumeric | <code>cavvPreauth.setCustId(custid);</code> |
| Dynamic descriptor | String | 20-character alphanumeric | <code>cavvPreauth.setDynamicDescriptor(dynamic_descriptor);</code> |
| AVS | Object | Not applicable. Click | <code>AvsInfo avsCheck = new</code> |

| Value | Type | Limits | Set method |
|---|--------|---|--|
| | | here See Appendix E (page 334). | <pre>AvsInfo(); cavvPreauth.setAvsInfo(avsCheck);</pre> |
| CVD | Object | Not applicable. Click here See Appendix F (page 340). | <pre>CvdInfo cvdCheck = new CvdInfo(); cavvPreauth.setCvdInfo(cvdCheck);</pre> |
| Wallet indicator <div> NOTE: For Cavv Purchase and Cavv Pre-Authentication, wallet indicator applies to Apple Pay or Android Pay only. For more, see Appendix A Definition of Request Fields </div> | String | 3-character alphanumeric | <pre>cavvPreauth.setWalletIndicator(wallet_indicator);</pre> |

Sample Cavv Pre-Authentication

```
package Canada;
import JavaAPI.*;
public class TestCanadaCavvPreauth
{
    public static void main(String[] args)
    {
        String store_id = "store5";
        String api_token = "yesguy";
        java.util.Date createDate = new java.util.Date();
        String order_id = "Test"+createDate.getTime();
        String cust_id = "CUS887H67";
        String amount = "10.42";
        String pan = "4242424242424242";
        String expdate = "1911"; //YYMM format
        String cavv = "AAABBJg0VhIOVniQEjRWAAAAA=";
        String dynamic_descriptor = "123456";
        String processing_country_code = "CA";
        String crypt_type = "5";
        boolean status_check = false;
        CavvPreAuth cavvPreauth = new CavvPreAuth();
        cavvPreauth.setOrderId(order_id);
        cavvPreauth.setCustId(cust_id);
        cavvPreauth.setAmount(amount);
        cavvPreauth.setPan(pan);
        cavvPreauth.setExpdate(expdate);
        cavvPreauth.setCavv(cavv);
        cavvPreauth.setCryptType(crypt_type); //Mandatory for AMEX only
        cavvPreauth.setDynamicDescriptor(dynamic_descriptor);
        //cavvPreauth.setWalletIndicator("APP"); //set only for wallet transactions. e.g APPLE PAY
    }
}
```

Sample Cavv Pre-Authorization

```

HttpPostRequest mpgReq = new HttpPostRequest();
mpgReq.setProcCountryCode(processing_country_code);
mpgReq.setTestMode(true); //false or comment out this line for production transactions
mpgReq.setStoreId(store_id);
mpgReq.setApiToken(api_token);
mpgReq.setTransaction(cavvPreauth);
mpgReq.setStatusCheck(status_check);
mpgReq.send();
try
{
    Receipt receipt = mpgReq.getReceipt();
    System.out.println("CardType = " + receipt.getCardType());
    System.out.println("TransAmount = " + receipt.getTransAmount());
    System.out.println("TxnNumber = " + receipt.getTxnNumber());
    System.out.println("ReceiptId = " + receipt.getReceiptId());
    System.out.println("TransType = " + receipt.getTransType());
    System.out.println("ReferenceNum = " + receipt.getReferenceNum());
    System.out.println("ResponseCode = " + receipt.getResponseCode());
    System.out.println("ISO = " + receipt.getISO());
    System.out.println("BankTotals = " + receipt.getBankTotals());
    System.out.println("Message = " + receipt.getMessage());
    System.out.println("AuthCode = " + receipt.getAuthCode());
    System.out.println("Complete = " + receipt.getComplete());
    System.out.println("TransDate = " + receipt.getTransDate());
    System.out.println("TransTime = " + receipt.getTransTime());
    System.out.println("Ticket = " + receipt.getTicket());
    System.out.println("TimedOut = " + receipt.getTimedOut());
    System.out.println("CavvResultCode = " + receipt.getCavvResultCode());
}
catch (Exception e)
{
    e.printStackTrace();
}
}

```

3.6.7 Cavv Result Codes for Verified by Visa

Table 27: CAVV result codes for VbV

| Code | Message | Significance |
|------|--|---|
| 0 | CAVV authentication results invalid | For this transaction, you may not receive protection from chargebacks as a result of using VbV because the CAVV was considered invalid at the time the financial transaction was processed. Check that you are following the VbV process correctly and passing the correct data in our transactions. |
| 1 | CAVV failed validation; authentication | Provided that you have implemented the VbV process correctly, the liability for this transaction should remain with the Issuer for chargeback |

Table 27: CAVV result codes for VbV (continued)

| Code | Message | Significance |
|------|--|---|
| | | reason codes covered by Verified by Visa. |
| 2 | CAVV passed validation; authentication | The CAVV was confirmed as part of the financial transaction. This transaction is a fully authenticated VbV transaction (ECI 5) |
| 3 | CAVV passed validation; attempt | The CAVV was confirmed as part of the financial transaction. This transaction is an attempted VbV transaction (ECI 6) |
| 4 | CAVV failed validation; attempt | Provided that you have implemented the VbV process correctly the liability for this transaction should remain with the Issuer for chargeback reason codes covered by Verified by Visa. |
| 7 | CAVV failed validation; attempt (US issued cards only) | <p>Please check that you are following the VbV process correctly and passing the correct data in your transactions.</p> <p>Provided that you have implemented the VbV process correctly the liability for this transaction should be the same as an attempted transaction (ECI 6)</p> |
| 8 | CAVV passed validation; attempt (US issued cards only) | The CAVV was confirmed as part of the financial transaction. This transaction is an attempted VbV transaction (ECI 6) |
| 9 | CAVV failed validation; attempt (US issued cards only) | <p>Please check that you are following the VbV process correctly and passing the correct data in our transactions.</p> <p>Provided that you have implemented the VbV process correctly the liability for this transaction should be the same as an attempted transaction (ECI 6)</p> |
| A | CAVV passed validation; attempt (US issued cards only) | The CAVV was confirmed as part of the financial transaction. This transaction is an attempted VbV transaction (ECI 6) |

Table 27: CAVV result codes for VbV (continued)

| Code | Message | Significance |
|------|--|---|
| B | CAVV passed validation; information only, no liability shift | The CAVV was confirmed as part of the financial transaction. However, this transaction does not qualify for the liability shift. Treat this transaction the same as an ECI 7. |

3.6.8 Vault Cavv Purchase

Vault Cavv Purchase transaction object definition

```
ResCavvPurchaseCC resCavvPurchaseCC = new ResCavvPurchaseCC();
```

HttpPostRequest object for Vault Cavv Purchase transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

```
mpgReq.setTransaction(resCavvPurchaseCC);
```

Vault Cavv Purchase transaction details

Table 28: Vault Cavv Purchase transaction object mandatory values

| Value | Type | Limits | Set method |
|---|--------|----------------------------|--|
| Data Key | String | 25-character alpha-numeric | <code>resCavvPurchaseCC.setData(data_key);</code> |
| Order ID | String | 50-character alpha-numeric | <code>resCavvPurchaseCC</code> |
| Amount | String | 9-character decimal | <code>resCavvPurchaseCC.setAmount(amount);</code> |
| Cardholder Authentication Verification Value (CAVV) | String | 50-character alpha-numeric | <code>resCavvPurchaseCC.setCavv(cavv);</code> |
| E-commerce indicator | String | 1-character alpha-numeric | <code>resCavvPurchaseCC.setCryptType(crypt_type);</code> |

Table 29: Vault Cavv Purchase transaction object optional values

| Value | Type | Limits | Set method |
|--------------|---------|--|--|
| Customer ID | String | 50-character alpha-numeric | resCavvPurchaseCC.setCustId(custid); |
| Status Check | Boolean | true/false | mpgReq.setStatusCheck(status_check); |
| Expiry date | String | 4-character alpha-numeric (YYMM format) | resCavvPurchaseCC.setExpDate(expdate); |

Sample Vault Cavv Purchase

```

package Canada;
import JavaAPI.*;
public class TestCanadaResCavvPurchaseCC
{
    public static void main(String[] args)
    {
        String store_id = "store1";
        String api_token = "yesguy";
        String data_key = "4INQRlA8ocxD0oafSz50LADXY";
        java.util.Date createDate = new java.util.Date();
        String order_id = "Test"+createDate.getTime();
        String amount = "1.00";
        String cust_id = "customer1"; //if sent will be submitted, otherwise cust_id from profile will be
            used
        String cavv = "AAABBJg0VhI0VniQEjRWAAAAA";
        String processing_country_code = "CA";
        String exp_date = "1901";
        boolean status_check = false;
        ResCavvPurchaseCC resCavvPurchaseCC = new ResCavvPurchaseCC();
        resCavvPurchaseCC.setOrderId(order_id);
        resCavvPurchaseCC.setData(data_key);
        resCavvPurchaseCC.setCustId(cust_id);
        resCavvPurchaseCC.setAmount(amount);
        resCavvPurchaseCC.setCavv(cavv);
        resCavvPurchaseCC.setExpDate(exp_date);
        HttpsPostRequest mpgReq = new HttpsPostRequest();
        mpgReq.setProcCountryCode(processing_country_code);
        mpgReq.setTestMode(true); //false or comment out this line for production transactions
        mpgReq.setStoreId(store_id);
        mpgReq.setApiToken(api_token);
        mpgReq.setTransaction(resCavvPurchaseCC);
        mpgReq.setStatusCheck(status_check);
        mpgReq.send();
        try
        {
            Receipt receipt = mpgReq.getReceipt();
            System.out.println("DataKey = " + receipt.getDataKey());
            System.out.println("ReceiptId = " + receipt.getReceiptId());
            System.out.println("ReferenceNum = " + receipt.getReferenceNum());
            System.out.println("ResponseCode = " + receipt.getResponseCode());
        }
    }
}

```

Sample Vault Cavv Purchase

```

System.out.println("AuthCode = " + receipt.getAuthCode());
System.out.println("Message = " + receipt.getMessage());
System.out.println("TransDate = " + receipt.getTransDate());
System.out.println("TransTime = " + receipt.getTransTime());
System.out.println("TransType = " + receipt.getTransType());
System.out.println("Complete = " + receipt.getComplete());
System.out.println("TransAmount = " + receipt.getTransAmount());
System.out.println("CardType = " + receipt.getCardType());
System.out.println("TxnNumber = " + receipt.getTxnNumber());
System.out.println("TimedOut = " + receipt.getTimedOut());
System.out.println("ResSuccess = " + receipt.getResSuccess());
System.out.println("PaymentType = " + receipt.getPaymentType());
System.out.println("CavvResultCode = " + receipt.getCavvResultCode());
//ResolveData
System.out.println("Cust ID = " + receipt.getResCustId());
System.out.println("Phone = " + receipt.getResPhone());
System.out.println("Email = " + receipt.getResEmail());
System.out.println("Note = " + receipt.getResNote());
System.out.println("Masked Pan = " + receipt.getResMaskedPan());
System.out.println("Exp Date = " + receipt.getResExpdate());
System.out.println("Crypt Type = " + receipt.getResCryptType());
System.out.println("Avs Street Number = " + receipt.getResAvsStreetNumber());
System.out.println("Avs Street Name = " + receipt.getResAvsStreetName());
System.out.println("Avs Zipcode = " + receipt.getResAvsZipcode());
}
catch (Exception e)
{
e.printStackTrace();
}
}
}

```

3.6.9 Vault Cavv Pre-Authorization**Vault Cavv Pre-Authorization transaction object definition**

```
ResCavvPreAuthCC resCavvPreauthCC = new ResCavvPreAuthCC();
```

HttpPostRequest object for Vault Cavv Pre-Authorization

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

```
mpgReq.setTransaction(resCavvPreauthCC);
```

Vault Cavv Pre-Authorization transaction details

Table 30: Vault Cavv Pre-Authorization object mandatory values

| Value | Type | Limits | Set method |
|----------------------|--------|----------------------------|---|
| Data Key | String | 25-character alpha-numeric | <code>resCavvPreauthCC.setData(data_key);</code> |
| Order ID | String | 50-character alpha-numeric | <code>resCavvPreauthCC.setOrderId(order_id);</code> |
| Amount | String | 9-character decimal | <code>resCavvPreauthCC.setAmount(amount);</code> |
| CAVV | String | 50-character alpha-numeric | <code>resCavvPreauthCC.setCavv(cavv);</code> |
| E-commerce indicator | String | 1-character alpha-numeric | <code>resCavvPreauthCC.setCryptType(crypt_type);</code> |

Table 31: Vault Cavv Pre-Authorization object optional values

| Value | Type | Limits | Set method |
|--------------|---------|---------------------------|--|
| Customer ID | String | 50-character alphanumeric | <code>resCavvPreauthCC.setCustId(custid);</code> |
| Status Check | Boolean | true/false | <code>mpgReq.setStatusCheck(status_check);</code> |
| Expiry date | String | 4-character numeric | <code>resCavvPreauthCC.setExpDate(expdate);</code> |

Sample Vault Cavv Pre-Authorization

```
package Canada;
import JavaAPI.*;
public class TestCanadaResCavvPreauthCC
{
    public static void main(String[] args)
    {
        String store_id = "store1";
        String api_token = "yesguy";
        String data_key = "4INQR1A8ocxD0oafSz50LADXY";
        java.util.Date createDate = new java.util.Date();
        String order_id = "Test"+createDate.getTime();
        String amount = "1.00";
        String cust_id = "customer1"; //if sent will be submitted, otherwise cust_id from profile will be
```


Sample Vault Cavv Pre-Authorization

```

        used
        String cavv = "AAABBJg0VhI0VniQEjRWAAAAA";
        String processing_country_code = "CA";
        String expdate = "1901";
        boolean status_check = false;
        ResCavvPreauthCC resCavvPreauthCC = new ResCavvPreauthCC();
        resCavvPreauthCC.setOrderId(order_id);
        resCavvPreauthCC.setData(data_key);
        resCavvPreauthCC.setCustId(cust_id);
        resCavvPreauthCC.setAmount(amount);
        resCavvPreauthCC.setCavv(cavv);
        resCavvPreauthCC.setExpDate(expdate);
        HttpsPostRequest mpgReq = new HttpsPostRequest();
        mpgReq.setProcCountryCode(processing_country_code);
        mpgReq.setTestMode(true); //false or comment out this line for production transactions
        mpgReq.setStoreId(store_id);
        mpgReq.setApiToken(api_token);
        mpgReq.setTransaction(resCavvPreauthCC);
        mpgReq.setStatusCheck(status_check);
        mpgReq.send();
        try
        {
            Receipt receipt = mpgReq.getReceipt();
            System.out.println("DataKey = " + receipt.getDataKey());
            System.out.println("ReceiptId = " + receipt.getReceiptId());
            System.out.println("ReferenceNum = " + receipt.getReferenceNum());
            System.out.println("ResponseCode = " + receipt.getResponseCode());
            System.out.println("AuthCode = " + receipt.getAuthCode());
            System.out.println("Message = " + receipt.getMessage());
            System.out.println("TransDate = " + receipt.getTransDate());
            System.out.println("TransTime = " + receipt.getTransTime());
            System.out.println("TransType = " + receipt.getTransType());
            System.out.println("Complete = " + receipt.getComplete());
            System.out.println("TransAmount = " + receipt.getTransAmount());
            System.out.println("CardType = " + receipt.getCardType());
            System.out.println("TxnNumber = " + receipt.getTxnNumber());
            System.out.println("TimedOut = " + receipt.getTimedOut());
            System.out.println("ResSuccess = " + receipt.getResSuccess());
            System.out.println("PaymentType = " + receipt.getPaymentType());
            System.out.println("CavvResultCode = " + receipt.getCavvResultCode());
            //ResolveData
            System.out.println("Cust ID = " + receipt.getResCustId());
            System.out.println("Phone = " + receipt.getResPhone());
            System.out.println("Email = " + receipt.getResEmail());
            System.out.println("Note = " + receipt.getResNote());
            System.out.println("Masked Pan = " + receipt.getResMaskedPan());
            System.out.println("Exp Date = " + receipt.getResExpdate());
            System.out.println("Crypt Type = " + receipt.getResCryptType());
            System.out.println("Avs Street Number = " + receipt.getResAvsStreetNumber());
            System.out.println("Avs Street Name = " + receipt.getResAvsStreetName());
            System.out.println("Avs Zipcode = " + receipt.getResAvsZipcode());
        }
        catch (Exception e)
        {
            e.printStackTrace();
        }
    }
}

```

4 INTERAC® Online Payment

- 4.1 About INTERAC® Online Payment Transactions
- 4.2 Other Documents and References
- 4.3 Website and Certification Requirements
- 4.4 Transaction Flow for INTERAC® Online Payment
- 4.5 Sending an INTERAC® Online Payment Purchase Transaction
- 4.6 INTERAC® Online Payment Purchase
- 4.7 INTERAC® Online Payment Refund
- 4.8 INTERAC® Online Payment Field Definitions

4.1 About INTERAC® Online Payment Transactions

The INTERAC® Online Payment method offers cardholders the ability to pay using online banking. This payment method can be combined with the Moneris GatewayJava API solution to allow online payments using credit and debit cards.

INTERAC® Online Payment transactions via the Java API require two steps:

1. The cardholder guarantees the funds for the purchase amount using their online banking process.
2. The merchant confirms the payment by sending an INTERAC® Online Payment purchase request to Moneris using the Java API.

Any of the transaction objects that are defined in this section can be passed to the `HttpPostRequest` connection object defined in Section 11.5 (page 282)[here](#).

INTERAC® Online Payment transactions are available to **Canadian integrations** only.

4.2 Other Documents and References

INTERAC® Online Payment is offered by Acxsys Corporation, which is also a licensed user of the *Interac* logo. Refer to the following documentation and websites for additional details.

INTERAC® Online PaymentMerchant Guideline

Visit the Moneris Developer Portal (<https://developer.moneris.com>) to access the latest documentation and downloads.

This details the requirements for each page consumers visit on a typical INTERAC® Online Payment merchant website. It also details the requirements that can be displayed on any page (that is, requirements that are not page-specific).

Logos

Visit the Moneris Developer Portal (<https://developer.moneris.com>) to access the logos and downloads.

4.3 Website and Certification Requirements

4.3.1 Things to provide to Moneris

Refer to the Merchant Guidelines referenced in Section 4.2 for instructions on proper use of logos and the term "INTERAC® Online Payment". You need to provide Moneris with the following registration information:

- Merchant logo to be displayed on the INTERAC® Online Payment Gateway page
 - In both French and English
 - 120 × 30 pixels
 - Only PNG format is supported.
- Merchant business name
 - In both English and French
 - Maximum 30 characters.
- List of all referrer URLs. That is, URLs from which the customer may be redirected to the INTERAC® Online Payment gateway.
- List of all URLs that may appear in the IDEBIT_FUNDEDURL field of the https form POST to the INTERAC® Online Payment Gateway.
- List of all URLs that may appear in the IDEBIT_NOTFUNDEDURL field of the https form POST to the INTERAC® Online Payment Gateway.

Note that if your test and production environments are different, provide the above information for both environments.

4.3.2 Certification process

Test cases

All independent merchants and third-party service/shopping cart providers must pass the certification process by conducting all the test cases outlined in Appendix N (page 385) and "Third-Party Service Provider Checklists for INTERAC® Online Payment Certification Testing" on page 389 respectively. This is required after you have completed all of your testing.

Any major changes to your website after certification (with respect to the INTERAC® Online Payment functionality) require the site to be re-certified by completing the test cases again.

Appendix Q (page 397) is the Certification Test Case Detail showing all the information and requirements for each test case.

Screenshots

You must provide Moneris with screenshots of your check-out process showing examples of approved and declined transactions using the INTERAC® Online Payment service.

Checklists

To consistently portray the INTERAC Online service as a secure payment option, you must complete the respective Merchant Requirement checklist in Appendix N (page 385) or Appendix O (page 389) accordingly. The detailed descriptions of the requirements in these checklists can be found in the INTERAC® Online Payment Merchant Guidelines document referred to in 4.2 (page 66). If any item does not apply, mark it as "N/A".

After completion, fax or email the results to the Moneris Integration Support help desk for review before implementing the change into the production environment.

4.3.3 Client Requirements

Checklists

As a merchant using an INTERAC® Online Payment-certified third-party solution, your clients must complete the Merchant Checklists for INTERAC® Online Payment Certification form (Appendix P, page 394). They will **not** be required to complete any of the test cases.

Your clients must also complete the Merchant Requirement checklist (Appendix P, page 394). Ensure that your product documentation properly instructs your clients to fax or email the results to the Moneris Integration Support helpdesk for registration purposes.

Screenshots

Your clients must provide Moneris with screenshots of their check-out process that show examples of approved and declined transactions using INTERAC® Online Payment.

4.3.4 Delays

Note that merchants that fall under the following category codes listed in Table 32 may experience delays in the certification or registration process of up to 7 days.

Table 32: Category codes that might introduce certification/registration delays

| Category code | Merchant type/name |
|---------------|---|
| 4812 | Telecommunication equipment including telephone sales |
| 4829 | Money transfer—merchant |
| 5045 | Computers, computer peripheral equipment, software |
| 5732 | Electronic sales |
| 6012 | Financial institution—merchandise and services |
| 6051 | Quasi cash—merchant |

| Category code | Merchant type/name |
|---------------|--|
| 6530 | Remote stored value load—merchant |
| 6531 | Payment service provider—money transfer for a purchase |
| 6533 | Payment service provider—merchant—payment transaction |

4.4 Transaction Flow for INTERAC® Online Payment

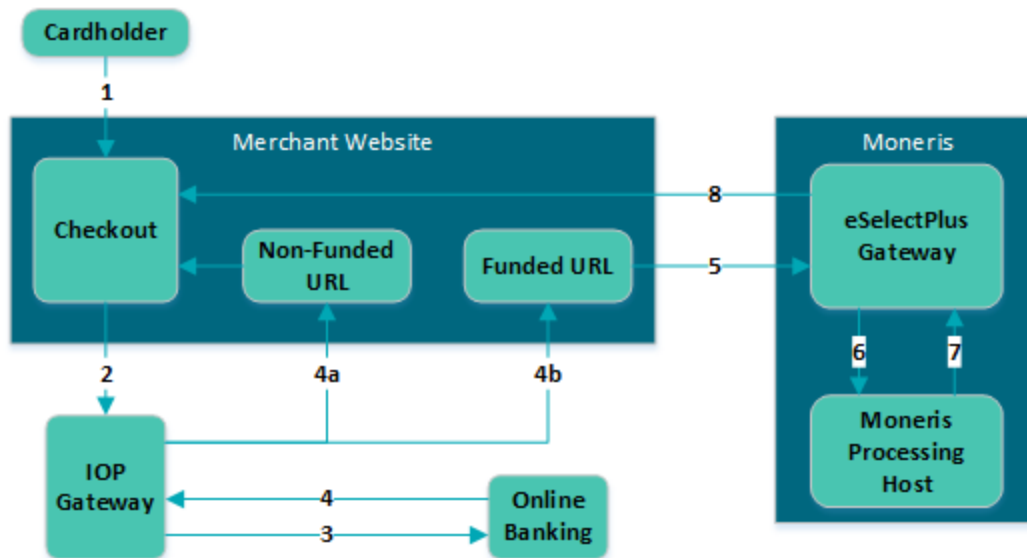


Figure 2: INTERAC® Online Payment transaction flow diagram

- Customer selects the INTERAC® Online Payment option on the merchant's web store.
- Merchant redirects the customer to the IOP gateway to select a financial institution (issuer) of choice. This step involves form-posting the following required variables over the HTTPS protocol:
 - IDEBIT_MERCHNUM
 - IDEBIT_AMOUNT¹
 - IDEBIT_CURRENCY
 - IDEBIT_FUNDEDURL
 - IDEBIT_NOTFUNDEDURL
 - IDEBIT_MERCHLANG
 - IDEBIT_VERSIONIDEBIT_TERMID - optional
 - IDEBIT_INVOICE - optional
 - IDEBIT_MERCHDATA - optional
- Customer selects an issuer, and is directed to the online banking site. Customer completes the online banking process and guarantees the funds for the purchase.

¹This value is expressed in cents. Therefore, \$1 is input as 100

4. Depending on the results of step 4.4, the issuer re-directs the customer through the IOP Gateway to either the merchant's non-funded URL (4a) or funded URL (4b). Both URLs can appear on the same page. The funded/non-funded URLs must validate the variables posted back according to 4.8 (page 77) before continuing.

4.4 shows the variables that are posted back in the re-direction.

If the customer is directed to the non-funded URL, return to step 4.4 and ask for another means of payment.

If the customer is directed to the funded URL, continue to the next step.

5. Merchant sends an INTERAC® Online Payment purchase request to Moneris Gateway while displaying the "Please wait...." message to the customer. This should be done within 30 minutes of receiving the response in step 4.4.
6. Moneris' processing host sends a request for payment confirmation to the issuer.
7. The issuer sends a response (either approved or declined) to Moneris host.
8. Moneris Gateway relays the response back to the merchant. If the payment was approved, the merchant fulfills the order.

Table 33: Funded and non-funded URL variables

| To funded URL only | To funded and non-funded URL |
|--------------------|------------------------------|
| IDEBIT_TRACK2 | IDEBIT_VERSION |
| IDEBIT_ISSCONF | IDEBIT_ISSLANG |
| IDEBIT_ISSNAME | IDEBIT_TERMID (optional) |
| | IDEBIT_INVOICE (optional) |
| | IDEBIT_MERCHDATA (optional) |

4.5 Sending an INTERAC® Online Payment Purchase Transaction

4.5.1 Fund-Guarantee Request

After choosing to pay by INTERAC® Online Payment, the customer is redirected using an HTML form post to the INTERAC® Online PaymentGateway page. Below is a sample code that is used to post the request to the Gateway.

```
<form action='from Section 9' method='post'>
<input type='text' name='IDEBIT_INVOICE' value='your unique invoice number'>
  <input type='text' name='IDEBIT_AMOUNT' value='100'> <!-- ($1.00) use cent values instead of
    dollar.cent format ->
<input type='text' name='IDEBIT_MERCHNUM' value='from Moneris Solutions'>
<input type='text' name='IDEBIT_CURRENCY' value='CA'>
<input type='text' name='IDEBIT_FUNDEDURL' value='your funded url'>
<input type='text' name='IDEBIT_NOTFUNDEDURL' value='your not funded url'>
<input type='text' name='IDEBIT_ISSLANG' value='en'>
<input type='text' name='IDEBIT_VERSION' value='1'>
<input type="submit" name="Submit" value="Submit to Gateway">
</form>
```

4.5.2 Online Banking Response and Fund-Confirmation Request

The response variables are posted back in an HTML form to either the funded or non-funded URL that was provided to INTERAC®.

The following variables must be validated (4.8, page 77):

- IDEBIT_TRACK2
- IDEBIT_ISSCONF
- IDEBIT_ISSNAME
- IDEBIT_VERSION
- IDEBIT_ISSLANG
- IDEBIT_INVOICE

Note that IDEBIT_ISSCONF and IDEBIT_ISSNAME must be displayed on the client's receipt that is generated by the merchant.

After validation, IDEBIT_TRACK2 is used to form an IDebitPurchase transaction that is sent to Moneris Gateway to confirm the fund.

If the validation fails, redirect the client to the main page and ask for a different means of payment.

If the validation passes, an IDebitPurchase transaction can be sent to Moneris Gateway.

4.6 INTERAC® Online Payment Purchase

INTERAC® Online Payment Purchase transaction object definition

```
IDebitPurchase IOP_Txn = new IDebitPurchase();
```

HttpPostRequest object for INTERAC® Online Payment Purchase transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

```
mpgReq.setTransaction(IOP_Txn);
```

INTERAC® Online Payment Purchase transaction values

For a full description of mandatory and optional values, see "Definition of Request Fields" on page 302 "Definition of Request Fields" on page 302

Table 34: INTERAC® Online Payment transaction object mandatory values

| Value | Type | Limits | Set method |
|-------------|--------|----------------------------|--|
| Order ID | String | 50-character alpha-numeric | <code>IOP_Txn.setOrderId(order_id);</code> |
| Amount | String | 9-character decimal | <code>IOP_Txn.setAmount(amount);</code> |
| Track2 data | String | 40-character alpha-numeric | <code>IOP_Txn.setTrack2(track2);</code> |

Table 35: INTERAC® Online Payment Purchase transaction optional values

| Value | Type | Limits | Set method |
|----------------------|--------|---|--|
| Customer ID | String | 50-character alphanumeric | <code>IOP_Txn.setCustId(custid);</code> |
| Dynamic descriptor | String | 20-character alphanumeric | <code>IOP_Txn.setDynamicDescriptor(dynamic_descriptor);</code> |
| Customer information | Object | Not applicable. Click here See Section Appendix D (page 326). | <code>IOP_Txn.setCustInfo(customer);</code> |

Sample INTERAC® Online Payment Purchase

```

package Canada;
import JavaAPI.*;
public class TestCanadaIDebitPurchase
{
    public static void main(String[] args)
    {
        String store_id = "store5";
        String api_token = "yesguy";
        java.util.Date createDate = new java.util.Date();
        String order_id = "Test"+createDate.getTime();
        String cust_id = "Lance_Briggs_55";
        String amount = "5.00";
        String track2 = "5268051119993326=0609AAAAAAAAAAAA000";
        String processing_country_code = "CA";
        boolean status_check = false;
        /***** Billing/Shipping Variables *****/
        String first_name = "Bob";
        String last_name = "Smith";
        String company_name = "ProLine Inc.";
        String address = "623 Bears Ave";
        String city = "Chicago";
        String province = "Illinois";
        String postal_code = "M1M2M1";
        String country = "Canada";
        String phone = "777-999-7777";
        String fax = "777-999-7778";
        String tax1 = "10.00";
    }
}

```


Sample INTERAC® Online Payment Purchase

```

String tax2 = "5.78";
String tax3 = "4.56";
String shipping_cost = "10.00";
/***** Order Line Item Variables *****/
String[] item_description = new String[] { "Chicago Bears Helmet", "Soldier Field Poster" };
String[] item_quantity = new String[] { "1", "1" };
String[] item_product_code = new String[] { "CB3450", "SF998S" };
String[] item_extended_amount = new String[] { "150.00", "19.79" };
/***** Customer Information Object *****/
CustInfo customer = new CustInfo();
/***** Set Customer Billing Information *****/
customer.setBilling(first_name, last_name, company_name, address, city,
    province, postal_code, country, phone, fax, tax1, tax2,
    tax3, shipping_cost);
/***** Set Customer Shipping Information *****/
customer.setShipping(first_name, last_name, company_name, address, city,
    province, postal_code, country, phone, fax, tax1, tax2,
    tax3, shipping_cost);
/***** Order Line Items *****/
customer.setItem(item_description[0], item_quantity[0],
    item_product_code[0], item_extended_amount[0]);
customer.setItem(item_description[1], item_quantity[1],
    item_product_code[1], item_extended_amount[1]);
/***** Request *****/
IDebitPurchase IOP_Txn = new IDebitPurchase();
IOP_Txn.setOrderId(order_id);
IOP_Txn.setCustId(cust_id);
IOP_Txn.setAmount(amount);
IOP_Txn.setDebitTrack2(track2);
IOP_Txn.setCustInfo(customer);
//IOP_Txn.setDynamicDescriptor("dynamicdescriptor1");
HttpPostRequest mpgReq = new HttpPostRequest();
mpgReq.setProcCountryCode(processing_country_code);
mpgReq.setTestMode(true); //false or comment out this line for production transactions
mpgReq.setStoreId(store_id);
mpgReq.setApiToken(api_token);
mpgReq.setTransaction(IOP_Txn);
mpgReq.setStatusCheck(status_check);
mpgReq.send();
try
{
    Receipt receipt = mpgReq.getReceipt();
    System.out.println("CardType = " + receipt.getCardType());
    System.out.println("TransAmount = " + receipt.getTransAmount());
    System.out.println("TxnNumber = " + receipt.getTxnNumber());
    System.out.println("ReceiptId = " + receipt.getReceiptId());
    System.out.println("TransType = " + receipt.getTransType());
    System.out.println("ReferenceNum = " + receipt.getReferenceNum());
    System.out.println("ResponseCode = " + receipt.getResponseCode());
    System.out.println("ISO = " + receipt.getISO());
    System.out.println("BankTotals = " + receipt.getBankTotals());
    System.out.println("Message = " + receipt.getMessage());
    System.out.println("AuthCode = " + receipt.getAuthCode());
    System.out.println("Complete = " + receipt.getComplete());
    System.out.println("TransDate = " + receipt.getTransDate());
    System.out.println("TransTime = " + receipt.getTransTime());
    System.out.println("Ticket = " + receipt.getTicket());
    System.out.println("TimedOut = " + receipt.getTimedOut());
}

```

Sample INTERAC® Online Payment Purchase

```
catch (Exception e)
{
    e.printStackTrace();
}
}
```

4.7 INTERAC® Online Payment Refund

To process this transaction, you need the order ID and transaction number from the original INTERAC® Online Payment Purchase transaction.

INTERAC® Online Payment Refund transaction object definition

```
IDebitRefund refund = new IDebitRefund();
```

HttpPostRequest object for INTERAC® Online Payment Refund transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();

mpgReq.setTransaction(refund);
```

INTERAC® Online Payment Refund transaction object values

For a full description of mandatory and optional values, see "Definition of Request Fields" on page 302 "Definition of Request Fields" on page 302

Table 36: INTERAC® Online Payment Refund transaction object mandatory variables

| Value | Type | Limits | Set method |
|--------------------|--------|----------------------------|---|
| Order ID | String | 50-character alpha-numeric | <code>refund.setOrderId(order_id);</code> |
| Amount | String | 9-character decimal | <code>refund.setAmount(amount);</code> |
| Transaction number | String | 255-character varchar | <code>refund.setTxnNumber(txn_number);</code> |

Table 37: INTERAC® Online Payment Refund transaction optional values

| Value | Type | Limits | Set method |
|--------------|---------|----------------------------|---|
| Customer ID | String | 50-character alpha-numeric | <code>refund.setCustId(custid);</code> |
| Status Check | Boolean | true/false | <code>mpgReq.setStatusCheck(status_check);</code> |

Sample code

Sample INTERAC® Online Payment Refund

```

package Canada;
import JavaAPI.*;
public class TestCanadaIDebitRefund
{
    public static void main(String[] args)
    {
        String store_id = "store5";
        String api_token = "yesguy";
        String order_id = "Test1435508096214";
        String amount = "5.00";
        String txn_number = "116181-0_10";
        String processing_country_code = "CA";
        String cust_id = "my customer id";
        boolean status_check = false;
        IDebitRefund refund = new IDebitRefund();
        refund.setOrderId(order_id);
        refund.setAmount(amount);
        refund.setTxnNumber(txn_number);
        refund.setCustId(cust_id);
        HttpsPostRequest mpgReq = new HttpsPostRequest();
        mpgReq.setProcCountryCode(processing_country_code);
        mpgReq.setTestMode(true); //false or comment out this line for production transactions
        mpgReq.setStoreId(store_id);
        mpgReq.setApiToken(api_token);
        mpgReq.setTransaction(refund);
        mpgReq.setStatusCheck(status_check);
        mpgReq.send();
        try
        {
            Receipt receipt = mpgReq.getReceipt();
            System.out.println("CardType = " + receipt.getCardType());
            System.out.println("TransAmount = " + receipt.getTransAmount());
            System.out.println("TxnNumber = " + receipt.getTxnNumber());
            System.out.println("ReceiptId = " + receipt.getReceiptId());
            System.out.println("TransType = " + receipt.getTransType());
            System.out.println("ReferenceNum = " + receipt.getReferenceNum());
            System.out.println("ResponseCode = " + receipt.getResponseCode());
            System.out.println("ISO = " + receipt.getISO());
            System.out.println("BankTotals = " + receipt.getBankTotals());
            System.out.println("Message = " + receipt.getMessage());
            System.out.println("AuthCode = " + receipt.getAuthCode());
            System.out.println("Complete = " + receipt.getComplete());
            System.out.println("TransDate = " + receipt.getTransDate());
            System.out.println("TransTime = " + receipt.getTransTime());
            System.out.println("Ticket = " + receipt.getTicket());
            System.out.println("TimedOut = " + receipt.getTimedOut());
        }
        catch (Exception e)
        {
            e.printStackTrace();
        }
    }
}

```

4.8 INTERAC® Online Payment Field Definitions

Table 38: Field Definitions

| Value | Limits | |
|------------------|---|---|
| | Description | |
| IDEBIT_MERCHNUM | 5-14 | Numbers and uppercase letters |
| | This field is provided by Moneris. For example, 0003MONMPGXXXX. | |
| IDEBIT_TERMID | 8 | Numbers and uppercase letters |
| | Optional field | |
| IDEBIT_AMOUNT | 1-12 | Numbers |
| | Amount expressed in cents (for example, 1245 for \$12.45) to charge to the card. | |
| IDEBIT_CURRENCY | 3 | "CAD" or "USD" |
| | National currency of the transaction. | |
| IDEBIT_INVOICE | 1-20 | ISO-8859-1 encoded characters restricted to: <ul style="list-style-type: none"> • Uppercase and lowercase • Numbers • À Á Â Ã Ä Å Æ Ç È É Ê Ë Ì Í Î Ï Ñ Ò Ó Ô Õ Ö × à á â ã ä å æ ç è é ê ë ì í î ï ò ó ô õ ö ÷ ÿ ç • Spaces • # \$. , - / = ? @ ' |
| | Optional field Can be the Order ID when used with Moneris Gateway fund confirmation transactions. | |
| IDEBIT_MERCHDATA | 1024 | ISO-8859-1 restricted to single-byte codes, hex 20 to 7E (consistent with US-ASCII and ISO-8859-1 Latin-1). Note that the following character combinations may not be accepted in the IDEBIT_MERCHDATA field: <ul style="list-style-type: none"> • "/. ", "/%2E.", "/.%2E", "/%2E%2E", "\\%2E%2E", "\\%2E.", "\\.%2E", "\\%2E%2E", "&#", "<", "%3C", ">", "%3E" |
| | Free form data provided by the merchant that will be passed back unchanged to the merchant once the payment has been guaranteed in online banking. This may be used to identify the customer, session or both. | |

Table 38: Field Definitions (continued)

| Value | Limits | |
|---------------------|--|---|
| | Description | |
| IDEBIT_FUNDEDURL | 1024 | ISO-8859-1 restricted to single-byte codes, restricted to: <ul style="list-style-type: none"> • Uppercase and lowercase letters • Numbers • ; / ? : @ & = + \$, - _ . ! ~ * ' () % |
| | Https address to which the issuer will redirect cardholders after guaranteeing the fund through online banking. | |
| IDEBIT_NOTFUNDEDURL | 1024 | ISO-8859-1, restricted to single-byte codes, restricted to: <ul style="list-style-type: none"> • Uppercase and lowercase letters • Numbers • ; / ? : @ & = + \$, - _ . ! ~ * ' () % |
| | Https address to which the issuer redirects cardholders after failing or canceling the online banking process. | |
| IDEBIT_MERCHLANG | 2 | “en” or “fr” |
| | Customer's current language at merchant. | |
| IDEBIT_VERSION | 3 | Numbers |
| | Initially, the value is 1. | |
| IDEBIT_ISSLANG | 2 | “en” or “fr” |
| | Customer's current language at issuer. | |
| IDEBIT_TRACK2 | 37 | ISO-8859-1 (restricted to single-byte codes), hex 20 to 7E (consistent with US-ASCII and ISO-8859-1 Latin-1) |
| | Value returned by the issuer. It includes the PAN, expiry date, and transaction ID. | |
| IDEBIT_ISSCONF | 15 | ISO-8859-1 encoded characters restricted to: <ul style="list-style-type: none"> • Uppercase and lowercase letters • Numbers • À Á Â Ã Ä Å Æ Ç È É Ê Ë Ì Í Î Ï Ñ Ò Ó Ô Õ Ö × à á â ã ä å è é ê ë ì í î ï ò ó ô õ ö ÷ ç • Spaces • # \$. , - / = ? @ ' |
| | Confirmation number returned from the issuer to be displayed on the merchant's confirmation page and on the receipt. | |

Table 38: Field Definitions (continued)

| Value | Characters | Limits |
|--------------------|---|---|
| | Description | |
| IDEBIT_ ISSNAME | 30 | ISO-8859-1 encoded characters restricted to: <ul style="list-style-type: none"> • Uppercase and lowercase letters • Numbers • À Á Â Ã Ä Å Æ Ç È É Ê Ë Ì Í Î Ï Ñ Ò Ó Ô Õ Ö × à á â ã ä å æ ç è é ê ë ì í î ï ò ó ô õ ö ÷ ÿ ç • Spaces • # \$. , - / = ? @ • ' |
| | Issuer name to be displayed on the merchant's confirmation page and on the receipt. | |

5 Vault

- 5.1 About the Vault Transaction Set
- 5.2 Vault Transaction Types
- 5.3 Administrative Transactions
- 5.4 Financial Transactions
- 5.5 Hosted Tokenization

5.1 About the Vault Transaction Set

The Vault feature allows merchants to create customer profiles, edit those profiles, and use them to process transactions without having to enter financial information each time. Customer profiles store customer data essential to processing transactions, including credit and signature debit.

The Vault is a complement to the recurring payment module. It securely stores customer account information on Moneris secure servers. This allows merchants to bill customers for routine products or services when an invoice is due.

Any of the transaction objects that are defined in this section can be passed to the `HttpPostRequest` connection object defined in Section 11.5 (page 282)[here](#).

5.2 Vault Transaction Types

The Vault API supports both administrative and financial transactions.

5.2.1 Administrative Vault Transaction types

ResAddCC

Creates a new credit card profile, and generates a unique data key which can be obtained from the Receipt object.

This data key is the profile identifier that all future financial Vault transactions will use to associate with the saved information (see 5.3.1, page 83).

EncResAddCC

Creates a new credit card profile, but requires the card data to be either swiped or manually keyed in via a Moneris-provided encrypted mag swipe reader.

ResTempAdd

Creates a new temporary token credit card profile. This transaction requires a duration to be set to indicate how long the temporary token is to be stored for.

During the lifetime of this temporary token, it may be used for any other vault transaction before it is permanently deleted from the system.

ResUpdateCC

Updates a Vault profile (based on the data key) to contain credit card information.

All information contained within a credit card profile is updated as indicated by the submitted fields. The fields are explained in more detail in "Administrative Transactions" on page 82.

EncResUpdateCC

Updates a profile (based on the data key) to contain credit card information. The encrypted version of this transaction requires the card data to either be swiped or manually keyed in via a Moneris-provided encrypted mag swipe reader.

ResDelete

Deletes an existing Vault profile of any type using the unique data key that was assigned when the profile was added.

It is important to note that after a profile is deleted, the information which was saved within can no longer be retrieved.

ResLookupFull

Verifies what is currently saved under the Vault profile associated with the given data key. The response to this transaction returns the latest active data for that profile.

Unlike ResLookupMasked (which returns the masked credit card number), this transaction returns both the masked and the unmasked credit card numbers.

ResLookupMasked

Verifies what is currently saved under the Vault profile associated with the given data key. The response to this transaction returns the latest active data for that profile.

Unlike ResLookupFull (which only returns both the masked and the unmasked credit card numbers), this transaction only returns the masked credit card number.

ResGetExpiring

Verifies which profiles have credit cards that are expiring during the current and next calendar month. For example, if you are processing this transaction on September 30, then it will return all cards that expire(d) in September and October of this year.

When generating a list of profiles with expiring credit cards, only the **masked** credit card numbers are returned.

This transaction can be performed no more than 2 times on any given calendar day, and it only applies to credit card profiles.

ResIsCorporateCard

Determines whether a profile has a corporate card registered within it.

After sending the transaction, the response field to the Receipt object's getCorporateCard method is either `true` or `false` depending on whether the associated card is a corporate card.

ResAddToken

Converts a Hosted Tokenization temporary token to a permanent Vault token.

A temporary token is valid for 15 minutes after it is created.

ResTokenizeCC

Creates a new credit card profile using the credit card number, expiry date and e-commerce indicator that were submitted in a previous financial transaction. A transaction that was previously done in Moneris Gateway is taken, and the card data from that transaction is stored in the Moneris Vault.

As with ResAddCC, a unique data key is generated and returned to the merchant via the Receipt object. This is the profile identifier that all future financial Vault transactions will use to associate with the saved information.

For more information about the data key, see "Vault Add Credit Card- ResAddCC" on the next page.

5.2.2 Financial Vault Transaction types

ResPurchaseCC

Uses the data key to identify a previously registered credit card profile. The details saved within the profile are then submitted to perform a Purchase transaction.

ResPreauthCC

Uses the data key to identify a previously registered credit card profile. The details within the profile are submitted to perform a Pre-Authorization transaction.

ResIndRefundCC

Uses the unique data key to identify a previously registered credit card profile, and credits a specified amount to that credit card.

ResMpiTxn

Uses the data key (as opposed to a credit card number) in a VBV/SecureCode Txn MPI transaction. The merchant uses the data key with ResMpiTxn request, and then reads the response fields to verify whether the card is enrolled in Verified by Visa or MasterCard SecureCode. Retrieves the vault transaction value to pass on to Visa or MasterCard.

After it has been validated that the data key is enrolled in 3-D Secure, a window appears in which the customer can enter the 3-D Secure password. The merchant may initiate the forming of the validation form `getMpiInlineForm()`.

For more information on integrating with MonerisMPI, refer to MPI (page 40)

5.2.3 Charging a Temporary Token

The only difference between charging a temporary token and charging a normal Vault token is whether the expiry date is sent. With the Vault token, the expiry date is stored along with the card number as part of the Vault profile. Therefore, there is no need to send the expiry date again with each normal Vault transaction. However, a temporary token transaction only stores the card number. Therefore, the expiry date must be sent when you charge the card.

The following financial transactions can charge a temporary token:

- ResPurchaseCC (page 109)
- ResPreauthCC (page 111)

A temporary token can be made permanent by using the ResAddTokenCC transaction (page 104).

5.3 Administrative Transactions

Administrative transactions allow you to perform such tasks as creating new Vault profiles, deleting existing Vault profiles and updating profile information.

5.3.1 Vault Add Credit Card- ResAddCC

ResAddCC transaction object definition

```
ResAddCC resaddcc = new ResAddCC();
```

HttpPostRequest object for ResAddCC transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

```
mpgReq.setTransaction(resaddcc);
```

ResAddCC transaction values

For a full description of mandatory and optional values, see "Definition of Request Fields" on page 302."Definition of Request Fields" on page 302

Table 39: ResAddCC transaction object mandatory values

| Value | Type | Limits | Set method |
|----------------------|--------|--|---|
| Credit card number | String | 20-character alpha-numeric | <code>resaddcc.setPan(pan);</code> |
| Expiry date | String | 4-character alpha-numeric (YYMM format) | <code>resaddcc.setExpDate(exp-date);</code> |
| E-commerce indicator | String | 1-character alpha-numeric | <code>resaddcc.setCryptType(crypt_type);</code> |

Table 40: ResAddCC transaction optional values

| Value | Type | Limits | Set method |
|-----------------|--------|---|---|
| Customer ID | String | 50-character alpha-numeric | <code>resaddcc.setCustId(custid);</code> |
| AVS information | Object | Not applicable. Click here See Appendix E (page 334). | <code>resaddcc.setAvsInfo(avsCheck);</code> |
| Email address | String | 30-character alpha-numeric | <code>resaddcc.setEmail(email);</code> |

Table 40: ResAddCC transaction optional values

| Value | Type | Limits | Set method |
|------------------------------|--------|----------------------------|--|
| Phone number | String | 30-character alpha-numeric | <code>resaddcc.setPhone(phone);</code> |
| Note | String | 30-character alpha-numeric | <code>resaddcc.setNote(note);</code> |
| Data key format ¹ | String | 2-character alpha-numeric | <code>resaddcc.setDataKeyFormat(data_key_format);</code> |

Sample ResAddCC - CA

```

package Canada;
import JavaAPI.*;
public class TestCanadaResAddCC
{
    public static void main(String[] args)
    {
        String store_id = "store5";
        String api_token = "yesguy";
        String pan = "5454545454545454";
        String expdate = "1912";
        String phone = "0000000000";
        String email = "bob@smith.com";
        String note = "my note";
        String cust_id = "customer1";
        String crypt_type = "7";
        String processing_country_code = "CA";
        boolean status_check = false;
        AvsInfo avsCheck = new AvsInfo();
        avsCheck.setAvsStreetNumber("212");
        avsCheck.setAvsStreetName("Payton Street");
        avsCheck.setAvsZipCode("M1M1M1");
        ResAddCC resaddcc = new ResAddCC();
        resaddcc.setPan(pan);
        resaddcc.setExpdate(expdate);
        resaddcc.setCryptType(crypt_type);
        resaddcc.setCustId(cust_id);
        resaddcc.setPhone(phone);
        resaddcc.setEmail(email);
        resaddcc.setNote(note);
        resaddcc.setAvsInfo(avsCheck);
        resaddcc.setDataKeyFormat("00");

        HttpsPostRequest mpgReq = new HttpsPostRequest();
        mpgReq.setProcCountryCode(processing_country_code);
        mpgReq.setTestMode(true); //false or comment out this line for production transactions
        mpgReq.setStoreId(store_id);
        mpgReq.setApiToken(api_token);
        mpgReq.setTransaction(resaddcc);
    }
}

```

¹Available to Canadian integrations only.

Sample ResAddCC - CA

```

mpgReq.setStatusCheck(status_check);
mpgReq.send();
try
{
    Receipt receipt = mpgReq.getReceipt();
    System.out.println("DataKey = " + receipt.getDataKey());
    System.out.println("ResponseCode = " + receipt.getResponseCode());
    System.out.println("Message = " + receipt.getMessage());
    System.out.println("TransDate = " + receipt.getTransDate());
    System.out.println("TransTime = " + receipt.getTransTime());
    System.out.println("Complete = " + receipt.getComplete());
    System.out.println("TimedOut = " + receipt.getTimedOut());
    System.out.println("ResSuccess = " + receipt.getResSuccess());
    System.out.println("PaymentType = " + receipt.getPaymentType());
    System.out.println("Cust ID = " + receipt.getResCustId());
    System.out.println("Phone = " + receipt.getResPhone());
    System.out.println("Email = " + receipt.getResEmail());
    System.out.println("Note = " + receipt.getResNote());
    System.out.println("MaskedPan = " + receipt.getResMaskedPan());
    System.out.println("Exp Date = " + receipt.getResExpdate());
    System.out.println("Crypt Type = " + receipt.getResCryptType());
    System.out.println("Avs Street Number = " + receipt.getResAvsStreetNumber());
    System.out.println("Avs Street Name = " + receipt.getResAvsStreetName());
    System.out.println("Avs Zipcode = " + receipt.getResAvsZipcode());
}
catch (Exception e)
{
    e.printStackTrace();
}
}

```

Vault response fields

For a list and explanation of (Receipt object) response fields that are available after sending this Vault transaction, see [Definition of Response Fields \(page 312\)](#).

5.3.1.1 Vault Data Key

The ResAddCC sample code includes the following instruction from the Receipt object:

```
System.out.println("DataKey = " + receipt.getDataKey());
```

The data key response field is populated when you send a Vault Add Credit Card- ResAddCC (page 83), Vault Encrypted Add Credit Card - EncResAddCC (page 86), Vault Tokenize Credit Card - ResTokenizeCC (page 106), Vault Temporary Token Add - ResTempAdd (page 88) or Vault Add Token - ResAddToken (page 104) transaction. It is the profile identifier that all future financial Vault transactions will use to associate with the saved information.

The data key is a maximum 28-character alphanumeric string.

5.3.1.2 Vault Encrypted Add Credit Card - EncResAddCC

Vault Encrypted Add Credit Card transaction object definition

```
EncResAddCC encresaddcc = new EncResAddCC();
```

HttpPostRequest object for Vault Encrypted Add Credit Card transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

```
mpgReq.setTransaction(encresaddcc);
```

Vault Encrypted Add Credit Card transaction values

For a full description of mandatory and optional values, see "Definition of Request Fields" on page 302 "Definition of Request Fields" on page 302

Table 41: Vault Encrypted Add Credit Card transaction object mandatory values

| Value | Type | Limits | Set method |
|-----------------------|--------|----------------------------|---|
| Encrypted Track2 data | String | 40-character numeric | encresaddcc.setEncTrack2(enc_track2); |
| Device type | String | 30-character alpha-numeric | encresaddcc.setDeviceType(device_type); |
| E-commerce indicator | String | 1-character alpha-numeric | encresaddcc.setCryptType(crypt_type); |

Table 42: Vault Encrypted Add Credit Card transaction optional values

| Value | Type | Limits | Set method |
|-----------------|--------|---|-----------------------------------|
| Customer ID | String | 50-character alpha-numeric | encresaddcc.setCustId(custid); |
| AVS information | Object | Not applicable. Click here See Appendix E (page 334). | encresaddcc.setAvsInfo(avsCheck); |
| Email address | String | 30-character alpha-numeric | encresaddcc.setEmail(email); |

| Value | Type | Limits | Set method |
|------------------------------|--------|----------------------------|---|
| Phone number | String | 30-character alpha-numeric | <code>encresaddcc.setPhone(phone);</code> |
| Note | String | 30-character alpha-numeric | <code>encresaddcc.setNote(note);</code> |
| Data key format ¹ | String | 2-character alpha-numeric | <code>encresaddcc.setDataKeyFormat(data_key_format);</code> |

Sample Vault Encrypted Add Credit Card - CA

```

package Canada;
import JavaAPI.*;
public class TestCanadaEncResAddCC
{
    public static void main(String args[])
    {
        String store_id = "moneris";
        String api_token = "hurgle";
        String enc_track2 = "ENCRYPTEDTRACK2DATA";
        String device_type = "idtech_bdk";
        String phone = "5555555555";
        String email = "test.user@moneris.com";
        String note = "my note";
        String cust_id = "customer2";
        String crypt = "7";
        String processing_country_code = "CA";

        AvsInfo avsCheck = new AvsInfo();
        avsCheck.setAvsStreetNumber("212");
        avsCheck.setAvsStreetName("Payton Street");
        avsCheck.setAvsZipcode("M1M1M1");
        EncResAddCC enc_res_add_cc = new EncResAddCC ();
        enc_res_add_cc.setEncTrack2(enc_track2);
        enc_res_add_cc.setDeviceType(device_type);
        enc_res_add_cc.setCryptType(crypt);
        enc_res_add_cc.setCustId(cust_id);
        enc_res_add_cc.setPhone(phone);
        enc_res_add_cc.setEmail(email);
        enc_res_add_cc.setNote(note);
        //enc_res_add_cc.setAvsInfo(avsCheck);
        HttpsPostRequest mpgReq = new HttpsPostRequest();
        mpgReq.setProcCountryCode(processing_country_code);
        mpgReq.setTestMode(true); //false or comment out this line for production transactions
        mpgReq.setStoreId(store_id);
        mpgReq.setApiToken(api_token);
        mpgReq.setTransaction(enc_res_add_cc);
        mpgReq.send();

        try
        {

```

¹Available to Canadian integrations only.

Sample Vault Encrypted Add Credit Card - CA

```

Receipt receipt = mpgReq.getReceipt();
System.out.println("DataKey = " + receipt.getDataKey());
System.out.println("ResponseCode = " + receipt.getResponseCode());
System.out.println("Message = " + receipt.getMessage());
System.out.println("TransDate = " + receipt.getTransDate());
System.out.println("TransTime = " + receipt.getTransTime());
System.out.println("Complete = " + receipt.getComplete());
System.out.println("TimedOut = " + receipt.getTimedOut());
System.out.println("ResSuccess = " + receipt.getResSuccess());
System.out.println("PaymentType = " + receipt.getPaymentType() + "\n");
//Contents of ResolveData
System.out.println("Cust ID = " + receipt.getResCustId());
System.out.println("Phone = " + receipt.getResPhone());
System.out.println("Email = " + receipt.getResEmail());
System.out.println("Note = " + receipt.getResNote());
System.out.println("MaskedPan = " + receipt.getResMaskedPan());
System.out.println("Exp Date = " + receipt.getResExpDate());
System.out.println("Crypt Type = " + receipt.getResCryptType());
System.out.println("Avs Street Number = " + receipt.getResAvsStreetNumber());
System.out.println("Avs Street Name = " + receipt.getResAvsStreetName());
System.out.println("Avs Zipcode = " + receipt.getResAvsZipcode());
}
catch (Exception e)
{
e.printStackTrace();
}
}
}

```

Vault response fields

For a list and explanation of (Receipt object) response fields that are available after sending this Vault transaction, see Definition of Response Fields (page 312).

5.3.2 Vault Temporary Token Add - ResTempAdd

Vault Temporary Token Add transaction object definition

```
ResTempAdd resTempAdd = new ResTempAdd();
```

HttpPostRequest object for Vault Temporary Token Add transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

```
mpgReq.setTransaction(resTempAdd);
```

Vault Temporary Token Add transaction values

For a full description of mandatory and optional values, see "Definition of Request Fields" on page 302 "Definition of Request Fields" on page 302

Table 43: Vault Temporary Token Add transaction object mandatory values

| Value | Type | Limits | Set method |
|----------------------|--------|---|--------------------------------------|
| Credit card number | String | 20-character numeric | resTempAdd.setPan(pan); |
| Expiry date | String | 4-character numeric | resTempAdd.setExpDate(exp-date); |
| Duration | String | 3-character numeric maximum 15 minutes | resTempAdd.setDuration(duration); |
| E-commerce indicator | String | 1-character alpha-numeric | resTempAdd.setCryptType(crypt_type); |

Table 44: Vault Temporary Token Add transaction optional values

| Value | Type | Limits | Set method |
|------------------------------|--------|---------------------------|---|
| Data key format ¹ | String | 2-character alpha-numeric | resTempAdd.setDataKeyFormat(data_key_format); |

Sample Vault Temporary Token Add - CA

```

package Canada;
import JavaAPI.*;
public class TestCanadaResTempAdd
{
    public static void main(String[] args)
    {
        String store_id = "store1";
        String api_token = "yesguy";
        String pan = "5454545454545454";
        String expdate = "1901"; //YYMM format
        String crypt_type = "7";
        String duration = "900";
        String processing_country_code = "CA";
        boolean status_check = false;
        ResTempAdd resTempAdd = new ResTempAdd();
        resTempAdd.setPan(pan);
        resTempAdd.setExpdate(expdate);
        resTempAdd.setDuration(duration);
        resTempAdd.setCryptType(crypt_type);
        // resTempAdd.setDataKeyFormat("00");

        HttpsPostRequest mpgReq = new HttpsPostRequest();
        mpgReq.setProcCountryCode(processing_country_code);
        mpgReq.setTestMode(true); //false or comment out this line for production transactions
        mpgReq.setStoreId(store_id);
        mpgReq.setApiToken(api_token);

```

¹Available to Canadian integrations only.

Sample Vault Temporary Token Add - CA

```

mpgReq.setTransaction(resTempAdd);
mpgReq.setStatusCheck(status_check);
mpgReq.send();
try
{
    Receipt receipt = mpgReq.getReceipt();
    System.out.println("DataKey = " + receipt.getDataKey());
    System.out.println("ResponseCode = " + receipt.getResponseCode());
    System.out.println("Message = " + receipt.getMessage());
    System.out.println("TransDate = " + receipt.getTransDate());
    System.out.println("TransTime = " + receipt.getTransTime());
    System.out.println("Complete = " + receipt.getComplete());
    System.out.println("TimedOut = " + receipt.getTimedOut());
    System.out.println("ResSuccess = " + receipt.getResSuccess());
    System.out.println("PaymentType = " + receipt.getPaymentType());
    System.out.println("MaskedPan = " + receipt.getResMaskedPan());
    System.out.println("Exp Date = " + receipt.getResExpdate());
}
catch (Exception e)
{
    e.printStackTrace();
}
}
}

```

Vault response fields

For a list and explanation of (Receipt object) response fields that are available after sending this Vault transaction, see Definition of Response Fields (page 312).

5.3.3 Vault Update Credit Card - ResUpdateCC

Things to Consider:

- Updates a Vault profile (based on the data key) to contain credit card information. All information contained within a credit card profile is updated as indicated by the submitted fields.
- This will update a profile to contain Credit Card information by referencing the profile's unique data_key. If the profile which is being updated was already a Credit Card profile, all information contained within it will simply be updated as indicated by the submitted fields. This means that all fields are optional, and only those fields that are submitted will be updated.
- If however the profile was of a different payment type (i.e., ACH), the old profile will be deactivated and the new Credit Card information will be associated with the data_key. As a result, the mandatory fields for creating a new Credit Card profile will be required. These fields have been listed as conditional.

- To update a specific field on the profile, only set that specific element using the corresponding set method.
- If the Vault profile currently contains ACH payment details, then this transaction will update the token to contain Credit Card payment details and all ACH specific data, such as ACHInfo, will be overwritten.

Vault Update Credit Card transaction object definition

```
ResUpdateCC resUpdateCC = new ResUpdateCC();
```

HttpPostRequest object for Vault Update Credit Card transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();  
mpgReq.setTransaction(resUpdateCC);
```

Vault Update Credit Card transaction values

For a full description of mandatory and optional values, see "Definition of Request Fields" on page 302 "Definition of Request Fields" on page 302

Table 45: Vault Update Credit Card transaction object mandatory values

| Value | Type | Limits | Set method |
|----------|--------|---------------------------|---|
| Data key | String | 25-character alphanumeric | <code>resUpdateCC.setData(data_key);</code> |

Optional values that are submitted to the ResUpdateCC object are updated. Unsubmitted optional values (with one exception) remain unchanged. This allows you to change only the fields you want.

The exception is that if you are making changes to the payment type, **all** of the variables in the optional values table below must be submitted.

If you update a profile to a different payment type, it is automatically deactivated and a new credit card profile is created and assigned to the data key. The only values from the prior profile that will remain unchanged are the customer ID, phone number, email address, and note.

EXAMPLE: If a profile contains AVS information, but a ResUpdateCC transaction is submitted without an AVSInfo object, the existing AVSInfo details are deactivated and the new credit card information is registered without AVS.

Table 46: Vault Update Credit Card transaction optional values

| Value | Type | Limits | Set method |
|----------------------|--------|---|--|
| Credit card number | String | 20-character alpha-numeric | <code>resUpdateCC.setPan (pan) ;</code> |
| Expiry date | String | 4-character alpha-numeric (YYMM format) | <code>resUpdateCC.setExpDate (exp-date) ;</code> |
| E-commerce indicator | String | 1-character alpha-numeric | <code>resUpdateCC.setCryptType (crypt_type) ;</code> |
| Customer ID | String | 50-character alpha-numeric | <code>resUpdateCC.setCustId (custid) ;</code> |
| AVS information | Object | Not applicable. Click here See Appendix E (page 334). | <code>resUpdateCC.setAvsInfo (avsCheck) ;</code> |
| Email address | String | 30-character alpha-numeric | <code>resUpdateCC.setEmail (email) ;</code> |
| Phone number | String | 30-character alpha-numeric | <code>resUpdateCC.setPhone (phone) ;</code> |
| Note | String | 30-character alpha-numeric | <code>resUpdateCC.setNote (note) ;</code> |

Sample Vault Update Credit Card - CA

```

package Canada;
import JavaAPI.*;
public class TestCanadaResUpdateCC
{
    public static void main(String[] args)
    {
        String store_id = "moneris";
        String api_token = "hurgle";
        String data_key = "vthBJyNlBicbRkdWFZ9flyDP2";
        String pan = "4242424242424242";
        String expdate = "1901";
        String phone = "0000000000";
        String email = "bob@smith.com";
        String note = "my note";
        String cust_id = "customer1";
        String crypt_type = "7";
    }
}

```

Sample Vault Update Credit Card - CA

```

String processing_country_code = "CA";
boolean status_check = false;
AvsInfo avsCheck = new AvsInfo();
avsCheck.setAvsStreetNumber("212");
avsCheck.setAvsStreetName("Payton Street");
avsCheck.setAvsZipCode("M1M1M1");
ResUpdateCC resUpdateCC = new ResUpdateCC();
resUpdateCC.setData(data_key);
resUpdateCC.setAvsInfo(avsCheck);
resUpdateCC.setCustId(cust_id);
resUpdateCC.setPan(pan);
resUpdateCC.setExpdate(expdate);
resUpdateCC.setPhone(phone);
resUpdateCC.setEmail(email);
resUpdateCC.setNote(note);
resUpdateCC.setCryptType(crypt_type);
HttpPostRequest mpgReq = new HttpPostRequest();
mpgReq.setProcCountryCode(processing_country_code);
mpgReq.setTestMode(true); //false or comment out this line for production transactions
mpgReq.setStoreId(store_id);
mpgReq.setApiToken(api_token);
mpgReq.setTransaction(resUpdateCC);
mpgReq.setStatusCheck(status_check);
mpgReq.send();
try
{
    Receipt receipt = mpgReq.getReceipt();
    System.out.println("DataKey = " + receipt.getDataKey());
    System.out.println("ResponseCode = " + receipt.getResponseCode());
    System.out.println("Message = " + receipt.getMessage());
    System.out.println("TransDate = " + receipt.getTransDate());
    System.out.println("TransTime = " + receipt.getTransTime());
    System.out.println("Complete = " + receipt.getComplete());
    System.out.println("TimedOut = " + receipt.getTimedOut());
    System.out.println("ResSuccess = " + receipt.getResSuccess());
    System.out.println("PaymentType = " + receipt.getPaymentType());
    System.out.println("Cust ID = " + receipt.getResCustId());
    System.out.println("Phone = " + receipt.getResPhone());
    System.out.println("Email = " + receipt.getResEmail());
    System.out.println("Note = " + receipt.getResNote());
    System.out.println("MaskedPan = " + receipt.getResMaskedPan());
    System.out.println("Exp Date = " + receipt.getResExpdate());
    System.out.println("Crypt Type = " + receipt.getResCryptType());
    System.out.println("Avs Street Number = " + receipt.getResAvsStreetNumber());
    System.out.println("Avs Street Name = " + receipt.getResAvsStreetName());
    System.out.println("Avs Zipcode = " + receipt.getResAvsZipcode());
}
catch (Exception e)
{
    e.printStackTrace();
}
}

```

Vault response fields

For a list and explanation of (Receipt object) response fields that are available after sending this Vault transaction, see Definition of Response Fields (page 312).

5.3.3.1 Vault Encrypted Update CC - EncResUpdateCC

Vault Encrypted Update CC transaction object definition

```
EncResUpdateCC enc_res_update_cc = new EncResUpdateCC ();
```

HttpPostRequest object for Vault Encrypted Update CC transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

```
mpgReq.setTransaction(enc_res_update_cc);
```

Vault Encrypted Update CC transaction values

For a full description of mandatory and optional values, see "Definition of Request Fields" on page 302 "Definition of Request Fields" on page 302

Table 47: Vault Encrypted Update CC transaction object mandatory values

| Value | Type | Limits | Set method |
|-----------------------|--------|----------------------------|--|
| Data key | String | 25-character alpha-numeric | <code>enc_res_update_cc.setData(data_key);</code> |
| Encrypted Track2 data | String | Variable length | <code>enc_res_update_cc.setEncTrack2(enc_track2);</code> |
| Device type | String | 30-character alpha-numeric | <code>enc_res_update_cc.setDeviceType(device_type);</code> |

Optional values that are submitted to the ResUpdateCC object are updated, while unsubmitted optional values (with one exception) remain unchanged. This allows you to change only the fields you want.

The exception is that if you are making changes to the payment type, **all** of the variables in the optional values table below must be submitted.

If you update a profile to a different payment type, it is automatically deactivated and a new credit card profile is created and assigned to the data key. The only values from the prior profile that will remain unchanged are the customer ID, phone number, email address, and note.

EXAMPLE: If a profile contains AVS information, but a ResUpdateCC transaction is submitted without an AVSInfo object, the existing AVSInfo details are deactivated and the new credit card information is registered without AVS.

Table 48: Vault Encrypted Update CC transaction optional values

| Value | Type | Limits | Set method |
|----------------------|--------|---|--|
| E-commerce indicator | String | 1-character alpha-numeric | <code>enc_res_update_cc.setCryptType(crypt_type);</code> |
| Customer ID | String | 50-character alpha-numeric | <code>enc_res_update_cc.setCustId(custid);</code> |
| AVS information | Object | Not applicable. Click here See Appendix E (page 334). | <code>enc_res_update_cc.setAvsInfo(avsCheck);</code> |
| Email address | String | 30-character alpha-numeric | <code>enc_res_update_cc.setEmail(email);</code> |
| Phone number | String | 30-character alpha-numeric | <code>enc_res_update_cc.setPhone(phone);</code> |
| Note | String | 30-character alpha-numeric | <code>enc_res_update_cc.setNote(note);</code> |

Sample Vault Encrypted Update CC - CA

```

package Canada;
import JavaAPI.*;
public class TestCanadaEncResUpdateCC
{
    public static void main(String args[])
    {
        String store_id = "store1";
        String api_token = "yesguy";
        String data_key = "PHTMlpun7VOaSCFM2xdeP2Sim";
        String enc_track2 = "ENCRYPTEDTRACK2DATA";
        String device_type = "idtech_bdk";
        String phone = "5555555555";
        String email = "test.user@moneris.com";
        String note = "my note";
        String cust_id = "customer2";
        String crypt = "7";
        String processing_country_code = "CA";
        AvsInfo avsinfo = new AvsInfo();
        avsinfo.setAvsStreetNumber("212");
        avsinfo.setAvsStreetName("Smith Street");
        avsinfo.setAvsZipcode("M1M1M1");
        EncResUpdateCC enc_res_update_cc = new EncResUpdateCC ();
        enc_res_update_cc.setDataKey(data_key);
        enc_res_update_cc.setAvsInfo(avsinfo);
        enc_res_update_cc.setCustId(cust_id);
        enc_res_update_cc.setEncTrack2(enc_track2);
        enc_res_update_cc.setDeviceType(device_type);
    }
}

```

Sample Vault Encrypted Update CC - CA

```

enc_res_update_cc.setPhone(phone);
enc_res_update_cc.setEmail(email);
enc_res_update_cc.setNote(note);
enc_res_update_cc.setCryptType(crypt);
HttpPostRequest mpgReq = new HttpPostRequest();
mpgReq.setProcCountryCode(processing_country_code);
mpgReq.setTestMode(true); //false or comment out this line for production transactions
mpgReq.setStoreId(store_id);
mpgReq.setApiToken(api_token);
mpgReq.setTransaction(enc_res_update_cc);
mpgReq.send();
try
{
    Receipt receipt = mpgReq.getReceipt();
    System.out.println("DataKey = " + receipt.getDataKey());
    System.out.println("ResponseCode = " + receipt.getResponseCode());
    System.out.println("Message = " + receipt.getMessage());
    System.out.println("TransDate = " + receipt.getTransDate());
    System.out.println("TransTime = " + receipt.getTransTime());
    System.out.println("Complete = " + receipt.getComplete());
    System.out.println("TimedOut = " + receipt.getTimedOut());
    System.out.println("ResSuccess = " + receipt.getResSuccess());
    System.out.println("PaymentType = " + receipt.getPaymentType() + "\n");
    //Contents of ResolveData
    System.out.println("Cust ID = " + receipt.getResCustId());
    System.out.println("Phone = " + receipt.getResPhone());
    System.out.println("Email = " + receipt.getResEmail());
    System.out.println("Note = " + receipt.getResNote());
    System.out.println("MaskedPan = " + receipt.getResMaskedPan());
    System.out.println("Exp Date = " + receipt.getResExpDate());
    System.out.println("Crypt Type = " + receipt.getResCryptType());
    System.out.println("Avs Street Number = " + receipt.getResAvsStreetNumber());
    System.out.println("Avs Street Name = " + receipt.getResAvsStreetName());
    System.out.println("Avs Zipcode = " + receipt.getResAvsZipcode());
}
catch (Exception e)
{
    e.printStackTrace();
}
}

```

Vault response fields

For a list and explanation of (Receipt object) response fields that are available after sending this Vault transaction, see Definition of Response Fields (page 312).

5.3.4 Vault Delete - ResDelete

NOTE: After a profile has been deleted, the details can no longer be retrieved.

Vault Delete transaction object definition

```
ResDelete resDelete = new ResDelete (data_key);
```

HttpPostRequest object for Vault Delete transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

```
mpgReq.setTransaction(resDelete);
```

Vault Delete transaction values

For a full description of mandatory and optional values, see "Definition of Request Fields" on page 302."Definition of Request Fields" on page 302

Table 49: Vault Delete transaction object mandatory values

| Value | Type | Limits | Set method |
|----------|--------|----------------------------|-------------------------------------|
| Data key | String | 25-character alpha-numeric | Not applicable (passed as argument) |

Sample Vault Delete - CA

```
package Canada;
import JavaAPI.*;
public class TestCanadaResDelete
{
    public static void main(String[] args)
    {
        String store_id = "moneris";
        String api_token = "hurgle";
        String data_key = "DxwdemrvfnoXOlHhmRikfw3gA";
        String processing_country_code = "CA";
        boolean status_check = false;
        ResDelete resDelete = new ResDelete(data_key);
        HttpPostRequest mpgReq = new HttpPostRequest();
        mpgReq.setProcCountryCode(processing_country_code);
        mpgReq.setTestMode(true); //false or comment out this line for production transactions
        mpgReq.setStoreId(store_id);
        mpgReq.setApiToken(api_token);
        mpgReq.setTransaction(resDelete);
        mpgReq.setStatusCheck(status_check);
        mpgReq.send();
        try
        {
            Receipt receipt = mpgReq.getReceipt();
            System.out.println("DataKey = " + receipt.getDataKey());
            System.out.println("ResponseCode = " + receipt.getResponseCode());
            System.out.println("Message = " + receipt.getMessage());
            System.out.println("TransDate = " + receipt.getTransDate());
            System.out.println("TransTime = " + receipt.getTransTime());
            System.out.println("Complete = " + receipt.getComplete());
            System.out.println("TimedOut = " + receipt.getTimedOut());
            System.out.println("ResSuccess = " + receipt.getResSuccess());
            System.out.println("PaymentType = " + receipt.getPaymentType());
            //ResolveData
        }
    }
}
```

Sample Vault Delete - CA

```

System.out.println("Cust ID = " + receipt.getResCustId());
System.out.println("Phone = " + receipt.getResPhone());
System.out.println("Email = " + receipt.getResEmail());
System.out.println("Note = " + receipt.getResNote());
System.out.println("MaskedPan = " + receipt.getResMaskedPan());
System.out.println("Exp Date = " + receipt.getResExpdate());
System.out.println("Crypt Type = " + receipt.getResCryptType());
System.out.println("Avs Street Number = " + receipt.getResAvsStreetNumber());
System.out.println("Avs Street Name = " + receipt.getResAvsStreetName());
System.out.println("Avs Zipcode = " + receipt.getResAvsZipcode());
}
catch (Exception e)
{
    e.printStackTrace();
}
}
}

```

Vault response fields

For a list and explanation of (Receipt object) response fields that are available after sending this Vault transaction, see Definition of Response Fields (page 312).

5.3.5 Vault Lookup Full - ResLookupFull

Vault Lookup Full transaction object definition

```
ResLookupFull resLookupFull = new ResLookupFull(data_key);
```

HttpPostRequest object for Vault Lookup Full transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

```
mpgReq.setTransaction(resLookupFull);
```

Vault Lookup Full transaction values

Table 50: Vault Lookup Full transaction object mandatory values

| Value | Type | Limits | Set method |
|----------|--------|----------------------------|-------------------------------------|
| Data key | String | 25-character alpha-numeric | Not applicable (passed as argument) |

Sample Vault Lookup Full - CA

```

package Canada;
import JavaAPI.*;
public class TestCanadaResLookupFull
{

```

Sample Vault Lookup Full - CA

```

public static void main(String[] args)
{
    String store_id = "store1";
    String api_token = "yesguy";
    String data_key = "pi3ZMZoTTM8pLM9wuwws2KBxw";
    String processing_country_code = "CA";
    boolean status_check = false;
    ResLookupFull resLookupFull = new ResLookupFull(data_key);
    HttpsPostRequest mpgReq = new HttpsPostRequest();
    mpgReq.setProcCountryCode(processing_country_code);
    mpgReq.setTestMode(true); //false or comment out this line for production transactions
    mpgReq.setStoreId(store_id);
    mpgReq.setApiToken(api_token);
    mpgReq.setTransaction(resLookupFull);
    mpgReq.setStatusCheck(status_check);
    mpgReq.send();
    try
    {
        Receipt receipt = mpgReq.getReceipt();
        System.out.println("DataKey = " + receipt.getDataKey());
        System.out.println("ResponseCode = " + receipt.getResponseCode());
        System.out.println("Message = " + receipt.getMessage());
        System.out.println("TransDate = " + receipt.getTransDate());
        System.out.println("TransTime = " + receipt.getTransTime());
        System.out.println("Complete = " + receipt.getComplete());
        System.out.println("TimedOut = " + receipt.getTimedOut());
        System.out.println("ResSuccess = " + receipt.getResSuccess());
        System.out.println("PaymentType = " + receipt.getPaymentType());
        System.out.println("Cust ID = " + receipt.getResCustId());
        System.out.println("Phone = " + receipt.getResPhone());
        System.out.println("Email = " + receipt.getResEmail());
        System.out.println("Note = " + receipt.getResNote());
        System.out.println("Pan = " + receipt.getResPan());
        System.out.println("MaskedPan = " + receipt.getResMaskedPan());
        System.out.println("Exp Date = " + receipt.getResExpddate());
        System.out.println("Crypt Type = " + receipt.getResCryptType());
        System.out.println("Avs Street Number = " + receipt.getResAvsStreetNumber());
        System.out.println("Avs Street Name = " + receipt.getResAvsStreetName());
        System.out.println("Avs Zipcode = " + receipt.getResAvsZipcode());
    }
    catch (Exception e)
    {
        e.printStackTrace();
    }
}

```

Vault response fields

For a list and explanation of (Receipt object) response fields that are available after sending this Vault transaction, see Definition of Response Fields (page 312).

5.3.6 Vault Lookup Masked - ResLookupMasked**Vault Lookup Masked transaction object definition**

```
ResLookupMasked resLookupMasked = new ResLookupMasked();
```

HttpPostRequest object for Vault Lookup Masked transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();

mpgReq.setTransaction(resLookupMasked);
```

Vault Lookup Masked transaction values

For a full description of mandatory and optional values, see "Definition of Request Fields" on page 302 "Definition of Request Fields" on page 302

Table 51: Vault Lookup Masked transaction object mandatory values

| Value | Type | Limits | Set method |
|----------|--------|----------------------------|------------------------------------|
| Data key | String | 25-character alpha-numeric | resLookupMasked.setData(data_key); |

Sample Vault Lookup Masked - CA

```
package Canada;
import JavaAPI.*;
public class TestCanadaResLookupMasked
{
    public static void main(String[] args)
    {
        String store_id = "store1";
        String api_token = "yesguy";
        String data_key = "pi3ZMzoTTM8pLM9wuwws2KBxw";
        String processing_country_code = "CA";
        boolean status_check = false;
        ResLookupMasked resLookupMasked = new ResLookupMasked();
        resLookupMasked.setData(data_key);
        HttpPostRequest mpgReq = new HttpPostRequest();
        mpgReq.setProcCountryCode(processing_country_code);
        mpgReq.setTestMode(true); //false or comment out this line for production transactions
        mpgReq.setStoreId(store_id);
        mpgReq.setApiToken(api_token);
        mpgReq.setTransaction(resLookupMasked);
        mpgReq.setStatusCheck(status_check);
        mpgReq.send();
        try
        {
            Receipt receipt = mpgReq.getReceipt();
            System.out.println("DataKey = " + receipt.getDataKey());
            System.out.println("ResponseCode = " + receipt.getResponseCode());
            System.out.println("Message = " + receipt.getMessage());
            System.out.println("TransDate = " + receipt.getTransDate());
            System.out.println("TransTime = " + receipt.getTransTime());
            System.out.println("Complete = " + receipt.getComplete());
            System.out.println("TimedOut = " + receipt.getTimedOut());
            System.out.println("ResSuccess = " + receipt.getResSuccess());
            System.out.println("PaymentType = " + receipt.getPaymentType());
            System.out.println("Cust ID = " + receipt.getResCustId());
            System.out.println("Phone = " + receipt.getResPhone());
            System.out.println("Email = " + receipt.getResEmail());
            System.out.println("Note = " + receipt.getResNote());
            System.out.println("MaskedPan = " + receipt.getResMaskedPan());
```

Sample Vault Lookup Masked - CA

```

System.out.println("Exp Date = " + receipt.getResExpdate());
System.out.println("Crypt Type = " + receipt.getResCryptType());
System.out.println("Avs Street Number = " + receipt.getResAvsStreetNumber());
System.out.println("Avs Street Name = " + receipt.getResAvsStreetName());
System.out.println("Avs Zipcode = " + receipt.getResAvsZipcode());
}
catch (Exception e)
{
e.printStackTrace();
}
}
}

```

Vault response fields

For a list and explanation of (Receipt object) response fields that are available after sending this Vault transaction, see Definition of Response Fields (page 312).

5.3.7 Vault Get Expiring - ResGetExpiring**Vault Get Expiring transaction object definition**

```
ResGetExpiring resGetExpiring = new ResGetExpiring();
```

HttpPostRequest object for Vault Get Expiring transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

```
mpgReq.setTransaction(resGetExpiring);
```

Vault Get Expiring transaction values

ResGetExpiring transaction object mandatory values: None.

Sample Vault Get Expiring - CA

```

package Canada;
import JavaAPI.*;
public class TestCanadaResGetExpiring
{
public static void main(String[] args)
{
String store_id = "store1";
String api_token = "yesguy";
String processing_country_code = "CA";
boolean status_check = false;
ResGetExpiring resGetExpiring = new ResGetExpiring();
HttpPostRequest mpgReq = new HttpPostRequest();
mpgReq.setProcCountryCode(processing_country_code);
mpgReq.setTestMode(true); //false or comment out this line for production transactions
mpgReq.setStoreId(store_id);
mpgReq.setApiToken(api_token);
mpgReq.setTransaction(resGetExpiring);
}
}

```

Sample Vault Get Expiring - CA

```

mpgReq.setStatusCheck(status_check);
mpgReq.send();
try
{
    Receipt receipt = mpgReq.getReceipt();
    System.out.println("DataKey = " + receipt.getDataKey());
    System.out.println("ResponseCode = " + receipt.getResponseCode());
    System.out.println("Message = " + receipt.getMessage());
    System.out.println("TransDate = " + receipt.getTransDate());
    System.out.println("TransTime = " + receipt.getTransTime());
    System.out.println("Complete = " + receipt.getComplete());
    System.out.println("TimedOut = " + receipt.getTimedOut());
    System.out.println("ResSuccess = " + receipt.getResSuccess());
    System.out.println("PaymentType = " + receipt.getPaymentType());
    //ResolveData
    for (int index =0; index < receipt.getExpiredCardCount(); index++)
    {
        System.out.println("\nDataKey = " + index);
        System.out.println("Payment Type = " + receipt.getExpPaymentType(index));
        System.out.println("Cust ID = " + receipt.getExpCustId(index));
        System.out.println("Phone = " + receipt.getExpPhone(index));
        System.out.println("Email = " + receipt.getExpEmail(index));
        System.out.println("Note = " + receipt.getExpNote(index));
        System.out.println("Masked Pan = " + receipt.getExpMaskedPan(index));
        System.out.println("Exp Date = " + receipt.getExpExpdate(index));
        System.out.println("Crypt Type = " + receipt.getExpCryptType(index));
        System.out.println("Avs Street Number = " + receipt.getExpAvsStreetNumber(index));
        System.out.println("Avs Street Name = " + receipt.getExpAvsStreetName(index));
        System.out.println("Avs Zipcode = " + receipt.getExpAvsZipCode(index));
    }
}
catch (Exception e)
{
    e.printStackTrace();
}
}

```

Vault response fields

For a list and explanation of (Receipt object) response fields that are available after sending this Vault transaction, see Definition of Response Fields (page 312).

5.3.8 Vault Is Corporate Card - ResIsCorporateCard

Vault Is Corporate Card transaction object definition

```
ResIsCorporatecard resIsCorporatecard = new ResIsCorporatecard();
```

HttpPostRequest object for Vault Is Corporate Card transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

```
mpgReq.setTransaction(ResIsCorporateCard);
```

Vault Is Corporate Card transaction values

Table 52: Vault Is Corporate Card transaction object mandatory values

| Value | Type | Limits | Set method |
|----------|--------|----------------------------|--|
| Data key | String | 25-character alpha-numeric | <code>resIsCorporatecard.setData(data_key);</code> |

Sample Vault Is Corporate Card - CA

```
package Canada;
import JavaAPI.*;
public class TestCanadaResIsCorporatecard
{
    public static void main(String[] args)
    {
        String store_id = "store1";
        String api_token = "yesguy";
        String data_key = "eLqsADfwqHDxIpJG9vLnELx01";
        String processing_country_code = "CA";
        boolean status_check = false;
        ResIsCorporatecard resIsCorporatecard = new ResIsCorporatecard();
        resIsCorporatecard.setData(data_key);
        HttpsPostRequest mpgReq = new HttpsPostRequest();
        mpgReq.setProcCountryCode(processing_country_code);
        mpgReq.setTestMode(true); //false or comment out this line for production transactions
        mpgReq.setStoreId(store_id);
        mpgReq.setApiToken(api_token);
        mpgReq.setTransaction(resIsCorporatecard);
        mpgReq.setStatusCheck(status_check);
        mpgReq.send();
        try
        {
            Receipt receipt = mpgReq.getReceipt();
            System.out.println("DataKey = " + receipt.getDataKey());
            System.out.println("CorporateCard = " + receipt.getCorporateCard());
            System.out.println("ResponseCode = " + receipt.getResponseCode());
            System.out.println("Message = " + receipt.getMessage());
            System.out.println("TransDate = " + receipt.getTransDate());
            System.out.println("TransTime = " + receipt.getTransTime());
            System.out.println("Complete = " + receipt.getComplete());
            System.out.println("TimedOut = " + receipt.getTimedOut());
            System.out.println("ResSuccess = " + receipt.getResSuccess());
            System.out.println("PaymentType = " + receipt.getPaymentType());
        }
        catch (Exception e)
        {
            e.printStackTrace();
        }
    }
}
```

Vault response fields

For a list and explanation of (Receipt object) response fields that are available after sending this Vault transaction, see Definition of Response Fields (page 312).

5.3.9 Vault Add Token - ResAddToken

Vault Add Token transaction object definition

```
ResAddToken resAddToken = new ResAddToken();
```

HttpPostRequest object for Vault Add Token transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

```
mpgReq.setTransaction(resAddToken);
```

Vault Add Token transaction values

For a full description of mandatory and optional values, see "Definition of Request Fields" on page 302 "Definition of Request Fields" on page 302

Table 53: Vault Add Token transaction object mandatory values

| Value | Type | Limits | Set method |
|----------------------|--------|----------------------------|--|
| Data key | String | 28-character alpha-numeric | <code>resAddToken.setData(data_key);</code> |
| E-commerce indicator | String | 1-character alpha-numeric | <code>resAddToken.setCryptType(crypt_type);</code> |

Table 54: Vault Add Token transaction optional values

| Value | Type | Limits | Set method |
|-----------------|--------|---|--|
| Customer ID | String | 50-character alpha-numeric | <code>resAddToken.setCustId(custid);</code> |
| AVS information | Object | Not applicable. Click here See Appendix E (page 334). | <code>resAddToken.setAvsInfo(avsCheck);</code> |
| Email address | String | 30-character alpha-numeric | <code>resAddToken.setEmail(email);</code> |

| Value | Type | Limits | Set method |
|------------------------------|--------|----------------------------|---|
| Phone number | String | 30-character alpha-numeric | <code>resAddToken.setPhone(phone);</code> |
| Note | String | 30-character alpha-numeric | <code>resAddToken.setNote(note);</code> |
| Data key format ¹ | String | 2-character alpha-numeric | <code>resAddToken.setDataKeyFormat(data_key_format);</code> |

Sample Vault Add Token - CA

```

package Canada;
import JavaAPI.*;
public class TestCanadaResAddToken
{
    public static void main(String[] args)
    {
        String store_id = "moneris";
        String api_token = "hurgle";
        String data_key = "ot-IPFUqKokKWYzLN0zmzAhNYSCs";
        String expdate = "0115";
        String phone = "0000000000";
        String email = "bob@smith.com";
        String note = "my note";
        String cust_id = "customer1";
        String crypt_type = "7";
        String processing_country_code = "CA";
        boolean status_check = false;
        AvsInfo avsCheck = new AvsInfo();
        avsCheck.setAvsStreetNumber("212");
        avsCheck.setAvsStreetName("Payton Street");
        avsCheck.setAvsZipCode("M1M1M1");
        ResAddToken resAddToken = new ResAddToken();
        resAddToken.setDataKey(data_key);
        resAddToken.setCryptType(crypt_type);
        resAddToken.setExpdate(expdate);
        resAddToken.setCustId(cust_id);
        resAddToken.setPhone(phone);
        resAddToken.setEmail(email);
        resAddToken.setNote(note);
        resAddToken.setAvsInfo(avsCheck);
        //resAddToken.setDataKeyFormat("0U");

        HttpsPostRequest mpgReq = new HttpsPostRequest();
        mpgReq.setProcCountryCode(processing_country_code);
        mpgReq.setTestMode(true); //false or comment out this line for production transactions
        mpgReq.setStoreId(store_id);
        mpgReq.setApiToken(api_token);
        mpgReq.setTransaction(resAddToken);
        mpgReq.setStatusCheck(status_check);
        mpgReq.send();
    }
}

```

¹Available to Canadian integrations only.

Sample Vault Add Token - CA

```
try
{
    Receipt receipt = mpgReq.getReceipt();
    System.out.println("DataKey = " + receipt.getDataKey());
    System.out.println("ResponseCode = " + receipt.getResponseCode());
    System.out.println("Message = " + receipt.getMessage());
    System.out.println("TransDate = " + receipt.getTransDate());
    System.out.println("TransTime = " + receipt.getTransTime());
    System.out.println("Complete = " + receipt.getComplete());
    System.out.println("TimedOut = " + receipt.getTimedOut());
    System.out.println("ResSuccess = " + receipt.getResSuccess());
    System.out.println("PaymentType = " + receipt.getPaymentType());
    System.out.println("Cust ID = " + receipt.getResCustId());
    System.out.println("Phone = " + receipt.getResPhone());
    System.out.println("Email = " + receipt.getResEmail());
    System.out.println("Note = " + receipt.getResNote());
    System.out.println("MaskedPan = " + receipt.getResMaskedPan());
    System.out.println("Exp Date = " + receipt.getResExpdate());
    System.out.println("Crypt Type = " + receipt.getResCryptType());
    System.out.println("Avs Street Number = " + receipt.getResAvsStreetNumber());
    System.out.println("Avs Street Name = " + receipt.getResAvsStreetName());
    System.out.println("Avs Zipcode = " + receipt.getResAvsZipcode());
}
catch (Exception e)
{
    e.printStackTrace();
}
}
```

Vault response fields

For a list and explanation of (Receipt object) response fields that are available after sending this Vault transaction, see Definition of Response Fields (page 312).

5.3.10 Vault Tokenize Credit Card - ResTokenizeCC

Basic transactions that can be tokenized are:

- Purchase
- Preauthorization
- Capture
- Reauth
- Refund
- Purchase Correction
- Independent Refund

The tokenization process is outlined below :

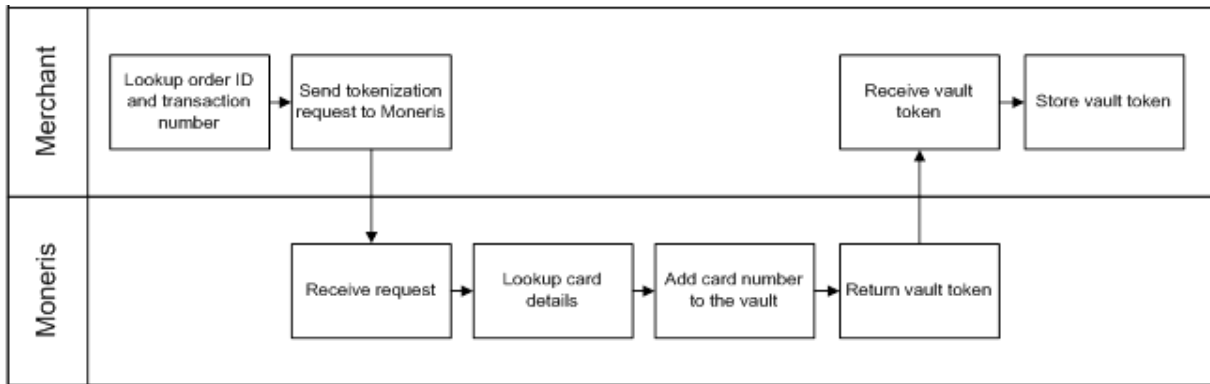


Figure 3: Tokenize process diagram

Vault Tokenize Credit Card transaction object definition

```
ResTokenizeCC resTokenizeCC = new ResTokenizeCC();
```

HttpPostRequest object for Vault Tokenize Credit Card transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

```
mpgReq.setTransaction(resTokenizeCC);
```

Vault Tokenize Credit Card transaction values

Table 55: Vault Tokenize Credit Card transaction object mandatory values

| Value | Type | Limits | Set method |
|--------------------|--------|-----------------------------|--|
| Order ID | String | 50-character alpha-numeric | <code>resTokenizeCC.setOrderId(order_id);</code> |
| Transaction number | String | 255-character alpha-numeric | <code>resTokenizeCC.setTxnNumber(txn_number);</code> |

These mandatory values reference a previously processed credit card financial transaction. The credit card number, expiry date, and crypt type from the original transaction are registered in the Vault for future financial Vault transactions.

Table 56: Vault Tokenize Credit Card transaction optional values

| Value | Type | Limits | Set method |
|---------------|--------|----------------------------|---|
| Customer ID | String | 50-character alpha-numeric | <code>resTokenizeCC.setCustId(custid);</code> |
| Email address | String | 30-character alpha-numeric | <code>resTokenizeCC.setEmail(email);</code> |
| Phone number | String | 30-character alpha- | <code>resTokenizeCC.setPhone</code> |

| Value | Type | Limits | Set method |
|------------------------------|--------|---|---|
| | | numeric | (phone) ; |
| Note | String | 30-character alpha-numeric | resTokenizeCC.setNote(note) ; |
| AVS information | Object | Not applicable. Click here See Appendix E (page 334). | resTokenizeCC.setAvsInfo(avsCheck) ; |
| Data key format ¹ | String | 2-character alpha-numeric | resTokenizeCC.setDataKeyFormat(data_key_format) ; |

5.4 Financial Transactions

After a financial transaction is complete, the response fields indicate all the values that are currently saved under the profile that was used.

5.4.1 Customer ID Changes

Some financial transactions take the customer ID as an optional value. The customer ID may or may not already be in the Vault profile when the transaction is sent. Therefore, it is possible to change the value of the customer ID by performing a financial transaction

The table below shows what the customer ID will be in the response field after a financial transaction is performed.

Table 57: Customer ID use in response fields

| Already in profile? | Passed in? | Version used in response |
|---------------------|------------|-------------------------------------|
| No | No | Customer ID not used in transaction |
| No | Yes | Passed in |
| Yes | No | Profile |
| Yes | Yes | Passed in |

¹Available to Canadian integrations only.

5.4.2 Purchase with Vault - ResPurchaseCC

Purchase with Vault transaction object definition

```
ResPurchaseCC resPurchaseCC = new ResPurchaseCC();
```

HttpPostRequest object for Purchase with Vault transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

```
mpgReq.setTransaction(resPurchaseCC);
```

Purchase with Vault transaction values

For a full description of mandatory and optional values, see "Definition of Request Fields" on page 302."Definition of Request Fields" on page 302

Table 58: Purchase with Vault transaction object mandatory values

| Value | Type | Limits | Set method |
|----------------------|--------|----------------------------|--|
| Data key | String | 25-character alpha-numeric | <code>resPurchaseCC.setData(data_key);</code> |
| Order ID | String | 50-character alpha-numeric | <code>resPurchaseCC.setOrderId(order_id);</code> |
| Amount | String | 9-character decimal | <code>resPurchaseCC.setAmount(amount);</code> |
| E-commerce indicator | String | 1-character alpha-numeric | <code>resPurchaseCC.setCryptType(crypt_type);</code> |

Table 59: Purchase with Vault transaction optional values

| Value | Type | Limits | Set method |
|--------------|---------|---|---|
| Status Check | Boolean | true/false | <code>mpgReq.setStatusCheck(status_check);</code> |
| Expiry date | String | 4-character numeric YYMM format. (Note that this is reversed from the date displayed on the card, which is MMY) | <code>resPurchaseCC.setExpDate(exp_date);</code> |
| Customer ID | String | 50-character alpha-numeric | <code>resPurchaseCC.setCustId(custid);</code> |

| Value | Type | Limits | Set method |
|----------------------|--------|---|--|
| Dynamic descriptor | String | 20-character alpha-numeric | <code>resPurchaseCC.setDynamicDescriptor(dynamic_descriptor);</code> |
| Customer information | Object | Not applicable. Click here See Section Appendix D (page 326). | <code>resPurchaseCC.setCustInfo(customer);</code> |
| AVS information | Object | Not applicable. Click here See Appendix E (page 334). | <code>resPurchaseCC.setAvsInfo(avsCheck);</code> |
| CVD information | Object | Not applicable. Click here See Appendix F (page 340) . | <code>resPurchaseCC.setCvdInfo(cvdCheck);</code> |
| Recurring billing | Object | Not applicable. Click here See Section 1 (page 1). | <code>resPurchaseCC.setRecurInfo(recurInfo);</code> |

Sample Purchase with Vault - CA

```

package Canada;
import JavaAPI.*;
public class TestCanadaResPurchaseCC
{
    public static void main(String[] args)
    {
        java.util.Date createDate = new java.util.Date();
        String order_id = "Test"+createDate.getTime();
        String store_id = "store5";
        String api_token = "yesguy";
        String data_key = "ot-APGL4zwRERtVQqeTn7ZwFSGJo";
        String amount = "1.00";
        String cust_id = "customer1"; //if sent will be submitted, otherwise cust_id from profile will be
            used
        String crypt_type = "1";
        String descriptor = "my descriptor";
        String processing_country_code = "CA";
        String expdate = "1512"; //For Temp Token
        boolean status_check = false;
        ResPurchaseCC resPurchaseCC = new ResPurchaseCC();
        resPurchaseCC.setData(data_key);
        resPurchaseCC.setOrderId(order_id);
        resPurchaseCC.setCustId(cust_id);
        resPurchaseCC.setAmount(amount);
        resPurchaseCC.setCryptType(crypt_type);
        //resPurchaseCC.setDynamicDescriptor(descriptor);
        resPurchaseCC.setExpDate(expdate); //Temp Tokens only
    }
}

```

Sample Purchase with Vault - CA

```

HttpPostRequest mpgReq = new HttpPostRequest();
mpgReq.setProcCountryCode(processing_country_code);
mpgReq.setTestMode(true); //false or comment out this line for production transactions
mpgReq.setStoreId(store_id);
mpgReq.setApiToken(api_token);
mpgReq.setTransaction(resPurchaseCC);
mpgReq.setStatusCheck(status_check);
mpgReq.send();
try
{
    Receipt receipt = mpgReq.getReceipt();
    System.out.println("DataKey = " + receipt.getDataKey());
    System.out.println("ReceiptId = " + receipt.getReceiptId());
    System.out.println("ReferenceNum = " + receipt.getReferenceNum());
    System.out.println("ResponseCode = " + receipt.getResponseCode());
    System.out.println("AuthCode = " + receipt.getAuthCode());
    System.out.println("Message = " + receipt.getMessage());
    System.out.println("TransDate = " + receipt.getTransDate());
    System.out.println("TransTime = " + receipt.getTransTime());
    System.out.println("TransType = " + receipt.getTransType());
    System.out.println("Complete = " + receipt.getComplete());
    System.out.println("TransAmount = " + receipt.getTransAmount());
    System.out.println("CardType = " + receipt.getCardType());
    System.out.println("TxnNumber = " + receipt.getTxnNumber());
    System.out.println("TimedOut = " + receipt.getTimedOut());
    System.out.println("ResSuccess = " + receipt.getResSuccess());
    System.out.println("PaymentType = " + receipt.getPaymentType());
    System.out.println("IsVisaDebit = " + receipt.getIsVisaDebit());
    System.out.println("Cust ID = " + receipt.getResCustId());
    System.out.println("Phone = " + receipt.getResPhone());
    System.out.println("Email = " + receipt.getResEmail());
    System.out.println("Note = " + receipt.getResNote());
    System.out.println("Masked Pan = " + receipt.getResMaskedPan());
    System.out.println("Exp Date = " + receipt.getResExpdate());
    System.out.println("Crypt Type = " + receipt.getResCryptType());
    System.out.println("Avs Street Number = " + receipt.getResAvsStreetNumber());
    System.out.println("Avs Street Name = " + receipt.getResAvsStreetName());
    System.out.println("Avs Zipcode = " + receipt.getResAvsZipcode());
}
catch (Exception e)
{
    e.printStackTrace();
}
}

```

Vault response fields

For a list and explanation of (Receipt object) response fields that are available after sending this Vault transaction, see Definition of Response Fields (page 312).

5.4.3 Pre-Authorization with Vault - ResPreauthCC**Pre-Authorization with Vault transaction object definition**

```
ResPreauthCC resPreauthCC = new ResPreauthCC();
```

HttpsPostRequest object for Pre-Authorization with Vault transaction

```
HttpsPostRequest mpgReq = new HttpsPostRequest();

mpgReq.setTransaction(resPreauthCC);
```

Pre-Authorization with Vault transaction values

Table 1: Pre-Authorization with Vault transaction object mandatory values

| Value | Type | Limits | Set method |
|----------------------|--------|-----------------------------|---|
| Data key | String | 25- character alpha-numeric | <code>resPreauthCC.setData(data_key);</code> |
| Order ID | String | 50-character alpha-numeric | <code>resPreauthCC.setOrderId(order_id);</code> |
| Amount | String | 9-character decimal | <code>resPreauthCC.setAmount(amount);</code> |
| E-commerce indicator | String | 1-character alpha-numeric | <code>resPreauthCC.setCryptType(crypt_type);</code> |

Table 2: Pre-Authorization with Vault transaction optional values

| Value | Type | Limits | Set method |
|----------------------|---------|---|---|
| Status Check | Boolean | true/false | <code>mpgReq.setStatusCheck(status_check);</code> |
| Expiry date | String | 4-character alpha-numeric (YYMM format) | <code>resPreauthCC.setExpDate(expdate);</code> |
| Customer ID | String | 50-character alpha-numeric | <code>resPreauthCC.setCustId(custid);</code> |
| Customer information | Object | Not applicable. Click here See Section Appendix D (page 326). | <code>resPreauthCC.setCustInfo(customer);</code> |
| AVS information | Object | Not applicable. Click here See Appendix E (page 334). | <code>resPreauthCC.setAvsInfo(avsCheck);</code> |
| CVD information | Object | Not applicable. Click here See Appendix F (page 340). | <code>resPreauthCC.setCvdInfo(cvdCheck);</code> |

Sample Pre-Authorization with Vault - CA

```

package Canada;
import JavaAPI.*;
public class TestCanadaResPreauthCC
{
    public static void main(String[] args)
    {
        java.util.Date createDate = new java.util.Date();
        String order_id = "Test"+createDate.getTime();
        String store_id = "store5";
        String api_token = "yesguy";
        String data_key = "ot-bPKO547Rqeb4ImweGGkLQUW3K";
        String amount = "1.00";
        String cust_id = "customer1"; //if sent will be submitted, otherwise cust_id from profile will be
            used
        String crypt_type = "1";
        String dynamic_descriptor = "my descriptor";
        String processing_country_code = "CA";
        String expdate = "1712"; //For Temp Token
        boolean status_check = false;
        ResPreauthCC resPreauthCC = new ResPreauthCC();
        resPreauthCC.setData(data_key);
        resPreauthCC.setOrderId(order_id);
        resPreauthCC.setCustId(cust_id);
        resPreauthCC.setAmount(amount);
        resPreauthCC.setCryptType(crypt_type);
        resPreauthCC.setDynamicDescriptor(dynamic_descriptor);
        //resPreauthCC.setExpDate(expdate); //Temp Tokens only
        HttpsPostRequest mpgReq = new HttpsPostRequest();
        mpgReq.setProcCountryCode(processing_country_code);
        mpgReq.setTestMode(true); //false or comment out this line for production transactions
        mpgReq.setStoreId(store_id);
        mpgReq.setApiToken(api_token);
        mpgReq.setTransaction(resPreauthCC);
        mpgReq.setStatusCheck(status_check);
        mpgReq.send();
        try
        {
            Receipt receipt = mpgReq.getReceipt();
            System.out.println("DataKey = " + receipt.getDataKey());
            System.out.println("ReceiptId = " + receipt.getReceiptId());
            System.out.println("ReferenceNum = " + receipt.getReferenceNum());
            System.out.println("ResponseCode = " + receipt.getResponseCode());
            System.out.println("AuthCode = " + receipt.getAuthCode());
            System.out.println("Message = " + receipt.getMessage());
            System.out.println("TransDate = " + receipt.getTransDate());
            System.out.println("TransTime = " + receipt.getTransTime());
            System.out.println("TransType = " + receipt.getTransType());
            System.out.println("Complete = " + receipt.getComplete());
            System.out.println("TransAmount = " + receipt.getTransAmount());
            System.out.println("CardType = " + receipt.getCardType());
            System.out.println("TxnNumber = " + receipt.getTxnNumber());
            System.out.println("TimedOut = " + receipt.getTimedOut());
            System.out.println("ResSuccess = " + receipt.getResSuccess());
            System.out.println("PaymentType = " + receipt.getPaymentType());
            System.out.println("IsVisaDebit = " + receipt.getIsVisaDebit());
            System.out.println("Cust ID = " + receipt.getResCustId());
            System.out.println("Phone = " + receipt.getResPhone());
            System.out.println("Email = " + receipt.getResEmail());
            System.out.println("Note = " + receipt.getResNote());
        }
    }
}

```

Sample Pre-Authorization with Vault - CA

```

System.out.println("Masked Pan = " + receipt.getResMaskedPan());
System.out.println("Exp Date = " + receipt.getResExpdate());
System.out.println("Crypt Type = " + receipt.getResCryptType());
System.out.println("Avs Street Number = " + receipt.getResAvsStreetNumber());
System.out.println("Avs Street Name = " + receipt.getResAvsStreetName());
System.out.println("Avs Zipcode = " + receipt.getResAvsZipcode());
}
catch (Exception e)
{
e.printStackTrace();
}
}
}

```

Vault response fields

For a list and explanation of (Receipt object) response fields that are available after sending this Vault transaction, see Definition of Response Fields (page 312).

5.4.4 Vault Independent Refund CC - ResIndRefundCC

Vault Independent Refund transaction object definition

```
ResIndRefundCC resIndRefundCC = new ResIndRefundCC();
```

HttpPostRequest object for Vault Independent Refund transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

```
mpgReq.setTransaction(resIndRefundCC);
```

Vault Independent Refund transaction values

For a full description of mandatory and optional values, see "Definition of Request Fields" on page 302."Definition of Request Fields" on page 302

Table 60: Vault Independent Refund transaction object mandatory values

| Value | Type | Limits | Set method |
|----------|--------|----------------------------|--------------------------------------|
| Data key | String | 25-character alpha-numeric | resIndRefundCC.setData(data_key); |
| Order ID | String | 50-character alpha-numeric | resIndRefundCC.setOrderId(order_id); |
| Amount | String | 9-character decimal | resIndRefundCC.setAmount(amount); |

| Value | Type | Limits | Set method |
|----------------------|--------|---------------------------|---|
| E-commerce indicator | String | 1-character alpha-numeric | <code>resIndRefundCC.setCryptType(crypt_type);</code> |

Table 61: Vault Independent Refund transaction optional values

| Value | Type | Limits | Set method |
|--------------------|---------|--|---|
| Customer ID | String | 50-character alpha-numeric | <code>resIndRefundCC.setCustId(custid);</code> |
| Expiry date | String | 4-character alpha-numeric (YYMM format) | <code>resIndRefundCC.setExpDate(expdate);</code> |
| Status Check | Boolean | true/false | <code>mpgReq.setStatusCheck(status_check);</code> |
| Dynamic descriptor | String | 20-character alpha-numeric | <code>resIndRefundCC.setDynamicDescriptor(dynamic_descriptor);</code> |

Sample Vault Independent Refund - CA

```

package Canada;
import JavaAPI.*;
public class TestCanadaResIndRefundCC
{
    public static void main(String[] args)
    {
        java.util.Date createDate = new java.util.Date();
        String order_id = "Test"+createDate.getTime();
        String store_id = "moneris";
        String api_token = "hurgle";
        String data_key = "eRNR61U1RD6jmgS9OPqmmmbVrk";
        String amount = "1.00";
        String cust_id = "customer1";
        String crypt_type = "1";
        String processing_country_code = "CA";
        boolean status_check = false;
        ResIndRefundCC resIndRefundCC = new ResIndRefundCC();
        resIndRefundCC.setOrderId(order_id);
        resIndRefundCC.setCustId(cust_id);
        resIndRefundCC.setAmount(amount);
        resIndRefundCC.setCryptType(crypt_type);
        resIndRefundCC.setData(data_key);
        HttpsPostRequest mpgReq = new HttpsPostRequest();
        mpgReq.setProcCountryCode(processing_country_code);
        mpgReq.setTestMode(true); //false or comment out this line for production transactions
        mpgReq.setStoreId(store_id);
    }
}

```

Sample Vault Independent Refund - CA

```

mpgReq.setApiToken(api_token);
mpgReq.setTransaction(resIndRefundCC);
mpgReq.setStatusCheck(status_check);
mpgReq.send();
try
{
    Receipt receipt = mpgReq.getReceipt();
    System.out.println("DataKey = " + receipt.getDataKey());
    System.out.println("ReceiptId = " + receipt.getReceiptId());
    System.out.println("ReferenceNum = " + receipt.getReferenceNum());
    System.out.println("ResponseCode = " + receipt.getResponseCode());
    System.out.println("AuthCode = " + receipt.getAuthCode());
    System.out.println("Message = " + receipt.getMessage());
    System.out.println("TransDate = " + receipt.getTransDate());
    System.out.println("TransTime = " + receipt.getTransTime());
    System.out.println("TransType = " + receipt.getTransType());
    System.out.println("Complete = " + receipt.getComplete());
    System.out.println("TransAmount = " + receipt.getTransAmount());
    System.out.println("CardType = " + receipt.getCardType());
    System.out.println("TxnNumber = " + receipt.getTxnNumber());
    System.out.println("TimedOut = " + receipt.getTimedOut());
    System.out.println("ResSuccess = " + receipt.getResSuccess());
    System.out.println("PaymentType = " + receipt.getPaymentType());
    System.out.println("IsVisaDebit = " + receipt.getIsVisaDebit());
    System.out.println("Cust ID = " + receipt.getResCustId());
    System.out.println("Phone = " + receipt.getResPhone());
    System.out.println("Email = " + receipt.getResEmail());
    System.out.println("Note = " + receipt.getResNote());
    System.out.println("Masked Pan = " + receipt.getResMaskedPan());
    System.out.println("Exp Date = " + receipt.getResExpdate());
    System.out.println("Crypt Type = " + receipt.getResCryptType());
    System.out.println("Avs Street Number = " + receipt.getResAvsStreetNumber());
    System.out.println("Avs Street Name = " + receipt.getResAvsStreetName());
    System.out.println("Avs Zipcode = " + receipt.getResAvsZipcode());
}
catch (Exception e)
{
    e.printStackTrace();
}
}

```

Vault response fields

For a list and explanation of (Receipt object) response fields that are available after sending this Vault transaction, see Definition of Response Fields (page 312).

5.4.5 Force Post with Vault - ResForcePostCC

Force Post with Vault transaction object definition

```
ResForcePostCC resForcePostCC = new ResForcePostCC();
```

HttpPostRequest object for Force Post with Vault transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

```
mpgReq.setTransaction(resForcePostCC);
```

Force Post with Vault transaction object values

Table 1: Force Post with Vault transaction object mandatory values

| Value | Type | Limits | Set Method |
|----------------------|--------|----------------------------|---|
| Amount | String | 9-character decimal | <code>resForcePostCC.setAmount(amount);</code> |
| Data key | String | 25-character alpha-numeric | <code>resForcePostCC.setData(data_key);</code> |
| Authorization code | String | 8-character alpha-numeric | <code>resForcePostCC.setAuthCode(auth_code);</code> |
| E-commerce indicator | String | 1-character alpha-numeric | <code>resForcePostCC.setCryptType(crypt_type);</code> |

Table 2: Force Post with Vault transaction object optional values

| Value | Type | Limits | Set Method |
|--------------------|---------|----------------------------|---|
| Customer ID | String | 50-character alpha-numeric | <code>resForcePostCC.setCustId(custid);</code> |
| Dynamic Descriptor | String | 20-character alpha-numeric | <code>resForcePostCC.setDynamicDescriptor(dynamic_descriptor);</code> |
| Status Check | Boolean | true/false | <code>mpgReq.setStatusCheck(status_check);</code> |

Sample Force Post with Vault

```
package Canada;
import JavaAPI.*;
public class TestCanadaResForcePostCC
{
    public static void main(String[] args)
    {
        java.util.Date createDate = new java.util.Date();
        String order_id = "Test"+createDate.getTime();
        String store_id = "store5";
        String api_token = "yesguy";
        String data_key = "uroyVNSxzjk5hHoT0kpQDBCw4";
        String amount = "1.00";
        String cust_id = "customer1"; //if sent will be submitted, otherwise cust_id from profile will be used
        String crypt_type = "7";
```

Sample Force Post with Vault

```
String auth_code = "124424";
String descriptor = "my descriptor";
String processing_country_code = "CA";
boolean status_check = false;
ResForcePostCC resForcePostCC = new ResForcePostCC();
resForcePostCC.setOrderId(order_id);
resForcePostCC.setCustId(cust_id);
resForcePostCC.setAmount(amount);
resForcePostCC.setDataKey(data_key);
resForcePostCC.setAuthCode(auth_code);
resForcePostCC.setCryptType(crypt_type);
resForcePostCC.setDynamicDescriptor(descriptor);
HttpsPostRequest mpgReq = new HttpsPostRequest();
mpgReq.setProcCountryCode(processing_country_code);
mpgReq.setTestMode(true); //false or comment out this line for production transactions
mpgReq.setStoreId(store_id);
mpgReq.setApiToken(api_token);
mpgReq.setTransaction(resForcePostCC);
mpgReq.setStatusCheck(status_check);
mpgReq.send();
try
{
    Receipt receipt = mpgReq.getReceipt();
    System.out.println("DataKey = " + receipt.getDataKey());
    System.out.println("ReceiptId = " + receipt.getReceiptId());
    System.out.println("ReferenceNum = " + receipt.getReferenceNum());
    System.out.println("ResponseCode = " + receipt.getResponseCode());
    System.out.println("AuthCode = " + receipt.getAuthCode());
    System.out.println("Message = " + receipt.getMessage());
    System.out.println("TransDate = " + receipt.getTransDate());
    System.out.println("TransTime = " + receipt.getTransTime());
    System.out.println("TransType = " + receipt.getTransType());
    System.out.println("Complete = " + receipt.getComplete());
    System.out.println("TransAmount = " + receipt.getTransAmount());
    System.out.println("CardType = " + receipt.getCardType());
    System.out.println("TxnNumber = " + receipt.getTxnNumber());
    System.out.println("TimedOut = " + receipt.getTimedOut());
    System.out.println("ResSuccess = " + receipt.getResSuccess());
    System.out.println("PaymentType = " + receipt.getPaymentType());
    System.out.println("IsVisaDebit = " + receipt.getIsVisaDebit());
    System.out.println("Cust ID = " + receipt.getResCustId());
    System.out.println("Phone = " + receipt.getResPhone());
    System.out.println("Email = " + receipt.getResEmail());
    System.out.println("Note = " + receipt.getResNote());
    System.out.println("Masked Pan = " + receipt.getResMaskedPan());
    System.out.println("Exp Date = " + receipt.getResExpdate());
    System.out.println("Crypt Type = " + receipt.getResCryptType());
    System.out.println("Avs Street Number = " + receipt.getResAvsStreetNumber());
    System.out.println("Avs Street Name = " + receipt.getResAvsStreetName());
    System.out.println("Avs Zipcode = " + receipt.getResAvsZipcode());
}
catch (Exception e)
{
    e.printStackTrace();
}
}
```

5.4.6 Card Verification with Vault - ResCardVerificationCC

Things to Consider:

- This transaction type only applies to Visa and MasterCard transactions.
- This transaction is also known as an "account status inquiry".
- The card number and expiry date for this transaction are passed using a token, as represented by the data key value.

Card Verification object definition

```
CardVerification resCardVerificationCC = new CardVerification();
```

HttpPostRequest object for Card Verification transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

```
mpgReq.setTransaction(resCardVerificationCC);
```

Card Verification transaction values

For a full description of mandatory and optional values, see "Definition of Request Fields" on page 302 "Definition of Request Fields" on page 302

Table 62: Card Verification transaction object mandatory values

| Value | Type | Limits | Set method |
|----------------------|--------|---|---|
| Order ID | String | 50-character alpha-numeric | <code>resCardVerificationCC.setOrderId(order_id);</code> |
| Data key | String | 25-character alpha-numeric | <code>resCardVerificationCC.setDataKeyFormat(data_key_format);</code> |
| E-commerce indicator | String | 1-character alpha-numeric | <code>resCardVerificationCC.setCryptType(crypt_type);</code> |
| AVS | Object | Not applicable. Click here See Appendix E (page 334). | <code>resCardVerificationCC.setAvsInfo(avsCheck);</code> |
| CVD | Object | Not applicable. Click here See Appendix F (page 340). | <code>resCardVerificationCC.setCvdInfo(cvdCheck);</code> |

Sample Card Verification with Vault

```

package Canada;
import java.io.*;
import JavaAPI.*;
public class TestCanadaResCardVerificationCC
{
    public static void main(String args[]) throws IOException
    {
        String store_id = "store5";
        String api_token = "yesguy";
        String data_key = "AoG4zAFz1FFfxCVmzWAZVQuhj";
        java.util.Date createDate = new java.util.Date();
        String order_id = "Test"+createDate.getTime();
        String crypt_type = "7";
        String processing_country_code = "CA";
        boolean status_check = false;
        /***** Efraud Variables *****/
        AvsInfo avs = new AvsInfo ();
        avs.setAvsStreetName("test ave");
        avs.setAvsStreetNumber("123");
        avs.setAvsZipcode("123456");
        CvdInfo cvd = new CvdInfo ("1", "099");
        /***** Transaction Object *****/
        ResCardVerificationCC resCardVerificationCC = new ResCardVerificationCC();
        resCardVerificationCC.setDataKey(data_key);
        resCardVerificationCC.setOrderId(order_id);
        resCardVerificationCC.setCryptType(crypt_type);
        resCardVerificationCC.setAvsInfo(avs);
        resCardVerificationCC.setCvdInfo(cvd);
        //resCardVerificationCC.setExpdate("1412"); //For Temp Tokens only

        HttpsPostRequest mpgReq = new HttpsPostRequest();
        mpgReq.setProcCountryCode(processing_country_code);
        mpgReq.setTestMode(true); //false or comment out this line for production transactions
        mpgReq.setStoreId(store_id);
        mpgReq.setApiToken(api_token);
        mpgReq.setTransaction(resCardVerificationCC);
        mpgReq.setStatusCheck(status_check);
        mpgReq.send();
        /***** Receipt Object *****/
        try
        {
            Receipt resreceipt = mpgReq.getReceipt();
            System.out.println("DataKey = " + resreceipt.getDataKey());
            System.out.println("ReceiptId = " + resreceipt.getReceiptId());
            System.out.println("ReferenceNum = " + resreceipt.getReferenceNum());
            System.out.println("ResponseCode = " + resreceipt.getResponseCode());
            System.out.println("AuthCode = " + resreceipt.getAuthCode());
            System.out.println("ISO = " + resreceipt.getISO());
            System.out.println("Message = " + resreceipt.getMessage());
            System.out.println("TransDate = " + resreceipt.getTransDate());
            System.out.println("TransTime = " + resreceipt.getTransTime());
            System.out.println("TransType = " + resreceipt.getTransType());
            System.out.println("Complete = " + resreceipt.getComplete());
            System.out.println("TransAmount = " + resreceipt.getTransAmount());
            System.out.println("CardType = " + resreceipt.getCardType());
            System.out.println("TxnNumber = " + resreceipt.getTxnNumber());
            System.out.println("TimedOut = " + resreceipt.getTimedOut());
            System.out.println("ResSuccess = " + resreceipt.getResSuccess());
            System.out.println("PaymentType = " + resreceipt.getPaymentType() + "\n");
        }
    }
}

```


Sample Card Verification with Vault

```
//Contents of ResolveData
System.out.println("Cust ID = " + resreceipt.getResCustId());
System.out.println("Phone = " + resreceipt.getResPhone());
System.out.println("Email = " + resreceipt.getResEmail());
System.out.println("Note = " + resreceipt.getResNote());
System.out.println("Masked Pan = " + resreceipt.getResMaskedPan());
System.out.println("Exp Date = " + resreceipt.getResExpdate());
System.out.println("Crypt Type = " + resreceipt.getResCryptType());
System.out.println("Avs Street Number = " + resreceipt.getResAvsStreetNumber());
System.out.println("Avs Street Name = " + resreceipt.getResAvsStreetName());
System.out.println("Avs Zipcode = " + resreceipt.getResAvsZipcode());
}
catch (Exception e)
{
e.printStackTrace();
}
}
} // end TestResCardVerificationCC
```

5.5 Hosted Tokenization

Moneris Hosted Tokenization is a solution for online e-commerce merchants who do not want to handle credit card numbers directly on their websites, yet want the ability to fully customize their check-out web page appearance.

When an hosted tokenization transaction is initiated, the Moneris Gateway displays (on the merchant's behalf) a single text box on the merchant's checkout page. The cardholder can then securely enter the credit card information into the text box. Upon submission of the payment information on the checkout page, Moneris Gateway returns a temporary token representing the credit card number to the merchant. This is then used in an API call to process a financial transaction directly with Moneris to charge the card. After receiving a response to the financial transaction, the merchant generates a receipt and allows the cardholder to continue with online shopping.

For more details on how to implement the Moneris Hosted Tokenization feature, see the Hosted Solutions Integration Guide. The guide can be downloaded from the Moneris Developer Portal (<https://developer.moneris.com>).

5.6 Mag Swipe Transaction Definitions

Purchase

Verifies funds on the customer's card, removes the funds and prepares them for deposit into the merchant's account.

Pre-Authorization

Verifies and locks funds on the customer's credit card. The funds are locked for a specified amount of time based on the card issuer.

To retrieve the funds that have been locked by a Pre-Authorization transaction so that they may be settled in the merchant's account, a Completion transaction must be performed. A Pre-Authorization may only be "completed" once.

Completion

Retrieves funds that have been locked (by a Mag Swipe Pre-Authorization transaction), and prepares them for settlement into the merchant's account.

Force Post

Retrieves the locked funds and prepares them for settlement into the merchant's account.

This is used when a merchant obtains the authorization number directly from the issuer by a third-party authorization method (such as by phone).

Purchase Correction

Restores the **full** amount of a previous Mag Swipe Purchase or Mag Swipe Completion transaction to the cardholder's card, and removes any record of it from the cardholder's statement. The order ID and transaction number from the original transaction are required, but the credit card does not need to be re-swiped.

This transaction can be used against a Purchase or Completion transaction that occurred same day provided that the batch containing the original transaction remains open. When using the automated closing feature, Batch Close occurs daily between 10 and 11 pm Eastern Time.

This transaction is sometimes referred to as "void".

Refund

Restores all or part of the funds from a Mag Swipe Purchase or Mag Swipe Completion transaction to the cardholder's card. Unlike a Purchase Correction, there is a record of the refund.

Independent Refund

Credits a specified amount to the cardholder's credit card.

This does not require a previous transaction (such as Mag Swipe Purchase) to be logged in the Moneris Gateway. However, a credit card must be swiped to provide the Track2 data.

5.6.1 Encrypted Mag Swipe Transactions

Encrypted Mag Swipe transactions allow the customer to swipe or key in a credit card using a Moneris-provided encrypted mag swipe reader, and submit the encrypted Track2 details.

The encrypted mag swipe reader can be used for processing:

- Swiped card-present transactions
- Manually keyed card-present transactions
- Manually keyed card-not-present transactions.

Encrypted Mag Swipe transactions are identical to the regular Mag Swipe transactions from the customer's perspective. However, the card data must be swiped or keyed in via a Moneris-provided encrypted mag swipe reader. Contact Moneris for more details.

Only Mag Swipe Purchase and Mag Swipe Pre-Authorization have encrypted versions. Their explanations appear in this document as subsections of the regular (unencrypted) Mag Swipe Purchase and Mag Swipe Pre-Authorization transactions respectively.

5.6.2 Encrypted Mag Swipe Purchase

Encrypted Mag Swipe Purchase transaction object definition

```
EncTrack2Purchase encpurchase = new EncTrack2Purchase();
```

HttpPostRequest object for Encrypted Mag Swipe Purchase transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

```
mpgReq.setTransaction(encpurchase);
```

Encrypted Mag Swipe Purchase transaction values

For a full description of mandatory and optional values, see "Definition of Request Fields" on page 302."Definition of Request Fields" on page 302

Table 63: Encrypted Mag Swipe Purchase transaction object mandatory values

| Value | Type | Limits | Set method |
|-----------------------|--------|----------------------------|---|
| Order ID | String | 50-character alpha-numeric | encpurchase |
| Amount | String | 9-character decimal | encpurchase.setAmount(amount); |
| Encrypted Track2 data | String | n/a | encpurchase.setEncTrack2(enc_track2); |
| POS code | String | 2-character numeric | encpurchase.setPosCode(pos_code); |
| Device type | String | 30-character alpha-numeric | encpurchase.setDeviceType(device_type); |

Table 64: Encrypted Mag Swipe Purchase transaction optional values

| Value | Type | Limits | Set method |
|-----------------|---------|---|--------------------------------------|
| Customer ID | String | 50-character alpha-numeric | encpurchase.setCustId(custid); |
| Status Check | Boolean | true/false | mpgReq.setStatusCheck(status_check); |
| AVS information | Object | Not applicable. Click here See Appendix E (page 334). | encpurchase.setAvsInfo(avsCheck); |

Table 64: Encrypted Mag Swipe Purchase transaction optional values (continued)

| Value | Type | Limits | Set method |
|--------------------|--------|----------------------------|--|
| Dynamic descriptor | String | 20-character alpha-numeric | <code>encpurchase.setDynamicDescriptor(dynamic_descriptor);</code> |

Sample Encrypted Mag Swipe Purchase - CA

```

package Canada;
import JavaAPI.*;
public class TestCanadaEncTrack2Purchase
{
    public static void main(String args[])
    {
        java.util.Date createDate = new java.util.Date();
        String order_id = "Test"+createDate.getTime();
        String store_id = "moneris";
        String api_token = "hurgle";
        String amount = "1.00";
        String enc_track2 = "ENCRYPTEDTRACK2DATA";
        String pan = "";
        String expdate = "";
        String pos_code = "00";
        String device_type = "idtech_bdk";
        String processing_country_code = "CA";
        EncTrack2Preauth enc_track2_preauth = new EncTrack2Preauth ();
        enc_track2_preauth.setOrderId(order_id);
        enc_track2_preauth.setAmount(amount);
        enc_track2_preauth.setEncTrack2(enc_track2);
        enc_track2_preauth.setPan(pan);
        enc_track2_preauth.setExpdate(expdate);
        enc_track2_preauth.setPosCode(pos_code);
        enc_track2_preauth.setDeviceType(device_type);
        HttpsPostRequest mpgReq = new HttpsPostRequest();
        mpgReq.setProcCountryCode(processing_country_code);
        mpgReq.setTestMode(true); //false or comment out this line for production transactions
        mpgReq.setStoreId(store_id);
        mpgReq.setApiToken(api_token);
        mpgReq.setTransaction(enc_track2_preauth);
        mpgReq.send();
        try
        {
            Receipt receipt = mpgReq.getReceipt();
            System.out.println("CardType = " + receipt.getCardType());
            System.out.println("TransAmount = " + receipt.getTransAmount());
            System.out.println("TxnNumber = " + receipt.getTxnNumber());
            System.out.println("ReceiptId = " + receipt.getReceiptId());
            System.out.println("TransType = " + receipt.getTransType());
            System.out.println("ReferenceNum = " + receipt.getReferenceNum());
            System.out.println("ResponseCode = " + receipt.getResponseCode());
            System.out.println("ISO = " + receipt.getISO());
            System.out.println("BankTotals = " + receipt.getBankTotals());
            System.out.println("Message = " + receipt.getMessage());
            System.out.println("AuthCode = " + receipt.getAuthCode());
            System.out.println("Complete = " + receipt.getComplete());
            System.out.println("TransDate = " + receipt.getTransDate());
            System.out.println("TransTime = " + receipt.getTransTime());
        }
    }
}

```

Sample Encrypted Mag Swipe Purchase - CA

```
System.out.println("Ticket = " + receipt.getTicket());
System.out.println("TimedOut = " + receipt.getTimedOut());
}
catch (Exception e)
{
    e.printStackTrace();
}
}
```

5.6.3 Encrypted Mag Swipe Pre-Authorization

Encrypted Mag Swipe Pre-Authorization transaction object definition

```
EncTrack2Preauth enc_track2_preauth = new EncTrack2Preauth ();
```

HttpPostRequest object for Encrypted Mag Swipe Pre-Authorization transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
mpgReq.setTransaction(enc_track2_preauth);
```

Encrypted Mag Swipe Pre-Authorization transaction values

For a full description of mandatory and optional values, see "Definition of Request Fields" on page 302

Table 65: Encrypted Mag Swipe Pre-Authorization transaction object mandatory values

| Value | Type | Limits | Set method |
|--|--------|-----------------------------------|---|
| Order ID | String | 50-character alpha-numeric | enc_track2_preauth |
| Amount | String | 9-character decimal | enc_track2_preauth.setAmount(amount); |
| Credit card number OR Encrypted Track2 | String | 20-character numeric OR n/a | enc_track2_preauth.setPan(pan); OR enc_track2_preauth.setEncTrack2(enc_track2); |

Table 65: Encrypted Mag Swipe Pre-Authorization transaction object mandatory values

| Value | Type | Limits | Set method |
|-------------|--------|----------------------------|--|
| POS code | String | 2-character numeric | enc_track2_preauth.setPosCode(pos_code); |
| Device type | String | 30-character alpha-numeric | enc_track2_preauth.setDeviceType(device_type); |

Table 66: Encrypted Mag Swipe Pre-Authorization transaction optional values

| Value | Type | Limits | Set method |
|--------------|---------|----------------------------|---------------------------------------|
| Customer ID | String | 50-character alpha-numeric | enc_track2_preauth.setCustId(custid); |
| Status Check | Boolean | true/false | mpgReq.setStatusCheck(status_check); |

Sample Encrypted Mag Swipe Pre-Authorization

```

package Canada;
import JavaAPI.*;
public class TestCanadaEncTrack2Preauth
{
    public static void main(String args[])
    {
        String host = "esqa.moneris.com";
        String store_id = "store1";
        String api_token = "yesguy";
        java.util.Date createDate = new java.util.Date();
        String order_id = "Test"+createDate.getTime();
        String amount = "1.00";
        String enc_track2 ="ENCRYPTEDTRACK2DATA";
        String pan = "";
        String expdate = "";
        String pos_code = "00";
        String device_type = "idtech_bdk";
        String processing_country_code = "CA";
        EncTrack2Preauth enc_track2_preauth = new EncTrack2Preauth ();
        enc_track2_preauth.setOrderId(order_id);
        enc_track2_preauth.setAmount(amount);
        enc_track2_preauth.setEncTrack2(enc_track2);
        enc_track2_preauth.setPan(pan);
        enc_track2_preauth.setExpdate(expdate);
        enc_track2_preauth.setPosCode(pos_code);
        enc_track2_preauth.setDeviceType(device_type);
        HttpsPostRequest mpgReq = new HttpsPostRequest();
        mpgReq.setProcCountryCode(processing_country_code);
        mpgReq.setTestMode(true); //false or comment out this line for production transactions
        mpgReq.setStoreId(store_id);
        mpgReq.setApiToken(api_token);
        mpgReq.setTransaction(enc_track2_preauth);
    }
}

```

Sample Encrypted Mag Swipe Pre-Authorization

```

mpgReq.send();
try
{
    Receipt receipt = mpgReq.getReceipt();
    System.out.println("CardType = " + receipt.getCardType());
    System.out.println("TransAmount = " + receipt.getTransAmount());
    System.out.println("TxnNumber = " + receipt.getTxnNumber());
    System.out.println("ReceiptId = " + receipt.getReceiptId());
    System.out.println("TransType = " + receipt.getTransType());
    System.out.println("ReferenceNum = " + receipt.getReferenceNum());
    System.out.println("ResponseCode = " + receipt.getResponseCode());
    System.out.println("ISO = " + receipt.getISO());
    System.out.println("BankTotals = " + receipt.getBankTotals());
    System.out.println("Message = " + receipt.getMessage());
    System.out.println("AuthCode = " + receipt.getAuthCode());
    System.out.println("Complete = " + receipt.getComplete());
    System.out.println("TransDate = " + receipt.getTransDate());
    System.out.println("TransTime = " + receipt.getTransTime());
    System.out.println("Ticket = " + receipt.getTicket());
    System.out.println("TimedOut = " + receipt.getTimedOut());
    receipt = null;
}
catch (Exception e)
{
    e.printStackTrace();
}
}
}

```

5.6.4 Encrypted Mag Swipe Force Post

The Encrypted Mag Swipe Force Post is used when a merchant obtains the authorization number directly from the issuer using a phone or any third-party authorization method. This transaction does not require that an existing order be logged in the Moneris Gateway. However, the credit card must be swiped or keyed in using a Moneris-provided encrypted mag swipe reader, and the encrypted Track2 details must be submitted. There are also optional fields that may be submitted such as `cust_id` and `dynamic_descriptor`.

To complete the transaction, the authorization number obtained from the issuer must be entered.

Encrypted Mag Swipe Force Post transaction object definition

```
EncTrack2Forcepost enctrack2fp = new EncTrack2Forcepost();
```

HttpPostRequest object for Encrypted Mag Swipe Force Post transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

```
mpgReq.setTransaction(enctrack2fp);
```

Encrypted Mag Swipe Force Post transaction object values

Table 1: Encrypted Mag Swipe Force Post transaction object mandatory values

| Value | Type | Limits | Set Method |
|-----------------------|--------|----------------------------|--|
| Order ID | String | 50-character alpha-numeric | enctrack2fp.setOrderId (order_id); |
| Amount | String | 9-character decimal | enctrack2fp.setAmount (amount); |
| Encrypted Track2 data | String | n/a | enctrack2fp.setEncTrack2 (enc_track2); |
| POS Code | String | 2-character numeric | enctrack2fp.setPosCode (pos_code); |
| Device type | String | 30-character alpha-numeric | enctrack2fp.setDeviceType (device_type); |
| Authorization Code | String | 8-character alpha-numeric | enctrack2fp.setAuthCode (auth_code); |

Table 2: Encrypted Mag Swipe Force Post transaction object optional values

| Value | Type | Limits | Set Method |
|--------------------|---------|----------------------------|--|
| Status Check | Boolean | true/false | mpgReq.setStatusCheck (status_check); |
| Customer ID | String | 50-character alpha-numeric | enctrack2fp.setCustId (custid); |
| Dynamic descriptor | String | 20-character alpha-numeric | enctrack2fp.setDynamicDescriptor (dynamic_descriptor); |

Sample Encrypted Mag Swipe Force Post - CA

```
package Canada;
import JavaAPI.*;
public class TestCanadaEncTrack2Forcepost
{
    public static void main(String[] args)
    {
        String store_id = "moneris";
        String api_token = "hurgle";
        java.util.Date createDate = new java.util.Date();
        String order_id = "Test"+createDate.getTime();
```


Sample Encrypted Mag Swipe Force Post - CA

```
String cust_id = "my customer id";
String amount = "5.00";
String pos_code = "00";
String device_type = "idtech_bdk";
String auth_code = "123456";
String processing_country_code = "CA";
boolean status_check = false;
String descriptor = "my descriptor";
String enc_track2 = "ENCRYPTEDTRACK2DATA";
EncTrack2Forcepost enctrack2fp = new EncTrack2Forcepost();
enctrack2fp.setOrderId(order_id);
enctrack2fp.setCustId(cust_id);
enctrack2fp.setAmount(amount);
enctrack2fp.setEncTrack2(enc_track2);
enctrack2fp.setPosCode(pos_code);
enctrack2fp.setDeviceType(device_type);
enctrack2fp.setAuthCode(auth_code);
enctrack2fp.setDynamicDescriptor(descriptor);
HttpsPostRequest mpgReq = new HttpsPostRequest();
mpgReq.setProcCountryCode(processing_country_code);
mpgReq.setTestMode(true); //false or comment out this line for production transactions
mpgReq.setStoreId(store_id);
mpgReq.setApiToken(api_token);
mpgReq.setTransaction(enctrack2fp);
mpgReq.setStatusCheck(status_check);
mpgReq.send();
try
{
    Receipt receipt = mpgReq.getReceipt();
    System.out.println("CardType = " + receipt.getCardType());
    System.out.println("TransAmount = " + receipt.getTransAmount());
    System.out.println("TxnNumber = " + receipt.getTxnNumber());
    System.out.println("ReceiptId = " + receipt.getReceiptId());
    System.out.println("TransType = " + receipt.getTransType());
    System.out.println("ReferenceNum = " + receipt.getReferenceNum());
    System.out.println("ResponseCode = " + receipt.getResponseCode());
    System.out.println("ISO = " + receipt.getISO());
    System.out.println("BankTotals = " + receipt.getBankTotals());
    System.out.println("Message = " + receipt.getMessage());
    System.out.println("AuthCode = " + receipt.getAuthCode());
    System.out.println("Complete = " + receipt.getComplete());
    System.out.println("TransDate = " + receipt.getTransDate());
    System.out.println("TransTime = " + receipt.getTransTime());
    System.out.println("Ticket = " + receipt.getTicket());
    System.out.println("TimedOut = " + receipt.getTimedOut());
    System.out.println("MaskedPan = " + receipt.getMaskedPan());
    System.out.println("CardLevelResult = " + receipt.getCardLevelResult());
}
catch (Exception e)
{
    e.printStackTrace();
}
}
```

5.6.5 Encrypted Mag Swipe Independent Refund

The Encrypted Mag Swipe Independent Refund credits a specified amount to the cardholder's credit card. The Encrypted Mag Swipe Independent Refund does not require an existing order to be logged in the Moneris Gateway. However, the credit card must be swiped using the Moneris-provided encrypted mag swipe reader to provide the encrypted track2 details.

There are also optional fields that may be submitted such as `cust_id` and `dynamic_descriptor`. The transaction format is almost identical to Encrypted Mag Swipe Purchase and Encrypted Mag Swipe PreAuth.

NOTE:

The Encrypted Mag Swipe Independent Refund transaction may not be supported on your account. This may yield a TRANSACTION NOT ALLOWED error when attempting the transaction.

To temporarily enable (or re-enable) the Independent Refund transaction type, contact Moneris

Encrypted Mag Swipe Independent Refund transaction object definition

```
EncTrack2IndependentRefund encindrefund = new EncTrack2IndependentRefund();
```

HttpPostRequest object for Encrypted Mag Swipe Independent Refund transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

```
mpgReq.setTransaction(encindrefund);
```

Encrypted Mag Swipe Independent Refund transaction object values

Table 1: Encrypted Mag Swipe Independent Refund transaction object mandatory values

| Value | Type | Limits | Set Method |
|------------------------|--------|----------------------------|---|
| Order ID | String | 50-character alpha-numeric | <code>encindrefund.setOrderId(order_id);</code> |
| Amount | String | 9-character decimal | <code>encindrefund.setAmount(amount);</code> |
| Encrypted Track 2 data | String | n/a | <code>encindrefund.setEncTrack2(enc_track2);</code> |

| Value | Type | Limits | Set Method |
|-------------|--------|----------------------------|---|
| Device Type | String | 30-character alpha-numeric | <code>encindrefund.setDeviceType(device_type);</code> |
| POS Code | String | 2-character numeric | <code>encindrefund.setPosCode(pos_code);</code> |

Table 2: Encrypted Mag Swipe Independent Refund transaction object optional values

| Value | Type | Limits | Set Method |
|--------------|---------|----------------------------|---|
| Status Check | Boolean | true/false | <code>mpgReq.setStatusCheck(status_check);</code> |
| Customer ID | String | 50-character alpha-numeric | <code>encindrefund.setCustId(custid);</code> |

Sample Encrypted Mag Swipe Ind Refund - CA

```

package Canada;
import JavaAPI.*;
public class TestCanadaEncTrack2IndependentRefund
{
    public static void main(String[] args)
    {
        String store_id = "moneris";
        String api_token = "hurgle";
        java.util.Date createDate = new java.util.Date();
        String order_id = "Test"+createDate.getTime();
        String cust_id = "my customer id";
        String amount = "5.00";
        String pos_code = "00";
        String device_type = "idtech_bdk";
        String processing_country_code = "CA";
        String enc_track2 = "ENCRYPTEDTRACK2DATA";
        EncTrack2IndependentRefund encindrefund = new EncTrack2IndependentRefund();
        encindrefund.setOrderId(order_id);
        encindrefund.setCustId(cust_id);
        encindrefund.setAmount(amount);
        encindrefund.setEncTrack2(enc_track2);
        encindrefund.setPosCode(pos_code);
        encindrefund.setDeviceType(device_type);
        HttpsPostRequest mpgReq = new HttpsPostRequest();
        mpgReq.setProcCountryCode(processing_country_code);
        mpgReq.setTestMode(true); //false or comment out this line for production transactions
        mpgReq.setStoreId(store_id);
        mpgReq.setApiToken(api_token);
        mpgReq.setTransaction(encindrefund);
        mpgReq.send();
        try
        {
            Receipt receipt = mpgReq.getReceipt();
            System.out.println("CardType = " + receipt.getCardType());
            System.out.println("TransAmount = " + receipt.getTransAmount());
        }
    }
}

```

Sample Encrypted Mag Swipe Ind Refund - CA

```
System.out.println("TxnNumber = " + receipt.getTxnNumber());
System.out.println("ReceiptId = " + receipt.getReceiptId());
System.out.println("TransType = " + receipt.getTransType());
System.out.println("ReferenceNum = " + receipt.getReferenceNum());
System.out.println("ResponseCode = " + receipt.getResponseCode());
System.out.println("ISO = " + receipt.getISO());
System.out.println("BankTotals = " + receipt.getBankTotals());
System.out.println("Message = " + receipt.getMessage());
System.out.println("AuthCode = " + receipt.getAuthCode());
System.out.println("Complete = " + receipt.getComplete());
System.out.println("TransDate = " + receipt.getTransDate());
System.out.println("TransTime = " + receipt.getTransTime());
System.out.println("Ticket = " + receipt.getTicket());
System.out.println("TimedOut = " + receipt.getTimedOut());
System.out.println("MaskedPan = " + receipt.getMaskedPan());
System.out.println("CardLevelResult = " + receipt.getCardLevelResult());
}
catch (Exception e)
{
    e.printStackTrace();
}
}
```


6 Transaction Risk Management Tool

- 6.1 About the Transaction Risk Management Tool
- 6.2 Introduction to Queries
- 6.3 Session Query
- 6.4 Attribute Query
- 6.6 Inserting the Profiling Tags Into Your Website
- 6.6 Inserting the Profiling Tags Into Your Website

Any of the transaction objects that are defined in this section can be passed to the `HttpPostRequest` connection object defined in Section 11.5 (page 282)[here](#).

The Transaction Risk Management Tool (TRMT) is available to **Canadian integrations** only.

6.1 About the Transaction Risk Management Tool

The Transaction Risk Management Tool provides additional information to assist in identifying fraudulent transactions. To maximize the benefits from the Transaction Risk Management Tool, it is highly recommended that you:

- Carefully consider the business logic and processes that you need to implement surrounding the handling of response information the Transaction Risk Management Tool provides.
- Implement the other fraud tools available through Moneris Gateway (such as AVS, CVD, Verified by Visa, MasterCard SecureCode and American Express SafeKey).

6.2 Introduction to Queries

There are two types of transactions associated with the Transaction Risk Management Tool (TRMT):

- Session Query (page 135)
- Attribute Query (page 142)

The Session Query and Attribute Query are used at the time of the transaction to obtain the risk assessment.

Moneris recommends that you use the Session Query as much as possible for obtaining your risk assessment because it uses the device fingerprint as well as other transaction information when providing the risk scores.

To use the Session Query, you must implement two components:

- Tags on your website to collect the device fingerprinting information
- Session Query transaction.

If you are not able to collect the necessary information for the Session Query (such as the device fingerprint), then use the Attribute Query.

6.3 Session Query

Once a device profiling session has been initiated upon a client device, the Session Query API is used at the time of the transaction or even to obtain a device identifier or 'fingerprint', attribute list and risk assessment for the client device.

Session Query transaction object definition

```
SessionQuery sq = new SessionQuery();
```

HttpPostRequest object for Session Query transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

```
mpgReq.setTransaction(sq);
```

Session Query transaction values

Table 67: Session Query transaction object mandatory values

| Value | Type | Limits | Set method |
|--------------------------|-------------|---|--|
| | Description | | |
| Session ID | String | 9-character decimal Permitted characters: [a-z], [A-Z], 0-9, _ - | <code>sq.setSessionId(session_id);</code> |
| | | Web server session identifier generated when device profiling was initiated. | |
| Service type | String | 9-character decimal | <code>sq.setServiceType(service_type);</code> |
| | | Which output fields are returned. session -- returns IP and device related attributes. | |
| Event type | String | payment | <code>sq.setEventType(service_type);</code> |
| | | Defines the type of transaction or event for reporting purposes. payment - Purchasing of goods/services. | |
| Credit card number (PAN) | String | 20-character numeric No spaces or dashes | <code>sq.setPan(pan);</code> |
| | | Most credit card numbers today are 16 digits, but some 13-digit numbers are still accepted by some issuers. This field has been intentionally expanded to 20 digits in consideration for future expansion and potential support of private label card ranges. | |
| Account address street 1 | String | 32-character alphanumeric | <code>sq.setAccountAddressStreet1("3300 Bloor St W");</code> |
| | | First portion of the street address component of the billing address. | |

Table 67: Session Query transaction object mandatory values (continued)

| Value | Type Limits | | Set method |
|-----------------------------------|---|---------------------------|--|
| | Description | | |
| Account Address street 2 | String | 32-character alphanumeric | <code>sq.setAccountAddressStreet2("4th Flr West Tower");</code> |
| | Second portion of the street address component of the billing address. | | |
| Account address city | String | 50-character alphanumeric | <code>sq.setAccountAddressCity("Toronto");</code> |
| | The city component of the billing address. | | |
| Account address state/- province | String | 64-character alphanumeric | <code>sq.setAccountAddressState("Ontario");</code> |
| | The state/province component of the billing address. | | |
| Account address country | String | 2-character alphanumeric | <code>sq.setAccountAddressCountry("CA");</code> |
| | ISO2 country code of the billing addresses. | | |
| Account address ZIP/- postal code | String | 8-character alphanumeric | <code>sq.setAccountAddressZip("M8X2X2");</code> |
| | ZIP/postal code of the billing address. | | |
| Shipping address street 1 | String | 32-character alphanumeric | <code>sq.setShippingAddressStreet1("3300 Bloor St W");</code> |
| | First portion of the street address component of the shipping address. | | |
| Shipping address street 2 | String | 32-character alphanumeric | <code>sq.setShippingAddressStreet2("4th Flr West Tower");</code> |
| | Second portion of the street address component of the shipping address. | | |
| Shipping address city | String | 50-character alphanumeric | <code>sq.setShippingAddressCity("Toronto");</code> |
| | City component of the shipping address. | | |
| Shipping address state/- province | String | 64-character alphanumeric | <code>sq.setShippingAddressState("Ontario");</code> |
| | The state/province component of the shipping address. | | |
| Shipping address country | String | 2-character alphanumeric | <code>sq.setShippingAddressCountry("CA");</code> |
| | ISO2 country code of the account address country. | | |
| Shipping address ZIP | String | 8-character alphanumeric | <code>sq.setAccountAddressZip("M8X2X2");</code> |
| | The ZIP/postal code component of the shipping address. | | |

Table 67: Session Query transaction object mandatory values (continued)

| Value | Type | Limits | Set method |
|----------------------|---|---|--|
| | Description | | |
| Local attribute 1-5 | String | 255-character alphanumeric | <code>sq.setLocalAttribute1("a");</code> |
| | These five attributes can be used to pass custom attribute data. These are used if you wish to correlate some data with the returned device information. | | |
| Transaction amount | String | 255-character alphanumeric Must contain 2 decimal places | <code>sq.setTransactionAmount("1.00");</code> |
| | The numeric currency amount. | | |
| Transaction currency | String | 10-character numeric | <code>sq.setTransactionCurrency("CAN");</code> |
| | <p>The currency type that the transaction was denominated in. If TransactionAmount is passed, the TransactionCurrency is required.</p> <p>Values to be used are:</p> <ul style="list-style-type: none"> • CAD – 124 • USD – 840 | | |

Table 68: Session Query transaction object optional values

| Value | Type | Limits | Set method |
|----------------|---|----------------------------|--|
| | Description | | |
| Account login | String | 255-character alphanumeric | <code>sq.setAccountLogin("13195417-8CA0-46cd-960D-14C158E4DBB2");</code> |
| | The Account Login name. | | |
| Password hash | String | 40-character alphanumeric | <code>sq.setPasswordHash("489c830f10f7c601d30599a0deaf66e64d2aa50a");</code> |
| | The input must be a SHA-2 hash of the password in hexadecimal format. Used to check if it is on a watch list. | | |
| Account number | String | 255-character alphanumeric | <code>sq.setAccountNumber("3E17A905-AC8A-4c8d-A417-3DADA2A55220");</code> |
| | The account number for the account. | | |
| Account name | String | 255-character alphanumeric | <code>sq.setAccountName("4590FCC0-DF4A-44d9-A57B-AF9DE98B84DD");</code> |
| | Account name (or concatenation of first and last name of account holder). | | |

Table 68: Session Query transaction object optional values (continued)

| Value | Type Limits | | Set method |
|-------------------------|--|----------------------------|--|
| | Description | | |
| Account email | String | 100-character alphanumeric | <code>sq.setAccountEmail("3CAE72EF-6B69-4a25-93FE-2674735E78E8@test.threatmetrix.com");</code> |
| | The email address entered into the form for this contact. Used to check if this is a high risk account email id. | | |
| Account telephone | String | 32-character alphanumeric | |
| | Contact telephone number including country and city codes. All whitespace is removed. Must be in format: 0..9,<space>,(,),[,] braces must be matched. | | |
| Address street 1 | String | 32-character alphanumeric | |
| | The first portion of the street address component of the account address. | | |
| Address street 2 | String | 32-character alphanumeric | |
| | The second portion of the street address component of the account address. | | |
| Address city | String | 50-character alphanumeric | |
| | The city component of the account address. | | |
| Address state/-province | String | 64-character alphanumeric | |
| | The state/province component of the account address | | |
| Address country | String | 2-character alphanumeric | |
| | The 2 character ISO2 country code of the account address country | | |
| Address ZIP | String | 8-character alphanumeric | |
| | The ZIP/postal code of the account address. | | |
| Ship Address Street 1 | String | 32-character alphanumeric | |
| | The first portion of the street address component of the shipping address | | |

Table 68: Session Query transaction object optional values (continued)

| Value | Type Limits | | Set method |
|-----------------------------|--|----------------------------|------------|
| | Description | | |
| Ship Address Street 2 | String | 32-character alphanumeric | |
| | The second portion of the street address component of the shipping address | | |
| Ship Address City | String | 50-character alphanumeric | |
| | The city component of the shipping address | | |
| Ship Address State/Province | String | 64-character alphanumeric | |
| | The state/province component of the shipping address | | |
| Ship Address Country | String | 2-character alphanumeric | |
| | The 2 character ISO2 country code of the shipping address country | | |
| Ship Address ZIP | String | 8-character alphanumeric | |
| | The ZIP/postal code of the shipping address | | |
| CC Number Hash | String | 255-character alphanumeric | |
| | This is a SHA-2 hash (in hexadecimal format) of the credit card number. | | |
| Custom Attribute 1-8 | String | 255-character alphanumeric | |
| | These 8 attributes can be used to pass custom attribute data which can be used within the rules. | | |

Sample Session Query - CA

```

package Canada;
import java.util.Hashtable;
import java.util.Iterator;
import java.util.Map;
import JavaAPI.*;
public class TestCanadaRiskCheckSession
{
    public static void main(String[] args)
    {
        String store_id = "moneris";
        String api_token = "hurgle";

```

Sample Session Query - CA

```

java.util.Date createDate = new java.util.Date();
String order_id = "Test"+createDate.getTime();
String session_id = "abc123";
String service_type = "session";
//String event_type = "LOGIN";
String processing_country_code = "CA";
boolean status_check = false;
SessionQuery sq = new SessionQuery();
sq.setOrderId(order_id);
sq.setSessionId(session_id);
sq.setServiceType(service_type);
sq.setEventType(service_type);
//sq.setPolicy("");
//sq.setDeviceId("4EC40DE5-0770-4fa0-BE53-981C067C598D");
sq.setAccountLogin("13195417-8CA0-46cd-960D-14C158E4DBB2");
sq.setPasswordHash("489c830f10f7c601d30599a0deaf66e64d2aa50a");
sq.setAccountNumber("3E17A905-AC8A-4c8d-A417-3DADA2A55220");
sq.setAccountName("4590FCC0-DF4A-44d9-A57B-AF9DE98B84DD");
sq.setAccountEmail("3CAE72EF-6B69-4a25-93FE-2674735E78E8@test.threatmetrix.com");

//sq.setAccountTelephone("5556667777");
sq.setPan("4242424242424242");
//sq.setAccountAddressStreet1("3300 Bloor St W");
//sq.setAccountAddressStreet2("4th Flr West Tower");
//sq.setAccountAddressCity("Toronto");
//sq.setAccountAddressState("Ontario");
//sq.setAccountAddressCountry("CA");
//sq.setAccountAddressZip("M8X2X2");
//sq.setShippingAddressStreet1("3300 Bloor St W");
//sq.setShippingAddressStreet2("4th Flr West Tower");
//sq.setShippingAddressCity("Toronto");
//sq.setShippingAddressState("Ontario");
//sq.setShippingAddressCountry("CA");
//sq.setShippingAddressZip("M8X2X2");
//sq.setLocalAttrib1("a");
//sq.setLocalAttrib2("b");
//sq.setLocalAttrib3("c");
//sq.setLocalAttrib4("d");
//sq.setLocalAttrib5("e");
//sq.setTransactionAmount("1.00");
//sq.setTransactionCurrency("840");
//set SessionAccountInfo
sq.setTransactionCurrency("CAN");
HttpPostRequest mpgReq = new HttpPostRequest();
mpgReq.setProcCountryCode(processing_country_code);
mpgReq.setTestMode(true); //false or comment out this line for production transactions
mpgReq.setStoreId(store_id);
mpgReq.setApiToken(api_token);
mpgReq.setTransaction(sq);
mpgReq.setStatusCheck(status_check);
mpgReq.send();
try
{
String[] rules;
Hashtable<String, String> results = new Hashtable<String, String>();
Receipt receipt = mpgReq.getReceipt();
System.out.println("ResponseCode = " + receipt.getResponseCode());
System.out.println("Message = " + receipt.getMessage());
System.out.println("TxnNumber = " + receipt.getTxnNumber());

```

Sample Session Query - CA

```

results = receipt.getRiskResult();
Iterator<Map.Entry<String, String>> response = results.entrySet().iterator();
while (response.hasNext())
{
    Map.Entry<String, String> entry = response.next();
    System.out.println(entry.getKey().toString() + " = " + entry.getValue().toString());
}
rules = receipt.getRiskRules();
for (int i = 0; i < rules.length; i++)
{
    System.out.println("RuleName = " + rules[i]);
    System.out.println("RuleCode = " + receipt.getRuleCode(rules[i]));
    System.out.println("RuleMessageEn = " + receipt.getRuleMessageEn(rules[i]));
    System.out.println("RuleMessageFr = " + receipt.getRuleMessageFr(rules[i]));
}
}
catch (Exception e)
{
    e.printStackTrace();
}
}
}

```

6.3.1 Session Query Transaction Flow

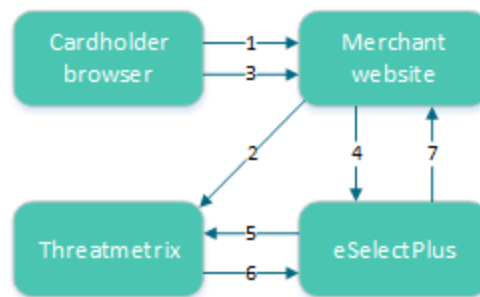


Figure 4: Session Query transaction flow

1. Cardholder logs onto the merchant website.
2. When the page has loaded in the cardholder's browser, special tags within the site allow information from the device to be gathered and sent to ThreatMetrix as the device fingerprint.
The HTML tags should be placed where the cardholder is resident on the page for a couple of seconds to get the broadest data possible.
3. Customer submits a transaction.
4. Merchant's web application makes a Session Query transaction to the Moneris Gateway using the same session id that was included in the device fingerprint. This call must be made within 30 minutes of profiling (2).
5. Moneris Gateway submits the Session Query data to ThreatMetrix.
6. ThreatMetrix uses the Session Query data and the device fingerprint information to assess the transaction against the rules. A score is generated based on the rules.

- The merchant uses the returned device information in its risk analysis to make a business decision. The merchant may wish to continue or cancel with the cardholder's payment transaction.

6.4 Attribute Query

The Attribute Query is used to obtain a risk assessment of transaction-related identifiers such as the email address and the card number. Unlike the Session Query, the Attribute Query does not require the device fingerprinting information to be provided.

AttributeQuery transaction object definition

```
AttributeQuery aq = new AttributeQuery();
```

HttpPostRequest object for AttributeQuery transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

```
mpgReq.setTransaction(aq);
```

Attribute Query transaction values

Table 69: Attribute Query transaction object mandatory values

| Value | Type | | Limits | Set method |
|---|---|---------------------------|--------|---|
| | Description | | | |
| Service type | String | N/A | | <code>aq.setServiceType(service_type);</code> |
| | Which output fields are returned. session -- returns IP and device related attributes. | | | |
| Device ID | String | 36-character alphanumeric | | <code>aq.setDeviceId("");</code> |
| | Unique device identifier generated by a previous call to the ThreatMetrix session-query API. | | | |
| Credit card number | String | 20-character numeric | | <code>aq.setPan(pan);</code> |
| | | No spaces or dashes | | |
| Most credit card numbers today are 16 digits, but some 13-digit numbers are still accepted by some issuers. This field has been intentionally expanded to 20 digits in consideration for future expansion and potential support of private label card ranges. | | | | |
| IP address | String | 64-character alphanumeric | | <code>aq.setIPAddress("192.168.0.1");</code> |
| | True IP address. Results will be returned as <code>true_ip_geo</code> , <code>true_ip_score</code> and so on. | | | |

Table 69: Attribute Query transaction object mandatory values (continued)

| Value | Type | Limits | Set method |
|-----------------------------------|--|---------------------------|---|
| | Description | | |
| IP forwarded | String | 64-character alphanumeric | <code>aq.setIPForwarded ("192.168.1.0");</code> |
| | <p>The IP address of the proxy. If the IPAddress is supplied, results will be returned as proxy_ip_geo and proxy_ip_score.</p> <p>If the IP Address is not supplied, this IP address will be treated as the true IP address and results will be returned as true_ip_geo, true_ip_score and so on</p> | | |
| Account address street 1 | String | 32-character alphanumeric | <code>aq.setAccountAddressStreet1 ("3300 Bloor St W");</code> |
| | First portion of the street address component of the billing address. | | |
| Account Address Street 2 | String | 32-character alphanumeric | <code>aq.setAccountAddressStreet2 ("4th Flr West Tower");</code> |
| | Second portion of the street address component of the billing address. | | |
| Account address city | String | 50-character alphanumeric | <code>aq.setAccountAddressCity ("Toronto");</code> |
| | The city component of the billing address. | | |
| Account address state/- province | String | 64-character alphanumeric | <code>aq.setAccountAddressState ("Ontario");</code> |
| | The state component of the billing address. | | |
| Account address country | String | 2-character alphanumeric | <code>aq.setAccountAddressCountry ("CA");</code> |
| | ISO2 country code of the billing addresses. | | |
| Account address zip/- postal code | String | 8-character alphanumeric | <code>aq.setAccountAddressZip ("M8X2X2");</code> |
| | Zip/postal code of the billing address. | | |
| Shipping address street 1 | String | 32-character alphanumeric | <code>aq.setShippingAddressStreet1 ("3300 Bloor St W");</code> |
| | Account address country | | |
| Shipping Address Street 2 | String | 32-character alphanumeric | <code>aq.setShippingAddressStreet2 ("4th Flr West Tower");</code> |
| | Second portion of the street address component of the shipping address. | | |
| Shipping Address City | String | 50-character alphanumeric | <code>aq.setShippingAddressCity ("Toronto");</code> |
| | City component of the shipping address. | | |

Table 69: Attribute Query transaction object mandatory values (continued)

| Value | Type Limits | | Set method |
|------------------------------------|--|---------------------------|--|
| | Description | | |
| Shipping Address State/Province | String | 64-character alphanumeric | aq.setShippingAddressState("Ontario"); |
| | State/Province component of the shipping address. | | |
| Shipping Address Country | String | 2-character alphanumeric | aq.setShippingAddressCountry("CA"); |
| | ISO2 country code of the account address country. | | |
| Shipping Address zip/- postal code | String | 8-character alphanumeric | aq.setAccountAddressZip("M8X2X2"); |
| | The zip/postal code component of the shipping address. | | |

Sample Attribute Query - CA

```

String store_id = "moneris";
String api_token = "hurgle";
java.util.Date createDate = new java.util.Date();
String order_id = "Test"+createDate.getTime();
String service_type = "session";
String processing_country_code = "CA";
boolean status_check = false;

AttributeQuery aq = new AttributeQuery();
aq.setOrderId(order_id);
aq.setServiceType(service_type);
aq.setDeviceId("");
aq.setAccountLogin("13195417-8CA0-46cd-960D-14C158E4DBB2");
aq.setPasswordHash("489c830f10f7c601d30599a0deaf66e64d2aa50a");
aq.setAccountNumber("3E17A905-AC8A-4c8d-A417-3DADA2A55220");
aq.setAccountName("4590FCC0-DF4A-44d9-A57B-AF9DE98B84DD");
aq.setAccountEmail("3CAE72EF-6B69-4a25-93FE-2674735E78E8@test.threatmetrix.com");
//aq.setCCNumberHash("4242424242424242");
//aq.setIPAddress("192.168.0.1");
//aq.setIPForwarded("192.168.1.0");
aq.setAccountAddressStreet1("3300 Bloor St W");
aq.setAccountAddressStreet2("4th Flr West Tower");
aq.setAccountAddressCity("Toronto");
aq.setAccountAddressState("Ontario");
aq.setAccountAddressCountry("CA");
aq.setAccountAddressZip("M8X2X2");
aq.setShippingAddressStreet1("3300 Bloor St W");
aq.setShippingAddressStreet2("4th Flr West Tower");
aq.setShippingAddressCity("Toronto");
aq.setShippingAddressState("Ontario");
aq.setShippingAddressCountry("CA");
aq.setShippingAddressZip("M8X2X2");

HttpPostRequest mpgReq = new HttpPostRequest();
mpgReq.setTransaction(aq);
mpgReq.send();

```


Sample Attribute Query - CA

```

try
{
    String[] rules;
    Hashtable<String, String> results = new Hashtable<String, String>();
    Receipt receipt = mpgReq.getReceipt();
    System.out.println("ResponseCode = " + receipt.getResponseCode());
    System.out.println("Message = " + receipt.getMessage());
    System.out.println("TxnNumber = " + receipt.getTxnNumber());

    results = receipt.getRiskResult();
    Iterator<Map.Entry<String, String>> response = results.entrySet().iterator();
    while (response.hasNext())
    {
        Map.Entry<String, String> entry = response.next();
        System.out.println(entry.getKey().toString() + " = " + entry.getValue().toString());
    }
    rules = receipt.getRiskRules();
    for (int i = 0; i < rules.length; i++)
    {
        System.out.println("RuleName = " + rules[i]);
        System.out.println("RuleCode = " + receipt.getRuleCode(rules[i]));
        System.out.println("RuleMessageEn = " + receipt.getRuleMessageEn(rules[i]));
        System.out.println("RuleMessageFr = " + receipt.getRuleMessageFr(rules[i]));
    }
}

```

6.4.1 Attribute Query Transaction Flow

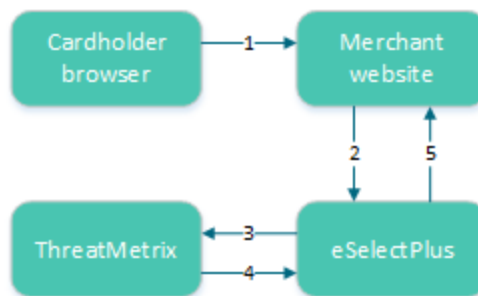


Figure 5: Attribute query transaction flow

1. Cardholder logs onto merchant website and submits a transaction.
2. The merchant's web application makes an Attribute Query transaction that includes the session ID to the Moneris Gateway.
3. Moneris Gateway submits Attribute Query data to ThreatMetrix.
4. ThreatMetrix uses the Attribute Query data to assess the transaction against the rules. A score is generated based on the rules.
5. The merchant uses the returned device information in its risk analysis to make a business decision. The merchant may wish to continue or cancel with the cardholder's payment transaction.

6.5 Handling Response Information

When reviewing the response information and determining how to handle the transaction, it is recommended that you (either manually or through automated logic on your site) use the following pieces of information:

- Risk score
- Rules triggered (such as Rule Codes, Rule Names, Rule Messages)
- Results obtained from Verified by Visa, MasterCard Secure Code, AVS, CVD and the financial transaction authorization
- Response codes for the Transaction Risk Management Transaction that are included by automated processes.

6.5.1 TRMT Response Fields

Table 70: Receipt object response values for TRMT

| Value | Type | Limits | Get method |
|---------------|--|---------------------------|--|
| | Definition | | |
| Response Code | String | 3-character alpha-numeric | <code>receipt.getResponseCode()</code> ; |
| | 001 – Success 981 – Data error 982 – Duplicate Order ID 983 – Invalid Transaction 984 – Previously asserted 985 – Invalid activity description 986- Invalid impact description 987 – Invalid Confidence description 988 - Cannot find Previous | | |
| Message | String | N/A | <code>receipt.getMessage()</code> ; |
| | Response message | | |
| Event type | String | N/A | |
| | Type of transaction or event returned in the response. | | |

Table 70: Receipt object response values for TRMT (continued)

| Value | Type | Limits | Get method |
|--------------------|---|--------|--|
| | Definition | | |
| Org ID | String | N/A | |
| | ThreatMetrix-defined unique transaction identifier | | |
| Policy | String | N/A | |
| | Policy used for the Session Query will be returned with the return request. If the Policy was not included, then the Policy name default is returned. | | |
| Policy score | String | N/A | |
| | The sum of all the risks weights from triggered rules within the selected policy in the range [-100...100] | | |
| Request duration | String | N/A | |
| | Length of time it takes for the transaction to be processed. | | |
| Request ID | String | N/A | |
| | Unique number and will always be returned with the return request. | | |
| Request result | String | N/A | <code>receipt.getRiskResult()</code> ; |
| | See 6.5.1 (page 146). | | |
| Review status | String | N/A | |
| | The transaction status based on the assessments and risk scores. | | |
| Risk rating | String | N/A | |
| | The rating based on the assessments and risk scores. | | |
| Service type | String | N/A | |
| | The service type will be returned in the attribute query response. | | |
| Session ID | String | N/A | |
| | Temporary identifier unique to the visitor will be returned in the return request. | | |
| Summary risk score | String | N/A | |
| | Based on all of the returned values in the range [-100 ... 100] | | |
| Transaction ID | String | N/A | |
| | This is the transaction identifier and will always be returned in the response when supplied as input. | | |
| Unknown session | String | N/A | |
| | If present, the value is "yes". It indicates the session ID that was passed was not found. | | |

Table 71: Response code descriptions

| Value | Definition |
|-------|--------------------------------|
| 001 | Success |
| 981 | Data error |
| 982 | Duplicate order ID |
| 983 | Invalid transaction |
| 984 | Previously asserted |
| 985 | Invalid activity description |
| 986 | Invalid impact description |
| 987 | Invalid confidence description |
| 988 | Cannot find previous |

Table 72: Request result values and descriptions

| Value | Definition |
|--------------------------------------|--|
| fail_duplicate_entities_of_same_type | More than one entity of the same was specified, e.g. password_hash was specified twice. |
| fail_incomplete | ThreatMetrix was unable to process the request due to incomplete or incorrect input data |
| fail_invalid_account_number | The format of the supplied account number was invalid |
| fail_invalid_characters | Invalid characters submitted |
| fail_invalid_charset | The value of character set was invalid |
| fail_invalid_currency_code | The format of the currency_code was invalid |
| fail_invalid_currency_format | The format of the currency_format was invalid |
| fail_invalid_telephone_number | Format of the supplied telephone number was invalid |
| fail_access | ThreatMetrix was unable to process the request because of API verification failing |
| fail_internal_error | ThreatMetrix encountered an error while processing the request |

| Value | Definition |
|---|--|
| fail_invalid_device_id | Format of the supplied device_id was invalid |
| fail_invalid_email_address | Format of the supplied email address was invalid |
| fail_invalid_fuzzy_device_id | The format of fuzzy_device_id was invalid |
| fail_invalid_ip_address_parameter | Format of a supplied ip_address parameter was invalid |
| fail_invalid_parameter | The format of the parameter was invalid, or the value is out of boundary |
| fail_invalid_sha_hash | The format of a parameter specified as a sha hash was invalid, sha hash included sha1/2/3 hash |
| fail_invalid_submitter_id | The format of the submitter id was invalid or the value is out of boundary |
| fail_no_policy_configured | No policy was configured against the org_id |
| fail_not_enough_params | Not enough device attributes were collected during profiling to perform a fingerprint match |
| fail_parameter_overlength | The value of the parameter was overlength |
| fail_temporarily_unavailable | Request failed because the service is temporarily unavailable |
| fail_too_many_instances_of_same_parameter | Multiple values for some parameters which only allow one instance |
| fail_verification | API query limit reached |
| success | ThreatMetrix was able to process the request successfully |

6.5.2 Understanding the Risk Score

For each Session Query or Attribute Query, a score with a value between -100 and +100 is returned based on the rules that were triggered for the transaction.

Table 73 defines the risk scores ranges.

Table 73: Session Query and Attribute Query risk score definitions

| Risk score | Visa definition |
|------------|--|
| -100 to -1 | A lower score indicates a higher probability that the transaction is fraudulent. |
| 0 | Neutral transaction |
| 1 to 100 | <p>A higher score indicates a lower probability that the transaction is fraudulent.</p> <p>Note: All e-commerce transactions have some level of risk associated with them. Therefore, it is rare to see risk score in the high positive values.</p> |

When evaluating the risk of a transaction, the risk score gives an initial indicator of the potential risk that the transaction is fraudulent. Because some of the rules that are evaluated on each transaction may not be relevant to your business scenario, review the rules that were triggered for the transaction before determining how to handle the transaction.

6.5.3 Understanding the Rule Codes, Rule Names and Rule Messages

The rule codes, rule names and rule messages provide details about what rules were triggered during the assessment of the information provided in the Session or Attribute Query. Each rule code has a rule name and rule message. The rule name and rule message are typically similar. Table 74 provides additional information on each rule.

When evaluating the risk of a transaction, it is recommended that you review the rules that were triggered for the transaction and assess the relevance to your business. (That is, how does it relate to the typical buying habits of your customer base?)

If you are automating some or all of the decision-making processes related to handling the responses, you may want to use the rule codes. If you are documenting manual processes, you may want to refer to the more user-friendly rule name or rule message.

Table 74: Rule names, numbers and messages

| Rule name | Rule number | Rule message |
|-------------------|---|---------------------|
| | Rule explanation | |
| White lists | | |
| DeviceWhitelisted | WL001 | Device White Listed |
| | Device is on the white list. This indicates that the device has been flagged as always "ok". Note: This rule is currently not in use. | |

Table 74: Rule names, numbers and messages (continued)

| Rule name | Rule number | | Rule message |
|-----------------------|--|--|--------------|
| | Rule explanation | | |
| IPWhitelisted | WL002 | IP White Listed | |
| | IP address is on the white list. This indicates the device has been flagged as always "ok". | | |
| | Note: This rule is currently not in use. | | |
| EmailWhitelisted | WL003 | Email White Listed | |
| | Email address is on the white list. This indicates that the device has been flagged as always "ok". | | |
| | Note: This rule is currently not in use. | | |
| Event velocity | | | |
| 2DevicePayment | EV003 | 2 Device Payment Velocity | |
| | Multiple payments were detected from this device in the past 24 hours. | | |
| 2IPPaymentVelocity | EV006 | 2 IP Payment Velocity | |
| | Multiple payments were detected from this IP within the past 24 hours. | | |
| 2ProxyPaymentVelocity | EV008 | 2 Proxy Payment Velocity | |
| | The device has used 3 or more different proxies during a 24 hour period. This could be a risk or it could be someone using a legitimate corporate proxy. | | |
| Email | | | |
| 3EmailPerDeviceDay | EM001 | 3 Emails for the Device ID in 1 Day | |
| | This device has presented 3 different email IDs within the past 24 hours. | | |
| 3EmailPerDeviceWeek | EM002 | 3 emails for the Device ID in 1 week | |
| | This device has presented 3 different email IDs within the past week. | | |
| 3DevciePerEmailDay | EM003 | 3 Device Ids for email address in 1 day | |
| | This email has been presented from three different devices in the past 24 hours. | | |
| 3DevciePerEmailWeek | EM004 | 3 Device Ids for email address in 1 week | |
| | This email has been presented from three different devices in the past week. | | |

Table 74: Rule names, numbers and messages (continued)

| Rule name | Rule number | Rule message |
|--------------------------------|--|---|
| | Rule explanation | |
| EmailDistanceTravelled | EM005 | Email Distance Travelled |
| | This email address has been associated with different physical locations in a short period of time. | |
| 3EmailPerSmartIDHour | EM006 | 3 Emails for SmartID in 1 Hour |
| | The SmartID for this device has been associated with 3 different email addresses in 1 hour. | |
| GlobalEMailOverOneMonth | EM007 | Global Email over 1 month |
| | The e-mail address involved in the transaction over 30 days ago. This generally indicates that the transaction is less risky. Note: This rule is set so that it does not impact the policy score or risk rating. | |
| ComputerGeneratedEmailAddress | EM008 | Computer Generated Email Address |
| | This transaction used a computer-generated email address. | |
| Account Number | | |
| 3AccountNumberPerDeviceDay | AN001 | 3 Account Numbers for device in 1 day |
| | This device has presented 3 different user accounts within the past 24 hours. | |
| 3AccountNumberPerDeviceWeek | AN002 | 3 Account Numbers for device in 1 week |
| | This device has presented 3 different user accounts within the past week. | |
| 3DeviciePerAccountNumberDay | AN003 | 3 Device IDs for account number in 1 day |
| | This user account been used from three different devices in the past 24 hours. | |
| 3DeviciePerAccountNumberWeek | AN004 | 3 Device IDs for account number in 1 week |
| | This card number has been used from three different devices in the past week. | |
| AccountNumberDistanceTravelled | AN005 | Account Number distance travelled |
| | This card number has been used from a number of physically different locations in a short period of time. | |

Table 74: Rule names, numbers and messages (continued)

| Rule name | Rule number | Rule message |
|-------------------------------------|--|--|
| | Rule explanation | |
| Credit card/payments | | |
| 3CreditCardPerDeviceDay | CP001 | 3 credit cards for device in 1 day |
| | This device has used three credit cards within 24 hours. | |
| 3CreditCardPerDeviceWeek | CP002 | 3 credit cards for device in 1 week |
| | This device has used three credit cards within 1 week. | |
| 3DevicePerCreditCardDay | CP003 | 3 device ids for credit card in 1 day |
| | This credit card has been used on three different devices in 24 hours. | |
| 3DevciePerCreditCardWeek | CP004 | 3 device ids for credit card in 1 week |
| | This credit card has been used on three different devices in 1 week. | |
| CredtCardDistanceTravelled | CP005 | Credit Card has travelled |
| | The credit card has been used at a number of physically different locations in a short period of time. | |
| CreditCardShipAddressGeoMismatch | CP006 | Credit Card and Ship Address do not match |
| | The credit card was issued in a region different from the Ship To Address information provided. | |
| CreditCardBillAddressGeoMismatch | CP007 | Credit Card and Billing Address do not match |
| | The credit card was issued in a region different from the Billing Address information provided. | |
| CreditCardDeviceGeoMismatch | CP008 | Credit Card and device location do not match |
| | The device is located in a region different from where the card was issued. | |
| CreditCardBINShipAddressGeoMismatch | CP009 | Credit Card issuing location and Shipping address do not match |
| | The credit card was issued in a region different from the Ship To Address information provided. | |
| CreditCardBINBillAddressGeoMismatch | CP010 | Credit Card issuing location and Billing address do not match |
| | The credit card was issued in a region different from the Billing Address information provided. | |

Table 74: Rule names, numbers and messages (continued)

| Rule name | Rule number | | Rule message | |
|--------------------------------|--|--|--|--|
| | Rule explanation | | | |
| CreditCardBINDeviceGeoMismatch | CP011 | | Credit Card issuing location and location of the device do not match | |
| | The device is located in a region different from where the card was issued. | | | |
| TransactionValueDay | CP012 | | Daily Transaction Value Threshold | |
| | The transaction value exceeds the daily threshold. | | | |
| TransactionValueWeek | CP013 | | Weekly Transaction Value Threshold | |
| | The transaction value exceeds the weekly threshold. | | | |
| Proxy rules | | | | |
| 3ProxyPerDeviceDay | PX001 | | 3 Proxy Ips in 1 day | |
| | This device has used three different proxy servers in the past 24 hours. | | | |
| AnonymousProxy | PX002 | | Anonymous Proxy IP | |
| | This device is using an anonymous proxy | | | |
| UnusualProxyAttributes | PX003 | | Unusual Proxy Attributes | |
| | This transaction is coming from a source with unusual proxy attributes. | | | |
| AnonymousProxy | PX004 | | Anonymous Proxy | |
| | This device is connecting through an anonymous proxy connection. | | | |
| HiddenProxy | PX005 | | Hidden Proxy | |
| | This device is connecting via a hidden proxy server. | | | |
| OpenProxy | PX006 | | Open Proxy | |
| | This transaction is coming from a source that is using an open proxy. | | | |
| TransparentProxy | PX007 | | Transparent Proxy | |
| | This transaction is coming from a source that is using a transparent proxy. | | | |
| DeviceProxyGeoMismatch | PX008 | | Proxy and True GEO Match | |
| | This device is connecting through a proxy server that didn't match the devices geo-location. | | | |

Table 74: Rule names, numbers and messages (continued)

| Rule name | Rule number | | Rule message | |
|-------------------------------|--|--|--------------|--|
| | Rule explanation | | | |
| ProxyTrueISPMismatch | PX009 | Proxy and True ISP Match | | |
| | This device is connecting through a proxy server that doesn't match the true IP address of the device. | | | |
| ProxyTrueOrganizationMismatch | PX010 | Proxy and True Org Match | | |
| | The Proxy information and True ISP information for this source do not match. | | | |
| DeviceProxyRegionMismatch | PX011 | Proxy and True Region Match | | |
| | The proxy and device region location information do not match. | | | |
| ProxyNegativeReputation | PX012 | Proxy IP Flagged Risky in Reputation Network | | |
| | This device is connecting from a proxy server with a known negative reputation. | | | |
| SatelliteProxyISP | PX013 | Satellite Proxy | | |
| | This transaction is coming from a source that is using a satellite proxy. | | | |
| GEO | | | | |
| DeviceCountriesNotAllowed | GE001 | True GEO in Countries Not Allowed blacklist | | |
| | This device is connecting from a high-risk geographic location. | | | |
| DeviceCountriesNotAllowed | GE002 | True GEO in Countries Not Allowed (negative whitelist) | | |
| | The device is from a region that is not on the whitelist of regions that are accepted. | | | |
| DeviceProxyGeoMismatch | GE003 | True GEO different from Proxy GEO | | |
| | The true geographical location of this device is different from the proxy geographical location. | | | |
| DeviceAccountGeoMismatch | GE004 | Account Address different from True GEO | | |
| | This device has presented an account billing address that doesn't match the devices geolocation. | | | |
| DeviceShipGeoMismatch | GE005 | Device and Ship Geo mismatch | | |
| | The location of the device and the shipping address do not match. | | | |

Table 74: Rule names, numbers and messages (continued)

| Rule name | Rule number | Rule message |
|----------------------------|--|--|
| | Rule explanation | |
| DeviceShipGeoMismatch | GE006 | Device and Ship Geo mismatch |
| | The location of the device and the shipping address do not match. | |
| Device | | |
| SatelliteISP | DV001 | Satellite ISP |
| | This transaction is from a source that is using a satellite ISP. | |
| MidsessionChange | DV002 | Session Changed Mid-session |
| | This device changed session details and identifiers in the middle of a session. | |
| LanguageMismatch | DV003 | Language Mismatch |
| | The language of the user does not match the primary language spoken in the location where the True IP is registered. | |
| NoDeviceID | DV004 | No Device ID |
| | No device ID was available for this transaction. | |
| Dial-upConnection | DV005 | Dial-up connection |
| | This device uses a less identifiable dial-up connection. | |
| DeviceNegativeReputation | DV006 | Device Blacklisted in Reputational Network |
| | This device has a known negative reputation as reported to the fraud network. | |
| DeviceGlobalBlacklist | DV007 | Device on the Global Black List |
| | This device has been flagged on the global blacklist of known problem devices. | |
| DeviceCompromisedDay | DV008 | Device compromised in last day |
| | This device has been reported as compromised in the last 24 hours. | |
| DeviceCompromisedHour | DV009 | Device compromised in last hour |
| | This device has been reported as compromised in the last hour. | |
| FlashImagesCookiesDisabled | DV010 | Flash Images Cookies Disabled |
| | Key browser functions/identifiers have been disabled on this device. | |

Table 74: Rule names, numbers and messages (continued)

| Rule name | Rule message | |
|-------------------------|--|---------------------------------|
| | Rule explanation | |
| FlashCookiesDisabled | DV011 | Flash Cookies Disabled |
| | Key browser functions/identifiers have been disabled on this device. | |
| FlashDisabled | DV012 | Flash Disabled |
| | Key browser functions/identifiers have been disabled on this device. | |
| ImagesDisabled | DV013 | Images Disabled |
| | Key browser functions/identifiers have been disabled on this device. | |
| CookiesDisabled | DV014 | Cookies Disabled |
| | Key browser functions/identifiers have been disabled on this device. | |
| DeviceDistanceTravelled | DV015 | Device Distance Travelled |
| | The device has been used from multiple physical locations in a short period of time. | |
| PossibleCookieWiping | DV016 | Cookie Wiping |
| | This device appears to be deleting cookies after each session. | |
| PossibleCookieCopying | DV017 | Possible Cookie Copying |
| | This device appears to be copying cookies. | |
| PossibleVPNConnection | DV018 | Possibly using a VPN Connection |
| | This device may be using a VPN connection | |

6.5.4 Examples of Risk Response

6.5.4.1 Session Query

| Sample Risk Response - Session Query |
|---|
| <pre><?xml version="1.0"?> <response> <receipt> <ResponseCode>001</ResponseCode> <Message>Success</Message> </Result></pre> |

Sample Risk Response - Session Query

```

<session_id>abc123</session_id>
<unknown_session>yes</unknown_session>
<event_type>payment</event_type>
<service_type>session</service_type>
<policy_score>-25</policy_score>
<transaction_id>riskcheck42</transaction_id>
<org_id>11kue096</org_id>
<request_id>91C1879B-33D4-4D72-8FCB-B60A172B3CAC</request_id>
<risk_rating>medium</risk_rating>
<request_result>success</request_result>
<summary_risk_score>-25</summary_risk_score>
<Policy>default</policy>
<review_status>review</review_status>
</Result>
<Rule>
  <RuleName>ComputerGeneratedEMail</RuleName>
  <RuleCode>UN001</RuleCode>
  <RuleMessageEn>Unknown Rule</RuleMessageEn>
  <RuleMessageFr>Regle Inconnus</RuleMessageFr>
</Rule>
<Rule>
  <RuleName>NoDeviceID</RuleName>
  <RuleCode>DV004</RuleCode>
  <RuleMessageEn>No Device ID</RuleMessageEn>
  <RuleMessageFr>null</RuleMessageFr>
</Rule>
</receipt>
</response>

```

6.5.4.2 Attribute Query

Sample Risk Response - Attribute Query

```

<?xml version="1.0"?>
<response>
<receipt>
  <ResponseCode001</ReponseCode>
  <Message = Success</Message>
<Result>
  <org_id>11kue096</org_id>
  <request_id>443D7FB5-CC5C-4917-A57E-27EAC824069C</request_id>
  <service_type>session</service_type>
  <risk_rating>medium</risk_rating>
  <summary_risk_score>-25</summary_risk_score>
  <request_result>success</request_result>
  <policy>default</policy>
  <policy_score>-25</policy_score>
  <transaction_id>riskcheck19</transaction_id>
  <review_status>review</review_status>
</Result>
<Rule>
  <RuleName>ComputerGeneratedEMail</RuleName>
  <RuleCode>UN001</RuleCode>
  <RuleMessageEn>Unknown Rule</RuleMessageEn>
  <RuleMessageFr>Regle Inconnus</RuleMessageFr>
</Rule>
<Rule>

```

Sample Risk Response - Attribute Query

```
<RuleName>NoDeviceID</RuleName>
<RuleCode>DV004</RuleCode>
<RuleMessageEn>No Device ID</RuleMessageEn>
<RuleMessageFr>null</RuleMessageFr>
</Rule>
</receipt>
</response>
```

6.6 Inserting the Profiling Tags Into Your Website

Place the profiling tags on an HTML page served by your web application such that ThreatMetrix can collect device information from the customer's web browser. The tags must be placed on a page that a visitor would display in a browser window for 3-5 seconds (such as a page that requires a user to input data). After the device is profiled, a Session Query may be used to obtain the detail device information for risk assessment before submitting a financial payment transaction.

There are two profiling tags that require two variables. Those tags are `org_id` and `session_id`. `session_id` must match the session ID value that is to be passed in the Session Query transaction. The valid `org_id` values are:

11kue096

QA testing environment.

lbhqgx47

Production environment.

Below is an HTML sample of the profiling tags.

NOTE: Your site must replace `<my_session_id>` in the sample code with a unique alphanumeric value each time you fingerprint a new customer.

```
<p style="background:url(https://h.online-metrix.net/fp/clear.png?org_id=11kue096&session_id=<my_session_id>&m=1)">
</p>



<script src="https://h.onlinemetrix.net/fp/check.js?org_id=11kue096&session_id=<my_session_id>"
type="text/javascript">
</script>

<object type="application/x-shockwave-flash"

data="https://h.onlinemetrix.net/fp/fp.swf?org_id=11kue096&session_id=<my_session_id>"
width="1" height="1" id="obj_id">
<param name="movie"
value="https://h.onlinemetrix.net/fp/fp.swf?org_id=11kue096&session_id=<my_session_id>" />
<div></div>
</object>
```

7 Convenience Fee

- 7.1 About Convenience Fee
- 7.2 Purchase - Convenience Fee
- 7.3 Convenience Fee Purchase w/ Customer Information
- 7.4 Purchase with VbV, MCSC and Amex SafeKey

7.1 About Convenience Fee

The Convenience Fee program was designed to allow merchants to offer the convenience of an alternative payment channel to the cardholder at a charge. This applies only when providing a true "convenience" in the form of an alternative payment channel outside the merchant's customary face-to-face payment channels. The convenience fee will be a separate charge on top of what the consumer is paying for the goods and/or services they were given, and this charge will appear as a separate line item on the consumer's statement.

NOTE: The Convenience Fee program is only offered to certain supported Merchant Category Codes (MCCs). Please speak to your account manager for further details.

7.2 Purchase - Convenience Fee

NOTE: Convenience Fee Purchase with Customer Information is also supported.

Convenience Fee Purchase transaction object definition

```
Purchase purchase = new Purchase();
```

HttpPostRequest object for Convenience Fee Purchase transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();  
mpgReq.setTransaction(purchase);
```

Convenience Fee Purchase transaction object values

For a full description of mandatory and optional values, see "Definition of Request Fields" on page 302 "Definition of Request Fields" on page 302

Table 1: Convenience Fee Purchase transaction object mandatory values

| Value | Type | Limits | Set Method |
|------------------------|--------|------------------------------------|--|
| Convenience Fee | Object | n/a | <pre>ConvFeeInfo convFeeInfo = new ConvFeeInfo(); purchase.setConvFeeInfo(convFeeInfo);</pre> |
| Order ID | String | 50-character alpha-numeric | <code>purchase.setOrderId(order_id);</code> |
| Amount | String | 9-character decimal | <code>purchase.setAmount(amount);</code> |
| Credit card number | String | 20-character numeric | <code>purchase.setPan(pan);</code> |
| Expiry date | String | 4-character numeric YYMM format | <code>purchase.setExpDate(exp-date);</code> |
| E-commerce indicator | String | 1-character alpha-numeric | <code>purchase.setCryptType(crypt_type);</code> |
| Convenience fee amount | String | 9-character decimal | <code>purchase.setConvFeeInfo(convFeeInfo);</code> |

Table 2: Convenience Fee Purchase transaction object optional values

| Value | Type | Limits | Set Method |
|--------------------|--------|----------------------------|--|
| Customer ID | String | 50-character alpha-numeric | <code>purchase.setCustId(custid);</code> |
| Dynamic descriptor | String | 20-character alpha-numeric | <code>purchase.setDynamicDescriptor(dynamic_descriptor);</code> |
| AVS information | Object | | <pre>AvsInfo avsCheck = new AvsInfo(); purchase.setAvsInfo(avsCheck);</pre> |
| CVD information | Object | | <pre>CvdInfo cvdCheck = new CvdInfo(); purchase.setCvdInfo(cvdCheck);</pre> |

Sample Convenience Fee Purchase

```

package Canada;
import JavaAPI.*;
public class TestCanadaConvFeePurchase
{
    public static void main(String args[])
    {
        String store_id = "monca00392";
        String api_token = "qYdISUhHiOdfTr1CLNpN";
        String processing_country_code = "CA";
        java.util.Date createDate = new java.util.Date();
        String order_id = "Test"+createDate.getTime();
        String amount = "10.00";
        String pan = "42424242424242";
        String expdate = "1911";
        String crypt = "7";

        ConvFeeInfo convFeeInfo = new ConvFeeInfo();
        convFeeInfo.setConvenienceFee("1.00");

        Purchase purchase = new Purchase();
        purchase.setOrderId(order_id);
        purchase.setAmount(amount);
        purchase.setPan(pan);
        purchase.setExpdate(expdate);
        purchase.setCryptType(crypt);
        purchase.setConvFeeInfo(convFeeInfo);
        HttpsPostRequest mpgReq = new HttpsPostRequest();
        mpgReq.setProcCountryCode(processing_country_code);
        mpgReq.setTestMode(true); //false or comment out this line for production transactions
        mpgReq.setStoreId(store_id);
        mpgReq.setApiToken(api_token);
        mpgReq.setTransaction(purchase);
        mpgReq.send();
        try
        {
            Receipt receipt = mpgReq.getReceipt();
            System.out.println("CardType = " + receipt.getCardType());
            System.out.println("TransAmount = " + receipt.getTransAmount());
            System.out.println("TxnNumber = " + receipt.getTxnNumber());
            System.out.println("ReceiptId = " + receipt.getReceiptId());
            System.out.println("TransType = " + receipt.getTransType());
            System.out.println("ReferenceNum = " + receipt.getReferenceNum());
            System.out.println("ResponseCode = " + receipt.getResponseCode());
            System.out.println("ISO = " + receipt.getISO());
            System.out.println("BankTotals = " + receipt.getBankTotals());
            System.out.println("Message = " + receipt.getMessage());
            System.out.println("AuthCode = " + receipt.getAuthCode());
            System.out.println("Complete = " + receipt.getComplete());
            System.out.println("TransDate = " + receipt.getTransDate());
            System.out.println("TransTime = " + receipt.getTransTime());
            System.out.println("Ticket = " + receipt.getTicket());
            System.out.println("TimedOut = " + receipt.getTimedOut());
            System.out.println("CfSuccess = " + receipt.getCfSuccess());
            System.out.println("CfStatus = " + receipt.getCfStatus());
            System.out.println("FeeAmount = " + receipt.getFeeAmount());
            System.out.println("FeeRate = " + receipt.getFeeRate());
            System.out.println("FeeType = " + receipt.getFeeType());
        }
        catch (Exception e)
    }
}

```

Sample Convenience Fee Purchase

```
{
  e.printStackTrace();
}
}
```

7.3 Convenience Fee Purchase w/ Customer Information

Convenience Fee Purchase with Customer information transaction object definition

```
Purchase purchase = new Purchase();
```

HttpPostRequest object for Convenience Fee Purchase with Customer Info transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
mpgReq.setTransaction(purchase);
```

Convenience Fee Purchase with Customer information transaction object values

For a full description of mandatory and optional values, see "Definition of Request Fields" on page 302 "Definition of Request Fields" on page 302

Table 1: Convenience Fee Purchase w/ Customer Info transaction object mandatory values

| Value | Type | Limits | Set Method |
|------------------------|--------|---------------------------------|--|
| Convenience Fee | Object | n/a | <pre>ConvFeeInfo convFeeInfo = new ConvFeeInfo(); purchase.setConvFeeInfo(convFeeInfo);</pre> |
| Order ID | String | 50-character alpha-numeric | <pre>purchase.setOrderId(order_id);</pre> |
| Amount | String | 9-character decimal | <pre>purchase.setAmount(amount);</pre> |
| Credit card number | String | 20-character numeric | <pre>purchase.setPan(pan);</pre> |
| Expiry date | String | 4-character numeric YYMM format | <pre>purchase.setExpDate(exp-date);</pre> |
| E-commerce indicator | String | 1-character alpha-numeric | <pre>purchase.setCryptType(crypt_type);</pre> |
| Convenience fee amount | String | 9-character decimal | <pre>purchase.setConvFeeInfo(convFeeInfo);</pre> |

Table 2: Convenience Fee Purchase w/ Customer Info transaction object optional values

| Value | Type | Limits | Set Method |
|----------------------|--------|----------------------------|--|
| Customer ID | String | 50-character alpha-numeric | <code>purchase.setCustId(custid);</code> |
| Dynamic descriptor | String | 20-character alpha-numeric | <code>purchase.setDynamicDescriptor(dynamic_descriptor);</code> |
| Customer information | Object | | <code>CustInfo customer = new CustInfo();</code> <code>purchase.setCustInfo(customer);</code> |
| AVS information | Object | | <code>AvsInfo avsCheck = new AvsInfo();</code> <code>purchase.setAvsInfo(avsCheck);</code> |
| CVD information | Object | | <code>CvdInfo cvdCheck = new CvdInfo();</code> <code>purchase.setCvdInfo(cvdCheck);</code> |

Sample Convenience Fee Purchase with Customer Information

```

package Canada;

import java.util.*;
import JavaAPI.*;
public class TestCanadaConvFeePurchaseCustInfo
{
    public static void main(String[] args)
    {
        String store_id = "monca00392";
        String api_token = "qYdISUhHiOdfTr1CLNpN";
        java.util.Date createDate = new java.util.Date();
        String order_id = "Test"+createDate.getTime();
        String amount = "10.00";
        String pan = "4242424242424242";
        String expdate = "1901"; //YYMM format
        String crypt = "7";
        String processing_country_code = "CA";
        boolean status_check = false;
        /***** Billing/Shipping Variables *****/
        String first_name = "Bob";
        String last_name = "Smith";
    }
}

```

Sample Convenience Fee Purchase with Customer Information

```

String company_name = "ProLine Inc.";
String address = "623 Bears Ave";
String city = "Chicago";
String province = "Illinois";
String postal_code = "M1M2M1";
String country = "Canada";
String phone = "777-999-7777";
String fax = "777-999-7778";
String tax1 = "10.00";
String tax2 = "5.78";
String tax3 = "4.56";
String shipping_cost = "10.00";
/***** Order Line Item Variables *****/
String[] item_description = new String[] { "Chicago Bears Helmet", "Soldier Field Poster" };
String[] item_quantity = new String[] { "1", "1" };
String[] item_product_code = new String[] { "CB3450", "SF998S" };
String[] item_extended_amount = new String[] { "150.00", "19.79" };
/***** *****/
/* */
/* Customer Information Option 1 */
/* */
/***** *****/
/***** Customer Information Object *****/
CustInfo customer = new CustInfo();
/***** Set Customer Billing Information *****/
customer.setBilling(first_name, last_name, company_name, address, city,
province, postal_code, country, phone, fax, tax1, tax2,
tax3, shipping_cost);
/***** Set Customer Shipping Information *****/
customer.setShipping(first_name, last_name, company_name, address, city,
province, postal_code, country, phone, fax, tax1, tax2,
tax3, shipping_cost);
/***** Order Line Items *****/
customer.setItem(item_description[0], item_quantity[0],
item_product_code[0], item_extended_amount[0]);
customer.setItem(item_description[1], item_quantity[1],
item_product_code[1], item_extended_amount[1]);
/***** *****/
/* */
/* Customer Information Option 2 */
/* */
/***** *****/
/***** Customer Information Object *****/
CustInfo customer2 = new CustInfo();
/***** Billing Hashtable *****/
Hashtable<String, String> b = new Hashtable<String, String>(); //billing hashtable
b.put("first_name", first_name);
b.put("last_name", last_name);
b.put("company_name", company_name);
b.put("address", address);
b.put("city", city);
b.put("province", province);
b.put("postal_code", postal_code);
b.put("country", country);
b.put("phone", phone);
b.put("fax", fax);
b.put("tax1", tax1); //federal tax
b.put("tax2", tax2); //prov tax
b.put("tax3", tax3); //luxury tax
b.put("shipping_cost", shipping_cost); //shipping cost

```

Sample Convenience Fee Purchase with Customer Information

```

customer2.setBilling(b);
/***** Shipping Hashtable *****/
Hashtable<String, String> s = new Hashtable<String, String>(); //shipping hashtable
s.put("first_name", first_name);
s.put("last_name", last_name);
s.put("company_name", company_name);
s.put("address", address);
s.put("city", city);
s.put("province", province);
s.put("postal_code", postal_code);
s.put("country", country);
s.put("phone", phone);
s.put("fax", fax);
s.put("tax1", tax1); //federal tax
s.put("tax2", tax2); //prov tax
s.put("tax3", tax3); //luxury tax
s.put("shipping_cost", shipping_cost); //shipping cost
customer2.setShipping(s);
/***** Order Line Item1 Hashtable *****/
Hashtable<String, String> i1 = new Hashtable<String, String>(); //item hashtable #1
i1.put("name", item_description[0]);
i1.put("quantity", item_quantity[0]);
i1.put("product_code", item_product_code[0]);
i1.put("extended_amount", item_extended_amount[0]);
customer2.setItem(i1);
/***** Order Line Item2 Hashtable *****/
Hashtable<String, String> i2 = new Hashtable<String, String>(); //item hashtable #2
i2.put("name", "item2's name");
i2.put("quantity", "7");
i2.put("product_code", "item2's product code");
i2.put("extended_amount", "5.01");
customer2.setItem(i2);
/***** Miscellaneous Customer Information Methods *****/
customer.setEmail("nick@widget.com");
customer.setInstructions("Make it fast!");

/***** Convenience Fee *****/
ConvFeeInfo convFeeInfo = new ConvFeeInfo();
convFeeInfo.setConvenienceFee("1.00");
/***** Transactional Request Object *****/
Purchase purchase = new Purchase();
purchase.setOrderId(order_id);
purchase.setAmount(amount);
purchase.setPan(pan);
purchase.setExpdate(expdate);
purchase.setCryptType(crypt);
purchase.setCustInfo(customer);
purchase.setConvFeeInfo(convFeeInfo);
HttpPostRequest mpgReq = new HttpPostRequest();
mpgReq.setProcCountryCode(processing_country_code);
mpgReq.setTestMode(true); //false or comment out this line for production transactions
mpgReq.setStoreId(store_id);
mpgReq.setApiToken(api_token);
mpgReq.setTransaction(purchase);
mpgReq.setStatusCheck(status_check);
mpgReq.send();
try
{
Receipt receipt = mpgReq.getReceipt();
System.out.println("CardType = " + receipt.getCardType());
}

```

Sample Convenience Fee Purchase with Customer Information

```

System.out.println("TransAmount = " + receipt.getTransAmount());
System.out.println("TxnNumber = " + receipt.getTxnNumber());
System.out.println("ReceiptId = " + receipt.getReceiptId());
System.out.println("TransType = " + receipt.getTransType());
System.out.println("ReferenceNum = " + receipt.getReferenceNum());
System.out.println("ResponseCode = " + receipt.getResponseCode());
System.out.println("ISO = " + receipt.getISO());
System.out.println("BankTotals = " + receipt.getBankTotals());
System.out.println("Message = " + receipt.getMessage());
System.out.println("AuthCode = " + receipt.getAuthCode());
System.out.println("Complete = " + receipt.getComplete());
System.out.println("TransDate = " + receipt.getTransDate());
System.out.println("TransTime = " + receipt.getTransTime());
System.out.println("Ticket = " + receipt.getTicket());
System.out.println("TimedOut = " + receipt.getTimedOut());
System.out.println("IsVisaDebit = " + receipt.getIsVisaDebit());

System.out.println("CfSuccess = " + receipt.getCfSuccess());
System.out.println("CfStatus = " + receipt.getCfStatus());
System.out.println("FeeAmount = " + receipt.getFeeAmount());
System.out.println("FeeRate = " + receipt.getFeeRate());
System.out.println("FeeType = " + receipt.getFeeType());
}
catch (Exception e)
{
    e.printStackTrace();
}
}
}

```

7.4 Purchase with VbV, MCSC and Amex SafeKey

Convenience Fee Purchase with VbV/MCSC/SafeKey transaction object definition

```
CavvPurchase cavvPurchase = new CavvPurchase();
```

HttpPostRequest object for Convenience Fee Purchase w/ VbV/MCSC/SafeKey transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

Convenience Fee Purchase with VbV/MCSC/SafeKey transaction object values

For a full description of mandatory and optional values, see "Definition of Request Fields" on page 302."Definition of Request Fields" on page 302

Table 1: Convenience Fee Purchase with VbV, MCSC, SafeKey - Mandatory Values

| Value | Type | Limits | Set Method |
|---|--------|---|--|
| Convenience Fee | Object | Not applicable. Click here See Appendix H (page 352). | <code>cavvPurchase.setConvFeeInfo (convFeeInfo) ;</code> |
| Order ID | String | 50-character alpha-numeric | <code>cavvPurchase.setOrderId (order_id) ;</code> |
| Amount | String | 9-character decimal | <code>cavvPurchase.setAmount (amount) ;</code> |
| Credit card number | String | 20-character numeric | <code>cavvPurchase.setPan (pan) ;</code> |
| Expiry date | String | 4-character numeric YYMM format | <code>cavvPurchase.setExpDate (exp-date) ;</code> |
| E-Commerce indicator | String | 1-character alpha-numeric | <code>cavvPurchase.setCryptType (crypt_type) ;</code> |
| Cardholder Authentication Verification Value (CAVV) | String | 50-character alpha-numeric | <code>cavvPurchase.setCavv (cavv) ;</code> |
| Convenience fee amount | String | 9-character decimal | <code>cavvPurchase.setConvFeeInfo (convFeeInfo) ;</code> |

Table 2: Convenience Fee Purchase with VbV, MCSC, SafeKey - Optional Values

| Value | Type | Limits | Set Method |
|----------------------|---------|--|---|
| Status Check | Boolean | true/false | <code>mpgReq.setStatusCheck (status_check) ;</code> |
| Customer ID | String | 50-character alpha-numeric | <code>cavvPurchase.setCustId (custid) ;</code> |
| Dynamic descriptor | String | 20-character alpha-numeric | <code>cavvPurchase.setDynamicDescriptor (dynamic_descriptor) ;</code> |
| E-Commerce Indicator | String | 1-character numeric | <code>cavvPurchase.setCryptType (crypt_type) ;</code> |
| Customer Information | Object | Not applicable. Click here See Section | <code>cavvPurchase.setCustInfo (customer) ;</code> |

| Value | Type | Limits | Set Method |
|-----------------|--------|---|---|
| | | Appendix D (page 326). | |
| AVS Information | Object | Not applicable. Click here See Appendix E (page 334). | <code>cavvPurchase.setAvsInfo (avsCheck) ;</code> |
| CVD Information | Object | Not applicable. See Appendix F (page 340). | <code>cavvPurchase.setCvdInfo (cvdCheck) ;</code> |

Sample Purchase with VbV/MCSC/SafeKey

```

package Canada;
import JavaAPI.*;
public class TestCanadaConvFeeCavvPurchase
{
    public static void main(String[] args)
    {
        String store_id = "monca00392";
        String api_token = "qYdISUhHiOdfTr1CLNpN";
        java.util.Date createDate = new java.util.Date();
        String order_id = "Test"+createDate.getTime();
        String cust_id = "CUS887H67";
        String amount = "10.42";
        String pan = "4242424242424242";
        String expdate = "1901"; //YYMM
        String cavv = "AAABBJg0VhI0VniQEjRWAAAAA=";
        String dynamic_descriptor = "123456";
        String processing_country_code = "CA";
        String crypt_type = "5";
        boolean status_check = false;
        /***** Convenience Fee *****/
        ConvFeeInfo convFeeInfo = new ConvFeeInfo();
        convFeeInfo.setConvenienceFee("1.00");

        CavvPurchase cavvPurchase = new CavvPurchase();
        cavvPurchase.setOrderId(order_id);
        cavvPurchase.setCustId(cust_id);
        cavvPurchase.setAmount(amount);
        cavvPurchase.setPan(pan);
        cavvPurchase.setExpdate(expdate);
        cavvPurchase.setCavv(cavv);
        cavvPurchase.setCryptType(crypt_type); //Mandatory for AMEX only
        cavvPurchase.setDynamicDescriptor(dynamic_descriptor);
        cavvPurchase.setConvFeeInfo(convFeeInfo);
        HttpsPostRequest mpgReq = new HttpsPostRequest();
        mpgReq.setProcCountryCode(processing_country_code);
        mpgReq.setTestMode(true); //false or comment out this line for production transactions
        mpgReq.setStoreId(store_id);
        mpgReq.setApiToken(api_token);
        mpgReq.setTransaction(cavvPurchase);
        mpgReq.setStatusCheck(status_check);
        mpgReq.send();
    }
}

```

Sample Purchase with VbV/MCSC/SafeKey

```
try
{
    Receipt receipt = mpgReq.getReceipt();
    System.out.println("CardType = " + receipt.getCardType());
    System.out.println("TransAmount = " + receipt.getTransAmount());
    System.out.println("TxnNumber = " + receipt.getTxnNumber());
    System.out.println("ReceiptId = " + receipt.getReceiptId());
    System.out.println("TransType = " + receipt.getTransType());
    System.out.println("ReferenceNum = " + receipt.getReferenceNum());
    System.out.println("ResponseCode = " + receipt.getResponseCode());
    System.out.println("ISO = " + receipt.getISO());
    System.out.println("BankTotals = " + receipt.getBankTotals());
    System.out.println("Message = " + receipt.getMessage());
    System.out.println("AuthCode = " + receipt.getAuthCode());
    System.out.println("Complete = " + receipt.getComplete());
    System.out.println("TransDate = " + receipt.getTransDate());
    System.out.println("TransTime = " + receipt.getTransTime());
    System.out.println("Ticket = " + receipt.getTicket());
    System.out.println("TimedOut = " + receipt.getTimedOut());
    System.out.println("CavvResultCode = " + receipt.getCavvResultCode());

    System.out.println("CfSuccess = " + receipt.getCfSuccess());
    System.out.println("CfStatus = " + receipt.getCfStatus());
    System.out.println("FeeAmount = " + receipt.getFeeAmount());
    System.out.println("FeeRate = " + receipt.getFeeRate());
    System.out.println("FeeType = " + receipt.getFeeType());
}
catch (Exception e)
{
    e.printStackTrace();
}
```

8 Apple Pay and Android Pay In-App Integration

- 8.1 About Apple Pay and Android Pay In-App Integration
- 8.2 About API Integration of Apple Pay & Android Pay
- 8.3 Apple Pay and Android Pay In-App Process Flows
- 8.4 Cavv Purchase - Apple Pay and Android Pay In-App
- 8.5 Cavv Pre-Authorization - Apple Pay and Android Pay

8.1 About Apple Pay and Android Pay In-App Integration

The Moneris Gateway enables merchants to process in-app payment methods in mobile applications via Apple Pay or Android Pay.

Moneris Solutions offers two processing and integration methods for Apple Pay and Android Pay. Merchants can choose to use one of two methods:

- Software Development Kit (SDK), or
- API

While both methods provide the same basic functionalities, there are differences in their implementations.

This guide only deals with the API method; for detailed information about the SDK method of integration, see the Moneris Developer Portal at <https://developer.moneris.com>.

8.2 About API Integration of Apple Pay & Android Pay

An API works to provide a communication link between the merchants' server and Moneris' server. APIs are required to complete any transaction, and therefore the APIs for Apple Pay and Android Pay are also included within an SDK.

If the merchant chooses to use only an API, the merchant must decrypt payload information themselves before sending the decrypted information to the Moneris Gateway to be processed. Because this process is complicated, Apple and Google recommend only businesses with expertise and a previously integrated payment processing system use APIs instead of SDKs.

8.2.1 Transaction Types That Use Apple Pay or Android Pay

In the Moneris Gateway API, there are two transaction types that allow you to process decrypted transaction payload information with Apple Pay or Android Pay:


- Cavv Purchase - Apple Pay and Android Pay In-App (page 173)
- Cavv Pre-Authorization - Apple Pay and Android Pay (page 176)

Once you have processed the initial transaction using Cavv Purchase or Cavv Pre-Authorization, if required you can then process any of the following transactions:

- Refund (page 28)
- Pre-Authorization Completion (page 18)
- Purchase Correction (page 26)

8.3 Apple Pay and Android Pay In-App Process Flows

For both API and SDK methods of mobile in-app integration, the merchant's iOS app uses Apple's PassKit Framework (Apple Pay only) or the Android Pay framework (Android Pay only) to request and receive encrypted payment details from Apple or Android Pay. When payment details are returned in their encrypted form, they can be decrypted and processed by the Moneris Gateway in one of two ways: SDK or API.

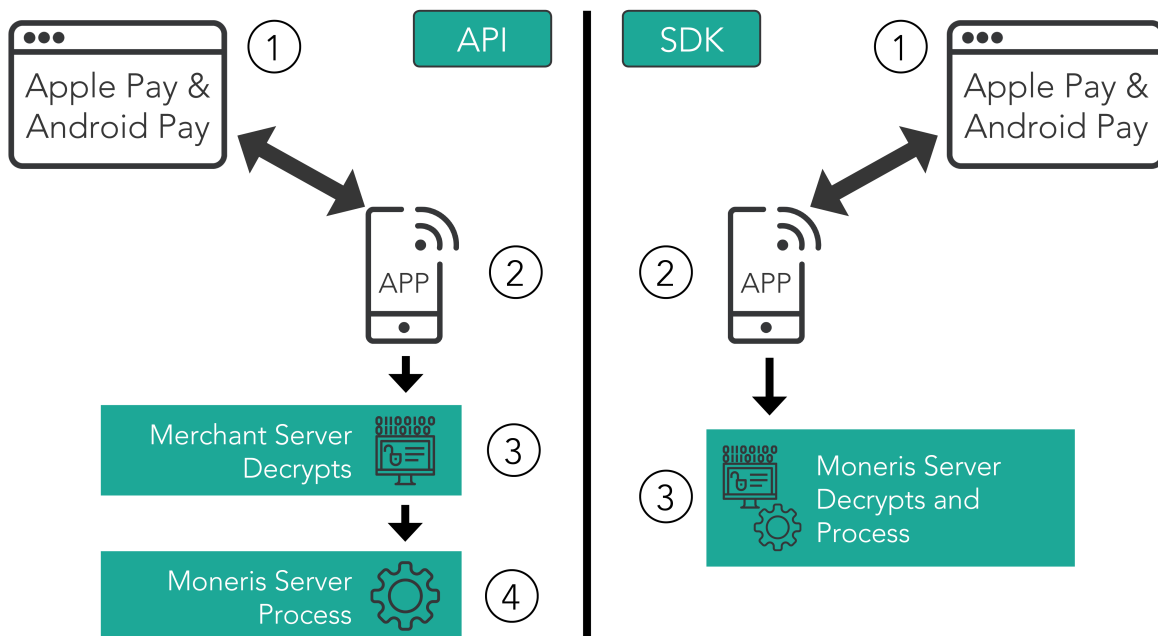

Steps in the Apple Pay and Android Pay in-app payment process

API

1. Merchant's mobile application requests and receives the encrypted payload.
2. Encrypted payload is sent to the merchant's server, where it is decrypted.
3. Moneris Gateway receives the decrypted payload from the merchant's server, and processes the Cavv Purchase - Apple Pay and Android Pay In-App (page 173) or Cavv Pre-Authorization - Apple Pay and Android Pay (page 176) transaction.
 - a. Please ensure the wallet indicator is properly populated with the correct wallet.

SDK

1. Merchant's mobile application requests and receives the encrypted payload.
2. Encrypted payload is sent from the merchant's server to the Moneris Gateway, and the payload is decrypted and processed.

This guide only deals with the API method; for detailed information about the SDK method of integration, see the Moneris Developer Portal at <https://developer.moneris.com>.

8.4 Cavv Purchase - Apple Pay and Android Pay In-App

The Cavv Purchase for Apple Pay/Android Pay transaction follows a 3-D Secure model but it does not require an MPI. Once the Apple Pay/Android Pay payload has been decrypted, this Purchase verifies funds on the customer's card, removes the funds and prepares them for deposit into the merchant's account.

For Apple Pay and Android Pay processing, this transaction is only applicable if choosing to integrate directly to the Apple and Google wallets (if not using the Moneris Apple Pay or Android Pay SDK). Please refer to 8 Apple Pay and Android Pay In-App Integration for more details on your integration options.

Refer to Apple's and Google's developer portals, respectively, for details on integrating directly to their wallets to retrieve the payload data.

CavvPurchase transaction object definition

```
CavvPurchase cavvPurchase = new CavvPurchase();
```

HttpPostRequest object for Cavv Purchase transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

```
mpgReq.setTransaction(cavvPurchase);
```

Cavv Purchase transaction values

For a full description of mandatory and optional values, see "Definition of Request Fields" on page 302."Definition of Request Fields" on page 302

Table 75: CavvPurchase transaction object mandatory values

| Value | Type | Limits | Set method |
|--------------------|--------|----------------------------|---|
| Order ID | String | 50-character alpha-numeric | <code>cavvPurchase.setOrderId(order_id);</code> |
| Amount | String | 9-character decimal | <code>cavvPurchase.setAmount(amount);</code> |
| Credit card number | String | 20-character alpha-numeric | <code>cavvPurchase.setPan(pan);</code> |
| Expiry date | String | 4-character alpha- | <code>cavvPurchase.setExpDate(exp-</code> |

Table 75: CavvPurchase transaction object mandatory values

| Value | Type | Limits | Set method |
|--|--------|----------------------------|--|
| | | numeric (YYMM format) | date) ; |
| CAVV NOTE: For Apple Pay and Android Pay Cavv Purchase and Cavv Pre-Authorization transactions, CAVV field contains the decrypted cryptogram. For more, see Appendix A Definition of Request Fields. | String | 50-character alpha-numeric | cavvPurchase.setCavv (cavv) ; |
| E-commerce indicator NOTE: For Apple Pay and Android Pay Cavv Purchase and Cavv Pre-Authorization transactions, the E-commerce indicator is a mandatory field containing the value received from the decrypted payload or a default value of 7. For more, see Appendix A Definition of Request Fields. | String | 1-character alpha-numeric | cavvPurchase.setCryptType (crypt_type) ; |

Table 1: CavvPurchase transaction object optional values

| Value | Type | Limits | Set Method |
|----------------------|---------|----------------------------|--|
| Status Check | Boolean | true/false | mpgReq.setStatusCheck (status_check) ; |
| Customer ID | String | 50-character alpha-numeric | cavvPurchase.setCustId (custid) ; |
| Dynamic descriptor | String | 20-character alpha-numeric | cavvPurchase.setDynamicDescriptor (dynamic_descriptor) ; |
| Customer information | Object | Not applicable. Click | CustInfo customer = new |

| Value | Type | Limits | Set Method |
|-------|--------|--|---|
| | | here See Appendix D (page 326) | CustInfo(); cavvPurchase.setCustInfo(customer); |
| AVS | Object | Not applicable. Click here See Appendix E (page 334) | AvsInfo avsCheck = new AvsInfo(); cavvPurchase.setAvsInfo(avsCheck); |
| CVD | Object | Not applicable. Click here See Appendix F (page 340) . | CvdInfo cvdCheck = new CvdInfo(); cavvPurchase.setCvdInfo(cvdCheck); |

Sample Cavv Purchase for Apple Pay and Android Pay

```

package Canada;
import JavaAPI.*;
public class TestCanadaCavvPurchase
{
    public static void main(String[] args)
    {
        String store_id = "store5";
        String api_token = "yesguy";
        java.util.Date createDate = new java.util.Date();
        String order_id = "Test"+createDate.getTime();
        String cust_id = "CUS887H67";
        String amount = "10.42";
        String pan = "4242424242424242";
        String expdate = "1901"; //YYMM
        String cavv = "AAABBJg0VhI0VniQEjRWAAAAA=";
        String dynamic_descriptor = "123456";
        String processing_country_code = "CA";
        String crypt_type = "5";
        boolean status_check = false;
        CavvPurchase cavvPurchase = new CavvPurchase();
        cavvPurchase.setOrderId(order_id);
        cavvPurchase.setCustId(cust_id);
        cavvPurchase.setAmount(amount);
        cavvPurchase.setPan(pan);
        cavvPurchase.setExpdate(expdate);
        cavvPurchase.setCavv(cavv);
        cavvPurchase.setCryptType(crypt_type); //Mandatory for AMEX only
        cavvPurchase.setDynamicDescriptor(dynamic_descriptor);
        //cavvPurchase.setWalletIndicator("APP"); //set only for wallet transactions. e.g APPLE PAY
        HttpsPostRequest mpgReq = new HttpsPostRequest();
        mpgReq.setProcCountryCode(processing_country_code);
        mpgReq.setTestMode(true); //false or comment out this line for production transactions
        mpgReq.setStoreId(store_id);
        mpgReq.setApiToken(api_token);
        mpgReq.setTransaction(cavvPurchase);
        mpgReq.setStatusCheck(status_check);
    }
}

```

Sample Cavv Purchase for Apple Pay and Android Pay

```

mpgReq.send();
try
{
    Receipt receipt = mpgReq.getReceipt();
    System.out.println("CardType = " + receipt.getCardType());
    System.out.println("TransAmount = " + receipt.getTransAmount());
    System.out.println("TxnNumber = " + receipt.getTxnNumber());
    System.out.println("ReceiptId = " + receipt.getReceiptId());
    System.out.println("TransType = " + receipt.getTransType());
    System.out.println("ReferenceNum = " + receipt.getReferenceNum());
    System.out.println("ResponseCode = " + receipt.getResponseCode());
    System.out.println("ISO = " + receipt.getISO());
    System.out.println("BankTotals = " + receipt.getBankTotals());
    System.out.println("Message = " + receipt.getMessage());
    System.out.println("AuthCode = " + receipt.getAuthCode());
    System.out.println("Complete = " + receipt.getComplete());
    System.out.println("TransDate = " + receipt.getTransDate());
    System.out.println("TransTime = " + receipt.getTransTime());
    System.out.println("Ticket = " + receipt.getTicket());
    System.out.println("TimedOut = " + receipt.getTimedOut());
    System.out.println("CavvResultCode = " + receipt.getCavvResultCode());
}
catch (Exception e)
{
    e.printStackTrace();
}
}
}

```

8.5 Cavv Pre-Authorization - Apple Pay and Android Pay

The Cavv Pre-Authorization for Apple Pay/Android Pay transaction follows a 3-D Secure model but it does not require an MPI. Once the Apple Pay/Android Pay payload has been decrypted, this Pre-Authorization verifies funds on the customer's card, and holds the funds. To prepare the funds for deposit into the merchant's account please process a Pre-Authorization Completion transaction.

For Apple Pay and Android Pay processing, this transaction is only applicable if choosing to integrate directly to the Apple and Google wallets (if not using the Moneris Apple Pay or Android Pay SDK). Please refer to 8 Apple Pay and Android Pay In-App Integration for more details on your integration options.

Refer to Apple's and Google's developer portals, respectively, for details on integrating directly to their wallets to retrieve the payload data.

Cavv Pre-Authorization transaction object definition

```
CavvPreAuth cavvPreauth = new CavvPreAuth();
```

HttpPostRequest object for Cavv Pre-Authorization transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

```
mpgReq.setTransaction(cavvPreauth);
```


Cavv Pre-Authorization transaction values

For a full description of mandatory and optional values, see "Definition of Request Fields" on page 302 "Definition of Request Fields" on page 302

Table 76: Cavv Pre-Authorization object mandatory values

| Value | Type | Limits | Set method |
|--|--------|----------------------------|--|
| Order ID | String | 50-character alpha-numeric | <code>cavvPreauth.setOrderId (order_id) ;</code> |
| Amount | String | 9-character decimal | <code>cavvPreauth.setAmount (amount) ;</code> |
| Credit card number | String | 20-character numeric | <code>cavvPreauth.setPan (pan) ;</code> |
| Cardholder Authentication Verification Value (CAVV) NOTE: For Apple Pay and Android Pay Cavv Purchase and Cavv Pre-Authorization transactions, CAVV field contains the decrypted cryptogram. For more, see Appendix A Definition of Request Fields. | String | 50-character alpha-numeric | <code>cavvPreauth.setCavv (cavv) ;</code> |
| Expiry date | String | 4-character numeric | <code>cavvPreauth.setExpDate (exp-date) ;</code> |
| E-commerce indicator NOTE: For Apple Pay and Android Pay Cavv Purchase and Cavv Pre-Authorization transactions, the E-commerce indicator is a mandatory field containing the value received from the decrypted payload or a default value of 7. For more, see Appendix A Definition of Request Fields. | String | 1-character alpha-numeric | <code>cavvPreauth.setCryptType (crypt_type) ;</code> |

Table 1: Cavv Pre-Authorization object optional values

| Value | Type | Limits | Set method |
|--------------------|---------|---|--|
| Status Check | Boolean | true/false | <code>mpgReq.setStatusCheck(status_check);</code> |
| Customer ID | String | 50-character alpha-numeric | <code>cavvPreauth.setCustId(custid);</code> |
| Dynamic descriptor | String | 20-character alpha-numeric | <code>cavvPreauth.setDynamicDescriptor(dynamic_descriptor);</code> |
| AVS | Object | Not applicable. Click here See Appendix E (page 334). | <code>AvsInfo avsCheck = new AvsInfo();</code> <code>cavvPreauth.setAvsInfo(avsCheck);</code> |
| CVD | Object | Not applicable. Click here See Appendix F (page 340). | <code>CvdInfo cvdCheck = new CvdInfo();</code> <code>cavvPreauth.setCvdInfo(cvdCheck);</code> |

Sample Cavv Pre-Authorization for Apple Pay and Android Pay

```

package Canada;
import JavaAPI.*;
public class TestCanadaCavvPreauth
{
    public static void main(String[] args)
    {
        String store_id = "store5";
        String api_token = "yesguy";
        java.util.Date createDate = new java.util.Date();
        String order_id = "Test"+createDate.getTime();
        String cust_id = "CUS887H67";
        String amount = "10.42";
        String pan = "4242424242424242";
        String expdate = "1911"; //YYMM format
        String cavv = "AAABBJg0VhI0VniQEjRWAAAAA=";
        String dynamic_descriptor = "123456";
        String processing_country_code = "CA";
        String crypt_type = "5";
        boolean status_check = false;
        CavvPreAuth cavvPreauth = new CavvPreAuth();
        cavvPreauth.setOrderId(order_id);
        cavvPreauth.setCustId(cust_id);
        cavvPreauth.setAmount(amount);
        cavvPreauth.setPan(pan);
        cavvPreauth.setExpdate(expdate);
        cavvPreauth.setCavv(cavv);
        cavvPreauth.setCryptType(crypt_type); //Mandatory for AMEX only
    }
}

```

Sample Cavv Pre-Authorization for Apple Pay and Android Pay

```
cavvPreauth.setDynamicDescriptor(dynamic_descriptor);
//cavvPreauth.setWalletIndicator("APP"); //set only for wallet transactions. e.g APPLE PAY
HttpPostRequest mpgReq = new HttpPostRequest();
mpgReq.setProcCountryCode(processing_country_code);
mpgReq.setTestMode(true); //false or comment out this line for production transactions
mpgReq.setStoreId(store_id);
mpgReq.setApiToken(api_token);
mpgReq.setTransaction(cavvPreauth);
mpgReq.setStatusCheck(status_check);
mpgReq.send();
try
{
    Receipt receipt = mpgReq.getReceipt();
    System.out.println("CardType = " + receipt.getCardType());
    System.out.println("TransAmount = " + receipt.getTransAmount());
    System.out.println("TxnNumber = " + receipt.getTxnNumber());
    System.out.println("ReceiptId = " + receipt.getReceiptId());
    System.out.println("TransType = " + receipt.getTransType());
    System.out.println("ReferenceNum = " + receipt.getReferenceNum());
    System.out.println("ResponseCode = " + receipt.getResponseCode());
    System.out.println("ISO = " + receipt.getISO());
    System.out.println("BankTotals = " + receipt.getBankTotals());
    System.out.println("Message = " + receipt.getMessage());
    System.out.println("AuthCode = " + receipt.getAuthCode());
    System.out.println("Complete = " + receipt.getComplete());
    System.out.println("TransDate = " + receipt.getTransDate());
    System.out.println("TransTime = " + receipt.getTransTime());
    System.out.println("Ticket = " + receipt.getTicket());
    System.out.println("TimedOut = " + receipt.getTimedOut());
    System.out.println("CavvResultCode = " + receipt.getCavvResultCode());
}
catch (Exception e)
{
    e.printStackTrace();
}
}
```

9 Visa Checkout

- 9.1 About Visa Checkout
- 9.2 Transaction Types - Visa Checkout
- 9.3 Integrating Visa Checkout Lightbox
- 9.4 Transaction Flow for Visa Checkout
- 9.5 Visa Checkout Purchase
- 9.6 Visa Checkout Pre-Authorization
- 9.7 Visa Checkout Completion
- 9.8 Visa Checkout Purchase Correction
- 9.9 Visa Checkout Refund
- 9.10 Visa Checkout Information

9.1 About Visa Checkout

Visa Checkout is a digital wallet service offered to customers using credit cards. Visa Checkout functionality can be integrated into the Moneris Gateway via the API.

9.2 Transaction Types - Visa Checkout

Below is a list of transactions supported by the Visa Checkout API, other terms used for the transaction type are indicated in brackets.

VdotMePurchase (sale)

Call to Moneris to obtain funds on the Visa Checkout `callId` and ready them for deposit into the merchant's account. It also updates the customer's Visa Checkout transaction history.

VdotMePreAuth (authorisation / pre-authorization)

Call to Moneris to verify funds on the Visa Checkout `callId` and reserve those funds for your merchant account. The funds are locked for a specified amount of time, based on the card issuer. To retrieve the funds from this call so that they may be settled in the merchant's account, a `VdotMeCompletion` must be performed. It also updates the customer's Visa Checkout transaction history.

VdotMeCompletion (Completion / Capture)

Call to Moneris to obtain funds reserved by `VdotMePreAuth` call. This transaction call retrieves the locked funds and readies them for settlement into the merchant's account. This call must be made typically within 72 hours of performing `VdotMePreAuth`. It also updates the customer's Visa Checkout transaction history.

VdotMePurchaseCorrection (Void / Purchase Correction)

Call to Moneris to void the `VdotMePurchases` and `VdotMeCompletions` the same day* that they occurred on. It also updates the customer's Visa Checkout transaction history.

VdotMeRefund (Credit)

Call to Moneris to refund against a `VdotMePurchase` or `VdotMeCompletion` to refund any part, or all of the transaction. It also updates the customer's Visa Checkout transaction history.

VdotMeInfo (Credit)

Call to Moneris to obtain cardholder details such as, name on card, partial card number, expiry date, shipping and billing information.

9.3 Integrating Visa Checkout Lightbox

1. Using the API Key you obtained when you configured your Visa Checkout store, create Visa Checkout Lightbox integration with JavaScript by following the Visa documentation, which is available on Visa Developer portal:

Visa Checkout General Information (JavaScript SDK download)

https://developer.visa.com/products/visa_checkout

Getting Started With Visa checkout

https://developer.visa.com/products/visa_checkout/guides#getting_started

Adding Visa Checkout to Your Web Page

https://developer.visa.com/products/visa_checkout/guides#adding_to_page

Submitting the Consumer Payment Request

https://developer.visa.com/products/visa_checkout/guides#submitting_csr


2. If you get a payment success event from the resulting Visa Lightbox JavaScript, you will have to parse and obtain the `callid` from their JSON response. The additional information is obtained using `VdotMeInfo`.

Once you have obtained the `callid` from Visa Lightbox, you can make appropriate Visa Checkout `VdotMe` transaction call to Moneris to process your transaction and obtain your funds.

NOTE: During Visa Checkout testing in our QA test environment, please use the API key that you generated in the Visa Checkout configuration for the `V.Init` call in your JavaScript.

9.4 Transaction Flow for Visa Checkout

VISA Checkout Process – Successful Process

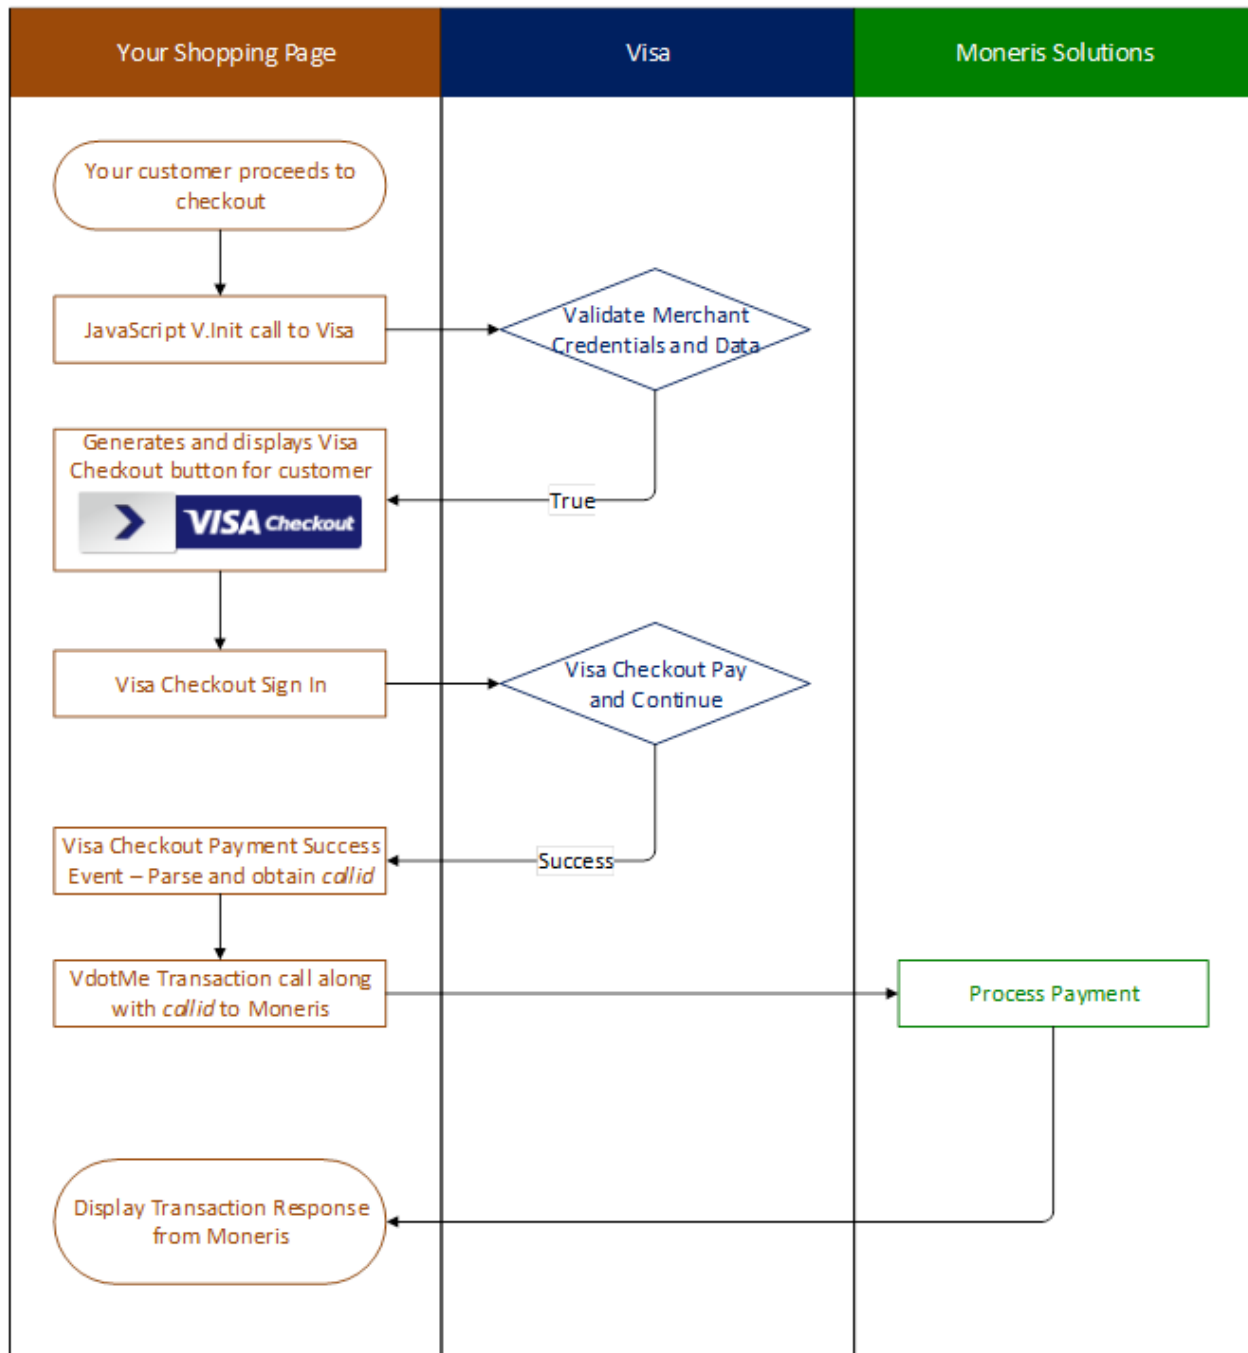

9.5 Visa Checkout Purchase

VdotMePurchase transaction object definition

```
VdotMePurchase vmepurchase = new VdotMePurchase();
```

HttpPostRequest for VdotMePurchase transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

VdotMePurchase transaction object values

Table 1: VdotMePurchase transaction object mandatory values

| Value | Type | Limits | Set Method |
|----------------------|--------|----------------------------|--|
| Order ID | String | 50-character alpha-numeric | <code>vmepurchase.setOrderId(order_id);</code> |
| Call ID | String | 20-character numeric | <code>vmepurchase.setCallId(call_id);</code> |
| Amount | String | 9-character decimal | <code>vmepurchase.setAmount(amount);</code> |
| E-commerce indicator | String | 1-character alpha-numeric | <code>vmepurchase.setCryptType(crypt_type);</code> |

Table 2: VdotMePurchase transaction object optional values

| Value | Type | Limits | Set Method |
|--------------------|---------|---------------------------|--|
| Dynamic descriptor | String | 20-character alphanumeric | <code>vmepurchase.setDynamicDescriptor(dynamic_descriptor);</code> |
| Status check | Boolean | true/false | <code>mpgReq.setStatusCheck(status_check);</code> |

Sample VdotMePurchase

```
package Canada;
import JavaAPI.*;
public class TestCanadaVdotMePurchase
{
    public static void main(String[] args)
    {
        String store_id = "store2";
        String api_token = "yesguy";
        String cust_id = "Joe Doe";
        java.util.Date createDate = new java.util.Date();
        String order_id = "Test"+createDate.getTime();
        String amount = "8.00";
```

Sample VdotMePurchase

```
String crypt_type = "7";
String call_id = "9104624497663077101";
String dynamic_descriptor = "inv123";
String processing_country_code = "CA";
boolean status_check = false;
VdotMePurchase vmepurchase = new VdotMePurchase();
vmepurchase.setOrderId(order_id);
vmepurchase.setCustId(cust_id);
vmepurchase.setAmount(amount);
vmepurchase.setCallId(call_id);
vmepurchase.setCryptType(crypt_type);
vmepurchase.setDynamicDescriptor(dynamic_descriptor);
HttpPostRequest mpgReq = new HttpPostRequest();
mpgReq.setProcCountryCode(processing_country_code);
mpgReq.setTestMode(true); //false or comment out this line for production transactions
mpgReq.setStoreId(store_id);
mpgReq.setApiToken(api_token);
mpgReq.setTransaction(vmepurchase);
mpgReq.setStatusCheck(status_check);
mpgReq.send();
try
{
    Receipt receipt = mpgReq.getReceipt();
    System.out.println("CardType = " + receipt.getCardType());
    System.out.println("TransAmount = " + receipt.getTransAmount());
    System.out.println("TxnNumber = " + receipt.getTxnNumber());
    System.out.println("ReceiptId = " + receipt.getReceiptId());
    System.out.println("TransType = " + receipt.getTransType());
    System.out.println("ReferenceNum = " + receipt.getReferenceNum());
    System.out.println("ResponseCode = " + receipt.getResponseCode());
    System.out.println("ISO = " + receipt.getISO());
    System.out.println("BankTotals = " + receipt.getBankTotals());
    System.out.println("Message = " + receipt.getMessage());
    System.out.println("AuthCode = " + receipt.getAuthCode());
    System.out.println("Complete = " + receipt.getComplete());
    System.out.println("TransDate = " + receipt.getTransDate());
    System.out.println("TransTime = " + receipt.getTransTime());
    System.out.println("Ticket = " + receipt.getTicket());
    System.out.println("TimedOut = " + receipt.getTimedOut());
    System.out.println("StatusCode = " + receipt.getStatusCode());
    System.out.println("StatusMessage = " + receipt.getStatusMessage());
}
catch (Exception e)
{
    e.printStackTrace();
}
}
```

9.6 Visa Checkout Pre-Authorization

`VdotMePreAuth` is virtually identical to the `VdotMePurchase` with the exception of the transaction type name.

If the order could not be completed for some reason, such as an order is cancelled, made in error or not fulfillable, the `VdotMePreAuth` transaction must be reversed within 72 hours.

To reverse an authorization, perform a `VdotMeCompletion` transaction for \$0.00 (zero dollars).

VdotMePreAuth transaction object definition

```
VdotMePreauth vMePreauthRequest = new VdotMePreauth();
```

HttpPostRequest object for VdotMePreAuth transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

VdotMePreAuth transaction object values**Table 1: VdotMePreAuth transaction object mandatory values**

| Value | Type | Limits | Set Method |
|----------------------|--------|----------------------------|--|
| Amount | String | 9-character decimal | <code>vDotMeReauthRequest.setAmount(amount);</code> |
| Call ID | String | 20-character numeric | <code>vDotMeReauthRequest.setCallId(call_id);</code> |
| Order ID | String | 50-character alpha-numeric | <code>vDotMeReauthRequest.setOrderId(order_id);</code> |
| E-commerce indicator | String | 1-character alpha-numeric | <code>vDotMeReauthRequest.setCryptType(crypt_type);</code> |

Table 2: VdotMePreAuth transaction object optional values

| Value | Type | Limits | Set Method |
|--------------------|--------|----------------------------|--|
| Customer ID | String | 50-character alpha-numeric | <code>vMePreauthRequest.setCustId(custid);</code> |
| Dynamic descriptor | String | 20-character alpha-numeric | <code>vDotMeReauthRequest.setDynamicDescriptor(dynamic_descriptor);</code> |

Sample VdotMePreAuth

```
package Canada;
import JavaAPI.*;
public class TestCanadaVdotMePreauth
{
    public static void main(String[] args)
    {
        String store_id = "store2";
        String api_token = "yesguy";
        String amount = "5.00";
        String crypt_type = "7";
        java.util.Date createDate = new java.util.Date();
        String order_id = "Test"+createDate.getTime();
        String call_id = "9104624497663077101";
```

Sample VdotMePreAuth

```
String cust_id = "my customer id";
String processing_country_code = "CA";
boolean status_check = false;
VdotMePreauth vMePreauthRequest = new VdotMePreauth();
vMePreauthRequest.setOrderId(order_id);
vMePreauthRequest.setAmount(amount);
vMePreauthRequest.setCallId(call_id);
vMePreauthRequest.setCustId(cust_id);
vMePreauthRequest.setCryptType(crypt_type);
HttpPostRequest mpgReq = new HttpPostRequest();
mpgReq.setProcCountryCode(processing_country_code);
mpgReq.setTestMode(true); //false or comment out this line for production transactions
mpgReq.setStoreId(store_id);
mpgReq.setApiToken(api_token);
mpgReq.setTransaction(vMePreauthRequest);
mpgReq.setStatusCheck(status_check);
mpgReq.send();
try
{
    Receipt receipt = mpgReq.getReceipt();
    System.out.println("CardType = " + receipt.getCardType());
    System.out.println("TransAmount = " + receipt.getTransAmount());
    System.out.println("TxnNumber = " + receipt.getTxnNumber());
    System.out.println("ReceiptId = " + receipt.getReceiptId());
    System.out.println("TransType = " + receipt.getTransType());
    System.out.println("ReferenceNum = " + receipt.getReferenceNum());
    System.out.println("ResponseCode = " + receipt.getResponseCode());
    System.out.println("ISO = " + receipt.getISO());
    System.out.println("BankTotals = " + receipt.getBankTotals());
    System.out.println("Message = " + receipt.getMessage());
    System.out.println("AuthCode = " + receipt.getAuthCode());
    System.out.println("Complete = " + receipt.getComplete());
    System.out.println("TransDate = " + receipt.getTransDate());
    System.out.println("TransTime = " + receipt.getTransTime());
    System.out.println("Ticket = " + receipt.getTicket());
    System.out.println("TimedOut = " + receipt.getTimedOut());
    System.out.println("StatusCode = " + receipt.getStatusCode());
    System.out.println("StatusMessage = " + receipt.getStatusMessage());
}
catch (Exception e)
{
    e.printStackTrace();
}
}
```

9.7 Visa Checkout Completion

The `VdotMeCompletion` transaction is used to secure the funds locked by a `VdotMePreAuth` transaction.

You may also perform this transaction at \$0.00 (zero dollars) to reverse a `VdotMePreauth` transaction that you are unable to fulfill.

VdotMeCompletion transaction object definition

```
VdotMeCompletion vmecompletion = new VdotMeCompletion();
```

HttpPostRequest object for VdotMeCompletion transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

VdotMeCompletion transaction object values**Table 1: VdotMeCompletion transaction object mandatory values**

| Value | Type | Limits | Set Method |
|----------------------|--------|-----------------------------|--|
| Order ID | String | 50-character alpha-numeric | <code>vmecompletion.setOrderId(order_id);</code> |
| Transaction number | String | 255-character alpha-numeric | <code>vmecompletion.setTxnNumber(txn_number);</code> |
| Completion amount | String | 9-character decimal | <code>vmecompletion.setAmount(comp_amount);</code> |
| E-commerce indicator | String | 1-character alpha-numeric | <code>vmecompletion.setCryptType(crypt_type);</code> |

Table 2: VdotMeCompletion transaction object optional values

| Value | Type | Limits | Set Method |
|--------------------|--------|----------------------------|--|
| Customer ID | String | 50-character alpha-numeric | <code>vmecompletion.setCustId(custid);</code> |
| Dynamic descriptor | String | 20-character alpha-numeric | <code>vmecompletion.setDynamicDescriptor(dynamic_descriptor);</code> |

Sample VdotMeCompletion

```
package Canada;
import JavaAPI.*;
public class TestCanadaVdotMeCompletion
{
    public static void main(String[] args)
    {
        String store_id = "store2";
        String api_token = "yesguy";
        String order_id = "Test1432134710264";
        String txn_number = "724379-0_10";
        String comp_amount = "1.00";
        String ship_indicator = "P";
        String crypt_type = "7";
        String cust_id = "mycustomerid";
        String dynamic_descriptor = "inv 123";
        String processing_country_code = "CA";
        boolean status_check = false;
        VdotMeCompletion vmecompletion = new VdotMeCompletion();
```

Sample VdotMeCompletion

```

vmecompletion.setOrderId(order_id);
vmecompletion.setTxnNumber(txn_number);
vmecompletion.setAmount(comp_amount);
vmecompletion.setCryptType(crypt_type);
vmecompletion.setDynamicDescriptor(dynamic_descriptor);
vmecompletion.setCustId(cust_id);
vmecompletion.setShipIndicator(ship_indicator);
HttpPostRequest mpgReq = new HttpPostRequest();
mpgReq.setProcCountryCode(processing_country_code);
mpgReq.setTestMode(true); //false or comment out this line for production transactions
mpgReq.setStoreId(store_id);
mpgReq.setApiToken(api_token);
mpgReq.setTransaction(vmecompletion);
mpgReq.setStatusCheck(status_check);
mpgReq.send();
try
{
    Receipt receipt = mpgReq.getReceipt();
    System.out.println("CardType = " + receipt.getCardType());
    System.out.println("TransAmount = " + receipt.getTransAmount());
    System.out.println("TxnNumber = " + receipt.getTxnNumber());
    System.out.println("ReceiptId = " + receipt.getReceiptId());
    System.out.println("TransType = " + receipt.getTransType());
    System.out.println("ReferenceNum = " + receipt.getReferenceNum());
    System.out.println("ResponseCode = " + receipt.getResponseCode());
    System.out.println("ISO = " + receipt.getISO());
    System.out.println("BankTotals = " + receipt.getBankTotals());
    System.out.println("Message = " + receipt.getMessage());
    System.out.println("AuthCode = " + receipt.getAuthCode());
    System.out.println("Complete = " + receipt.getComplete());
    System.out.println("TransDate = " + receipt.getTransDate());
    System.out.println("TransTime = " + receipt.getTransTime());
    System.out.println("Ticket = " + receipt.getTicket());
    System.out.println("TimedOut = " + receipt.getTimedOut());
    System.out.println("StatusCode = " + receipt.getStatusCode());
    System.out.println("StatusMessage = " + receipt.getStatusMessage());
}
catch (Exception e)
{
    e.printStackTrace();
}
}

```

9.8 Visa Checkout Purchase Correction

`VdotMePurchaseCorrection` is used to cancel a `VdotMeCompletion` or `VdotMePurchase` transaction that was performed in the current batch. No other transaction types can be corrected using this method.

No amount is required because it is always for 100% of the original transaction.

VdotMePurchaseCorrection transaction object definition

```

VdotMePurchaseCorrection vDotMePurchaseCorrection = new VdotMePurchaseCor-
rection();

```

HttpPostRequest object for VdotMePurchaseCorrection transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

VdotMePurchaseCorrection transaction object values**Table 1: VdotMePurchaseCorrection transaction object mandatory values**

| Value | Type | Limits | Set Method |
|--------------------|--------|-----------------------------|---|
| Order ID | String | 50-character alpha-numeric | <code>vDotMePurchaseCorrection.setOrderId(order_id);</code> |
| Transaction number | String | 255-character alpha-numeric | <code>vDotMePurchaseCorrection.setTxnNumber(txn_number);</code> |

Table 2: VdotMePurchaseCorrection transaction object optional values

| Value | Type | Limits | Set Method |
|--------------|---------|----------------------------|--|
| Customer ID | String | 50-character alpha-numeric | <code>vDotMePurchaseCorrection.setCustId(custid);</code> |
| Status check | Boolean | true/false | <code>mpgReq.setStatusCheck(status_check);</code> |

Sample VdotMePurchaseCorrection

```
package Canada;
import JavaAPI.*;
public class TestCanadaVdotMePurchaseCorrection
{
    public static void main(String[] args)
    {
        String store_id = "store2";
        String api_token = "yesguy";
        String order_id = "Test1432134533159";
        String txn_number = "724377-0_10";
        String crypt_type = "7";
        String cust_id = "my customer id";
        String processing_country_code = "CA";
        boolean status_check = false;
        VdotMePurchaseCorrection vDotMePurchaseCorrection = new VdotMePurchaseCorrection();
        vDotMePurchaseCorrection.setOrderId(order_id);
        vDotMePurchaseCorrection.setCustId(cust_id);
        vDotMePurchaseCorrection.setTxnNumber(txn_number);
        vDotMePurchaseCorrection.setCryptType(crypt_type);
        HttpPostRequest mpgReq = new HttpPostRequest();
        mpgReq.setProcCountryCode(processing_country_code);
        mpgReq.setTestMode(true); //false or comment out this line for production transactions
        mpgReq.setStoreId(store_id);
        mpgReq.setApiToken(api_token);
        mpgReq.setTransaction(vDotMePurchaseCorrection);
        mpgReq.setStatusCheck(status_check);
        mpgReq.send();
    }
}
```

Sample VdotMePurchaseCorrection

```
try
{
    Receipt receipt = mpgReq.getReceipt();
    System.out.println("CardType = " + receipt.getCardType());
    System.out.println("TransAmount = " + receipt.getTransAmount());
    System.out.println("TxnNumber = " + receipt.getTxnNumber());
    System.out.println("ReceiptId = " + receipt.getReceiptId());
    System.out.println("TransType = " + receipt.getTransType());
    System.out.println("ReferenceNum = " + receipt.getReferenceNum());
    System.out.println("ResponseCode = " + receipt.getResponseCode());
    System.out.println("ISO = " + receipt.getISO());
    System.out.println("BankTotals = " + receipt.getBankTotals());
    System.out.println("Message = " + receipt.getMessage());
    System.out.println("AuthCode = " + receipt.getAuthCode());
    System.out.println("Complete = " + receipt.getComplete());
    System.out.println("TransDate = " + receipt.getTransDate());
    System.out.println("TransTime = " + receipt.getTransTime());
    System.out.println("Ticket = " + receipt.getTicket());
    System.out.println("TimedOut = " + receipt.getTimedOut());
    System.out.println("StatusCode = " + receipt.getStatusCode());
    System.out.println("StatusMessage = " + receipt.getStatusMessage());
}
catch (Exception e)
{
    e.printStackTrace();
}
}
```

9.9 Visa Checkout Refund

VdotMeRefund will credit a specified amount to the cardholder's credit card and update their Visa Checkout transaction history. A refund can be sent up to the full value of the original VdotMeCompletion or VdotMePurchase.

VdotMeRefund transaction object definition

```
VdotMeRefund vDotMeRefundRequest = new VdotMeRefund();
```

HttpPostRequest object for VdotMeRefund transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

VdotMeRefund transaction object values**Table 1: VdotMeRefund transaction object mandatory values**

| Value | Type | Limits | Set Method |
|----------------------|--------|-----------------------------|--|
| Order ID | String | 50-character alpha-numeric | <code>vDotMeRefundRequest.setOrderId(order_id);</code> |
| Amount | String | 9-character decimal | <code>vDotMeRefundRequest.setAmount(amount);</code> |
| Transaction number | String | 255-character alpha-numeric | <code>vDotMeRefundRequest.setTxnNumber(txn_number);</code> |
| E-commerce indicator | String | 1-character alpha-numeric | <code>vDotMeRefundRequest.setCryptType(crypt_type);</code> |

Table 2: VdotMeRefund transaction object optional values

| Value | Type | Limits | Set Method |
|--------------------|---------|----------------------------|--|
| Customer ID | String | 50-character alpha-numeric | <code>vDotMeRefundRequest.setCustId(custid);</code> |
| Dynamic descriptor | String | 20-character alpha-numeric | <code>vDotMeRefundRequest.setDynamicDescriptor(dynamic_descriptor);</code> |
| Status check | Boolean | true/false | <code>mpgReq.setStatusCheck(status_check);</code> |

Sample VdotMeRefund

```

package Canada;
import JavaAPI.*;
public class TestCanadaVdotMeRefund
{
    public static void main(String[] args)
    {
        String store_id = "store2";
        String api_token = "yesguy";
        String order_id = "Test1432134710264";
        String txn_number = "724380-1_10";
        String amount = "1.00";
        String crypt_type = "7";
        String dynamic_descriptor = "inv 123";
        String cust_id = "my customer id";
        String processing_country_code = "CA";
        boolean status_check = false;
        VdotMeRefund vDotMeRefundRequest = new VdotMeRefund();
        vDotMeRefundRequest.setOrderId(order_id);
    }
}

```

Sample VdotMeRefund

```

vDotMeRefundRequest.setAmount(amount);
vDotMeRefundRequest.setCustId(cust_id);
vDotMeRefundRequest.setTxnNumber(txn_number);
vDotMeRefundRequest.setCryptType(crypt_type);
vDotMeRefundRequest.setDynamicDescriptor(dynamic_descriptor);
HttpPostRequest mpgReq = new HttpPostRequest();
mpgReq.setProcCountryCode(processing_country_code);
mpgReq.setTestMode(true); //false or comment out this line for production transactions
mpgReq.setStoreId(store_id);
mpgReq.setApiToken(api_token);
mpgReq.setTransaction(vDotMeRefundRequest);
mpgReq.setStatusCheck(status_check);
mpgReq.send();
try
{
    Receipt receipt = mpgReq.getReceipt();
    System.out.println("CardType = " + receipt.getCardType());
    System.out.println("TransAmount = " + receipt.getTransAmount());
    System.out.println("TxnNumber = " + receipt.getTxnNumber());
    System.out.println("ReceiptId = " + receipt.getReceiptId());
    System.out.println("TransType = " + receipt.getTransType());
    System.out.println("ReferenceNum = " + receipt.getReferenceNum());
    System.out.println("ResponseCode = " + receipt.getResponseCode());
    System.out.println("ISO = " + receipt.getISO());
    System.out.println("BankTotals = " + receipt.getBankTotals());
    System.out.println("Message = " + receipt.getMessage());
    System.out.println("AuthCode = " + receipt.getAuthCode());
    System.out.println("Complete = " + receipt.getComplete());
    System.out.println("TransDate = " + receipt.getTransDate());
    System.out.println("TransTime = " + receipt.getTransTime());
    System.out.println("Ticket = " + receipt.getTicket());
    System.out.println("TimedOut = " + receipt.getTimedOut());
    System.out.println("StatusCode = " + receipt.getStatusCode());
    System.out.println("StatusMessage = " + receipt.getStatusMessage());
}
catch (Exception e)
{
    e.printStackTrace();
}
}

```

9.10 Visa Checkout Information

VdotMeInfo will get customer information from their Visa Checkout wallet. The details returned are dependent on what the customer has stored in Visa Checkout.

VdotMeInfo transaction object definition

```
VdotMeInfo vmeinfo = new VdotMeInfo();
```

HttpPostRequest object for VdotMeInfo transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
```


VdotMeInfo transaction object values

Table 1: VdotMeInfo transaction object mandatory values

| Value | Type | Limits | Set Method |
|---------|--------|----------------------|-----------------------------|
| Call ID | String | 20-character numeric | vmeinfo.setCallId(call_id); |

Sample VdotMeInfo

```

package Canada;
import java.util.Hashtable;
import java.util.Set;
import JavaAPI.*;
public class TestCanadaVdotMeInfo
{
    public static void main(String[] args)
    {
        String store_id = "store2";
        String api_token = "yesguy";
        String call_id = "8620484083629792701";
        String processing_country_code = "CA";
        boolean status_check = false;
        VdotMeInfo vmeinfo = new VdotMeInfo();
        vmeinfo.setCallId(call_id);
        HttpsPostRequest mpgReq = new HttpsPostRequest();
        mpgReq.setProcCountryCode(processing_country_code);
        mpgReq.setTestMode(true); //false or comment out this line for production transactions
        mpgReq.setStoreId(store_id);
        mpgReq.setApiToken(api_token);
        mpgReq.setTransaction(vmeinfo);
        mpgReq.setStatusCheck(status_check);
        mpgReq.send();

        try
        {
            Receipt receipt = mpgReq.getReceipt();

            System.out.println("dump of vmeDataHash variables:");
            Hashtable<String, String>vmeDataHash = new Hashtable<String, String>();
            vmeDataHash = receipt.getVmeDataHash();

            Set<String> keys = vmeDataHash.keySet();
            for(String key: keys){
                System.out.println("Value of "+key+" is: "+vmeDataHash.get(key));
            }
            System.out.println("Response Code: " + receipt.getResponseCode());
            System.out.println("Response Message: " + receipt.getMessage());
            System.out.println("Currency Code: " + receipt.getCurrencyCode());
            System.out.println("Payment Totals: " + receipt.getPaymentTotal());
            System.out.println("User First Name: " + receipt.getUserFirstName());
            System.out.println("User Last Name: " + receipt.getUserLastName());
            System.out.println("Username: " + receipt.getUserName());
            System.out.println("User Email: " + receipt.getUserEmail());
            System.out.println("Encrypted User ID: " + receipt.getEncUserId());
            System.out.println("Creation Time Stamp: " + receipt.getCreationTimeStamp());
            System.out.println("Name on Card: " + receipt.getNameOnCard());
            System.out.println("Expiration Month: " + receipt.getExpirationDateMonth());
            System.out.println("Expiration Year: " + receipt.getExpirationDateYear());
        }
    }
}

```

Sample VdotMeInfo

```

System.out.println("Last 4 Digits: " + receipt.getLastFourDigits());
System.out.println("Bin Number (6 Digits): " + receipt.getBinSixDigits());
System.out.println("Card Brand: " + receipt.getCardBrand());
System.out.println("Card Type: " + receipt.getVdotMeCardType());
System.out.println("Billing Person Name: " + receipt.getPersonName());
System.out.println("Billing Address Line 1: " + receipt.getBillingAddressLine1());
System.out.println("Billing City: " + receipt.getBillingCity());
System.out.println("Billing State/Province Code: " + receipt.getBillingStateProvinceCode());
System.out.println("Billing Postal Code: " + receipt.getBillingPostalCode());
System.out.println("Billing Country Code: " + receipt.getBillingCountryCode());
System.out.println("Billing Phone: " + receipt.getBillingPhone());
System.out.println("Billing ID: " + receipt.getBillingId());
System.out.println("Billing Verification Status: " + receipt.getBillingVerificationStatus());
System.out.println("Partial Shipping Country Code: " + receipt.getPartialShippingCountryCode());
System.out.println("Partial Shipping Postal Code: " + receipt.getPartialShippingPostalCode());
System.out.println("Shipping Person Name: " + receipt.getShippingPersonName());
System.out.println("Shipping Address Line 1: " + receipt.getShipAddressLine1());
System.out.println("Shipping City: " + receipt.getShippingCity());
System.out.println("Shipping State/Province Code: " + receipt.getShippingStateProvinceCode());
System.out.println("Shipping Postal Code: " + receipt.getShippingPostalCode());
System.out.println("Shipping Country Code: " + receipt.getShippingCountryCode());
System.out.println("Shipping Phone: " + receipt.getShippingPhone());
System.out.println("Shipping Default: " + receipt.getShippingDefault());
System.out.println("Shipping ID: " + receipt.getShippingId());
System.out.println("Shipping Verification Status: " + receipt.getShippingVerificationStatus());
System.out.println("isExpired: " + receipt.getIsExpired());
System.out.println("Base Image File Name: " + receipt.getBaseImageFileName());
System.out.println("Height: " + receipt.getHeight());
System.out.println("Width: " + receipt.getWidth());
System.out.println("Issuer Bid: " + receipt.getIssuerBid());
System.out.println("Risk Advice: " + receipt.getRiskAdvice());
System.out.println("Risk Score: " + receipt.getRiskScore());
System.out.println("AVS Response Code: " + receipt.getAvsResponseCode());
System.out.println("CVV Response Code: " + receipt.getCvvResponseCode());
System.out.println("\r\nPress the enter key to exit");
}
catch (Exception e)
{
e.printStackTrace();
}
}
}

```


10 Level 2/3 Transactions

- 10.1 About Level 2/3 Transactions
- 10.2 Level 2/3 Visa Transactions
- 10.3 Level 2/3 MasterCard Transactions
- 10.4 Level 2/3 American Express Transactions

10.1 About Level 2/3 Transactions

The Moneris Gateway API supports passing Level 2/3 purchasing card transaction data for Visa, MasterCard and American Express corporate cards.

All Level 2/3 transactions use the same Pre-Authorization transaction as described in the topic Pre-Authorization (page 15).

10.2 Level 2/3 Visa Transactions

- 10.2.1 Level 2/3 Transaction Types for Visa
- 10.2.2 Level 2/3 Transaction Flow for Visa
- 10.2.3 VS Completion
- 10.2.4 VS Force Post
- 10.2.5 VS Purchase Correction
- 10.2.6 VS Refund
- 10.2.7 VS Independent Refund
- 10.2.8 VS Corpais

10.2.1 Level 2/3 Transaction Types for Visa

This transaction set includes a suite of corporate card financial transactions as well as a transaction that allows for the passing of Level 2/3 data. Please ensure that Visa Level 2/3 support is enabled on your merchant account. Batch Close, Open Totals and Preauth are identical to the transactions outlined in the section Basic Transaction Set (page 10).

- When the Pre-authorization response contains CorporateCard equal to true then you can submit the Visa transactions.
- If CorporateCard is false then the card does not support Level 2/3 data and non Level 2/3 transaction are to be used. If the card is not a corporate card, please refer to the section Basic Transaction Set (page 10) for the appropriate non-corporate card transactions.

NOTE: This transaction set is intended for transactions where Corporate Card is true and Level 2/3 data will be submitted. If the credit card is found to be a corporate card but you do not wish to send any Level 2/3 data then you may submit Visa transactions using the basic transaction set outlined in Basic Transaction Set (page 10).

Pre-authorization– (authorization / preauthorization)

Pre-authorization verifies and locks funds on the customer's credit card. The funds are locked for a specified amount of time, based on the card issuer. To retrieve the funds from a preauth so that they may be settled in the merchant account a capture must be performed. CorporateCard will return as true if the card supports Level 2/3.

VS Completion – (Capture/Preauth Completion)

Once a Pre-auth is obtained the funds that are locked need to be retrieved from the customer's credit card. The capture retrieves the locked funds and readies them for settlement in to the merchant account. Prior to performing a VS Completion, a Pre-authorization must be performed. Once the transaction is completed, VS Corpais must be used to process the Level 2/3 data.

VS Force Post – (Force Capture/Preauth Completion)

This transaction is an alternative to VS Completion to obtain the funds locked on Preauth obtained from IVR or equivalent terminal. The force post retrieves the locked funds and readies them for settlement in to the merchant account. Once the transaction is completed, VS Corpais must be used to process the Level 2/3 data.

VS Purchase Correction (Void, Correction)

VS Completion and VS Force Post can be voided the same day* that they occur. A void must be for the full amount of the transaction and will remove any record of it from the cardholder statement.

VS Refund – (Credit)

A refund can be performed against a VS Completion to refund any part or all of the transaction. Once the transaction is completed, VS Corpais must be used to process the Level 2/3 data.

VS IndependentRefund – (Credit)

A refund can be performed against a purchase or a capture to refund any part, or all of the transaction. Independent refund is used when the originating transaction was not performed through Moneris Gateway. Once the transaction is completed, VS Corpais must be used to process the Level 2/3 data.

NOTE: the Independent Refund transaction may or may not be supported on your account. If you receive a transaction not allowed error when attempting an independent refund, it may mean the transaction is not supported on your account. If you wish to have the Independent Refund transaction type temporarily enabled (or re-enabled), please contact the Service Centre at 1-866-319-7450.

VS Corpais – (Level 2/3 Data)


VSPurchal will contain all the required and optional data fields for Level 2/3 Business to Business data. VSPurchal data can be sent when the card has been identified in the Preauth transaction request as being a corporate card.

* A VS PurchaseCorrection can be performed against a transaction as long as the batch that contains the original transaction remains open. When using the automated closing feature, the batch close occurs daily between 10–11 pm EST.

10.2.2 Level 2/3 Transaction Flow for Visa

Pre-authorization/Completion Transaction Flow

Purchase Correction Transaction Flow

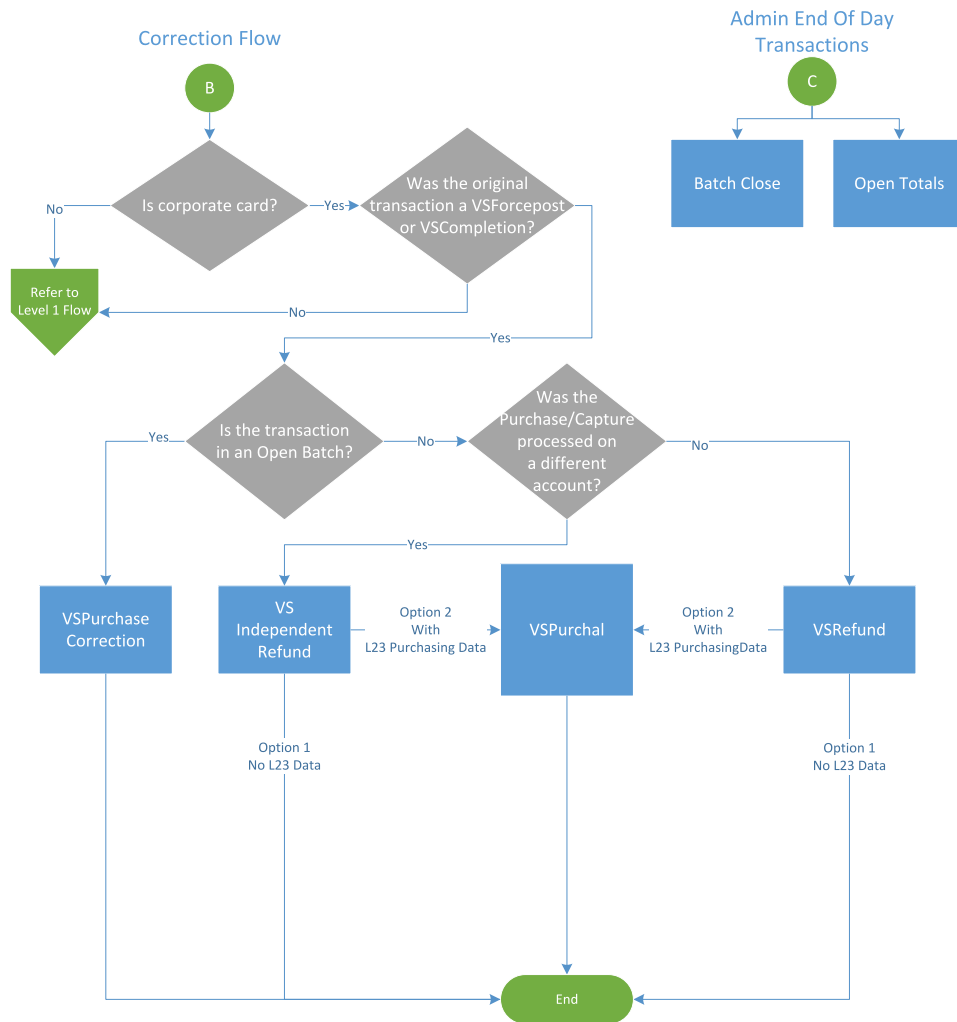

10.2.3 VS Completion

Once a Pre-authorization is obtained, the funds that are locked need to be retrieved from the customer's credit card. This Visa Completion transaction is used to secure the funds locked by a pre-authorization transaction and readies them for settlement in to the merchant account.

VS Completion transaction object definition

HttpPostRequest object for VS Completion transaction object

VS Completion transaction object values

Table 1: VS Completion transaction object mandatory values

| Value | Type | Limits | Set Method |
|----------------------|--------|-----------------------------|---|
| Order ID | String | 50-character alpha-numeric | <code>vsCompletion.setOrderId(order_id);</code> |
| Transaction number | String | 255-character alpha-numeric | <code>vsCompletion.setTxnNumber(txn_number);</code> |
| E-Commerce Indicator | String | 1-character alpha-numeric | <code>vsCompletion.setCryptType(crypt_type);</code> |

Table 2: Visa - Corporate Card Common Data - Level 2 Request Fields

| Req* | Value | Limits | Set Method | Description |
|------|---|----------------------------|---------------------------|---|
| Y | National Tax | 12-character decimal | <code>vsCompletion</code> | Must reflect the amount of National Tax (GST or HST) appearing on the invoice. Minimum - 0.01 Maximum - 999999.99. Must have 2 decimal places. |
| Y | Merchant VAT Registration/Single Business Reference | 20-character alpha-numeric | <code>vsCompletion</code> | Merchant's Tax Registration Number must be |

| Req* | Value | Limits | Set Method | Description |
|------|--|----------------------------|--------------|---|
| | | | | <p>provided if tax is included on the invoice</p> <div> NOTE: Must not be all spaces or all zeroes </div> |
| C | Local Tax | 12-character decimal | vsCompletion | <p>Must reflect the amount of Local Tax (PST or QST) appearing on the invoice</p> <p>If Local Tax included then must not be all spaces or all zeroes; Must be provided if Local Tax (PST or QST) applies</p> <p>Minimum = 0.01</p> <p>Maximum = 999999.99</p> <p>Must have 2 decimal places</p> |
| C | Local Tax (PST or QST) Registration Number | 15-character alpha-numeric | vsCompletion | <p>Merchant's Local Tax (PST/QST) Registration Number</p> <p>Must be provided if tax is included on the invoice; If Local Tax included then</p> |

| Req* | Value | Limits | Set Method | Description |
|------|---|----------------------------|--------------|---|
| | | | | <p>must not be all spaces or all zeroes</p> <p>Must be provided if Local Tax (PST or QST) applies</p> |
| C | Customer VAT Registration Number | 13-character alpha-numeric | vsCompletion | If the Customer's Tax Registration Number appears on the invoice to support tax exempt transactions it must be provided here |
| C | Customer Code/Customer Reference Identifier (CRI) | 16-character alpha-numeric | vsCompletion | Value which the customer may choose to provide to the supplier at the point of sale – must be provided if given by the customer |
| N | Customer Code | 17-character alpha-numeric | vsCompletion | Optional customer code field that will not be passed along to Visa, but will be included on Moneris reporting |
| N | Invoice Number | 17-character alpha-numeric | vsCompletion | Optional invoice number field that will not be passed along |

| Req* | Value | Limits | Set Method | Description |
|------|-------|--------|------------|--|
| | | | | to Visa, but will be included on Moneris reporting |

*Y = Required, N = Optional, C = Conditional

Sample VS Completion

```

package Level23;
import JavaAPI.*;
public class TestVsCompletion
{
    public static void main(String[] args)
    {
        String store_id = "moneris";
        String api_token = "hurgle";
        String processing_country_code = "CA";
        boolean status_check = false;

        String order_id="ord-210916-15:14:46";
        String comp_amount="5.00";
        String txn_number = "19002-0_11";
        String crypt="7";
        String national_tax = "1.23";
        String merchant_vat_no = "gstno111";
        String local_tax = "2.34";
        String customer_vat_no = "gstno999";
        String cri = "CUST-REF-002";
        String customer_code="ccvsfp";
        String invoice_number="invsfp";
        String local_tax_no="ltaxno";
        VsCompletion vsCompletion = new VsCompletion();
        vsCompletion.setOrderId(order_id);
        vsCompletion.setCompAmount(comp_amount);
        vsCompletion.setTxnNumber(txn_number);
        vsCompletion.setCryptType(crypt);
        vsCompletion.setNationalTax(national_tax);
        vsCompletion.setMerchantVatNo(merchant_vat_no);
        vsCompletion.setLocalTax(local_tax);
        vsCompletion.setCustomerVatNo(customer_vat_no);
        vsCompletion.setCri(cri);
        vsCompletion.setCustomerCode(customer_code);
        vsCompletion.setInvoiceNumber(invoice_number);
        vsCompletion.setLocalTaxNo(local_tax_no);
        HttpsPostRequest mpgReq = new HttpsPostRequest();
        mpgReq.setProcCountryCode(processing_country_code);
        mpgReq.setTestMode(true); //false or comment out this line for production transactions
        mpgReq.setStoreId(store_id);
        mpgReq.setApiToken(api_token);
        mpgReq.setTransaction(vsCompletion);
        mpgReq.setStatusCheck(status_check);
        mpgReq.send();
        try
        {
            Receipt receipt = mpgReq.getReceipt();

```

Sample VS Completion

```

System.out.println("CardType = " + receipt.getCardType());
System.out.println("TransAmount = " + receipt.getTransAmount());
System.out.println("TxnNumber = " + receipt.getTxnNumber());
System.out.println("ReceiptId = " + receipt.getReceiptId());
System.out.println("TransType = " + receipt.getTransType());
System.out.println("ReferenceNum = " + receipt.getReferenceNum());
System.out.println("ResponseCode = " + receipt.getResponseCode());
System.out.println("ISO = " + receipt.getISO());
System.out.println("BankTotals = " + receipt.getBankTotals());
System.out.println("Message = " + receipt.getMessage());
System.out.println("AuthCode = " + receipt.getAuthCode());
System.out.println("Complete = " + receipt.getComplete());
System.out.println("TransDate = " + receipt.getTransDate());
System.out.println("TransTime = " + receipt.getTransTime());
System.out.println("Ticket = " + receipt.getTicket());
System.out.println("TimedOut = " + receipt.getTimedOut());
System.out.println("CavvResultCode = " + receipt.getCavvResultCode());
}
catch (Exception e)
{
System.out.println(e);
}
}
}

```

10.2.4 VS Force Post

The Visa Force Post transaction is used to secure the funds locked by a preauth transaction performed over IVR or equivalent terminal. When sending a force post request, you will need order_id, amount, pan (card number), expiry date, crypt type and the auth code received in the preauth response.

VS Force Post transaction object definition

HttpPostRequest object for VS Force Post transaction

VS Force Post transaction object values

Table 1: VS Force Post transaction object mandatory values

| Value | Type | Limits | Set Method |
|--------------------|--------|----------------------------|-----------------------------------|
| Order ID | String | 50-character alpha-numeric | vsForcePost.setOrderId(order_id); |
| Amount | String | 9-character decimal | vsForcePost.setAmount(amount); |
| Credit card number | String | 20-character numeric | vsForcePost.setPan(pan); |
| Expiry Date | String | 4-character numeric | vsForcePost.setExpDate(exp-date); |

| Value | Type | Limits | Set Method |
|----------------------|--------|---------------------------|--|
| | | YYMM format | |
| Authorization code | String | 8-character alpha-numeric | <code>vsForcePost.setAuthCode(auth_code);</code> |
| E-commerce Indicator | String | 1-character alpha-numeric | <code>vsForcePost.setCryptType(crypt_type);</code> |

Table 2: VS Force Post transaction object optional values

| Value | Type | Limits | Set Method |
|-------------|--------|----------------------------|---|
| Customer ID | String | 50-character alpha-numeric | <code>vsForcePost.setCustId(custid);</code> |

Table 3: Visa - Corporate Card Common Data - Level 2 Request Fields

| Req* | Value | Limits | Set Method | Description |
|------|---|----------------------------|--------------------------|--|
| Y | National Tax | 12-character decimal | <code>vsForcePost</code> | <p>Must reflect the amount of National Tax (GST or HST) appearing on the invoice.</p> <p>Minimum - 0.01 Maximum - 999999.99. Must have 2 decimal places.</p> |
| Y | Merchant VAT Registration/Single Business Reference | 20-character alpha-numeric | <code>vsForcePost</code> | <p>Merchant's Tax Registration Number</p> <p>must be provided if tax is included on the invoice</p> <p>NOTE: Must</p> |

| Req* | Value | Limits | Set Method | Description |
|------|--|----------------------------|-------------|---|
| | | | | <div>not be all spaces or all zeroes</div> |
| C | Local Tax | 12-character decimal | vsForcePost | <p>Must reflect the amount of Local Tax (PST or QST) appearing on the invoice</p> <p>If Local Tax included then must not be all spaces or all zeroes; Must be provided if Local Tax (PST or QST) applies</p> <p>Minimum = 0.01</p> <p>Maximum = 999999.99</p> <p>Must have 2 decimal places</p> |
| C | Local Tax (PST or QST) Registration Number | 15-character alpha-numeric | vsForcePost | <p>Merchant's Local Tax (PST/QST) Registration Number</p> <p>Must be provided if tax is included on the invoice; If Local Tax included then must not be all spaces or all zeroes</p> |

| Req* | Value | Limits | Set Method | Description |
|------|---|---------------------------|-------------|---|
| | | | | Must be provided if Local Tax (PST or QST) applies |
| C | Customer VAT Registration Number | 13-character alphanumeric | vsForcePost | If the Customer's Tax Registration Number appears on the invoice to support tax exempt transactions it must be provided here |
| C | Customer Code/Customer Reference Identifier (CRI) | 16-character alphanumeric | vsForcePost | Value which the customer may choose to provide to the supplier at the point of sale – must be provided if given by the customer |
| N | Customer Code | 17-character alphanumeric | vsForcePost | Optional customer code field that will not be passed along to Visa, but will be included on Moneris reporting |
| N | Invoice Number | 17-character alphanumeric | vsForcePost | Optional invoice number field that will not be passed along to Visa, but will be included on |

| Req* | Value | Limits | Set Method | Description |
|------|-------|--------|------------|-------------------|
| | | | | Moneris reporting |

*Y = Required, N = Optional, C = Conditional

| Sample VS Force Post |
|---|
| <pre> package Level23; import JavaAPI.*; public class TestVsForcePost { public static void main(String[] args) { String store_id = "moneris"; String api_token = "hurgle"; String processing_country_code = "CA"; boolean status_check = false; java.util.Date createDate = new java.util.Date(); String order_id="Test"+createDate.getTime(); String cust_id="CUST13343"; String amount="5.00"; String pan="4242424254545454"; String expiry_date="2012"; //YYMM String auth_code="123456"; String crypt="7"; String national_tax = "1.23"; String merchant_vat_no = "gstno111"; String local_tax = "2.34"; String customer_vat_no = "gstno999"; String cri = "CUST-REF-002"; String customer_code="ccvsfp"; String invoice_number="invsfp"; String local_tax_no="ltaxno"; VsForcePost vsForcePost = new VsForcePost(); vsForcePost.setOrderId(order_id); vsForcePost.setCustId(cust_id); vsForcePost.setAmount(amount); vsForcePost.setPan(pan); vsForcePost.setExpDate(expiry_date); vsForcePost.setAuthCode(auth_code); vsForcePost.setCryptType(crypt); vsForcePost.setNationalTax(national_tax); vsForcePost.setMerchantVatNo(merchant_vat_no); vsForcePost.setLocalTax(local_tax); vsForcePost.setCustomerVatNo(customer_vat_no); vsForcePost.setCri(cri); vsForcePost.setCustomerCode(customer_code); vsForcePost.setInvoiceNumber(invoice_number); vsForcePost.setLocalTaxNo(local_tax_no); HttpsPostRequest mpgReq = new HttpsPostRequest(); mpgReq.setProcCountryCode(processing_country_code); mpgReq.setTestMode(true); //false or comment out this line for production transactions mpgReq.setStoreId(store_id); mpgReq.setApiToken(api_token); mpgReq.setTransaction(vsForcePost); mpgReq.setStatusCheck(status_check); </pre> |

Sample VS Force Post

```

mpgReq.send();
try
{
    Receipt receipt = mpgReq.getReceipt();
    System.out.println("CardType = " + receipt.getCardType());
    System.out.println("TransAmount = " + receipt.getTransAmount());
    System.out.println("TxnNumber = " + receipt.getTxnNumber());
    System.out.println("ReceiptId = " + receipt.getReceiptId());
    System.out.println("TransType = " + receipt.getTransType());
    System.out.println("ReferenceNum = " + receipt.getReferenceNum());
    System.out.println("ResponseCode = " + receipt.getResponseCode());
    System.out.println("ISO = " + receipt.getISO());
    System.out.println("BankTotals = " + receipt.getBankTotals());
    System.out.println("Message = " + receipt.getMessage());
    System.out.println("AuthCode = " + receipt.getAuthCode());
    System.out.println("Complete = " + receipt.getComplete());
    System.out.println("TransDate = " + receipt.getTransDate());
    System.out.println("TransTime = " + receipt.getTransTime());
    System.out.println("Ticket = " + receipt.getTicket());
    System.out.println("TimedOut = " + receipt.getTimedOut());
    System.out.println("CavvResultCode = " + receipt.getCavvResultCode());
}
catch (Exception e)
{
    System.out.println(e);
}
}
}

```

10.2.5 VS Purchase Correction

The Visa Purchase Correction (also known as a "void") transaction is used to cancel a transaction that was performed in the current batch. No amount is required because a void is always for 100% of the original transaction. The only transaction that can be voided using VS Purchase Correction is a VS Completion or VS Force Post. To send a void the order_id and txn_number from the VS Completion/VS Force Post are required.

VS Purchase Correction transaction object definition**HttpPostRequest object for VS Purchase Correction transaction**

VS Purchase Correction transaction object values

Table 1: VS Purchase Correction transaction object mandatory values

| Value | Type | Limits | Set Method |
|----------------------|--------|-----------------------------|---|
| Order ID | String | 50-character alpha-numeric | <code>vsPurchaseCorrection.setOrderId(order_id);</code> |
| Transaction number | String | 255-character alpha-numeric | <code>vsPurchaseCorrection.setTxnNumber(txn_number);</code> |
| E-Commerce Indicator | String | 1-character alpha-numeric | <code>vsPurchaseCorrection.setCryptType(crypt_type);</code> |

Sample VS Purchase Correction

```
package Level23;
import JavaAPI.*;

public class TestVsPurchaseCorrection
{
    public static void main(String[] args)
    {
        String store_id = "moneris";
        String api_token = "hurgle";
        String processing_country_code = "CA";
        boolean status_check = false;

        String order_id="Test1485208113189";
        String txn_number = "39793-0_11";
        String crypt="7";
        VsPurchaseCorrection vsPurchaseCorrection = new VsPurchaseCorrection();
        vsPurchaseCorrection.setOrderId(order_id);
        vsPurchaseCorrection.setTxnNumber(txn_number);
        vsPurchaseCorrection.setCryptType(crypt);
        HttpsPostRequest mpgReq = new HttpsPostRequest();
        mpgReq.setProcCountryCode(processing_country_code);
        mpgReq.setTestMode(true); //false or comment out this line for production transactions
        mpgReq.setStoreId(store_id);
        mpgReq.setApiToken(api_token);
        mpgReq.setTransaction(vsPurchaseCorrection);
        mpgReq.setStatusCheck(status_check);
        mpgReq.send();
        try
        {
            Receipt receipt = mpgReq.getReceipt();
            System.out.println("CardType = " + receipt.getCardType());
            System.out.println("TransAmount = " + receipt.getTransAmount());
            System.out.println("TxnNumber = " + receipt.getTxnNumber());
            System.out.println("ReceiptId = " + receipt.getReceiptId());
            System.out.println("TransType = " + receipt.getTransType());
            System.out.println("ReferenceNum = " + receipt.getReferenceNum());
            System.out.println("ResponseCode = " + receipt.getResponseCode());
            System.out.println("ISO = " + receipt.getISO());
            System.out.println("BankTotals = " + receipt.getBankTotals());
        }
    }
}
```

Sample VS Purchase Correction

```

System.out.println("Message = " + receipt.getMessage());
System.out.println("AuthCode = " + receipt.getAuthCode());
System.out.println("Complete = " + receipt.getComplete());
System.out.println("TransDate = " + receipt.getTransDate());
System.out.println("TransTime = " + receipt.getTransTime());
System.out.println("Ticket = " + receipt.getTicket());
System.out.println("TimedOut = " + receipt.getTimedOut());
System.out.println("CavvResultCode = " + receipt.getCavvResultCode());
}
catch (Exception e)
{
System.out.println(e);
}
}
}

```

10.2.6 VS Refund

Visa Refund will credit a specified amount to the cardholder's credit card. A refund can be sent up to the full value of the original VS Completion or VS Force Post. To send a refund you will require the order_id and txn_number from the original VS Completion or VS Force Post.

VS Refund transaction object definition

HttpPostRequest object for VS Refund transaction

VS Refund transaction object values

Table 1: VS Refund transaction object mandatory values

| Value | Type | Limits | Set Method |
|----------------------|--------|-----------------------------|------------------------------------|
| Order ID | String | 50-character alpha-numeric | vsRefund.setOrderId(order_id); |
| Transaction number | String | 255-character alpha-numeric | vsRefund.setTxnNumber(txn_number); |
| Amount | String | 9-character decimal | vsRefund.setAmount(amount); |
| E-Commerce Indicator | String | 1-character alpha-numeric | vsRefund.setCryptType(crypt_type); |

Table 2: Visa - Corporate Card Common Data - Level 2 Request Fields

| Req* | Value | Limits | Set Method | Description |
|------|---|----------------------------|------------|--|
| Y | National Tax | 12-character decimal | vsRefund | <p>Must reflect the amount of National Tax (GST or HST) appearing on the invoice.</p> <p>Minimum - 0.01 Maximum - 999999.99. Must have 2 decimal places.</p> |
| Y | Merchant VAT Registration/Single Business Reference | 20-character alpha-numeric | vsRefund | <p>Merchant's Tax Registration Number</p> <p>must be provided if tax is included on the invoice</p> <div style="border: 1px solid black; padding: 5px; margin-top: 10px;"> <p>NOTE: Must not be all spaces or all zeroes</p> </div> |
| C | Local Tax | 12-character decimal | vsRefund | <p>Must reflect the amount of Local Tax (PST or QST) appearing on the invoice</p> <p>If Local Tax included then must not be all spaces or all zeroes; Must be provided if Local Tax (PST</p> |

| Req* | Value | Limits | Set Method | Description |
|------|--|----------------------------|------------|--|
| | | | | <p>or QST) applies</p> <p>Minimum = 0.01</p> <p>Maximum = 999999.99</p> <p>Must have 2 decimal places</p> |
| C | Local Tax (PST or QST) Registration Number | 15-character alpha-numeric | vsRefund | <p>Merchant's Local Tax (PST/QST) Registration Number</p> <p>Must be provided if tax is included on the invoice; If Local Tax included then must not be all spaces or all zeroes</p> <p>Must be provided if Local Tax (PST or QST) applies</p> |
| C | Customer VAT Registration Number | 13-character alpha-numeric | vsRefund | <p>If the Customer's Tax Registration Number appears on the invoice to support tax exempt transactions it must be provided here</p> |
| C | Customer Code/Customer Reference Id- | 16-character alpha-numeric | vsRefund | <p>Value which the customer</p> |

| Req* | Value | Limits | Set Method | Description |
|------|----------------|----------------------------|------------|--|
| | tifier (CRI) | | | may choose to provide to the supplier at the point of sale – must be provided if given by the customer |
| N | Customer Code | 17-character alpha-numeric | vsRefund | Optional customer code field that will not be passed along to Visa, but will be included on Moneris reporting |
| N | Invoice Number | 17-character alpha-numeric | vsRefund | Optional invoice number field that will not be passed along to Visa, but will be included on Moneris reporting |

*Y = Required, N = Optional, C = Conditional

| Sample VS Refund |
|---|
| <pre> package Level23; import JavaAPI.*; public class TestVsRefund { public static void main(String[] args) { String store_id = "moneris"; String api_token = "hurgle"; String processing_country_code = "CA"; boolean status_check = false; String order_id="Test1485208133961"; String amount="5.00"; String txn_number = "39795-0_11"; String crypt="7"; String national_tax = "1.23"; </pre> |

Sample VS Refund

```

String merchant_vat_no = "gstno111";
String local_tax = "2.34";
String customer_vat_no = "gstno999";
String cri = "CUST-REF-002";
String customer_code="ccvsfp";
String invoice_number="invsfp";
String local_tax_no="ltaxno";
VsRefund vsRefund = new VsRefund();
vsRefund.setOrderId(order_id);
vsRefund.setAmount(amount);
vsRefund.setTxnNumber(txn_number);
vsRefund.setCryptType(crypt);
vsRefund.setNationalTax(national_tax);
vsRefund.setMerchantVatNo(merchant_vat_no);
vsRefund.setLocalTax(local_tax);
vsRefund.setCustomerVatNo(customer_vat_no);
vsRefund.setCri(cri);
vsRefund.setCustomerCode(customer_code);
vsRefund.setInvoiceNumber(invoice_number);
vsRefund.setLocalTaxNo(local_tax_no);
HttpPostRequest mpgReq = new HttpPostRequest();
mpgReq.setProcCountryCode(processing_country_code);
mpgReq.setTestMode(true); //false or comment out this line for production transactions
mpgReq.setStoreId(store_id);
mpgReq.setApiToken(api_token);
mpgReq.setTransaction(vsRefund);
mpgReq.setStatusCheck(status_check);
mpgReq.send();
try
{
    Receipt receipt = mpgReq.getReceipt();
    System.out.println("CardType = " + receipt.getCardType());
    System.out.println("TransAmount = " + receipt.getTransAmount());
    System.out.println("TxnNumber = " + receipt.getTxnNumber());
    System.out.println("ReceiptId = " + receipt.getReceiptId());
    System.out.println("TransType = " + receipt.getTransType());
    System.out.println("ReferenceNum = " + receipt.getReferenceNum());
    System.out.println("ResponseCode = " + receipt.getResponseCode());
    System.out.println("ISO = " + receipt.getISO());
    System.out.println("BankTotals = " + receipt.getBankTotals());
    System.out.println("Message = " + receipt.getMessage());
    System.out.println("AuthCode = " + receipt.getAuthCode());
    System.out.println("Complete = " + receipt.getComplete());
    System.out.println("TransDate = " + receipt.getTransDate());
    System.out.println("TransTime = " + receipt.getTransTime());
    System.out.println("Ticket = " + receipt.getTicket());
    System.out.println("TimedOut = " + receipt.getTimedOut());
    System.out.println("CavvResultCode = " + receipt.getCavvResultCode());
}
catch (Exception e)
{
    System.out.println(e);
}
}

```

10.2.7 VS Independent Refund

Visa Independent Refund will credit a specified amount to the cardholder's credit card. The independent refund does not require an existing order to be logged in the Moneris Gateway; however, the credit card number and expiry date will need to be passed. The transaction format is almost identical to a preauthorization.

VS Independent Refund transaction object definition

HttpPostRequest object for VS Independent Refund transaction

VS Independent Refund transaction object values

Table 1: VS Independent Refund transaction object mandatory values

| Value | Type | Limits | Set Method |
|----------------------|--------|------------------------------------|--|
| Order ID | String | 50-character alphanumeric | <code>vsIndependentRefund.setOrderId(order_id);</code> |
| Amount | String | 9-character decimal | <code>vsIndependentRefund.setAmount(amount);</code> |
| Credit card number | String | 20-character numeric | <code>vsIndependentRefund.setPan(pan);</code> |
| Expiry date | String | 4-character numeric YYMM format | <code>vsIndependentRefund.setExpDate(expdate);</code> |
| E-commerce indicator | String | 1-character alphanumeric | <code>vsIndependentRefund.setCryptType(crypt_type);</code> |

Table 2: VS Independent Refund transaction object optional values

| Value | Type | Limits | Set Method |
|-------------|--------|---------------------------|---|
| Customer ID | String | 50-character alphanumeric | <code>vsIndependentRefund.setCustId(custid);</code> |

Table 3: Visa - Corporate Card Common Data - Level 2 Request Fields

| Req* | Value | Limits | Set Method | Description |
|------|--------------|----------------------|----------------------------------|--|
| Y | National Tax | 12-character decimal | <code>vsIndependentRefund</code> | Must reflect the amount of National Tax (GST or HST) |

| Req* | Value | Limits | Set Method | Description |
|------|---|----------------------------|---------------------|---|
| | | | | <p>appearing on the invoice.</p> <p>Minimum - 0.01 Maximum - 999999.99. Must have 2 decimal places.</p> |
| Y | Merchant VAT Registration/Single Business Reference | 20-character alpha-numeric | vsIndependentRefund | <p>Merchant's Tax Registration Number</p> <p>must be provided if tax is included on the invoice</p> <div> NOTE: Must not be all spaces or all zeroes </div> |
| C | Local Tax | 12-character decimal | vsIndependentRefund | <p>Must reflect the amount of Local Tax (PST or QST) appearing on the invoice</p> <p>If Local Tax included then must not be all spaces or all zeroes; Must be provided if Local Tax (PST or QST) applies</p> <p>Minimum = 0.01</p> <p>Maximum = 999999.99</p> |

| Req* | Value | Limits | Set Method | Description |
|------|---|----------------------------|---------------------|--|
| | | | | Must have 2 decimal places |
| C | Local Tax (PST or QST) Registration Number | 15-character alpha-numeric | vsIndependentRefund | <p>Merchant's Local Tax (PST/QST) Registration Number</p> <p>Must be provided if tax is included on the invoice; If Local Tax included then must not be all spaces or all zeroes</p> <p>Must be provided if Local Tax (PST or QST) applies</p> |
| C | Customer VAT Registration Number | 13-character alpha-numeric | vsIndependentRefund | If the Customer's Tax Registration Number appears on the invoice to support tax exempt transactions it must be provided here |
| C | Customer Code/Customer Reference Identifier (CRI) | 16-character alpha-numeric | vsIndependentRefund | Value which the customer may choose to provide to the supplier at the point of sale – must be provided if given by the customer |

| Req* | Value | Limits | Set Method | Description |
|------|----------------|----------------------------|---------------------|--|
| N | Customer Code | 17-character alpha-numeric | vsIndependentRefund | Optional customer code field that will not be passed along to Visa, but will be included on Moneris reporting |
| N | Invoice Number | 17-character alpha-numeric | vsIndependentRefund | Optional invoice number field that will not be passed along to Visa, but will be included on Moneris reporting |

*Y = Required, N = Optional, C = Conditional

Sample VS IndependentRefund

```

package Level23;
import JavaAPI.*;
public class TestVsIndependentRefund
{
    public static void main(String[] args)
    {
        String store_id = "moneris";
        String api_token = "hurgle";
        String processing_country_code = "CA";
        boolean status_check = false;

        java.util.Date createDate = new java.util.Date();
        String order_id="Test"+createDate.getTime();
        String cust_id="CUST13343";
        String amount="5.00";
        String pan="4242424254545454";
        String expiry_date="2012"; //YYMM
        String crypt="7";
        String national_tax = "1.23";
        String merchant_vat_no = "gstno111";
        String local_tax = "2.34";
        String customer_vat_no = "gstno999";
        String cri = "CUST-REF-002";
        String customer_code="ccvsfp";
        String invoice_number="invsfp";
        String local_tax_no="ltaxno";
        VsIndependentRefund vsIndependentRefund = new VsIndependentRefund();
        vsIndependentRefund.setOrderId(order_id);

```

Sample VS IndependentRefund

```

vsIndependentRefund.setCustId(cust_id);
vsIndependentRefund.setAmount(amount);
vsIndependentRefund.setPan(pan);
vsIndependentRefund.setExpDate(expiry_date);
vsIndependentRefund.setCryptType(crypt);
vsIndependentRefund.setNationalTax(national_tax);
vsIndependentRefund.setMerchantVatNo(merchant_vat_no);
vsIndependentRefund.setLocalTax(local_tax);
vsIndependentRefund.setCustomerVatNo(customer_vat_no);
vsIndependentRefund.setCri(cri);
vsIndependentRefund.setCustomerCode(customer_code);
vsIndependentRefund.setInvoiceNumber(invoice_number);
vsIndependentRefund.setLocalTaxNo(local_tax_no);
HttpPostRequest mpgReq = new HttpPostRequest();
mpgReq.setProcCountryCode(processing_country_code);
mpgReq.setTestMode(true); //false or comment out this line for production transactions
mpgReq.setStoreId(store_id);
mpgReq.setApiToken(api_token);
mpgReq.setTransaction(vsIndependentRefund);
mpgReq.setStatusCheck(status_check);
mpgReq.send();
try
{
    Receipt receipt = mpgReq.getReceipt();
    System.out.println("CardType = " + receipt.getCardType());
    System.out.println("TransAmount = " + receipt.getTransAmount());
    System.out.println("TxnNumber = " + receipt.getTxnNumber());
    System.out.println("ReceiptId = " + receipt.getReceiptId());
    System.out.println("TransType = " + receipt.getTransType());
    System.out.println("ReferenceNum = " + receipt.getReferenceNum());
    System.out.println("ResponseCode = " + receipt.getResponseCode());
    System.out.println("ISO = " + receipt.getISO());
    System.out.println("BankTotals = " + receipt.getBankTotals());
    System.out.println("Message = " + receipt.getMessage());
    System.out.println("AuthCode = " + receipt.getAuthCode());
    System.out.println("Complete = " + receipt.getComplete());
    System.out.println("TransDate = " + receipt.getTransDate());
    System.out.println("TransTime = " + receipt.getTransTime());
    System.out.println("Ticket = " + receipt.getTicket());
    System.out.println("TimedOut = " + receipt.getTimedOut());
    System.out.println("CavvResultCode = " + receipt.getCavvResultCode());
}
catch (Exception e)
{
    System.out.println(e);
}
}

```

10.2.8 VS Corpais

Upon sending a VS Completion, VS Refund, VS Purchase Correction and successfully receiving a message_id in the response, the Level 2/3 data can be submitted by using VS Corpais.

Below is a sample of using VS Corpais to submit Level 2/3 data. For a full description of all fields (required and optional) please see Definition of Request Fields for Level 2/3 - Visa (page 365).

VS Corpais transaction object definition

HttpPostRequest object for VS Corpais transaction

VS Corpais transaction object values

Table 1: VS Corpais transaction object mandatory values

| Value | Type | Limits | Set Method |
|---|--------|-----------------------------|--|
| Order ID | String | 50-character alpha-numeric | <code>vsCorpais.setOrderId(order_id);</code> |
| Transaction number | String | 255-character alpha-numeric | <code>vsCorpais.setTxnNumber(txn_number);</code> |
| vsPurcha For a list of the variables that appear in this object, see the table below | Object | n/a | <code>VsPurcha vsPurcha = new VsPurcha();</code> <code>vsCorpais.SetVsPurch(vsPurcha, vsPurchl);</code> |
| vsPurchl For a list of the variables that appear in this object, see the table below | Object | n/a | <code>VsPurchl vsPurchl = new VsPurchl();</code> <code>vsCorpais.SetVsPurch(vsPurcha, vsPurchl);</code> |

Table 2: Corporate Card Common Data - Level 2 Request Fields - VSPurcha

| Req* | Value | Limits | Set Method | Description |
|------|----------------|---------------------------|--|--|
| C | Buyer Name | 30-character alphanumeric | <code>vsPurcha.setLocalTaxRate(local_tax_rate);</code> | Buyer/Recipient Name <div> NOTE: Name required by CRA on transactions >\$150 </div> |
| C | Local Tax Rate | 4-character decimal | <code>vsPurcha.setLocalTaxRate(local_tax_rate);</code> | Indicates the detailed tax rate applied in relationship to a local tax amount |

| Req* | Value | Limits | Set Method | Description |
|------|-------------------------------|---------------------|---|--|
| | | | | <div>EXAMPLE: 8% PST should be 8.0</div> <p>Minimum = 0.01</p> <p>Maximum = 99.99</p> <div>NOTE: Must be provided if Local Tax (PST or QST) applies.</div> |
| N | Duty Amount | 9-character decimal | <code>vsPurcha.setDutyAmount(duty_amount);</code> | <p>Duty on total purchase amount</p> <p>A minus sign means 'amount is a credit', plus sign or no sign means 'amount is a debit'</p> <p>maximum without sign is 999999.99</p> |
| N | Invoice Discount Treatment | 1-character numeric | <code>vsPurcha.setDiscountTreatment(discount_treatment);</code> | <p>Indicates how the merchant is managing discounts</p> <p>Must be one of the following values:</p> <p>0 - if no invoice level discounts apply for this invoice</p> <p>1 - if Tax was calculated on Post-Discount totals</p> <p>2 - if Tax was calculated on Pre-Discount totals</p> |
| N | Invoice Level Discount Amount | 9-character decimal | <code>vsPurcha.setDiscountAmt(discount_amt);</code> | Amount of discount (if provided at the invoice level according to the |

| Req* | Value | Limits | Set Method | Description |
|------|----------------------------------|---------------------------|--|--|
| | | | | <p>Invoice Discount Treatment)</p> <p>Must be non-zero if Invoice Discount Treatment is 1 or 2</p> <p>Minimum amount is 0.00 and maximum is 999999.99</p> |
| C | Ship To Postal Code / Zip Code | 10-character alphanumeric | <code>vsPurchase.setShipToPostalCode(ship_to_pos_code);</code> | <p>The postal code or zip code for the destination where goods will be delivered</p> <div> <p>NOTE: Required if shipment is involved</p> </div> <p>Full alpha postal code - Valid ANA<space>NAN format required if shipping to an address within Canada</p> |
| C | Ship From Postal Code / Zip Code | 10-character alphanumeric | <code>vsPurchase.setShipFromPostalCode(ship_from_pos_code);</code> | <p>The postal code or zip code from which items were shipped</p> <p>For Canadian addresses, requires full alpha postal code for the merchant with Valid ANA<space>NAN format</p> |
| C | Destination Country Code | 2-character alphanumeric | <code>vsPurchase.SetDesCouCode(des_cou_code);</code> | <p>Code of country where purchased goods will be delivered</p> <p>Use ISO 3166-1</p> |

| Req* | Value | Limits | Set Method | Description |
|------|---------------------------------------|---------------------------|---|--|
| | | | | alpha-2 format <div> NOTE: Required if it appears on the invoice for an international transaction </div> |
| Y | Unique VAT Invoice Reference Number | 25-character alphanumeric | <code>vsPurcha.setVatRefNum(vat_ref_num);</code> | Unique Value Added Tax Invoice Reference Number Must be populated with the invoice number and this cannot be all spaces or zeroes |
| Y | Tax Treatment | 1-character alphanumeric | <code>vsPurcha.setTaxTreatment(tax_treatment);</code> | Must be one of the following values: 0 = Net Prices with tax calculated at line item level; 1 = Net Prices with tax calculated at invoice level; 2 = Gross prices given with tax information provided at line item level; 3 = Gross prices given with tax information provided at invoice level; 4 = No tax applies (small merchant) on the invoice for the transaction |
| N | Freight/Shipping Amount (Ship Amount) | 9-character decimal | <code>vsPurcha.setFreightAmount(freight_amount);</code> | Freight charges on total purchase |

| Req* | Value | Limits | Set Method | Description |
|------|------------------------|---------------------|--|--|
| | | | | <p>If shipping is not provided as a line item it must be provided here, if applicable</p> <p>Signed monetary amount:</p> <p>Minus (-) sign means 'amount is a credit',</p> <p>Plus (+) sign or no sign means 'amount is a debit'</p> <p>Maximum without sign is 999999.99</p> |
| C | GST HST Freight Rate | 4-character decimal | <pre>vsPurcha .setGstHstFreightRate (gst_hst_freight_rate);</pre> | <p>Rate of GST (excludes PST) or HST charged on the shipping amount (in accordance with the Tax Treatment)</p> <p>If Freight/Shipping Amount is provided then this (National GST or HST) tax rate must be provided.</p> <p>Monetary amount, maximum is 99.99. Such as 13% HST is 13.00</p> |
| C | GST HST Freight Amount | 9-character decimal | <pre>vsPurcha .setGstHstFreightAmount (gst_hst_freight_ amount);</pre> | <p>Amount of GST (excludes PST) or HST charged on the shipping amount</p> <p>If Freight/Shipping Amount is provided then this (National GST or HST) tax amount</p> |

| Req* | Value | Limits | Set Method | Description |
|------|-------|--------|------------|---|
| | | | | <p>must be provided if taxTreatment is 0 or 2</p> <p>Signed monetary amount: maximum without sign is 999999.99.</p> |

*Y = Required, N = Optional, C = Conditional

Table 3: Corporate Card Common Data - Level 3 Request Fields - VSPurch

| Req* | Value | Limits | Variable/Field | Description |
|------|---------------------|----------------------------|------------------|--|
| C | Item Commodity Code | 12-character alpha-numeric | item_com_code | Line item Comodity Code (if this field is not sent, then Product Code must be sent) |
| Y | Product Code | 12-character alpha-numeric | product_code | <p>Line item Product Code (if this field is not sent, then send Item Commodity Code)</p> <p>If the order has a Freight/Shipping line item, the productCode value has to be "Freight/Shipping"</p> <p>If the order has a Discount line item, the productCode value has to be "Discount"</p> |
| Y | Item Description | 35-character alpha-numeric | item_description | Line item description |
| Y | Item Quantity | 12-character decimal | item_quantity | <p>Quantity invoiced for this line item</p> <p>Up to 4 decimal places supported</p> |

| Req* | Value | Limits | Variable/Field | Description |
|------|----------------------|---------------------------|---------------------|--|
| | | | | Minimum = 0.0001 Maximum = 9999999.9999 |
| Y | Item Unit of Measure | 2-character alpha-numeric | item_uom | Unit of measure Use ANSI X-12 EDI Allowable Units of Measure and Codes |
| Y | Item Unit Cost | 12-character decimal | unit_cost | Line item cost per unit 2-4 decimal places accepted Minimum = 0.0001 Maximum = 999999.9999 |
| N | VAT Tax Amount | 12-character decimal | vat_tax_amt | Any value-added tax or other sales tax amount Must have 2 decimal places Minimum = 0.01 Maximum = 999999.99 |
| N | VAT Tax Rate | 4-character decimal | vat_tax_rate | Sales tax rate <div> EXAMPLE: 8% PST should be 8.0 </div> maximum 99.99 |
| Y | Discount Treatment | 1-character numeric | discount_treatmentL | Must be one of the following values: 0 if no invoice level discounts apply for this invoice |

| Req* | Value | Limits | Variable/Field | Description |
|------|-----------------|----------------------|----------------|--|
| | | | | <p>1 if Tax was calculated on Post-Discout totals</p> <p>2 if Tax was calculated on Pre-Discout totals</p> |
| C | Discount Amount | 12-character decimal | discount_amtL | <p>Amount of discount, if provided for this line item according to the Line Item Discount Treatment</p> <p>Must be non-zero if Line Item Discount Treatment is 1 or 2</p> <p>Must have 2 decimal places</p> <p>Minimum = 0.01</p> <p>Maximum = 999999.99</p> |

*Y = Required, N = Optional, C = Conditional

| Sample VS Corpais |
|---|
| <pre> package Level23; import JavaAPI.*; public class TestVsCorpais { public static void main(String[] args) { String store_id = "moneris"; String api_token = "hurgle"; String processing_country_code = "CA"; boolean status_check = false; String order_id="Test1485208069127"; String txn_number="39791-0_11"; String buyer_name = "Buyer Manager"; String local_tax_rate = "13.00"; String duty_amount = "0.00"; String discount_treatment = "0"; String discount_amt = "0.00"; </pre> |

Sample VS Corpsais

```

String freight_amount = "0.20";
String ship_to_pos_code = "M8X 2W8";
String ship_from_pos_code = "M1K 2Y7";
String des_cou_code = "CAN";
String vat_ref_num = "VAT12345";
String tax_treatment = "3";//3 = Gross prices given with tax information provided at invoice level
String gst_hst_freight_amount = "0.00";
String gst_hst_freight_rate = "13.00";
String[] item_com_code = {"X3101", "X84802"};
String[] product_code = {"CHR123", "DDSK200"};
String[] item_description = {"Office Chair", "Disk Drive"};
String[] item_quantity = {"3", "1"};
String[] item_uom = {"EA", "EA"};
String[] unit_cost = {"0.20", "0.40"};
String[] vat_tax_amt = {"0.00", "0.00"};
String[] vat_tax_rate = {"13.00", "13.00"};
String[] discount_treatmentL = {"0", "0"};
String[] discount_amtL = {"0.00", "0.00"};
//Create and set VsPurcha
VsPurcha vsPurcha = new VsPurcha();
vsPurcha.setBuyerName(buyer_name);
vsPurcha.setLocalTaxRate(local_tax_rate);
vsPurcha.setDutyAmount(duty_amount);
vsPurcha.setDiscountTreatment(discount_treatment);
vsPurcha.setDiscountAmt(discount_amt);
vsPurcha.setFreightAmount(freight_amount);
vsPurcha.setShipToPostalCode(ship_to_pos_code);
vsPurcha.setShipFromPostalCode(ship_from_pos_code);
vsPurcha.setDesCouCode(des_cou_code);
vsPurcha.setVatRefNum(vat_ref_num);
vsPurcha.setTaxTreatment(tax_treatment);
vsPurcha.setGstHstFreightAmount(gst_hst_freight_amount);
vsPurcha.setGstHstFreightRate(gst_hst_freight_rate);
//Create and set VsPurchl
VsPurchl vsPurchl = new VsPurchl();
vsPurchl.setVsPurchl(item_com_code[0], product_code[0], item_description[0], item_quantity[0],
    item_uom[0], unit_cost[0], vat_tax_amt[0], vat_tax_rate[0], discount_treatmentL[0], discount_
    amtL[0]);
vsPurchl.setVsPurchl(item_com_code[1], product_code[1], item_description[1], item_quantity[1],
    item_uom[1], unit_cost[1], vat_tax_amt[1], vat_tax_rate[1], discount_treatmentL[1], discount_
    amtL[1]);

VsCorpais vsCorpais = new VsCorpais();
vsCorpais.setOrderId(order_id);
vsCorpais.setTxnNumber(txn_number);
vsCorpais.setVsPurch(vsPurcha, vsPurchl);
HttpsPostRequest mpgReq = new HttpsPostRequest();
mpgReq.setProcCountryCode(processing_country_code);
mpgReq.setTestMode(true); //false or comment out this line for production transactions
mpgReq.setStoreId(store_id);
mpgReq.setApiToken(api_token);
mpgReq.setTransaction(vsCorpais);
mpgReq.setStatusCheck(status_check);
mpgReq.send();
try
{
    Receipt receipt = mpgReq.getReceipt();
    System.out.println("CardType = " + receipt.getCardType());
    System.out.println("TransAmount = " + receipt.getTransAmount());
}

```

Sample VS Corps

```

System.out.println("TxnNumber = " + receipt.getTxnNumber());
System.out.println("ReceiptId = " + receipt.getReceiptId());
System.out.println("TransType = " + receipt.getTransType());
System.out.println("ReferenceNum = " + receipt.getReferenceNum());
System.out.println("ResponseCode = " + receipt.getResponseCode());
System.out.println("ISO = " + receipt.getISO());
System.out.println("BankTotals = " + receipt.getBankTotals());
System.out.println("Message = " + receipt.getMessage());
System.out.println("AuthCode = " + receipt.getAuthCode());
System.out.println("Complete = " + receipt.getComplete());
System.out.println("TransDate = " + receipt.getTransDate());
System.out.println("TransTime = " + receipt.getTransTime());
System.out.println("Ticket = " + receipt.getTicket());
System.out.println("TimedOut = " + receipt.getTimedOut());
System.out.println("CavvResultCode = " + receipt.getCavvResultCode());
}
catch (Exception e)
{
    System.out.println(e);
}
}
}

```

10.3 Level 2/3 MasterCard Transactions

- 10.3.1 Level 2/3 Transaction Types for MasterCard
- 10.3.2 Level 2/3 Transaction Flow for MasterCard
- 10.3.3 MC Completion
- 10.3.4 MC Force Post
- 10.3.5 MC Purchase Correction
- 10.3.6 MC Refund
- 10.3.7 MC Independent Refund
- 10.3.8 MC Corps - Corporate Card Common Data with Line Item Details

10.3.1 Level 2/3 Transaction Types for MasterCard

This transaction set includes a suite of corporate card financial transactions as well as a transaction that allows for the passing of Level 2/3 data. Please ensure MC Level 2/3 processing support is enabled on your merchant account. Batch Close, Open Totals and Preauth are identical to the transactions outlined in the section Basic Transaction Set (page 10).

When the Preauth response contains CorporateCard equal to true then you can submit the MC transactions.

If CorporateCard is false then the card does not support Level 2/3 data and non Level 2/3 transaction are to be used. If the card is not a corporate card, please refer to section 4 for the appropriate non-corporate card transactions.

NOTE: This transaction set is intended for transactions where Corporate Card is true and Level 2/3 data will be submitted. If the credit card is found to be a corporate card but you do not wish to send any Level 2/3 data then you may submit MC transactions using the transaction set outlined in Basic Transaction Set (page 10).

Preauth – (authorization / preauthorization)

The preauth verifies and locks funds on the customer's credit card. The funds are locked for a specified amount of time, based on the card issuer. To retrieve the funds from a preauth so that they may be settled in the merchant account a capture must be performed. Level 2/3 data submission is not supported as part of a preauth as a preauth is not settled. When CorporateCard is returned true then Level 2/3 data may be submitted.

MCCompletion – (Capture/Preauth Completion)

Once a Preauth is obtained the funds that are locked need to be retrieved from the customer's credit card. The capture retrieves the locked funds and readies them for settlement in to the merchant account. Prior to performing an MCCompletion a Preauth must be performed.

MCForcePost – (Force Capture/Preauth Completion)

This transaction is an alternative to MCCompletion to obtain the funds locked on Preauth obtained from IVR or equivalent terminal. The force post requires that the original Preauth's auth code is provided and it retrieves the locked funds and readies them for settlement in to the merchant account.

MCPurchaseCorrection – (Void, Correction)

MCCompletions can be voided the same day* that they occur. A void must be for the full amount of the transaction and will remove any record of it from the cardholder statement. * An MCPurchaseCorrection can be performed against a transaction as long as the batch that contains the original transaction remains open. When using the automated closing feature batch close occurs daily between 10 – 11 pm EST.

MCCrefund – (Credit)

A refund can be performed against an MCCompletion or MCForcepost to refund an amount less than or equal to the amount of the original transaction.

MCIIndependentRefund – (Credit)

A refund can be performed against an completion to refund any part, or all of the transaction. Independent refund is used when the originating transaction was not performed through Moneris Gateway. Please note, the Independent Refund transaction may or may not be supported on your account. If you receive a transaction not allowed error when attempting an independent refund, it may mean the transaction is not supported on your account. If you wish to have the Independent Refund transaction type temporarily enabled (or re-enabled), please contact the Service Centre at 1-866-319-7450.

MCCorpaisCommonLineItem – (Level 2/3 Data)

MCCorpaisCommonLineItem will contain the entire required and optional data field for Level 2/3 data. MCCorpaisCommonLineItem data can be sent when the card has been identified in the transaction request as being a corporate card. This transaction supports multiple data types and combinations:


- Purchasing Card Data:
 - Corporate card common data with Line Item Details


MCLevel23 [DEPRECATED] – (Level 2/3 Data)

MCLevel23 will contain all the required and optional data fields for Level 2/3 data. MCLevel23 data can be sent when the card has been identified in the transaction request as being a corporate card. Please use MCCorpaisCommonLineItem instead of MCLevel23 to submit any Level 2/3 Addendum data.

10.3.2 Level 2/3 Transaction Flow for MasterCard

Pre-authorization/Completion Transaction Flow

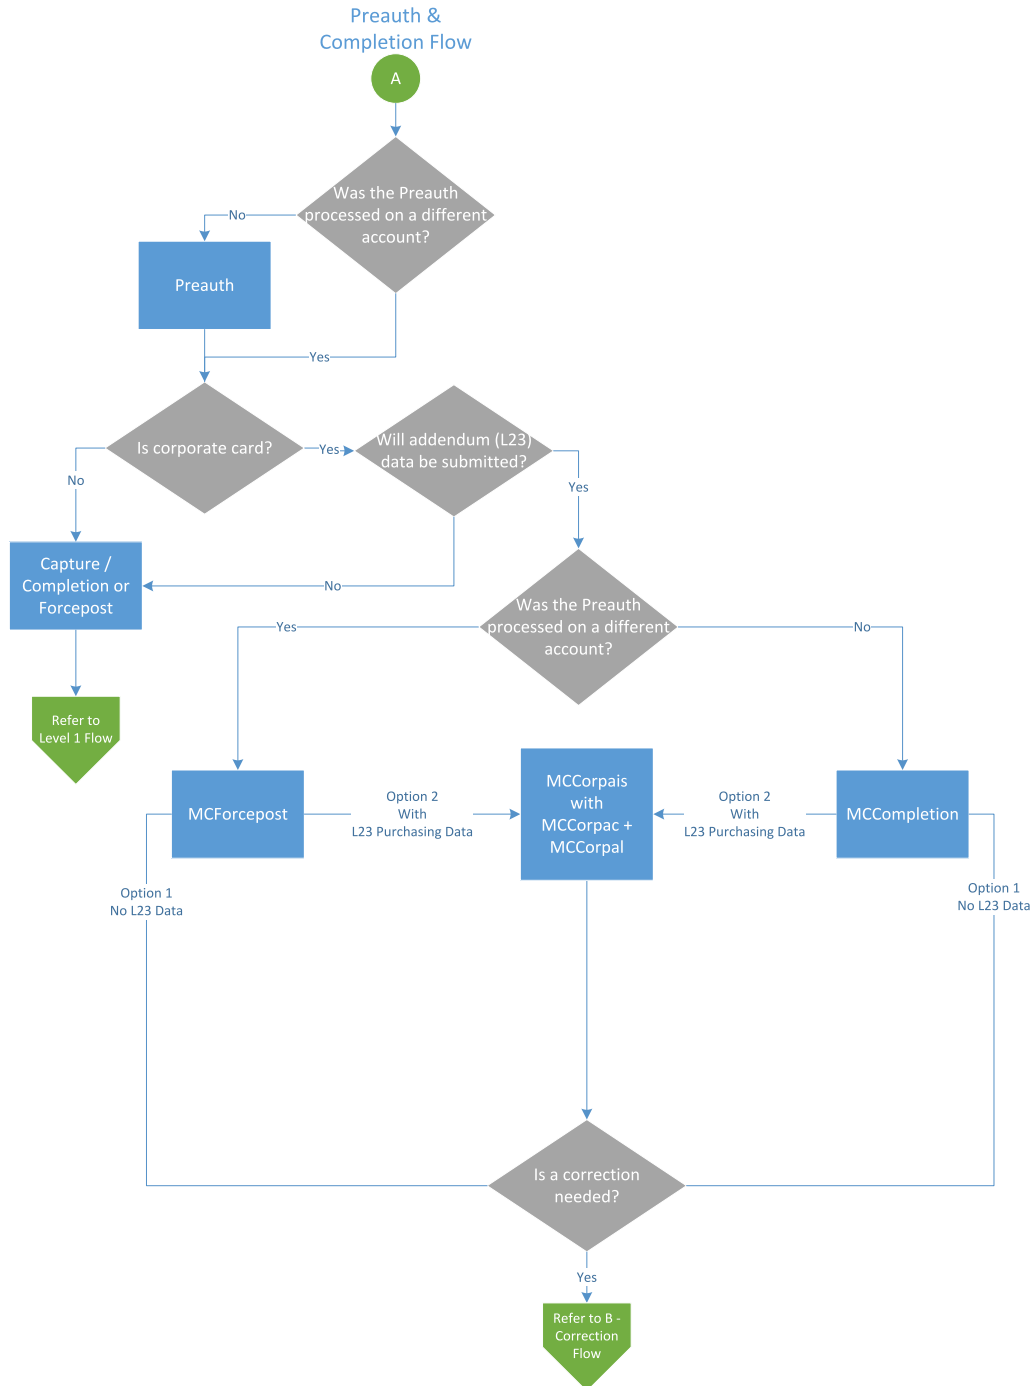

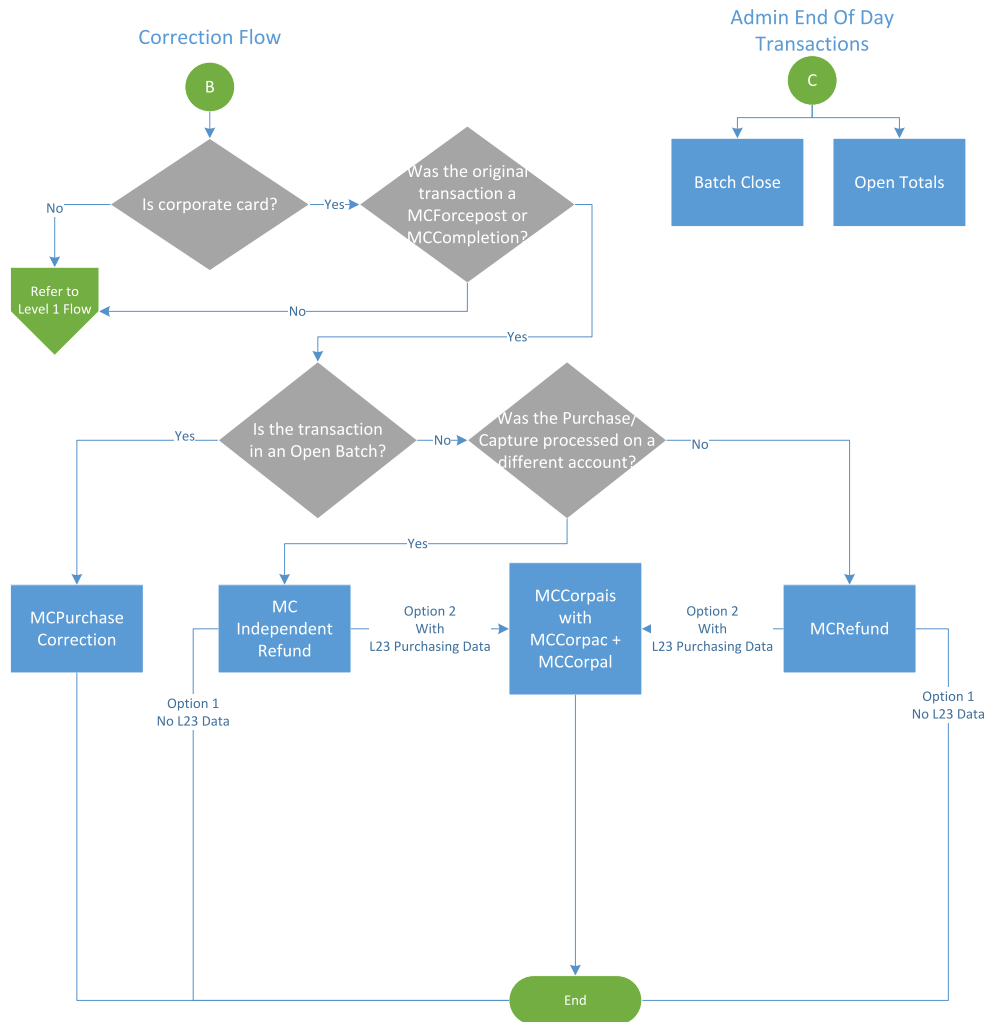Purchase Correction Transaction Flow

10.3.3 MC Completion

The MasterCard Completion transaction is used to secure the funds locked by a pre-authorization transaction. When sending a capture request you will need two pieces of information from the original pre-authorization—the `order_id` and the `txn_number` from the returned response.

MC Completion transaction object definition

```
McCompletion mcCompletion = new McCompletion();
```

HttpPostRequest object for MC Completion transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

```
mpgReq.setTransaction(mcCompletion);
```

MC Completion transaction object values

Table 1: MC Completion transaction object mandatory values

| Value | Type | Limits | Set Method |
|----------------------|--------|-----------------------------|---|
| Order ID | String | 50-character alpha-numeric | <code>mcCompletion.setOrderId(order_id);</code> |
| Amount | String | 9-character decimal | <code>mcCompletion.setAmount(amount);</code> |
| Transaction number | String | 255-character alpha-numeric | <code>mcCompletion.setTxnNumber(txn_number);</code> |
| E-commerce indicator | String | 1-character alpha-numeric | <code>mcCompletion.setCryptType(crypt_type);</code> |

Sample MC Completion

```
import JavaAPI.*;
import JavaAPI.XMLTable.*;
public class TestMCCompletion {
    public static void main(String args[])
    {
        String host = args[0];
        String store_id = args[1];
        String api_token = args[2];
        String order_id = args[3];
        String amount = args[4];
        String txn_number = args[5];
        String crypt = args[6];
        String merchant_ref_no = args[7];
        String customer_code = args[8];
        String invoice_number = args[9];
```

Sample MC Completion

```

MCCompletion completion = new MCCompletion (order_id, amount, txn_number, crypt,merchant_ref_no,
    customer_code,invoice_number);
HttpPostRequest mpgReq = new HttpPostRequest(host, store_id, api_token, completion);
try
{
    Receipt receipt = mpgReq.getReceipt();
    System.out.println("CardType = " + receipt.getCardType());
    System.out.println("TransAmount = " + receipt.getTransAmount());
    System.out.println("TxnNumber = " + receipt.getTxnNumber());
    System.out.println("ReceiptId = " + receipt.getReceiptId());
    System.out.println("TransType = " + receipt.getTransType());
    System.out.println("ReferenceNum = " + receipt.getReferenceNum());
    System.out.println("ResponseCode = " + receipt.getResponseCode());
    System.out.println("ISO = " + receipt.getISO());
    System.out.println("BankTotals = " + receipt.getBankTotals());
    System.out.println("Message = " + receipt.getMessage());
    System.out.println("AuthCode = " + receipt.getAuthCode());
    System.out.println("Complete = " + receipt.getComplete());
    System.out.println("TransDate = " + receipt.getTransDate());
    System.out.println("TransTime = " + receipt.getTransTime());
    System.out.println("Ticket = " + receipt.getTicket());
    System.out.println("TimedOut = " + receipt.getTimedOut());
    System.out.println("ITD Response = " + receipt.getITDResponse());
    System.out.println("IsVisaDebit = " + receipt.getIsVisaDebit());
}
catch (Exception e)
{
    e.printStackTrace();
}
}
}

```

10.3.4 MC Force Post

MasterCard Force Post transaction is used to secure the funds locked by a pre-authorization transaction performed over IVR or equivalent terminal. When sending a force post request, you will need order_id, amount, pan (card number), expiry date, crypt type and the authorization code received in the pre-authorization response.

MC Force Post transaction object definition

```
McForcePost mcforcepost= new McForcePost();
```

HttpPostRequest object for MC Force Post transaction

```

HttpPostRequest mpgReq = new HttpPostRequest();

mpgReq.setTransaction(mcforcepost);

```

MC Force Post transaction object values**Table 1: MC Force Post transaction object mandatory values**

| Value | Type | Limits | Set Method |
|----------------------|--------|--|--|
| Order ID | String | 50-character alpha-numeric | <code>mcforcepost.setOrderId(order_id);</code> |
| Amount | String | 9-character decimal | <code>mcforcepost.setAmount(amount);</code> |
| Credit card number | String | 20-character alpha-numeric | <code>mcforcepost.setPan(pan);</code> |
| Expiry date | String | 4-character alpha-numeric (YYMM format) | <code>mcforcepost.setExpDate(exp-date);</code> |
| Authorization code | String | 8-character alpha-numeric | <code>mcforcepost.setAuthCode(auth_code);</code> |
| E-commerce indicator | String | 1-character alpha-numeric | <code>mcforcepost.setCryptType(crypt_type);</code> |

Table 2: MC Force Post transaction object optional values

| Value | Type | Limits | Set Method |
|-------------|--------|----------------------------|---|
| Customer ID | String | 50-character alpha-numeric | <code>mcforcepost.setCustId(custid);</code> |

Sample MC Force Post

```
import JavaAPI.*;
public class TestMCForcePost {
    public static void main(String args[])
    {
        String host = args[0];
        String store_id = args[1];
        String api_token = args[2];
        String order_id = args[3];
        String amount = args[4];
        String pan = args[5];
        String expdate = args[6];
        String authCode = args[7];
        String merchant_ref_no = args[8];
        String customer_code = args[9];
        String invoice_number = args[10];
    }
}
```

Sample MC Force Post

```
String crypt_type = args[11];
MCForcePost mcforcrcpost = new MCForcePost (order_id, "Cust_id",amount, pan, expdate,authCode,
    merchant_ref_no,customer_code,invoice_number,crypt_type);
HttpPostRequest mpgReq = new HttpPostRequest(host, store_id, api_token, mcforcrcpost);
try
{
    Receipt receipt = mpgReq.getReceipt();
    System.out.println("CardType = " + receipt.getCardType());
    System.out.println("TransAmount = " + receipt.getTransAmount());
    System.out.println("TxnNumber = " + receipt.getTxnNumber());
    System.out.println("ReceiptId = " + receipt.getReceiptId());
    System.out.println("TransType = " + receipt.getTransType());
    System.out.println("ReferenceNum = " + receipt.getReferenceNum());
    System.out.println("ResponseCode = " + receipt.getResponseCode());
    System.out.println("ISO = " + receipt.getISO());
    System.out.println("BankTotals = " + receipt.getBankTotals());
    System.out.println("Message = " + receipt.getMessage());
    System.out.println("AuthCode = " + receipt.getAuthCode());
    System.out.println("Complete = " + receipt.getComplete());
    System.out.println("TransDate = " + receipt.getTransDate());
    System.out.println("TransTime = " + receipt.getTransTime());
    System.out.println("Ticket = " + receipt.getTicket());
    System.out.println("TimedOut = " + receipt.getTimedOut());
    System.out.println("ITD Response = " + receipt.getITDResponse());
    System.out.println("IsVisaDebit = " + receipt.getIsVisaDebit());
}
catch (Exception e)
{
    e.printStackTrace();
}
}
```

10.3.5 MC Purchase Correction

The MasterCard Purchase Correction (void) transaction is used to cancel a transaction that was performed in the current batch. No amount is required because a void is always for 100% of the original transaction. The only transaction that can be voided is completion. To send a void, the Order ID and Transaction Number from the MC Completion or MC Force Post are required.

MC Purchase Correction transaction object definition

```
McPurchaseCorrection mcpurchasecorrection = new McPurchaseCorrection();
```

HttpPostRequest object for MC Purchase Correction transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

```
mpgReq.setTransaction(mcpurchasecorrection);
```

MC Purchase Correction transaction object values**Table 1: MC Purchase Correction transaction object mandatory values**

| Value | Type | Limits | Set Method |
|----------------------|--------|-----------------------------|--|
| Order ID | String | 50-character alpha-numeric | <code>mcpurchasecorrection .setOrderId(order_id);</code> |
| Transaction number | String | 255-character alpha-numeric | <code>mcpurchasecorrection .setTxnNumber(txn_number);</code> |
| E-commerce indicator | String | 1-character alpha-numeric | <code>mcpurchasecorrection .setCryptType(crypt_type);</code> |

Sample MC Purchase Correction

```
import JavaAPI.*;
public class TestMCPurchaseCorrection {
public static void main(String args[])
{
String host = args[0];
String store_id = args[1];
String api_token = args[2];
String order_id = args[3];
String txn_number = args[4];
String crypt = args[5];
MCPurchaseCorrection pc = new MCPurchaseCorrection(order_id, txn_number, crypt);
HttpPostRequest mpgReq = new HttpPostRequest(host, store_id, api_token, pc);
try
{
Receipt receipt = mpgReq.getReceipt();
System.out.println("CardType = " + receipt.getCardType());
System.out.println("TransAmount = " + receipt.getTransAmount());
System.out.println("TxnNumber = " + receipt.getTxnNumber());
System.out.println("ReceiptId = " + receipt.getReceiptId());
System.out.println("TransType = " + receipt.getTransType());
System.out.println("ReferenceNum = " + receipt.getReferenceNum());
System.out.println("ResponseCode = " + receipt.getResponseCode());
System.out.println("ISO = " + receipt.getISO());
System.out.println("BankTotals = " + receipt.getBankTotals());
System.out.println("Message = " + receipt.getMessage());
System.out.println("AuthCode = " + receipt.getAuthCode());
System.out.println("Complete = " + receipt.getComplete());
System.out.println("TransDate = " + receipt.getTransDate());
System.out.println("TransTime = " + receipt.getTransTime());
System.out.println("Ticket = " + receipt.getTicket());
System.out.println("TimedOut = " + receipt.getTimedOut());
System.out.println("IsVisaDebit = " + receipt.getIsVisaDebit());
}
catch (Exception e)
{
e.printStackTrace();
}
}
}
```

10.3.6 MC Refund

The MasterCard Refund will credit a specified amount to the cardholder's credit card. A refund can be sent up to the full value of the original capture. To send a refund you will require the Order ID and Transaction Number from the original MC Completion or MC Force Post.

MC Refund transaction object definition

```
McRefund mcRefund = new McRefund();
```

HttpPostRequest object for MC Refund transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

```
mpgReq.setTransaction(mcRefund);
```


MC Refund transaction object values**Table 1: MC Refund transaction object mandatory values**

| Value | Type | Limits | Set Method |
|----------------------|--------|-----------------------------|---|
| Order ID | String | 50-character alpha-numeric | <code>mcRefund.setOrderId(order_id);</code> |
| Amount | String | 9-character decimal | <code>mcRefund.setAmount(amount);</code> |
| Transaction number | String | 255-character alpha-numeric | <code>mcRefund.setTxnNumber(txn_number);</code> |
| E-commerce indicator | String | 1-character alpha-numeric | <code>mcRefund.setCryptType(crypt_type);</code> |

Sample MC Refund

```

import JavaAPI.*;
public class TestMCRefund {
public static void main(String args[])
{
String host = args[0];
String store_id = args[1];
String api_token = args[2];
String order_id = args[3];
String amount = args[4];
String txn_number = args[5];
String crypt = args[6];
String merchant_ref_no = args[7];
String customer_code = args[8];
String invoice_number = args[9];
MCRefund refund = new MCRefund (order_id, amount, txn_number, crypt,merchant_ref_no, customer_
code,invoice_number);
HttpPostRequest mpgReq = new HttpPostRequest(host, store_id, api_token, refund);
try
{
Receipt receipt = mpgReq.getReceipt();
System.out.println("CardType = " + receipt.getCardType());
System.out.println("TransAmount = " + receipt.getTransAmount());
System.out.println("TxnNumber = " + receipt.getTxnNumber());
System.out.println("ReceiptId = " + receipt.getReceiptId());
System.out.println("TransType = " + receipt.getTransType());
System.out.println("ReferenceNum = " + receipt.getReferenceNum());
System.out.println("ResponseCode = " + receipt.getResponseCode());
System.out.println("ISO = " + receipt.getISO());
System.out.println("BankTotals = " + receipt.getBankTotals());
System.out.println("Message = " + receipt.getMessage());
System.out.println("AuthCode = " + receipt.getAuthCode());
System.out.println("Complete = " + receipt.getComplete());
System.out.println("TransDate = " + receipt.getTransDate());
System.out.println("TransTime = " + receipt.getTransTime());
System.out.println("Ticket = " + receipt.getTicket());
System.out.println("TimedOut = " + receipt.getTimedOut());
}
}

```

Sample MC Refund

```
System.out.println("ITD Response = " + receipt.getITDResponse());
System.out.println("IsVisaDebit = " + receipt.getIsVisaDebit());
}
catch (Exception e)
{
    e.printStackTrace();
}
}
```

10.3.7 MC Independent Refund

The MasterCard Independent Refund will credit a specified amount to the cardholder's credit card. A refund can be sent up to the full value of the original capture. To send a refund you will require the order_id and txn_number from the original MC Completion or MC Force Post.

MC Independent Refund transaction object definition

```
McIndependentRefund mcindrefund = new McIndependentRefund();
```

HttpPostRequest object for MC Independent Refund transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

```
mpgReq.setTransaction(mcindrefund);
```

MC Independent Refund transaction object values

Table 1: MC Independent Refund transaction object mandatory values

| Value | Type | Limits | Set Method |
|----------------------|--------|--|---------------------------------------|
| Order ID | String | 50-character alpha-numeric | mcindrefund.setOrderId(order_id); |
| Amount | String | 9-character decimal | mcindrefund.setAmount(amount); |
| E-commerce indicator | String | 1-character alpha-numeric | mcindrefund.setCryptType(crypt_type); |
| Credit card number | String | 20-character alpha-numeric | mcindrefund.setPan(pan); |
| Expiry date | String | 4-character alpha-numeric (YYMM format) | mcindrefund.setExpDate(exp-date); |

Table 2: MC Independent Refund transaction object optional values

| Value | Type | Limits | Set Method |
|-------------|--------|----------------------------|--------------------------------|
| Customer ID | String | 50-character alpha-numeric | mcindrefund.setCustId(custid); |

Sample MC Independent Refund

```

import JavaAPI.*;
public class TestMCIndependentRefund {
    public static void main(String args[])
    {
        String host = args[0];
        String store_id = args[1];
        String api_token = args[2];
        String order_id = args[3];
        String amount = args[4];
        String pan = args[5];
        String expdate = args[6];
        String cust_id = args[7];
        String merchant_ref_no = args[8];
        String customer_code = args[9];
        String invoice_number = args[10];
        String crypt_type = args[11];
        MCIndependentRefund indrefund = new MCIndependentRefund (order_id, cust_id, amount, pan, expdate,
            merchant_ref_no, customer_code, invoice_number, crypt_type);
        HttpsPostRequest mpgReq = new HttpsPostRequest(host, store_id, api_token, indrefund);
        try
        {
            Receipt receipt = mpgReq.getReceipt();
            System.out.println("CardType = " + receipt.getCardType());
            System.out.println("TransAmount = " + receipt.getTransAmount());
            System.out.println("TxnNumber = " + receipt.getTxnNumber());
            System.out.println("ReceiptId = " + receipt.getReceiptId());
            System.out.println("TransType = " + receipt.getTransType());
            System.out.println("ReferenceNum = " + receipt.getReferenceNum());
            System.out.println("ResponseCode = " + receipt.getResponseCode());
            System.out.println("ISO = " + receipt.getISO());
            System.out.println("BankTotals = " + receipt.getBankTotals());
            System.out.println("Message = " + receipt.getMessage());
            System.out.println("AuthCode = " + receipt.getAuthCode());
            System.out.println("Complete = " + receipt.getComplete());
            System.out.println("TransDate = " + receipt.getTransDate());
            System.out.println("TransTime = " + receipt.getTransTime());
            System.out.println("Ticket = " + receipt.getTicket());
            System.out.println("TimedOut = " + receipt.getTimedOut());
            System.out.println("ITD Response = " + receipt.getITDResponse());
            System.out.println("IsVisaDebit = " + receipt.getIsVisaDebit());
        }
        catch (Exception e)
        {
            e.printStackTrace();
        }
    }
}

```

10.3.8 MC Corpais - Corporate Card Common Data with Line Item Details

This transaction example includes the following elements for Level 2 and 3 purchasing card corporate card data processing:

- Corporate Card Common Data (MCCorpac)
 - only 1 set of MCCorpac fields can be submitted
 - this data set includes data elements that apply to the overall order, e.g., the total overall taxes
- Line Item Details (MCCorpai)
 - 1-998 counts of MCCorpai line items can be submitted
 - This data set includes the details about each individual item or service purchased

The MC Corpais request must be preceded by a financial transaction (MC Completion, MC Force Post, MC Refund, MC Independent Refund) and the Corporate Card flag must be set to “true” in the Preauthorization response. MCCorpais request will need to contain the Order ID of the financial transaction as well the Transaction Number.

For descriptions of the Level 2/3 fields, please see Definition of Request Fields for Level 2/3 - MasterCard (page 354).

MC Corpais transaction object definition

```
McCorpais mcCorpais = new McCorpais();
```

HttpPostRequest object for MC Corpais transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

```
mpgReq.setTransaction(mcCorpais);
```

MC Corpais transaction object values

Table 1: MC Corpais transaction object mandatory values

| Value | Type | Limits | Set Method |
|--------------------|--------|-----------------------------|------------|
| Order ID | String | 50-character alpha-numeric | |
| Transaction number | String | 255-character alpha-numeric | |
| MCCorpac | Object | n/a | |
| MC Corpai | Object | n/a | |

Table 2: Corporate Card Common Data - Level 2 Request Fields - MCCorpac

| Req* | Value | Limits | Set Method | Description |
|------|------------------------|--|---|---|
| N | Austin-Tetra Number | 15-character alphanumeric | .SetAustinTetraNumber (austin_tetra_number); This is a snippet | The Austin-Tetra Number assigned to the card acceptor |
| N | NAICS Code | 15-character alphanumeric | | North American Industry Classification System (NAICS) code assigned to the card acceptor |
| N | Customer Code | 25-character alphanumeric | | A control number, such as purchase order number, project number, department allocation number or name that the purchaser supplied the merchant Left-justified; may be spaces |
| N | Unique Invoice Number | 17-character alphanumeric | | Unique number associated with the individual transaction provided by the merchant |
| N | Commodity Code | 15-character alphanumeric | | Code assigned by the merchant that best categorizes the item (s) being purchased |
| N | Order Date | 6-character numeric YYMMDD format | | The date the item was ordered NOTE: If present, must contain a valid date |
| N | Corporation VAT Number | 20-character alphanumeric | | Contains a corporation's value added tax (VAT) number |
| N | Customer VAT Number | 20-character alphanumeric | | Contains the VAT number for the customer / cardholder used to identify the customer when purchasing goods and services from the merchant |
| N | Freight Amount | 12-character decimal | | The freight on the total purchase Must have 2 decimals |

| Req* | Value | Limits | Set Method | Description |
|------|-----------------------------------|---|------------|--|
| | | | | Minimum = 0.00 Maximum = 999999.99 |
| N | Duty Amount | 12-character decimal | | The duty on the total purchase Must have 2 decimals Minimum = 0.00 Maximum = 999999.99 |
| N | Destination State / Province Code | 3-character alphanumeric | | State or Province of the country where the goods will be delivered Left justified with trailing spaces EXAMPLE: ONT = Ontario |
| N | Destination Country Code | 3-character alphanumeric ISO 3166-1 alpha-3 format | | The country code where goods will be delivered Left justified with trailing spaces ISO 3166-1 alpha-3 format EXAMPLE: CAN = Canada |
| N | Ship From Postal Code | 10-character alphanumeric ANA NAN format | | The postal code or zip code from which items were shipped Full alpha postal code - Valid ANA<space>NAN format |
| N | Destination Postal Code | 10-character alphanumeric | | The postal code or zip code where goods will be delivered Full alpha postal code - Valid ANA<space>NAN format if shipping to an address within Canada |
| N | Authorized Contact Name | 36-character alphanumeric | | Name of an individual or company contacted for company authorized purchases |

| Req* | Value | Limits | Set Method | Description |
|------|-------------------------------|---------------------------|------------|---|
| N | Authorized Contact Phone | 17-character alphanumeric | | Phone number of an individual or company contacted for company authorized purchases |
| N | Additional Card Acceptor Data | 40-character alphanumeric | | Information pertaining to the card acceptor |
| N | Card Acceptor Type | 8-character alphanumeric | | <p>Various classifications of business ownership characteristics</p> <p>Each character represents a different component.</p> <p>1st character represents 'Business Type' and contains a code to identify the specific classification or type of business:</p> <ol style="list-style-type: none"> 1. Corporation 2. Not known 3. Individual/Sole Proprietorship 4. Partnership 5. Association/Estate/Trust 6. Tax Exempt Organizations (501C) 7. International Organization 8. Limited Liability Company (LLC) 9. Government Agency <p>2nd character represents 'Business Owner Type'. Contains a code to identify specific characteristics about the business owner.</p> <ol style="list-style-type: none"> 1 - No application classification 2 - Female business owner 3 - Physically handicapped female busi- |

| Req* | Value | Limits | Set Method | Description |
|------|-------|--------|------------|---|
| | | | | <p>ness owner 4 - Physically handicapped male business owner 0 - Unknown</p> <p>3rd character represents 'Business Certification Type'. Contains a code to identify specific characteristics about the business certification type, such as small business, disadvantaged, or other certification type:</p> <p>1 - Not certified 2 - Small Business Administration (SBA) certification small business 3 - SBA certification as small disadvantaged business 4 - Other government or agency-recognized certification (such as Minority Supplier Development Council) 5 - Self-certified small business 6 - SBA certification as small and other government or agency-recognized certification 7 - SBA certification as small disadvantaged business and other government or agency-recognized certification 8 - Other government or agency-recognized certification and self-certified small business A - SBA certification as 8 (a)</p> |

| Req* | Value | Limits | Set Method | Description |
|------|-------|--------|------------|---|
| | | | | <p>B - Self-certified small disadvantaged business (SDB) C - SBA certification as HUBZone 0 - Unknown</p> <p>4th character represents 'Business Racial/Ethnic Type'. Contains a code identifying the racial or ethnic type of the majority owner of the business.</p> <p>1 - African American 2 - Asian Pacific American 3 - Subcontinent Asian American 4 - Hispanic American 5 - Native American Indian 6 - Native Hawaiian 7 - Native Alaskan 8 - Caucasian 9 - Other 0 - Unknown</p> <p>5th character represents 'Business Type Provided Code'</p> <p>Y - Business type is provided. N - Business type was not provided. R - Card acceptor refused to provide business type</p> <p>6th character represents 'Business Owner Type Provided Code'</p> <p>Y - Business owner type is provided. N - Business owner type</p> |

| Req* | Value | Limits | Set Method | Description |
|------|--------------------------------|---------------------------|------------|---|
| | | | | <p>was not provided. R - Card acceptor refused to provide business type</p> <p>7th character represents 'Business Certification Type Provided Code'</p> <p>Y - Business certification type is provided. N - Business certification type was not provided. R - Card acceptor refused to provide business type</p> <p>8th character represents 'Business Racial/Ethnic Type'</p> <p>Y - Business racial/ethnic type is provided. N - Business racial/ethnic type was not provided. R - Card acceptor refused to provide business racial/ethnic type</p> |
| N | Card Acceptor Tax ID | 20-character alphanumeric | | US federal tax ID number or value-added tax (VAT) ID |
| N | Card Acceptor Reference Number | 25-character alphanumeric | | Code that facilitates card acceptor/corporation communication and record keeping |
| N | Card Acceptor VAT Number | 20-character alphanumeric | | <p>Value added tax (VAT) number for the card acceptor location</p> <p>Used to identify the card acceptor when collecting and reporting taxes</p> |

| Req* | Value | Limits | Set Method | Description |
|------|-------|----------------|------------|---|
| C | Tax | Up to 6 arrays | | Can have up to 6 arrays containing different tax details If you use this variable, you must fill in all the fields of tax array mentioned below. |

*Y = Required, N = Optional, C = Conditional

Table 3: Line Item Details - Level 3 Request Fields - MCCorpal

| Req* | Value | Limits | Set Method | Description |
|------|-------|--------|------------|-------------|
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

*Y = Required, N = Optional, C = Conditional

Sample MC Corpais - Corporate Card Common Data with Line Item Details

```
using System;
namespace Moneris
{
    public class TestMCCorpaisCommonLineItem
    {
        public static void Main(string[] args)
        {
            string host = "esqa.moneris.com";
            string store_id = "moneris";
            string api_token = "hurgle";
            string order_id;
            string txn_number;
```

Sample MC Corps - Corporate Card Common Data with Line Item Details

```

Console.Write ("Please enter an order ID: ");
order_id = Console.ReadLine();
Console.Write ("Please enter a txn number: ");
txn_number = Console.ReadLine();

try
{
/*****Passenger Transport Detail - General Ticket Information *****/

//you can only set values to fields which you have valid value
//common data first
MCCorpcorp corpac=new MCCorpcorp();
corpac.CustomerCode="CustomerCode123";
corpac.CardAcceptorTaxId="UrTaxId";//Merchant tax id which is mandatory
corpac.CorporationVatNumber="cvn123";
corpac.FreightAmount="1.23";
corpac.DutyAmount="2.34";
corpac.ShipToPosCode="M1R 1W5";
corpac.OrderDate="141211";
corpac.CustomerVatNumber="customervn231";
corpac.UniqueInvoiceNumber="uin567";
corpac.AuthorizedContactName="John Walker";
Tax[] taxc = new Tax[2];
taxc[0] = new Tax("1.19", "6.0", "GST", "gst1298", "Y");
taxc[1] = new Tax("1.29", "7.0", "PST", "pst1298", "N");
corpac.Tax=taxc;
//line item detail
MCCorpcorp[] corpal = new MCCorpcorp[2];
corpal[0] = new MCCorpcorp();
corpal[0].CustomerCode="customer code";
corpal[0].LineItemDate="150114";
corpal[0].ShipDate="150120";
corpal[0].OrderDate="150114";
corpal[0].ProductCode="pc11";
corpal[0].ItemDescription="Good item";
corpal[0].ItemQuantity="4";
corpal[0].UnitCost="1.25";
corpal[0].ItemUnitMeasure="EA";
corpal[0].ExtItemAmount="5.00";
corpal[0].DiscountAmount="1.00";
corpal[0].CommodityCode="cCode11";
Tax[] taxl = new Tax[1];
taxl[0] = new Tax("0.52", "13.0", "HST", "hst1298", "Y");
corpal[0].Tax=taxl;
corpal[1] = new MCCorpcorp();
corpal[1].CustomerCode="customer code2";
corpal[1].LineItemDate="150114";
corpal[1].ShipDate="150122";
corpal[1].OrderDate="150114";
corpal[1].ProductCode="pc12";
corpal[1].ItemDescription="Better item";
corpal[1].ItemQuantity="5";
corpal[1].UnitCost="10.00";
corpal[1].ItemUnitMeasure="EA";
corpal[1].ExtItemAmount="50.00";
corpal[1].CommodityCode="cCode12";

/***** Request *****/

```

Sample MC Corpais - Corporate Card Common Data with Line Item Details

```

MCCorpais data = new MCCorpais();
data.OrderId=order_id;
data.TxnNumber=txn_number;
data.Corpac=corpac;
data.Corpai=corpai;

L23HttpPostRequest request=new L23HttpPostRequest(host, store_id, api_token, data);

/***** Response *****/

Receipt myReceipt=request.GetReceipt();

Console.WriteLine("CardType = " + myReceipt.GetCardType());
Console.WriteLine("TransAmount = " + myReceipt.GetTransAmount());
Console.WriteLine("TxnNumber = " + myReceipt.GetTxnNumber());
Console.WriteLine("ReceiptId = " + myReceipt.GetReceiptId());
Console.WriteLine("TransType = " + myReceipt.GetTransType());
Console.WriteLine("ReferenceNum = " + myReceipt.GetReferenceNum());
Console.WriteLine("ResponseCode = " + myReceipt.GetResponseCode());
Console.WriteLine("ISO = " + myReceipt.GetISO());
Console.WriteLine("BankTotals = " + myReceipt.GetBankTotals());
Console.WriteLine("Message = " + myReceipt.GetMessage());
Console.WriteLine("AuthCode = " + myReceipt.GetAuthCode());
Console.WriteLine("Complete = " + myReceipt.GetComplete());
Console.WriteLine("TransDate = " + myReceipt.GetTransDate());
Console.WriteLine("TransTime = " + myReceipt.GetTransTime());
Console.WriteLine("Ticket = " + myReceipt.GetTicket());
Console.WriteLine("TimedOut = " + myReceipt.GetTimedOut());
Console.WriteLine("CorporateCard = " + myReceipt.GetCorporateCard());
Console.WriteLine("MessageId = " + myReceipt.GetMessageId());
}
catch (Exception e)
{
    Console.WriteLine("e.StackTrace:"+e.StackTrace+",e.Message:"+e.Message);
}
}
}
}

```

10.4 Level 2/3 American Express Transactions

- 10.4.1 Level 2/3 Transaction Types for Amex
- 10.4.2 Level 2/3 Transaction Flow for Amex
- 10.4.3 AX Completion10.4.3 AX Completion
- 10.4.4 AX Force Post
- 10.4.5 AX Purchase Correction
- 10.4.6 AX Refund
- 10.4.7 AX Independent Refund

10.4.1 Level 2/3 Transaction Types for Amex

This transaction set includes a suite of corporate card financial transactions as well as a transaction that allows for the passing of Level 2/3 data. Please ensure American Express Level 2/3 processing support is enabled on your merchant account. Batch Close, Open Totals and Preauth are identical to the transactions outlined in the section Basic Transaction Set (page 10).

- When the Preauth response contains CorporateCard equal to true then you can submit the AX transactions.
- If CorporateCard is false then the card does not support Level 2/3 data and non Level 2/3 transaction are to be used. If the card is not a corporate card, please refer to section 4 for the appropriate non-corporate card transactions.

NOTE: This transaction set is intended for transactions where Corporate Card is true and Level 2/3 data will be submitted. If the credit card is found to be a corporate card but you do not wish to send any Level 2/3 data then you may submit AX transactions using the transaction set outlined in the section Basic Transaction Set (page 10).

Preauth – (authorization / preauthorization)

The preauth verifies and locks funds on the customer's credit card. The funds are locked for a specified amount of time, based on the card issuer. To retrieve the funds from a preauth so that they may be settled in the merchant account a capture must be performed. CorporateCard will return as true if the card supports Level 2/3.

AXCompletion – (Capture/Preauth Completion)

Once a Preauth is obtained the funds that are locked need to be retrieved from the customer's credit card. The capture retrieves the locked funds and readies them for settlement in to the merchant account. Prior to performing an AXCompletion a Preauth must be performed.

AXForcePost – (Force Capture/Preauth Completion)

This transaction is an alternative to AXCompletion to obtain the funds locked on Preauth obtained from IVR or equivalent terminal. The capture retrieves the locked funds and readies them for settlement in to the merchant account.

AXPurchaseCorrection – (Void, Correction)

AXCompletion and AXForcepost can be voided the same day* that they occur. A void must be for the full amount of the transaction and will remove any record of it from the cardholder statement. * An AXPurchaseCorrection can be performed against a transaction as long as the batch that contains the original transaction remains open. When using the automated closing feature, the batch close occurs daily between 10 – 11 pm EST.


AXRefund – (Credit)

A refund can be performed against an AXCompletion and AXForcepost to refund any part, or all of the transaction.

AXIndependentRefund – (Credit)

A refund can be performed against a purchase or a capture to refund any part, or all of the transaction. Independent refund is used when the originating transaction was not performed through Moneris Gateway. Please note, the Independent Refund transaction may or may not be supported on your account. If you receive a transaction not allowed error when attempting an independent refund, it may mean the transaction is not supported on your account. If you wish to have the Independent Refund transaction type temporarily enabled (or re-enabled), please contact the Service Centre at 1-866-319-7450.

10.4.2 Level 2/3 Transaction Flow for Amex

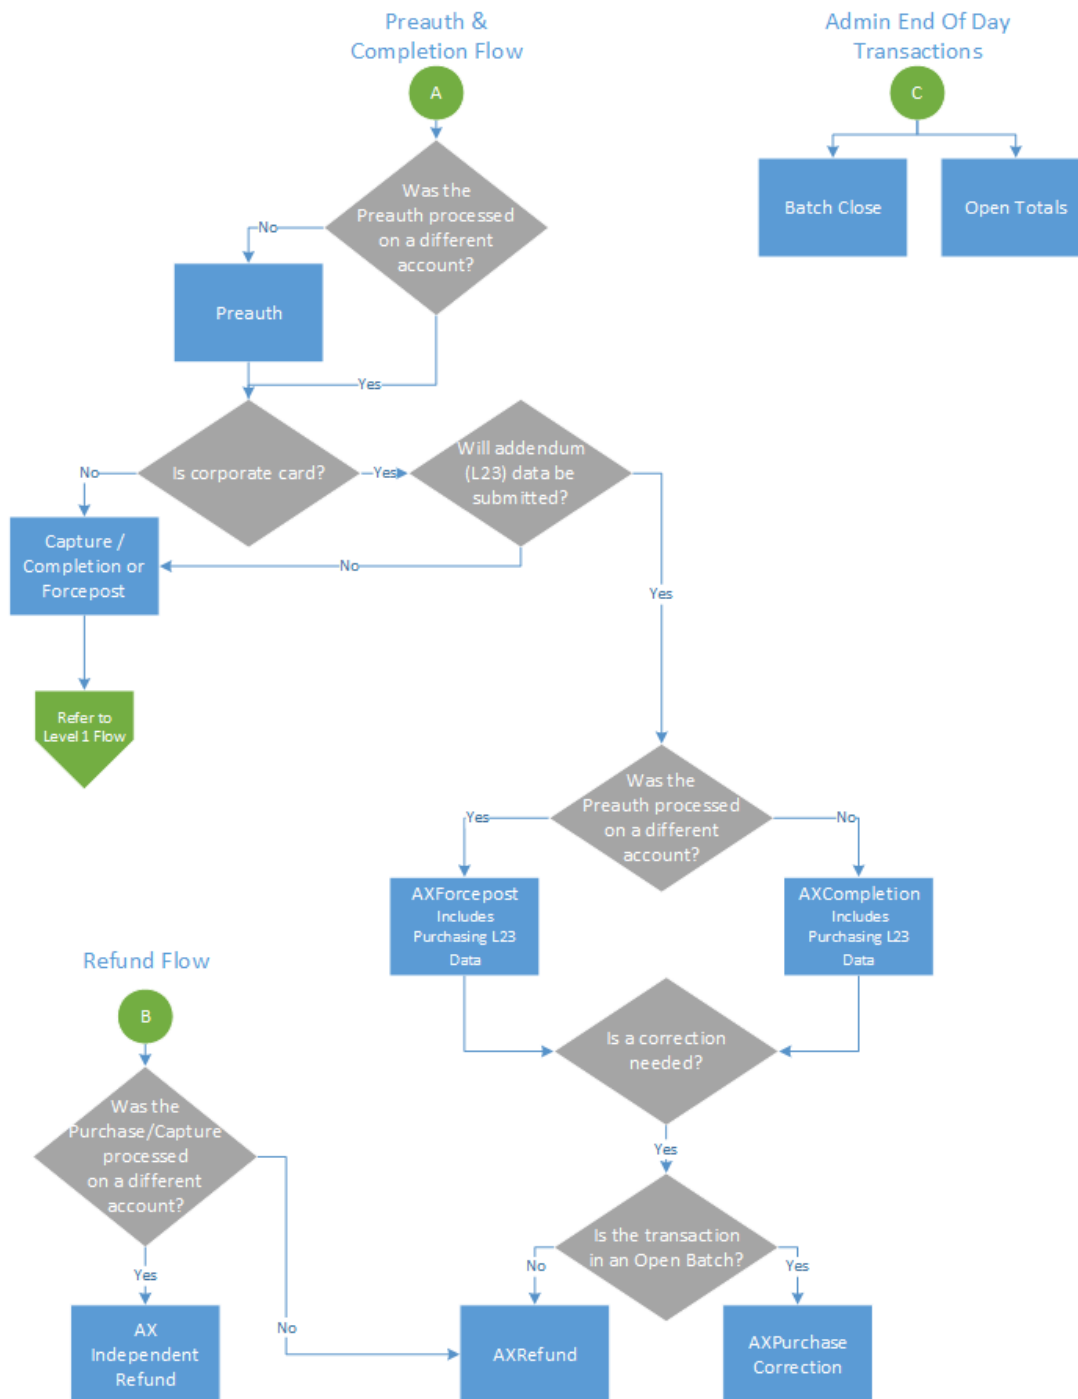

10.4.3 AX Completion

The American Express Completion transaction is used to secure the funds locked by a preauth transaction. When sending a capture request you will need two pieces of information from the original

preauth – the order_id and the txn_number from the returned response.

AX Completion transaction object definition

```
AxCompletion axCompletion = new AxCompletion()
```

HttpPostRequest object for AX Completion

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

```
mpgReq.setTransaction(axCompletion);
```

AX Completion transaction object values

Table 1: AX Completion transaction object mandatory values

| Value | Type | Limits | Set Method |
|----------------------|--------|-----------------------------|--|
| Order ID | String | 50-character alpha-numeric | axCompletion.setOrderId(order_id); |
| Amount | String | 9-character decimal | axCompletion.setAmount(amount); |
| Transaction number | String | 255-character alpha-numeric | axCompletion.setTxnNumber(txn_number); |
| E-commerce indicator | String | 1-character alpha-numeric | axCompletion.setCryptType(crypt_type); |
| Level 2/3 Data | Object | n/a | axCompletion.setAxLevel23(level23); |

Table 2: AX Completion transaction object optional values

| Value | Type | Limits | Set Method |
|-------------|--------|----------------------------|---------------------------------|
| Customer ID | String | 50-character alpha-numeric | axCompletion.setCustId(custid); |

Sample AX Completion

```
package Level23;
import JavaAPI.*;

public class TestAxCompletion
{
    public static void main(String[] args)
    {
        String store_id = "moneris";
```

Sample AX Completion

```

String api_token = "hurgle";
String processing_country_code = "CA";
boolean status_check = false;

String order_id="ord-210916-12:06:38";
String comp_amount="62.37";
String txn_number = "18924-0_11";
String crypt="7";

//Create Table 1 with details
String n101 = "R6"; //Entity ID Code
String n102 = "Retailing Inc. International"; //Name
String n301 = "919 Oriole Rd."; //Address Line 1
String n401 = "Toronto"; //City
String n402 = "On"; //State or Province
String n403 = "H1T6W3"; //Postal Code
String[] ref01 = {"4C", "CR"}; //Reference ID Qualifier
String[] ref02 = {"M5T3A5", "16802309004"}; //Reference ID
String big04 = "PO7758545"; //Purchase Order Number
String big05 = "RN0049858"; //Release Number
String big10 = "INV99870E"; //Invoice Number
AxRef axRef1 = new AxRef();
axRef1.setRef(ref01[0], ref02[0]);
axRef1.setRef(ref01[1], ref02[1]);
AxN1Loop n1Loop = new AxN1Loop();
n1Loop.setN1Loop(n101, n102, n301, n401, n402, n403, axRef1);
AxTable1 table1 = new AxTable1();
table1.setBig04(big04);
table1.setBig05(big05);
table1.setBig10(big10);
table1.setN1Loop(n1Loop);

//Create Table 2 with details
//the sum of the extended amount field (pam05) must equal the level 1 amount field
String[] it102 = {"1", "1", "1", "1", "1"}; //Line item quantity invoiced
String[] it103 = {"EA", "EA", "EA", "EA", "EA"}; //Line item unit or basis of measurement code
String[] it104 = {"10.00", "25.00", "8.62", "10.00", "-10.00"}; //Line item unit price
String[] it105 = {"", "", "", "", ""}; //Line item basis of unit price code

String[] it10618 = {"MG", "MG", "MG", "MG", "MG"}; //Product/Service ID qualifier
String[] it10719 = {"DJFR4", "JFJ49", "FEF33", "FEE43", "DISCOUNT"}; //Product/Service ID
(corresponds to it10618)

String[] txi01_GST = {"GS", "GS", "GS", "GS", "GS"}; //Tax type code
String[] txi02_GST = {"0.70", "1.75", "1.00", "0.80", "0.00"}; //Monetary amount
String[] txi03_GST = {"", "", "", "", ""}; //Percent
String[] txi06_GST = {"", "", "", "", ""}; //Tax exempt code

String[] txi01_PST = {"PG", "PG", "PG", "PG", "PG"}; //Tax type code
String[] txi02_PST = {"0.80", "2.00", "1.00", "0.80", "0.00"}; //Monetary amount
String[] txi03_PST = {"", "", "", "", ""}; //Percent
String[] txi06_PST = {"", "", "", "", ""}; //Tax exempt code
String[] pam05 = {"11.50", "28.75", "10.62", "11.50", "-10.00"}; //Extended line-item amount
String[] pid05 = {"Stapler", "Lamp", "Bottled Water", "Fountain Pen", "DISCOUNT"}; //Line item
description
AxIt106s[] it106s = {new AxIt106s(), new AxIt106s(), new AxIt106s(), new AxIt106s(), new AxIt106s
()};

it106s[0].setIt10618(it10618[0]);

```

Sample AX Completion

```

itl06s[0].setItl0719(itl0719[0]);

itl06s[1].setItl0618(itl0618[1]);
itl06s[1].setItl0719(itl0719[1]);

itl06s[2].setItl0618(itl0618[2]);
itl06s[2].setItl0719(itl0719[2]);

itl06s[3].setItl0618(itl0618[3]);
itl06s[3].setItl0719(itl0719[3]);

itl06s[4].setItl0618(itl0618[4]);
itl06s[4].setItl0719(itl0719[4]);
AxTxi[] txi = {new AxTxi(), new AxTxi(), new AxTxi(), new AxTxi(), new AxTxi()};
txi[0].setTxi(txi01_GST[0], txi02_GST[0], txi03_GST[0], txi06_GST[0]);
txi[0].setTxi(txi01_PST[0], txi02_PST[0], txi03_PST[0], txi06_PST[0]);
txi[1].setTxi(txi01_GST[1], txi02_GST[1], txi03_GST[1], txi06_GST[1]);
txi[1].setTxi(txi01_PST[1], txi02_PST[1], txi03_PST[1], txi06_PST[1]);
txi[2].setTxi(txi01_GST[2], txi02_GST[2], txi03_GST[2], txi06_GST[2]);
txi[2].setTxi(txi01_PST[2], txi02_PST[2], txi03_PST[2], txi06_PST[2]);
txi[3].setTxi(txi01_GST[3], txi02_GST[3], txi03_GST[3], txi06_GST[3]);
txi[3].setTxi(txi01_PST[3], txi02_PST[3], txi03_PST[3], txi06_PST[3]);
txi[4].setTxi(txi01_GST[4], txi02_GST[4], txi03_GST[4], txi06_GST[4]);
txi[4].setTxi(txi01_PST[4], txi02_PST[4], txi03_PST[4], txi06_PST[4]);
AxItlLoop itlLoop = new AxItlLoop();
itlLoop.setItlLoop(itl02[0], itl03[0], itl04[0], itl05[0], itl06s[0], txi[0], pam05[0], pid05[0]);
itlLoop.setItlLoop(itl02[1], itl03[1], itl04[1], itl05[1], itl06s[1], txi[1], pam05[1], pid05[1]);
itlLoop.setItlLoop(itl02[2], itl03[2], itl04[2], itl05[2], itl06s[2], txi[2], pam05[2], pid05[2]);
itlLoop.setItlLoop(itl02[3], itl03[3], itl04[3], itl05[3], itl06s[3], txi[3], pam05[3], pid05[3]);
itlLoop.setItlLoop(itl02[4], itl03[4], itl04[4], itl05[4], itl06s[4], txi[4], pam05[4], pid05[4]);
AxTable2 table2 = new AxTable2();
table2.setItlLoop(itlLoop);
//Create Table 3 with details
AxTxi taxTbl3 = new AxTxi();
taxTbl3.setTxi("GS", "4.25","", ""); //sum of GST taxes
taxTbl3.setTxi("PG", "4.60","", ""); //sum of PST taxes
taxTbl3.setTxi("TX", "8.85","", ""); //sum of all taxes
AxTable3 table3 = new AxTable3();
table3.setTxi(taxTbl3);

//Create and set Level23 Object
AxLevel23 level23 = new AxLevel23();
level23.setTable1(table1);
level23.setTable2(table2);
level23.setTable3(table3);
AxCompletion axCompletion = new AxCompletion();
axCompletion.setOrderId(order_id);
axCompletion.setCompAmount(comp_amount);
axCompletion.setTxnNumber(txn_number);
axCompletion.setCryptType(crypt);
axCompletion.setAxLevel23(level23);
HttpsPostRequest mpgReq = new HttpsPostRequest();
mpgReq.setProcCountryCode(processing_country_code);
mpgReq.setTestMode(true); //false or comment out this line for production transactions
mpgReq.setStoreId(store_id);
mpgReq.setApiToken(api_token);
mpgReq.setTransaction(axCompletion);
mpgReq.setStatusCheck(status_check);
mpgReq.send();

```

Sample AX Completion

```

try
{
    Receipt receipt = mpgReq.getReceipt();
    System.out.println("CardType = " + receipt.getCardType());
    System.out.println("TransAmount = " + receipt.getTransAmount());
    System.out.println("TxnNumber = " + receipt.getTxnNumber());
    System.out.println("ReceiptId = " + receipt.getReceiptId());
    System.out.println("TransType = " + receipt.getTransType());
    System.out.println("ReferenceNum = " + receipt.getReferenceNum());
    System.out.println("ResponseCode = " + receipt.getResponseCode());
    System.out.println("ISO = " + receipt.getISO());
    System.out.println("BankTotals = " + receipt.getBankTotals());
    System.out.println("Message = " + receipt.getMessage());
    System.out.println("AuthCode = " + receipt.getAuthCode());
    System.out.println("Complete = " + receipt.getComplete());
    System.out.println("TransDate = " + receipt.getTransDate());
    System.out.println("TransTime = " + receipt.getTransTime());
    System.out.println("Ticket = " + receipt.getTicket());
    System.out.println("TimedOut = " + receipt.getTimedOut());
    System.out.println("CavvResultCode = " + receipt.getCavvResultCode());
}
catch (Exception e)
{
    System.out.println(e);
}
}

new Txi(txi01_GST[1], txi02_GST[1], txi03_GST[1], txi06_GST[1]),
new Txi(txi01_GST[2], txi02_GST[2], txi03_GST[2], txi06_GST[2]),
new Txi(txi01_GST[3], txi02_GST[3], txi03_GST[3], txi06_GST[3]),
new Txi(txi01_GST[4], txi02_GST[4], txi03_GST[4], txi06_GST[4]));

Txi[] taxPST = {new Txi(txi01_PST[0], txi02_PST[0], txi03_PST[0], txi06_PST[0]),
new Txi(txi01_PST[1], txi02_PST[1], txi03_PST[1], txi06_PST[1]),
new Txi(txi01_PST[2], txi02_PST[2], txi03_PST[2], txi06_PST[2]),
new Txi(txi01_PST[3], txi02_PST[3], txi03_PST[3], txi06_PST[3]),
new Txi(txi01_PST[4], txi02_PST[4], txi03_PST[4], txi06_PST[4])};

String[] pam05 = {"11.50", "28.75", "10.62", "11.50", "-10.00"}; //Extended line-item amount
String[] pid05 = {"Stapler", "Lamp", "Bottled Water", "Fountain Pen", "DISCOUNT"}; //Line item
description
ArrayList<Itl06s[]> itQual = new ArrayList<Itl06s[]>(); //array list to hold product IDs and
Descriptions
ArrayList<Txi[]> level3Taxes = new ArrayList<Txi[]>(); //list to hold GST and PST objects for each
item

int numOfItems = pid05.length;

ItlLoop[] itemLoop = new ItlLoop[numOfItems]; //instantiate array of items object

//for (int item = 0; item < pid05.Length; item++)
for (int item = 0; item < numOfItems; item++)
{
    itQual.add(new Itl06s[]{new Itl06s(itl0618[item], itl0719[item])});
    level3Taxes.add(new Txi[]{taxGST[item], taxPST[item]}); //create tax object for item 1

    itemLoop[item] = new ItlLoop(itl02[item], itl03[item], itl04[item],
    itl05[item], itQual.get(item),
    level3Taxes.get(item), pam05[item], pid05[item]);
}

```

Sample AX Completion

```

}
Table2 tbl2 = new Table2 (itemLoop); //element of AXLevel23

/***** Table 3 - SUMMARY *****/

Txi[] taxTbl3 = new Txi[3];
taxTbl3[0] = new Txi("GS", "4.25", "", ""); //sum of GST taxes
taxTbl3[1] = new Txi("PG", "4.60", "", ""); //sum of PST taxes
taxTbl3[2] = new Txi("TX", "8.85", "", "");

Table3 tbl3 = new Table3(taxTbl3);

/***** REQUEST *****/

AXLevel23 level23 = new AXLevel23(tbl1, tbl2, tbl3);

AXCompletion completion = new AXCompletion (order_id, amount, txn_number, crypt, customer_
    code, invoice_number, level23);
HttpPostRequest mpgReq = new HttpPostRequest(host, store_id, api_token, completion);
try
{
    Receipt receipt = mpgReq.getReceipt();
    System.out.println("CardType = " + receipt.getCardType());
    System.out.println("TransAmount = " + receipt.getTransAmount());
    System.out.println("TxnNumber = " + receipt.getTxnNumber());
    System.out.println("ReceiptId = " + receipt.getReceiptId());
    System.out.println("TransType = " + receipt.getTransType());
    System.out.println("ReferenceNum = " + receipt.getReferenceNum());
    System.out.println("ResponseCode = " + receipt.getResponseCode());
    System.out.println("ISO = " + receipt.getISO());
    System.out.println("BankTotals = " + receipt.getBankTotals());
    System.out.println("Message = " + receipt.getMessage());
    System.out.println("AuthCode = " + receipt.getAuthCode());
    System.out.println("Complete = " + receipt.getComplete());
    System.out.println("TransDate = " + receipt.getTransDate());
    System.out.println("TransTime = " + receipt.getTransTime());
    System.out.println("Ticket = " + receipt.getTicket());
    System.out.println("TimedOut = " + receipt.getTimedOut());
    System.out.println("ITD Response = " + receipt.getITDResponse());
    System.out.println("IsVisaDebit = " + receipt.getIsVisaDebit());
}
catch (Exception e)
{
    e.printStackTrace();
}
}
}

```

10.4.4 AX Force Post

The American Express Force Post transaction is used to secure the funds locked by a pre-authorization transaction performed over IVR or equivalent terminal. When sending an AX Force Post request, you will need order_id, amount, pan (card number), expdate, auth_code and crypt.

AX Force Post transaction object definition

```
AxForcePost axForcePost = new AxForcePost();
```

HttpsPostRequest object for AX Force Post transaction

```
HttpsPostRequest mpgReq = new HttpsPostRequest();
mpgReq.setTransaction(axForcePost);
```

AX Force Post transaction object values**Table 1: AX Force Post transaction object mandatory values**

| Value | Type | Limits | Set Method |
|----------------------|--------|--|--|
| Order ID | String | 50-character alpha-numeric | <code>axForcePost.setOrderId(order_id);</code> |
| Amount | String | 9-character decimal | <code>axForcePost.setAmount(amount);</code> |
| Credit card number | String | 20-character alpha-numeric | <code>axForcePost.setPan(pan);</code> |
| Expiry date | String | 4-character alpha-numeric (YYMM format) | <code>axForcePost.setExpDate(exp-date);</code> |
| Authorization code | String | 8-character alpha-numeric | <code>axForcePost.setAuthCode(auth_code);</code> |
| E-commerce indicator | String | 1-character alpha-numeric | <code>axForcePost.setCryptType(crypt_type);</code> |
| Level 2/3 Data | Object | n/a | <code>axForcePost.setAxLevel23(level23);</code> |

Table 2: AX Force Post transaction object optional values

| Value | Type | Limits | Set Method |
|-------------|--------|----------------------------|---|
| Customer ID | String | 50-character alpha-numeric | <code>axForcePost.setCustId(custid);</code> |

Sample AX Force Post

```
package Level23;
import JavaAPI.*;

public class TestAxForcePost
{
```

Sample AX Force Post

```

public static void main(String[] args)
{
    String store_id = "moneris";
    String api_token = "hurgle";
    String processing_country_code = "CA";
    boolean status_check = false;

    java.util.Date createDate = new java.util.Date();
    String order_id="Test"+createDate.getTime();
    String cust_id="CUST13343";
    String amount="62.37";
    String pan="373269005095005";
    String expiry_date="2012"; //YYMM
    String auth_code="123456";
    String crypt="7";

    //Create Table 1 with details
    String n101 = "R6"; //Entity ID Code
    String n102 = "Retailing Inc. International"; //Name
    String n301 = "919 Oriole Rd."; //Address Line 1
    String n401 = "Toronto"; //City
    String n402 = "On"; //State or Province
    String n403 = "H1T6W3"; //Postal Code
    String[] ref01 = {"4C", "CR"}; //Reference ID Qualifier
    String[] ref02 = {"M5T3A5", "16802309004"}; //Reference ID
    String big04 = "PO7758545"; //Purchase Order Number
    String big05 = "RN0049858"; //Release Number
    String big10 = "INV99870E"; //Invoice Number
    AxRef axRef1 = new AxRef();
    axRef1.setRef(ref01[0], ref02[0]);
    axRef1.setRef(ref01[1], ref02[1]);
    AxNlLoop nlLoop = new AxNlLoop();
    nlLoop.setNlLoop(n101, n102, n301, n401, n402, n403, axRef1);
    AxTable1 table1 = new AxTable1();
    table1.setBig04(big04);
    table1.setBig05(big05);
    table1.setBig10(big10);
    table1.setNlLoop(nlLoop);

    //Create Table 2 with details
    //the sum of the extended amount field (pam05) must equal the level 1 amount field

    String[] it102 = {"1", "1", "1", "1", "1"}; //Line item quantity invoiced
    String[] it103 = {"EA", "EA", "EA", "EA", "EA"}; //Line item unit or basis of measurement code
    String[] it104 = {"10.00", "25.00", "8.62", "10.00", "-10.00"}; //Line item unit price
    String[] it105 = {"", "", "", "", ""}; //Line item basis of unit price code

    String[] it10618 = {"MG", "MG", "MG", "MG", "MG"}; //Product/Service ID qualifier
    String[] it10719 = {"DJFR4", "JFJ49", "FEF33", "FEE43", "DISCOUNT"}; //Product/Service ID
    (corresponds to it10618)

    String[] txi01_GST = {"GS", "GS", "GS", "GS", "GS"}; //Tax type code
    String[] txi02_GST = {"0.70", "1.75", "1.00", "0.80", "0.00"}; //Monetary amount
    String[] txi03_GST = {"", "", "", "", ""}; //Percent
    String[] txi06_GST = {"", "", "", "", ""}; //Tax exempt code

    String[] txi01_PST = {"PG", "PG", "PG", "PG", "PG"}; //Tax type code
    String[] txi02_PST = {"0.80", "2.00", "1.00", "0.80", "0.00"}; //Monetary amount
    String[] txi03_PST = {"", "", "", "", ""}; //Percent

```

Sample AX Force Post

```

String[] txi06_PST = {"", "", "", "", ""}; //Tax exempt code
String[] pam05 = {"11.50", "28.75", "10.62", "11.50", "-10.00"}; //Extended line-item amount
String[] pid05 = {"Stapler", "Lamp", "Bottled Water", "Fountain Pen", "DISCOUNT"}; //Line item
        description
AxItl06s[] itl06s = {new AxItl06s(), new AxItl06s(), new AxItl06s(), new AxItl06s(), new AxItl06s
        ()};

itl06s[0].setItl0618(itl0618[0]);
itl06s[0].setItl0719(itl0719[0]);

itl06s[1].setItl0618(itl0618[1]);
itl06s[1].setItl0719(itl0719[1]);

itl06s[2].setItl0618(itl0618[2]);
itl06s[2].setItl0719(itl0719[2]);

itl06s[3].setItl0618(itl0618[3]);
itl06s[3].setItl0719(itl0719[3]);

itl06s[4].setItl0618(itl0618[4]);
itl06s[4].setItl0719(itl0719[4]);
AxTxi[] txi = {new AxTxi(), new AxTxi(), new AxTxi(), new AxTxi(), new AxTxi()};
txi[0].setTxi(txi01_GST[0], txi02_GST[0], txi03_GST[0], txi06_GST[0]);
txi[0].setTxi(txi01_PST[0], txi02_PST[0], txi03_PST[0], txi06_PST[0]);
txi[1].setTxi(txi01_GST[1], txi02_GST[1], txi03_GST[1], txi06_GST[1]);
txi[1].setTxi(txi01_PST[1], txi02_PST[1], txi03_PST[1], txi06_PST[1]);
txi[2].setTxi(txi01_GST[2], txi02_GST[2], txi03_GST[2], txi06_GST[2]);
txi[2].setTxi(txi01_PST[2], txi02_PST[2], txi03_PST[2], txi06_PST[2]);
txi[3].setTxi(txi01_GST[3], txi02_GST[3], txi03_GST[3], txi06_GST[3]);
txi[3].setTxi(txi01_PST[3], txi02_PST[3], txi03_PST[3], txi06_PST[3]);
txi[4].setTxi(txi01_GST[4], txi02_GST[4], txi03_GST[4], txi06_GST[4]);
txi[4].setTxi(txi01_PST[4], txi02_PST[4], txi03_PST[4], txi06_PST[4]);
AxItlLoop itlLoop = new AxItlLoop();
itlLoop.setItlLoop(itl02[0], itl03[0], itl04[0], itl05[0], itl06s[0], txi[0], pam05[0], pid05[0]);
itlLoop.setItlLoop(itl02[1], itl03[1], itl04[1], itl05[1], itl06s[1], txi[1], pam05[1], pid05[1]);
itlLoop.setItlLoop(itl02[2], itl03[2], itl04[2], itl05[2], itl06s[2], txi[2], pam05[2], pid05[2]);
itlLoop.setItlLoop(itl02[3], itl03[3], itl04[3], itl05[3], itl06s[3], txi[3], pam05[3], pid05[3]);
itlLoop.setItlLoop(itl02[4], itl03[4], itl04[4], itl05[4], itl06s[4], txi[4], pam05[4], pid05[4]);
AxTable2 table2 = new AxTable2();
table2.setItlLoop(itlLoop);
//Create Table 3 with details
AxTxi taxTbl3 = new AxTxi();
taxTbl3.setTxi("GS", "4.25", "", ""); //sum of GST taxes
taxTbl3.setTxi("PG", "4.60", "", ""); //sum of PST taxes
taxTbl3.setTxi("TX", "8.85", "", ""); //sum of all taxes
AxTable3 table3 = new AxTable3();
table3.setTxi(taxTbl3);

AxLevel23 level23 = new AxLevel23();
level23.setTable1(table1);
level23.setTable2(table2);
level23.setTable3(table3);
AxForcePost axForcePost = new AxForcePost();
axForcePost.setOrderId(order_id);
axForcePost.setCustId(cust_id);
axForcePost.setAmount(amount);
axForcePost.setPan(pan);
axForcePost.setExpDate(expiry_date);
axForcePost.setAuthCode(auth_code);

```


Sample AX Force Post

```

axForcePost.setCryptType(crypt);
axForcePost.setAxLevel23(level23);
HttpsPostRequest mpgReq = new HttpsPostRequest();
mpgReq.setProcCountryCode(processing_country_code);
mpgReq.setTestMode(true); //false or comment out this line for production transactions
mpgReq.setStoreId(store_id);
mpgReq.setApiToken(api_token);
mpgReq.setTransaction(axForcePost);
mpgReq.setStatusCheck(status_check);
mpgReq.send();
try
{
    Receipt receipt = mpgReq.getReceipt();

    System.out.println("CardType = " + receipt.getCardType());
    System.out.println("TransAmount = " + receipt.getTransAmount());
    System.out.println("TxnNumber = " + receipt.getTxnNumber());
    System.out.println("ReceiptId = " + receipt.getReceiptId());
    System.out.println("TransType = " + receipt.getTransType());
    System.out.println("ReferenceNum = " + receipt.getReferenceNum());
    System.out.println("ResponseCode = " + receipt.getResponseCode());
    System.out.println("ISO = " + receipt.getISO());
    System.out.println("BankTotals = " + receipt.getBankTotals());
    System.out.println("Message = " + receipt.getMessage());
    System.out.println("AuthCode = " + receipt.getAuthCode());
    System.out.println("Complete = " + receipt.getComplete());
    System.out.println("TransDate = " + receipt.getTransDate());
    System.out.println("TransTime = " + receipt.getTransTime());
    System.out.println("Ticket = " + receipt.getTicket());
    System.out.println("TimedOut = " + receipt.getTimedOut());
    System.out.println("CavvResultCode = " + receipt.getCavvResultCode());
}
catch (Exception e)
{
    System.out.println(e);
}
}

```

10.4.5 AX Purchase Correction

The American Express Purchase Correction (Void) transaction is used to cancel a transaction that was performed in the current batch. No amount is required because a void is always for 100% of the original transaction. The only transaction that can be voided using AX Purchase Correction is AX Completion and AX Force Post. To send an AX Purchase Correction the order_id and TxnNumber from the AX Completion or AX Force Post are required.

AX Purchase Correction transaction object definition

```
AxPurchaseCorrection axPurchaseCorrection = new AxPurchaseCorrection();
```

HttpsPostRequest object for AX Purchase Correction transaction

```
HttpsPostRequest mpgReq = new HttpsPostRequest();
```

```
mpgReq.setTransaction(axPurchaseCorrection);
```

AX Purchase Correction transaction object values

Table 1: AX Purchase Correction transaction object mandatory values

| Value | Type | Limits | Set Method |
|----------------------|--------|-----------------------------|---|
| Order ID | String | 50-character alpha-numeric | <code>axPurchaseCorrection.setOrderId(order_id);</code> |
| Transaction number | String | 255-character alpha-numeric | <code>axPurchaseCorrection.setTxnNumber(txn_number);</code> |
| E-commerce indicator | String | 1-character alpha-numeric | <code>axPurchaseCorrection.setCryptType(crypt_type);</code> |

AX Purchase Correction

```
package Level23;
import JavaAPI.*;

public class TestAxPurchaseCorrection
{
    public static void main(String[] args)
    {
        String store_id = "moneris";
        String api_token = "hurgle";
        String processing_country_code = "CA";
        boolean status_check = false;

        String order_id="Test1485206180427";
        String txn_number = "660117311902017023161620759-0_11";
        String crypt="7";
        AxPurchaseCorrection axPurchaseCorrection = new AxPurchaseCorrection();
        axPurchaseCorrection.setOrderId(order_id);
        axPurchaseCorrection.setTxnNumber(txn_number);
        axPurchaseCorrection.setCryptType(crypt);
        HttpsPostRequest mpgReq = new HttpsPostRequest();
        mpgReq.setProcCountryCode(processing_country_code);
        mpgReq.setTestMode(true); //false or comment out this line for production transactions
        mpgReq.setStoreId(store_id);
        mpgReq.setApiToken(api_token);
        mpgReq.setTransaction(axPurchaseCorrection);
        mpgReq.setStatusCheck(status_check);
        mpgReq.send();
        try
        {
            Receipt receipt = mpgReq.getReceipt();
            System.out.println("CardType = " + receipt.getCardType());
            System.out.println("TransAmount = " + receipt.getTransAmount());
            System.out.println("TxnNumber = " + receipt.getTxnNumber());
            System.out.println("ReceiptId = " + receipt.getReceiptId());
            System.out.println("TransType = " + receipt.getTransType());
            System.out.println("ReferenceNum = " + receipt.getReferenceNum());
        }
    }
}
```

AX Purchase Correction

```

System.out.println("ResponseCode = " + receipt.getResponseCode());
System.out.println("ISO = " + receipt.getISO());
System.out.println("BankTotals = " + receipt.getBankTotals());
System.out.println("Message = " + receipt.getMessage());
System.out.println("AuthCode = " + receipt.getAuthCode());
System.out.println("Complete = " + receipt.getComplete());
System.out.println("TransDate = " + receipt.getTransDate());
System.out.println("TransTime = " + receipt.getTransTime());
System.out.println("Ticket = " + receipt.getTicket());
System.out.println("TimedOut = " + receipt.getTimedOut());
System.out.println("CavvResultCode = " + receipt.getCavvResultCode());
}
catch (Exception e)
{
System.out.println(e);
}
}
}

```

10.4.6 AX Refund

The American Express Refund will credit a specified amount to the cardholder's credit card. A refund can be sent up to the full value of the original AX Completion or AX Force Post. To send an AX Refund you will require the order_id and txn_number from the original AX Completion or AX Force Post.

AX Refund transaction object definition

```
AxRefund axRefund = new AxRefund();
```

HttpPostRequest object for AX Refund transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

```
mpgReq.setTransaction(axRefund);
```

AX Refund transaction object values**Table 1: AX Refund transaction object mandatory values**

| Value | Type | Limits | Set Method |
|--------------------|--------|-----------------------------|------------------------------------|
| Order ID | String | 50-character alpha-numeric | axRefund.setOrderId(order_id); |
| Transaction number | String | 255-character alpha-numeric | axRefund.setTxnNumber(txn_number); |
| Amount | String | 9-character decimal | axRefund.setAmount(amount); |

| Value | Type | Limits | Set Method |
|----------------------|--------|---------------------------|------------|
| E-commerce indicator | String | 1-character alpha-numeric | axRefund |
| Level 2/3 Data | Object | n/a | axRefund |

Sample AX Refund

```

package Level23;
import JavaAPI.*;
public class TestAxRefund
{
    public static void main(String[] args)
    {
        String store_id = "moneris";
        String api_token = "hurgle";
        String processing_country_code = "CA";
        boolean status_check = false;

        String order_id="Test1485206231878";
        String amount="62.37";
        String txn_number = "660117311902017023161712265-0_11";
        String crypt="7";

        //Create Table 1 with details
        String n101 = "R6"; //Entity ID Code
        String n102 = "Retailing Inc. International"; //Name
        String n301 = "919 Oriole Rd."; //Address Line 1
        String n401 = "Toronto"; //City
        String n402 = "On"; //State or Province
        String n403 = "H1T6W3"; //Postal Code
        String[] ref01 = {"4C", "CR"}; //Reference ID Qualifier
        String[] ref02 = {"M5T3A5", "16802309004"}; //Reference ID
        String big04 = "PO7758545"; //Purchase Order Number
        String big05 = "RN0049858"; //Release Number
        String big10 = "INV99870E"; //Invoice Number
        AxRef axRef1 = new AxRef();
        axRef1.setRef(ref01[0], ref02[0]);
        axRef1.setRef(ref01[1], ref02[1]);
        AxN1Loop n1Loop = new AxN1Loop();
        n1Loop.setN1Loop(n101, n102, n301, n401, n402, n403, axRef1);
        AxTable1 table1 = new AxTable1();
        table1.setBig04(big04);
        table1.setBig05(big05);
        table1.setBig10(big10);
        table1.setN1Loop(n1Loop);

        //Create Table 2 with details
        //the sum of the extended amount field (pam05) must equal the level 1 amount field
        String[] it102 = {"1", "1", "1", "1", "1"}; //Line item quantity invoiced
        String[] it103 = {"EA", "EA", "EA", "EA", "EA"}; //Line item unit or basis of measurement code
        String[] it104 = {"10.00", "25.00", "8.62", "10.00", "-10.00"}; //Line item unit price
        String[] it105 = {"", "", "", "", ""}; //Line item basis of unit price code

        String[] it10618 = {"MG", "MG", "MG", "MG", "MG"}; //Product/Service ID qualifier

```

Sample AX Refund

```

String[] it10719 = {"DJFR4", "JFJ49", "FEF33", "FEE43", "DISCOUNT"}; //Product/Service ID
(corresponds to it10618)

String[] txi01_GST = {"GS", "GS", "GS", "GS", "GS"}; //Tax type code
String[] txi02_GST = {"0.70", "1.75", "1.00", "0.80", "0.00"}; //Monetary amount
String[] txi03_GST = {"", "", "", "", ""}; //Percent
String[] txi06_GST = {"", "", "", "", ""}; //Tax exempt code

String[] txi01_PST = {"PG", "PG", "PG", "PG", "PG"}; //Tax type code
String[] txi02_PST = {"0.80", "2.00", "1.00", "0.80", "0.00"}; //Monetary amount
String[] txi03_PST = {"", "", "", "", ""}; //Percent
String[] txi06_PST = {"", "", "", "", ""}; //Tax exempt code
String[] pam05 = {"11.50", "28.75", "10.62", "11.50", "-10.00"}; //Extended line-item amount
String[] pid05 = {"Stapler", "Lamp", "Bottled Water", "Fountain Pen", "DISCOUNT"}; //Line item
description
AxItl06s[] itl06s = {new AxItl06s(), new AxItl06s(), new AxItl06s(), new AxItl06s(), new AxItl06s
()};

itl06s[0].setItl0618(it10618[0]);
itl06s[0].setItl0719(it10719[0]);

itl06s[1].setItl0618(it10618[1]);
itl06s[1].setItl0719(it10719[1]);

itl06s[2].setItl0618(it10618[2]);
itl06s[2].setItl0719(it10719[2]);

itl06s[3].setItl0618(it10618[3]);
itl06s[3].setItl0719(it10719[3]);

itl06s[4].setItl0618(it10618[4]);
itl06s[4].setItl0719(it10719[4]);
AxTxi[] txi = {new AxTxi(), new AxTxi(), new AxTxi(), new AxTxi(), new AxTxi()};
txi[0].setTxi(txi01_GST[0], txi02_GST[0], txi03_GST[0], txi06_GST[0]);
txi[0].setTxi(txi01_PST[0], txi02_PST[0], txi03_PST[0], txi06_PST[0]);
txi[1].setTxi(txi01_GST[1], txi02_GST[1], txi03_GST[1], txi06_GST[1]);
txi[1].setTxi(txi01_PST[1], txi02_PST[1], txi03_PST[1], txi06_PST[1]);
txi[2].setTxi(txi01_GST[2], txi02_GST[2], txi03_GST[2], txi06_GST[2]);
txi[2].setTxi(txi01_PST[2], txi02_PST[2], txi03_PST[2], txi06_PST[2]);
txi[3].setTxi(txi01_GST[3], txi02_GST[3], txi03_GST[3], txi06_GST[3]);
txi[3].setTxi(txi01_PST[3], txi02_PST[3], txi03_PST[3], txi06_PST[3]);
txi[4].setTxi(txi01_GST[4], txi02_GST[4], txi03_GST[4], txi06_GST[4]);
txi[4].setTxi(txi01_PST[4], txi02_PST[4], txi03_PST[4], txi06_PST[4]);
AxItlLoop itlLoop = new AxItlLoop();
itlLoop.setItlLoop(itl02[0], itl03[0], itl04[0], itl05[0], itl06s[0], txi[0], pam05[0], pid05[0]);
itlLoop.setItlLoop(itl02[1], itl03[1], itl04[1], itl05[1], itl06s[1], txi[1], pam05[1], pid05[1]);
itlLoop.setItlLoop(itl02[2], itl03[2], itl04[2], itl05[2], itl06s[2], txi[2], pam05[2], pid05[2]);
itlLoop.setItlLoop(itl02[3], itl03[3], itl04[3], itl05[3], itl06s[3], txi[3], pam05[3], pid05[3]);
itlLoop.setItlLoop(itl02[4], itl03[4], itl04[4], itl05[4], itl06s[4], txi[4], pam05[4], pid05[4]);
AxTable2 table2 = new AxTable2();
table2.setItlLoop(itlLoop);
//Create Table 3 with details
AxTxi taxTbl3 = new AxTxi();
taxTbl3.setTxi("GS", "4.25", "", ""); //sum of GST taxes
taxTbl3.setTxi("PG", "4.60", "", ""); //sum of PST taxes
taxTbl3.setTxi("TX", "8.85", "", ""); //sum of all taxes
AxTable3 table3 = new AxTable3();
table3.setTxi(taxTbl3);

```

Sample AX Refund

```

//Create and set Level23 Object
AxLevel23 level23 = new AxLevel23();
level23.setTable1(table1);
level23.setTable2(table2);
level23.setTable3(table3);
AxRefund axRefund = new AxRefund();
axRefund.setOrderId(order_id);
axRefund.setAmount(amount);
axRefund.setTxnNumber(txn_number);
axRefund.setCryptType(crypt);
axRefund.setAxLevel23(level23);
HttpPostRequest mpgReq = new HttpPostRequest();
mpgReq.setProcCountryCode(processing_country_code);
mpgReq.setTestMode(true); //false or comment out this line for production transactions
mpgReq.setStoreId(store_id);
mpgReq.setApiToken(api_token);
mpgReq.setTransaction(axRefund);
mpgReq.setStatusCheck(status_check);
mpgReq.send();
try
{
    Receipt receipt = mpgReq.getReceipt();
    System.out.println("CardType = " + receipt.getCardType());
    System.out.println("TransAmount = " + receipt.getTransAmount());
    System.out.println("TxnNumber = " + receipt.getTxnNumber());
    System.out.println("ReceiptId = " + receipt.getReceiptId());
    System.out.println("TransType = " + receipt.getTransType());
    System.out.println("ReferenceNum = " + receipt.getReferenceNum());
    System.out.println("ResponseCode = " + receipt.getResponseCode());
    System.out.println("ISO = " + receipt.getISO());
    System.out.println("BankTotals = " + receipt.getBankTotals());
    System.out.println("Message = " + receipt.getMessage());
    System.out.println("AuthCode = " + receipt.getAuthCode());
    System.out.println("Complete = " + receipt.getComplete());
    System.out.println("TransDate = " + receipt.getTransDate());
    System.out.println("TransTime = " + receipt.getTransTime());
    System.out.println("Ticket = " + receipt.getTicket());
    System.out.println("TimedOut = " + receipt.getTimedOut());
    System.out.println("CavvResultCode = " + receipt.getCavvResultCode());
}
catch (Exception e)
{
    System.out.println(e);
}
}

new Txi(txio1_GST[1], txio2_GST[1], txio3_GST[1], txio6_GST[1]),
new Txi(txio1_GST[2], txio2_GST[2], txio3_GST[2], txio6_GST[2]),
new Txi(txio1_GST[3], txio2_GST[3], txio3_GST[3], txio6_GST[3]),
new Txi(txio1_GST[4], txio2_GST[4], txio3_GST[4], txio6_GST[4]));

Txi[] taxPST = {new Txi(txio1_PST[0], txio2_PST[0], txio3_PST[0], txio6_PST[0]),
new Txi(txio1_PST[1], txio2_PST[1], txio3_PST[1], txio6_PST[1]),
new Txi(txio1_PST[2], txio2_PST[2], txio3_PST[2], txio6_PST[2]),
new Txi(txio1_PST[3], txio2_PST[3], txio3_PST[3], txio6_PST[3]),
new Txi(txio1_PST[4], txio2_PST[4], txio3_PST[4], txio6_PST[4])};

String[] pam05 = {"11.50", "28.75", "10.62", "11.50", "-10.00"}; //Extended line-item amount
String[] pid05 = {"Stapler", "Lamp", "Bottled Water", "Fountain Pen", "DISCOUNT"}; //Line item

```

Sample AX Refund

```

        description
        ArrayList<Itl106s[]> itQual = new ArrayList<Itl106s[]>(); //array list to hold product IDs and
        Descriptions
        ArrayList<Txi[]> level3Taxes = new ArrayList<Txi[]>(); //list to hold GST and PST objects for each
        item

        int numofItems = pid05.length;

        ItlLoop[] itemLoop = new ItlLoop[numofItems]; //instantiate array of items object

        //for (int item = 0; item < pid05.Length; item++)
        for (int item = 0; item < numofItems; item++)
        {
            itQual.add(new Itl106s[]{new Itl106s(itl10618[item], itl10719[item])});
            level3Taxes.add(new Txi[]{taxGST[item], taxPST[item]}); //create tax object for item 1

            itemLoop[item] = new ItlLoop(itl102[item], itl103[item], itl104[item],
            itl105[item], itQual.get(item),
            level3Taxes.get(item), pam05[item], pid05[item]);
        }
        Table2 tbl2 = new Table2 (itemLoop); //element of AXLevel23

        /***** Table 3 - SUMMARY *****/

        Txi[] taxTbl3 = new Txi[3];
        taxTbl3[0] = new Txi("GS", "4.25","", ""); //sum of GST taxes
        taxTbl3[1] = new Txi("PG", "4.60","", ""); //sum of PST taxes
        taxTbl3[2] = new Txi("TX", "8.85","", "");

        Table3 tbl3 = new Table3(taxTbl3);

        /***** REQUEST *****/

        AXLevel23 level23 = new AXLevel23(tbl1, tbl2, tbl3);

        AXRefund refund = new AXRefund (order_id, amount, txn_number, crypt, customer_code, invoice_
        number, level23);
        HttpsPostRequest mpgReq = new HttpsPostRequest(host, store_id, api_token, refund);
        try
        {
            Receipt receipt = mpgReq.getReceipt();
            System.out.println("CardType = " + receipt.getCardType());
            System.out.println("TransAmount = " + receipt.getTransAmount());
            System.out.println("TxnNumber = " + receipt.getTxnNumber());
            System.out.println("ReceiptId = " + receipt.getReceiptId());
            System.out.println("TransType = " + receipt.getTransType());
            System.out.println("ReferenceNum = " + receipt.getReferenceNum());
            System.out.println("ResponseCode = " + receipt.getResponseCode());
            System.out.println("ISO = " + receipt.getISO());
            System.out.println("BankTotals = " + receipt.getBankTotals());
            System.out.println("Message = " + receipt.getMessage());
            System.out.println("AuthCode = " + receipt.getAuthCode());
            System.out.println("Complete = " + receipt.getComplete());
            System.out.println("TransDate = " + receipt.getTransDate());
            System.out.println("TransTime = " + receipt.getTransTime());
            System.out.println("Ticket = " + receipt.getTicket());
            System.out.println("TimedOut = " + receipt.getTimedOut());
            System.out.println("ITD Response = " + receipt.getITDResponse());
        }
    }

```

Sample AX Refund

```
System.out.println("IsVisaDebit = " + receipt.getIsVisaDebit());
}
catch (Exception e)
{
e.printStackTrace();
}
}
```

10.4.7 AX Independent Refund

The American Express Independent Refund will credit a specified amount to the cardholder's credit card. The independent refund does not require an existing order to be logged in the Moneris Gateway; however, the credit card number and expiry date will need to be passed.

AX Independent Refund transaction object definition

```
AxIndependentRefund axIndependentRefund = new AxIndependentRefund();
```

HttpPostRequest object for AX Independent Refund transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
mpgReq.setTransaction(axIndependentRefund);
```

AX Independent Refund transaction object values

Table 1: AX Independent Refund transaction object mandatory values

| Value | Type | Limits | Set Method |
|----------------------|--------|--|--|
| Order ID | String | 50-character alpha-numeric | <code>axIndependentRefund.setOrderId(order_id);</code> |
| Amount | String | 9-character decimal | <code>axIndependentRefund.setAmount(amount);</code> |
| Credit card number | String | 20-character alpha-numeric | <code>axIndependentRefund.setPan(pan);</code> |
| Expiry date | String | 4-character alpha-numeric (YYMM format) | <code>axIndependentRefund.setExpDate(expdate);</code> |
| E-commerce indicator | String | 1-character alpha-numeric | <code>axIndependentRefund.setCryptType(crypt_type);</code> |

Table 2: AX Independent Refund transaction object optional values

| Value | Type | Limits | Set Method |
|-------------|--------|----------------------------|--|
| Customer ID | String | 50-character alpha-numeric | axIndependentRefund.setCustId(custid); |

Sample AX Independent Refund

```

package Level23;
import JavaAPI.*;
public class TestAxIndependentRefund
{
    public static void main(String[] args)
    {
        String store_id = "moneris";
        String api_token = "hurgle";
        String processing_country_code = "CA";
        boolean status_check = false;

        java.util.Date createDate = new java.util.Date();
        String order_id="Test"+createDate.getTime();
        String cust_id="CUST13343";
        String amount="62.37";
        String pan="373269005095005";
        String expiry_date="2012"; //YYMM
        String crypt="7";

        //Create Table 1 with details
        String n101 = "R6"; //Entity ID Code
        String n102 = "Retailing Inc. International"; //Name
        String n301 = "919 Oriole Rd."; //Address Line 1
        String n401 = "Toronto"; //City
        String n402 = "On"; //State or Province
        String n403 = "H1T6W3"; //Postal Code
        String[] ref01 = {"4C", "CR"}; //Reference ID Qualifier
        String[] ref02 = {"M5T3A5", "16802309004"}; //Reference ID
        String big04 = "PO7758545"; //Purchase Order Number
        String big05 = "RN0049858"; //Release Number
        String big10 = "INV99870E"; //Invoice Number
        AxRef axRef1 = new AxRef();
        axRef1.setRef(ref01[0], ref02[0]);
        axRef1.setRef(ref01[1], ref02[1]);
        AxN1Loop n1Loop = new AxN1Loop();
        n1Loop.setN1Loop(n101, n102, n301, n401, n402, n403, axRef1);
        AxTable1 table1 = new AxTable1();
        table1.setBig04(big04);
        table1.setBig05(big05);
        table1.setBig10(big10);
        table1.setN1Loop(n1Loop);

        //Create Table 2 with details
        //the sum of the extended amount field (pam05) must equal the level 1 amount field
        String[] it102 = {"1", "1", "1", "1", "1"}; //Line item quantity invoiced
        String[] it103 = {"EA", "EA", "EA", "EA", "EA"}; //Line item unit or basis of measurement code
        String[] it104 = {"10.00", "25.00", "8.62", "10.00", "-10.00"}; //Line item unit price
        String[] it105 = {"", "", "", "", ""}; //Line item basis of unit price code

```

Sample AX Independent Refund

```

String[] it10618 = {"MG", "MG", "MG", "MG", "MG"}; //Product/Service ID qualifier
String[] it10719 = {"DJFR4", "JFJ49", "FEF33", "FEE43", "DISCOUNT"}; //Product/Service ID
        (corresponds to it10618)

String[] txi01_GST = {"GS", "GS", "GS", "GS", "GS"}; //Tax type code
String[] txi02_GST = {"0.70", "1.75", "1.00", "0.80", "0.00"}; //Monetary amount
String[] txi03_GST = {"", "", "", "", ""}; //Percent
String[] txi06_GST = {"", "", "", "", ""}; //Tax exempt code

String[] txi01_PST = {"PG", "PG", "PG", "PG", "PG"}; //Tax type code
String[] txi02_PST = {"0.80", "2.00", "1.00", "0.80", "0.00"}; //Monetary amount
String[] txi03_PST = {"", "", "", "", ""}; //Percent
String[] txi06_PST = {"", "", "", "", ""}; //Tax exempt code
String[] pam05 = {"11.50", "28.75", "10.62", "11.50", "-10.00"}; //Extended line-item amount
String[] pid05 = {"Stapler", "Lamp", "Bottled Water", "Fountain Pen", "DISCOUNT"}; //Line item
        description
AxIt106s[] it106s = {new AxIt106s(), new AxIt106s(), new AxIt106s(), new AxIt106s(), new AxIt106s
        ()};

it106s[0].setIt10618(it10618[0]);
it106s[0].setIt10719(it10719[0]);

it106s[1].setIt10618(it10618[1]);
it106s[1].setIt10719(it10719[1]);

it106s[2].setIt10618(it10618[2]);
it106s[2].setIt10719(it10719[2]);

it106s[3].setIt10618(it10618[3]);
it106s[3].setIt10719(it10719[3]);

it106s[4].setIt10618(it10618[4]);
it106s[4].setIt10719(it10719[4]);
AxTxi[] txi = {new AxTxi(), new AxTxi(), new AxTxi(), new AxTxi(), new AxTxi()};
txi[0].setTxi(txi01_GST[0], txi02_GST[0], txi03_GST[0], txi06_GST[0]);
txi[0].setTxi(txi01_PST[0], txi02_PST[0], txi03_PST[0], txi06_PST[0]);
txi[1].setTxi(txi01_GST[1], txi02_GST[1], txi03_GST[1], txi06_GST[1]);
txi[1].setTxi(txi01_PST[1], txi02_PST[1], txi03_PST[1], txi06_PST[1]);
txi[2].setTxi(txi01_GST[2], txi02_GST[2], txi03_GST[2], txi06_GST[2]);
txi[2].setTxi(txi01_PST[2], txi02_PST[2], txi03_PST[2], txi06_PST[2]);
txi[3].setTxi(txi01_GST[3], txi02_GST[3], txi03_GST[3], txi06_GST[3]);
txi[3].setTxi(txi01_PST[3], txi02_PST[3], txi03_PST[3], txi06_PST[3]);
txi[4].setTxi(txi01_GST[4], txi02_GST[4], txi03_GST[4], txi06_GST[4]);
txi[4].setTxi(txi01_PST[4], txi02_PST[4], txi03_PST[4], txi06_PST[4]);
AxItlLoop itlLoop = new AxItlLoop();
itlLoop.setItlLoop(it102[0], it103[0], it104[0], it105[0], it106s[0], txi[0], pam05[0], pid05[0]);
itlLoop.setItlLoop(it102[1], it103[1], it104[1], it105[1], it106s[1], txi[1], pam05[1], pid05[1]);
itlLoop.setItlLoop(it102[2], it103[2], it104[2], it105[2], it106s[2], txi[2], pam05[2], pid05[2]);
itlLoop.setItlLoop(it102[3], it103[3], it104[3], it105[3], it106s[3], txi[3], pam05[3], pid05[3]);
itlLoop.setItlLoop(it102[4], it103[4], it104[4], it105[4], it106s[4], txi[4], pam05[4], pid05[4]);
AxTable2 table2 = new AxTable2();
table2.setItlLoop(itlLoop);
//Create Table 3 with details
AxTxi taxTbl3 = new AxTxi();
taxTbl3.setTxi("GS", "4.25", "", ""); //sum of GST taxes
taxTbl3.setTxi("PG", "4.60", "", ""); //sum of PST taxes
taxTbl3.setTxi("TX", "8.85", "", ""); //sum of all taxes
AxTable3 table3 = new AxTable3();
table3.setTxi(taxTbl3);

```

Sample AX Independent Refund

```

//Create and set Level23 Object
AxLevel23 level23 = new AxLevel23();
level23.setTable1(table1);
level23.setTable2(table2);
level23.setTable3(table3);
AxIndependentRefund axIndependentRefund = new AxIndependentRefund();
axIndependentRefund.setOrderId(order_id);
axIndependentRefund.setCustId(cust_id);
axIndependentRefund.setAmount(amount);
axIndependentRefund.setPan(pan);
axIndependentRefund.setExpDate(expiry_date);
axIndependentRefund.setCryptType(crypt);
axIndependentRefund.setAxLevel23(level23);
HttpPostRequest mpgReq = new HttpPostRequest();
mpgReq.setProcCountryCode(processing_country_code);
mpgReq.setTestMode(true); //false or comment out this line for production transactions
mpgReq.setStoreId(store_id);
mpgReq.setApiToken(api_token);
mpgReq.setTransaction(axIndependentRefund);
mpgReq.setStatusCheck(status_check);
mpgReq.send();
try
{
Receipt receipt = mpgReq.getReceipt();
System.out.println("CardType = " + receipt.getCardType());
System.out.println("TransAmount = " + receipt.getTransAmount());
System.out.println("TxnNumber = " + receipt.getTxnNumber());
System.out.println("ReceiptId = " + receipt.getReceiptId());
System.out.println("TransType = " + receipt.getTransType());
System.out.println("ReferenceNum = " + receipt.getReferenceNum());
System.out.println("ResponseCode = " + receipt.getResponseCode());
System.out.println("ISO = " + receipt.getISO());
System.out.println("BankTotals = " + receipt.getBankTotals());
System.out.println("Message = " + receipt.getMessage());
System.out.println("AuthCode = " + receipt.getAuthCode());
System.out.println("Complete = " + receipt.getComplete());
System.out.println("TransDate = " + receipt.getTransDate());
System.out.println("TransTime = " + receipt.getTransTime());
System.out.println("Ticket = " + receipt.getTicket());
System.out.println("TimedOut = " + receipt.getTimedOut());
System.out.println("CavvResultCode = " + receipt.getCavvResultCode());
}
catch (Exception e)
{
System.out.println(e);
}
}
String[] txi02_PST = new String[]{"0.80", "2.00", "1.00", "0.80","0.00"};
//Monetary amount
String[] txi03_PST = new String[]{"", "", "", "", ""}; //Percent
String[] txi06_PST = new String[]{"", "", "", "", ""}; //Tax exempt code

Txi[] taxGST = {new Txi(txi01_GST[0], txi02_GST[0], txi03_GST[0], txi06_GST[0]),
new Txi(txi01_GST[1], txi02_GST[1], txi03_GST[1], txi06_GST
[1]),
new Txi(txi01_GST[2], txi02_GST[2], txi03_GST[2], txi06_GST
[2]),

```

Sample AX Independent Refund

```

new Txi(txi01_GST[3], txi02_GST[3], txi03_GST[3],
txi06_GST[3]),
new Txi(txi01_GST[4], txi02_GST[4], txi03_GST[4], txi06_GST
[4]));

Txi[] taxPST = {new Txi(txi01_PST[0], txi02_PST[0], txi03_PST[0], txi06_PST[0]),
new Txi(txi01_PST[1], txi02_PST[1], txi03_PST[1], txi06_PST
[1]),
new Txi(txi01_PST[2], txi02_PST[2], txi03_PST[2], txi06_PST
[2]),
new Txi(txi01_PST[3], txi02_PST[3], txi03_PST[3],
txi06_PST[3]),
new Txi(txi01_PST[4], txi02_PST[4], txi03_PST[4], txi06_PST
[4])});

String[] pam05 = {"11.50", "28.75", "10.62", "11.50", "-10.00"}; //Extended
line-item amount
String[] pid05 = {"Stapler", "Lamp", "Bottled Water", "Fountain Pen", "DISCOUNT"};
//Line item description
ArrayList<Itl06s[]> itQual = new ArrayList<Itl06s[]>(); //array list to hold product
IDs and Descriptions
ArrayList<Txi[]> level3Taxes = new ArrayList<Txi[]>(); //list to hold GST and PST
objects for each item

int numofItems = pid05.length;

ItlLoop[] itemLoop = new ItlLoop[numofItems]; //instantiate array of items object

//for (int item = 0; item < pid05.Length; item++)
for (int item = 0; item < numofItems; item++)
{
itQual.add(new Itl06s[]{new Itl06s(itl0618[item], itl0719[item])});
level3Taxes.add(new Txi[]{taxGST[item], taxPST[item]}); //create tax object for
item 1

itemLoop[item] = new ItlLoop(itl02[item], itl03[item], itl04[item],
itl05[item], itQual.get(item),
level3Taxes.get(item), pam05[item], pid05[item]);
}
Table2 tbl2 = new Table2 (itemLoop); //element of AXLevel23

/***** Table 3 - SUMMARY *****/

Txi[] taxTbl3 = new Txi[3];
taxTbl3[0] = new Txi("GS", "4.25","", ""); //sum of GST taxes
taxTbl3[1] = new Txi("PG", "4.60","", ""); //sum of PST taxes
taxTbl3[2] = new Txi("TX", "8.85","", "");

Table3 tbl3 = new Table3(taxTbl3);

/***** REQUEST *****/

AXLevel23 level23 = new AXLevel23(tbl1, tbl2, tbl3);

AXIndependentRefund indrefund = new AXIndependentRefund (order_id, cust_id,amount, pan,
expdate, customer_code,invoice_number,level23);
HttpsPostRequest mpgReq = new HttpsPostRequest(host, store_id, api_token, indrefund);
try

```

Sample AX Independent Refund

```
{
Receipt receipt = mpgReq.getReceipt();
System.out.println("CardType = " + receipt.getCardType());
System.out.println("TransAmount = " + receipt.getTransAmount());
System.out.println("TxnNumber = " + receipt.getTxnNumber());
System.out.println("ReceiptId = " + receipt.getReceiptId());
System.out.println("TransType = " + receipt.getTransType());
System.out.println("ReferenceNum = " + receipt.getReferenceNum());
System.out.println("ResponseCode = " + receipt.getResponseCode());
System.out.println("ISO = " + receipt.getISO());
System.out.println("BankTotals = " + receipt.getBankTotals());
System.out.println("Message = " + receipt.getMessage());
System.out.println("AuthCode = " + receipt.getAuthCode());
System.out.println("Complete = " + receipt.getComplete());
System.out.println("TransDate = " + receipt.getTransDate());
System.out.println("TransTime = " + receipt.getTransTime());
System.out.println("Ticket = " + receipt.getTicket());
System.out.println("TimedOut = " + receipt.getTimedOut());
System.out.println("ITD Response = " + receipt.getITDResponse());
System.out.println("IsVisaDebit = " + receipt.getIsVisaDebit());
}
catch (Exception e)
{
e.printStackTrace();
}
}
```

11 Testing a Solution

- 11.1 About the Merchant Resource Center
- 11.2 Logging In to the QA Merchant Resource Center
- 11.3 Test Credentials for Merchant Resource Center
- 11.4 Getting a Unique Test Store ID and API Token
- 11.5 Processing a Transaction
- 11.6 Testing INTERAC® Online Payment Solutions
- 11.7 Testing MPI Solutions
- 11.8 Testing Visa Checkout
- 11.9 Test Cards
- 11.10 Simulator Host

11.1 About the Merchant Resource Center

The Merchant Resource Center is the user interface for Moneris Gateway services. There is also a QA version of the Merchant Resource Center site specifically allocated for you and other developers to use to test your API integrations with the gateway.

You can access the Merchant Resource Center in the test environment at:

<https://esqa.moneris.com/mpg> (Canada)

The test environment is generally available 24/7, but 100% availability is not guaranteed. Also, please be aware that other merchants are using the test environment in the Merchant Resource Center. Therefore, you may see transactions and user IDs that you did not create. As a courtesy to others who are testing, we ask that you use only the transactions/users that you created. This applies to processing Refund transactions, changing passwords or trying other functions.

11.2 Logging In to the QA Merchant Resource Center

To log in to the QA Merchant Resource Center for testing purposes:

1. Go to the Merchant Resource Center QA website at <https://esqa.moneris.com/mpg>
2. Enter your username and password, which are the same email address and password you use to log in to the Developer Portal
3. Enter your Store ID, which you obtained from the Developer Portal's My Testing Credentials as described in Test Credentials for Merchant Resource Center (page 278)

11.3 Test Credentials for Merchant Resource Center

For testing purposes, you can either use the pre-existing test stores in the Merchant Resource Center, or you can create your own unique test store where you will only see your own transactions. If you want to use the pre-existing stores, use the test credentials provided in the following tables with the corresponding lines of code, as in the examples below.

Example of Corresponding Code For Canada:

```
string processing_country_code = "CA";

mpgReq.setTestMode(true);

String store_id = "store5";

String api_token = "yesguy";
```

Table 77: Test Server Credentials - Canada


| store_id | api_token | Username | Password | Other Information |
|------------|-------------|----------|----------|---|
| store1 | yesguy | demouser | password | |
| store2 | yesguy | demouser | password | |
| store3 | yesguy | demouser | password | |
| store4 | yesguy | demouser | password | |
| store5 | yesguy | demouser | password | |
| monca00392 | yesguy | demouser | password | Use this store to test Convenience Fee transactions |
| moncaqagt1 | mgtokenguy1 | demouser | password | Use this store to test Token Sharing |
| moncaqagt2 | mgtokenguy2 | demouser | password | Use this store to test Token Sharing |
| moncaqagt3 | mgtokenguy3 | demouser | password | Use this store to test Token Sharing |
| monca01428 | mcmpguy | demouser | password | Use this store to test MasterCard MasterPass |

Alternatively, you can create and use a unique test store where you will only see your own transactions. For more on this, see [Getting a Unique Test Store ID and API Token](#) (page 280)

11.4 Getting a Unique Test Store ID and API Token

Transactions requests via the API will require you to have a Store ID and a corresponding API token. For testing purposes, you can either use the pre-existing test stores in the Merchant Resource Center, or you can create your own unique test store where you will only see your own transactions.

To get your unique Store ID and API token:

1. Log in to the Developer Portal at <https://developer.moneris.com>
2. In the My Profile dialog, click the Full Profile  button
3. Under My Testing Credentials, select Request Testing Credentials
4. Enter your Developer Portal password and select your country
5. Record the Store ID and API token that are given, as you will need them for logging in to the Merchant Resource Center (Store ID) and for API requests (API token).

Alternatively, you can use the pre-existing test stores already set up in the Merchant Resource Center as described in Test Credentials for Merchant Resource Center (page 278).

11.5 Processing a Transaction

- 1.1 Overview
- 1.2 HttpsPostRequest Object
- 1.3 Receipt Object

11.5.1 Overview

There are some common steps for every transaction that is processed.

1. Instantiate the transaction object (such as Purchase), and update it with object definitions that refer to the individual transaction.
2. Instantiate the HttpsPostRequest connection object and update it with connection information, host information and the transaction object that you created in step 11.5
Section 11.5 (page 282) provides the HttpsPostRequest connection object definition. This object and its variables apply to **every** transaction request.
3. Invoke the HttpsPostRequest object's `send()` method.
4. Instantiate the Receipt object, by invoking the HttpsPostRequest object's get Receipt method. Use this object to retrieve the applicable response details.

Some transactions may require steps in addition to the ones listed here. Below is a sample Purchase transaction with each major step outlined. For extensive code samples of other transaction types, refer to the Java API ZIP file.

NOTE: For illustrative purposes, the order in which lines of code appear below may differ slightly from the same sample code presented elsewhere in this document.

| | |
|--|--|
| <pre>import java.io.*; import java.util.*; import java.net.*; import JavaAPI.*;</pre> | Include all necessary classes. |
| <pre>public class TestPurchase { public static void main(String args[]) { java.util.Date createDate = new java.util.Date();</pre> | |
| <pre> String order_id = "Test"+createDate.getTime(); String amount = "5.00"; String pan = "4242424242424242"; String expdate = "1901"; //YYMM format String crypt = "7"; String processing_country_code = "CA";</pre> | Define all mandatory values for the transaction object properties. |
| <pre> String store_id = "store5"; String api_token = "yesguy";</pre> | Define all mandatory values for the connection object properties. |

| | |
|--|--|
| <pre>Purchase purchase = new Purchase(); purchase.setOrderId(order_id); purchase.setAmount(amount); purchase.setPan(pan); purchase.setExpdate(expdate); purchase.setCryptType(crypt); purchase.setDynamicDescriptor("2134565");</pre> | <p>Instantiate the transaction object and assign values to properties.</p> |
| <pre>HttpPostRequest mpgReq = new HttpPostRequest(); mpgReq.setProcCountryCode(processing_country_code); mpgReq.setTestMode(true); mpgReq.setStoreId(store_id); mpgReq.setApiToken(api_token); mpgReq.setTransaction(purchase); mpgReq.setStatusCheck(status_check);</pre> | <p>Instantiate connection object and assign values to properties, including the transaction object you just created.</p> |
| <pre>mpgReq.send();</pre> | <p>Invoke the connection object's <code>send()</code> method.</p> |
| <pre>try { Receipt receipt = mpgReq.getReceipt(); System.out.println("CardType = " + receipt.getCardType()); System.out.println("TransAmount = " + receipt.getTransAmount()); System.out.println("TxnNumber = " + receipt.getTxnNumber()); System.out.println("ReceiptId = " + receipt.getReceiptId()); System.out.println("TransType = " + receipt.getTransType()); System.out.println("ReferenceNum = " + receipt.getReferenceNum()); System.out.println("ResponseCode = " + receipt.getResponseCode()); System.out.println("ISO = " + receipt.getISO()); System.out.println("BankTotals = " + receipt.getBankTotals()); System.out.println("Message = " + receipt.getMessage()); System.out.println("AuthCode = " + receipt.getAuthCode()); System.out.println("Complete = " + receipt.getComplete()); System.out.println("TransDate = " + receipt.getTransDate()); System.out.println("TransTime = " + receipt.getTransTime()); System.out.println("Ticket = " + receipt.getTicket()); System.out.println("TimedOut = " + receipt.getTimedOut()); System.out.println("IsVisaDebit = " + receipt.getIsVisaDebit()); } catch (Exception e) { e.printStackTrace(); } }</pre> | <p>Instantiate the Receipt object and use its get methods to retrieve the desired response data.</p> |

11.5.2 HttpPostRequest Object

The transaction object that you instantiate becomes a property of this object when you call its set transaction method.

HttpPostRequest Object Definition

```
HttpPostRequest mpgReq = new HttpPostRequest();
```

After instantiating the `HttpPostRequest` object, update its mandatory and optional values as outlined in the following values tables.

Table 78: HttpPostRequest object mandatory values

| Value | Type | Limits | Set method |
|-------------------------|--|---------------------------|--|
| | Description | | |
| Processing country code | String | 2-character alphabetic | <code>mpgReq.setProcCountryCode (processing_country_code) ;</code> |
| | CA for Canada, US for USA. | | |
| Test mode | Boolean | true/false | <code>mpgReq.setTestMode (true) ;</code> |
| | Set to <code>true</code> when in test mode. Set to <code>false</code> (or comment out entire line) when in production mode. | | |
| Store ID | String | 10-character alphanumeric | <code>mpgReq.setStoreId (store_id) ;</code> |
| | Unique identifier provided by Moneris upon merchant account set up. See 11.1 About the Merchant Resource Center for test environment details. | | |
| API Token | String | 20-character alphanumeric | <code>mpgReq.setApiToken (api_token) ;</code> |
| | Unique alphanumeric string assigned upon merchant account activation. To locate your production API token, refer to the Merchant Resource Center Admin Store Settings. See 11.3 Test Credentials for Merchant Resource Center for test environment details. | | |
| Transaction | Object | Not applicable | <code>mpgReq.setTransaction (transaction) ;</code> |
| | This argument is one of the numerous transaction types discussed in the rest of this manual. (Such as Purchase, Refund and so on.) This object is instantiated in step 1 above. | | |

Table 1: HttpPostRequest object optional values

| Value | Type | Limits | Set method |
|--------------|--|------------|---|
| | Description | | |
| Status Check | Boolean | true/false | <code>mpgReq.setStatusCheck (status_check) ;</code> |
| | See Appendix A Definition of Request Fields. NOTE: while this value belongs to the <code>HttpPostRequest</code> object, it is only supported by some transactions. Check the individual transaction definition to find out whether Status Check can be used. | | |

11.5.3 Receipt Object

After you send a transaction using the `HttpPostRequest` object's `send` method, you can instantiate a receipt object.

Receipt Object Definition

```
Receipt receipt = mpgReq.getReceipt();
```

For an in-depth explanation of Receipt object methods and properties, see Appendix B Definition of Response Fields.

11.6 Testing INTERAC® Online Payment Solutions

Acxsys has two websites where merchants can post transactions for testing the fund guarantee porting of INTERAC® Online Payment transactions. The test `IDEBIT_MERCHNUM` value is provided by Moneris after registering in the test environment.

After registering, the following two links become accessible:

- Merchant Test Tool
- Certification Test Tool

Merchant Test Tool

https://merchant-test.interacdebit.ca/gateway/merchant_test_processor.do

This URL is used to simulate the transaction response process, to validate response variables, and to properly integrate your checkout process.

When testing INTERAC® Online Payment transactions, you are forwarded to the INTERAC® Online Payment Merchant Testing Tool. A screen appears where certain fields need to be completed.

For an approved response, do not alter any of the fields except for the ones listed here.

IDEBIT_TRACK2

To form a track2 when testing with the Moneris Gateway, use one of these three numbers:

3728024906540591206=01121122334455000

5268051119993326=01121122334455000000

453781122255=011211223344550000000000

IDEBIT_ISSNAME

RBC

IDEBIT_ISSCONF

123456

For a declined response, provide any other value as the `IDEBIT_TRACK2`. Click **Post to Merchant**.

Whether the transaction is approved or declined, do **not** click **Validate Data**. This will return validation errors.

Certification Test Tool

https://merchant-test.interacdebit.ca/gateway/merchant_certification_processor.do

This URL is used to complete the required INTERAC® Online Payment Merchant Front-End Certification test cases, which are outlined in Appendix N (page 385) and Appendix O (page 389).

To confirm the fund that was guaranteed above, an INTERAC® Online Payment Purchase (see page 71) must be sent to the Moneris Gateway QA using the following test store information:

Host: esqa.moneris.com

Store ID: store3

API Token: yesguy

You can always log into the Merchant Resource Center to check the results using the following information:

URL: <https://esqa.moneris.com/mpg>

Store ID: store3

Note that all response variables that are posted back from the IOP gateway in step 4.4 of 4.4 must be validated for length of field, permitted characters and invalid characters.

11.7 Testing MPI Solutions

When testing your implementation of the Moneris MPI, you can use the Visa/MasterCard/Amex PIT (production integration testing) environment. The testing process is slightly different than a production environment in that when the inline window is generated, it does not contain any input boxes. Instead, it contains a window of data and a **Submit** button. Clicking **Submit** loads the response in the testing window. The response will not be displayed in production.

NOTE: MasterCard SecureCode and Amex SafeKey may not be directly tested within our current test environment. However, the process and behavior tested with the Visa test cards will be the same for MCSC and SafeKey.

When testing you may use the following test card numbers with any future expiry date. Use the appropriate test card information from the tables below: Visa and MasterCard use the same test card information, while Amex uses unique information.

Table 79: MPI test card numbers (Visa and MasterCard only)

| Card Number | VERes | PARes | Action |
|--------------------------------------|-------|-------|--|
| 4012001037141112 4242424242424242 | Y | true | TXN – Call function to create inLine window. ACS – Send CAVV to Moneris Gateway using either the Cavv Purchase or the Cavv Pre-Authorization transaction. |
| 4012001038488884 | U | NA | Send transaction to Moneris Gateway using either the basic Purchase or the basic Pre-Authorization transaction. Set crypt_type = 7. |
| 4012001038443335 | N | NA | Send transaction to Moneris Gateway using either the basic Purchase or the basic Pre-Authorization transaction. Set crypt_type = 6. |
| 4012001037461114 | Y | false | Card failed to authenticate. Merchant may chose to send transaction or decline transaction. If transaction is sent, use crypt type = 7. |

Table 80: MPI test card numbers (Amex only)

| Card Number | Password | | | Action |
|-----------------|----------|--------------------|-------|--|
| | VERes | Required? | PARes | |
| 375987000000062 | U | Not required | N/A | TXN – Call function to create inLine window. ACS – Send CAVV to Moneris Gateway using either the Cavv Purchase or the Cavv Pre-Authorization transaction. Set crypt_type = 7. |
| 375987000000021 | Y | Yes: test13fail | false | Card failed to authenticate. Merchant may chose to send transaction or decline transaction. If transaction is sent, use crypt type = 7. |
| 375987000000013 | N | Not required | N/A | Send transaction to Moneris Gateway using either the basic Purchase or the basic Pre-Authorization transaction. Set crypt_type = 6. |
| 374500261001009 | Y | Yes: test09 | true | Card failed to authenticate. Merchant may choose to send transaction or decline transaction. Set crypt_type = 5. |

VERes

The result U, Y or N is obtained by using getMessage().

PARes

The result “true” or “false” is obtained by using getSuccess().

To access the Merchant Resource Center in the test environment go to <https://esqa.moneris.com/mpg> (Canada).

Transactions in the test environment should not exceed \$11.00.

11.8 Testing Visa Checkout

In order to test Visa Checkout you need to:

1. Create a Visa Checkout configuration profile in the Merchant Resource Center QA environment at <https://esqa.moneris.com/mpg>. To learn more about this, see "Creating a Visa Checkout Configuration for Testing" below.
2. Obtain a Lightbox API key to be used for Lightbox integration. To learn more about this, see "Integrating Visa Checkout Lightbox" on page 181.
3. For test card numbers specifically for use when testing Visa Checkout, see "Test Cards for Visa Checkout" on the next page

11.8.1 Creating a Visa Checkout Configuration for Testing

Once you have a test store created, you need to activate Visa Checkout in the QA environment.

To activate Visa Checkout in QA:

1. Log in to the the QA environment at <https://esqa.moneris.com/mpg>
2. In the Admin menu, select Visa Checkout
3. Complete the applicable fields
4. Click Save.

11.9 Test Cards

Because of security and compliance reasons, the use of live credit and debit card numbers for testing is strictly prohibited. Only test credit and debit card numbers are to be used.

To test general transactions, use the following test card numbers:

Table 81: General test card numbers

| Card Plan | Card Number |
|------------|------------------|
| MasterCard | 5454545454545454 |
| Visa | 4242424242424242 |
| Amex | 373599005095005 |

| Card Plan | Card Number |
|-----------|--|
| JCB | 3566007770015365 |
| Diners | 36462462742008 |
| Track2 | 5258968987035454=06061015454001060101? |

To test Level 2/3 transactions, use the following test card numbers:

Table 82: Level 2/3 test card numbers

| Card Plan | Card Number |
|------------|------------------|
| MasterCard | 5454545442424242 |
| Visa | 4242424254545454 |
| Amex | 373269005095005 |
| Diners | 36462462742008 |

11.9.1 Test Cards for Visa Checkout

Table 1: Test Cards Numbers - Visa Checkout

| Card Plan | Card Number |
|------------------|-------------------------------------|
| Visa | 4005520201264821 (without card art) |
| Visa | 4242424242424242 (with card art) |
| MasterCard | 5500005555555559 |
| American Express | 340353278080900 |
| Discover | 6011003179988686 |

11.10 Simulator Host

The test environment has been designed to replicate the production environment as closely as possible. One major difference is that Moneris is unable to send test transactions onto the production authorization network. Therefore, issuer responses are simulated. Additionally, the requirement to emulate approval, decline and error situations dictates that certain transaction variables initiate various response and error situations.

The test environment approves and declines transactions based on the penny value of the amount sent. For example, a transaction made for the amount of \$9.00 or \$1.00 is approved because of the .00 penny value.

Transactions in the test environment must not exceed \$11.00.

For a list of all current test environment responses for various penny values, please see the Test Environment Penny Response Table available at <https://developer.moneris.com>.

NOTE: These responses may change without notice. Check the Moneris Developer Portal (<https://developer.moneris.com>) regularly to access the latest documentation and downloads.

12 Moving to Production

- 12.1 Activating a Production Store Account
- 12.2 Configuring a Store for Production
- 12.3 Receipt Requirements
- 12.4 Getting Help

12.1 Activating a Production Store Account

The steps below outline how to activate your production account so that you can process production transactions.

1. Obtain your activation letter/fax from Moneris.
2. Go to <https://www3.moneris.com/connect/en/activate/index.php>.
3. Input your store ID and merchant ID from the letter/fax and click **Activate**.
4. Follow the on-screen instructions to create an administrator account. This account will grant you access to the Merchant Resource Center.
5. Log into the Merchant Resource Center at <https://www3.moneris.com/mpg> using the user credentials created in step 12.1.
6. Proceed to **ADMIN** and then **STORE SETTINGS**.
7. Locate the API token at the top of the page. You will use this API token along with the store ID that you received in your letter/fax and to send any production transactions through the API.

When your production store is activated, you need to configure your store so that it points to the production host. To learn how do to this, see [Configuring a Store for Production](#) (page 292)

NOTE: For more information about how to use the Merchant Resource Center, see the Moneris Gateway Merchant Resource Center User's Guide, which is available at <https://developer.moneris.com>.

12.2 Configuring a Store for Production

After you have completed your testing and have activated your production store, you are ready to point your store to the production host.

To configure a store for production:

1. Change the test mode set method from `true` to `false`.
2. Change the Store ID to reflect the production store ID that you received when you activated your production store. To review the steps for activating a production store, see [Activating a Production Store Account](#) (page 292).
3. Change the API token to the production token that you received during activation.

The table below illustrates the steps above using the relevant code (and where **x** is an alphanumeric character).

| Step | Code in Testing | Changes for Production |
|------|---|--|
| 1 | No string changes for this item, only set method is altered: <code>mpgReq.setTestMode(true);</code> | Set method for production: <code>mpgReq.setTestMode(false);</code> |
| 2 | String: <code>String store_id = "store5";</code> Associated Set Method: <code>mpgReq.setStoreId(store_id);</code> | String for Production: <code>String store_id = "monXXXXXXXXX";</code> |
| 3 | String: <code>String api_token = "yesguy";</code> Associated Set Method: <code>mpgReq.setApiToken(api_token);</code> | String for Production: <code>String api_token = "XXXXX";</code> |

One more thing to keep in mind is which country you are configuring your store for. For the set method
`mpgReq.SetProcCountryCode(processing_country_code);`

You need to declare the correct country code in the string:

For Canada: `string processing_country_code = "CA";`

For United States: `string processing_country_code = "US";`

12.2.1 Configuring an INTERAC® Online Payment Store for Production

Before you can process INTERAC® Online Payment transactions through your web site, you need to complete the certification registration process with Moneris, as described below. The production IDEBIT_MERCHNUM value is provided by Moneris after you have successfully completed the certification.

Acxsys' production INTERAC® Online PaymentGateway URL is https://gateway.interaonline.com/merchant_processor.do.

To access the Moneris Moneris Gateway production gateway URL, use the following:

Store ID: Provided by Moneris

API Token: Generated during your store activation process.

Processing country code: CA

The **production** Merchant Resource Center URL is <https://www3.moneris.com/mpg/>

12.2.1.1 Completing the Certification Registration - Merchants

To complete the certification registration, fax or email the information below to our Integration Support helpdesk:

- Merchant logo to be displayed on the INTERAC® Online Payment Gateway page
 - In both French and English
 - 120 × 30 pixels
 - Only PNG format is supported.
- Merchant business name
 - In both English and French
 - Maximum 30 characters.
- List of all referrer URLs. That is, URLs from which the customer may be redirected to the INTERAC® Online Payment gateway.
- List of all URLs that may appear in the IDEBIT_FUNDEDURL field of the https form POST to the INTERAC® Online Payment Gateway.
- List of all URLs that may appear in the IDEBIT_NOTFUNDEDURL field of the https form POST to the INTERAC® Online Payment Gateway.

12.2.1.2 Third-Party Service/Shopping Cart Provider

In your product documentation, instruct your clients to provide the information below to the Moneris Gateway Integration Support helpdesk for certification registration:

- Merchant logo to be displayed on the INTERAC® Online Payment Gateway page
 - In both French and English
 - 120 × 30 pixels
 - Only PNG format is supported.
- Merchant business name
 - In both English and French
 - Maximum 30 characters.
- List of all referrer URLs. That is, URLs from which the customer may be redirected to the INTERAC® Online Payment gateway.
- List of all URLs that may appear in the IDEBIT_FUNDEDURL field of the https form POST to the INTERAC® Online Payment Gateway.
- List of all URLs that may appear in the IDEBIT_NOTFUNDEDURL field of the https form POST to the INTERAC® Online Payment Gateway.

See 4.3.3, page 68 for additional client requirements.

12.3 Receipt Requirements

Visa and MasterCard expect certain details to be provided to the cardholder and on the receipt when a transaction is approved.

Receipts must comply with the standards outlined within the Integration Receipts Requirements. For all the receipt requirements covering all transaction scenarios, visit the Moneris Developer Portal at <https://developer.moneris.com>.

Production of the receipt must begin when the appropriate response to the transaction request is received by the application. The transaction may be any of the following:

- **Sale** (Purchase)
- **Authorization** (PreAuth, Pre-Authorization)
- **Authorization Completion** (Completion, Capture)
- **Offline Sale** (Force Post)
- **Sale Void** (Purchase Correction, Void)
- **Refund**.

The boldface terms listed above are the names for transactions as they are to be displayed on receipts. Other terms used for the transaction are indicated in brackets.

12.3.1 Certification Requirements

Card-present transaction receipts are required to complete certification.

Card-not-present integration

Certification is optional but highly recommended.

Card-present integration

After you have completed the development and testing, your application must undergo a certification process where all the applicable transaction types must be demonstrated, and the corresponding receipts properly generated.

Contact a Client Integration Specialist for the Certification Test checklist that must be completed and returned for verification. (See "Getting Help" below for contact details.) Be sure to include the application version of your product. Any further changes to the product after certification requires re-certification.

After the certification requirements are met, Moneris will provide you with an official certification letter.

12.4 Getting Help

Help is available to Moneris merchants at no cost. Ensure that you have your merchant number or store ID handy.

Getting Started

If you are just getting started, a client integration specialist can help with integration and certification.

Contact

- ClientIntegrations@moneris.com
- Monday-Friday: 8:30 am - 8 pm EST.

Development Assistance

If you are already working with an integration specialist and need development assistance, our eProducts technical consultants offer development and technical support.

Contact

- 1-866-562-4354
- eproducts@moneris.com
- Monday-Friday: 8 am - 8 pm EST

Production Support

Already have a live application and need production support? Our Customer Service specialists provide financial and technical support to merchants.

Contact

1-866-319-7450 (24 hours/day, 7 days/week)

onlinepayments@moneris.com

13 Incorporating All Available Fraud Tools

- 13 Incorporating All Available Fraud Tools
- 13.2 Implementation Checklist
- 13.3 Making a Decision

To minimize fraudulent activity in online transactions, Moneris recommends that you implement all of the fraud tools available through the Moneris Gateway. These are explained below:

Address Verification Service (AVS)

Verifies the cardholder's billing address information.

Verified by Visa, MasterCard Secure Code and Amex SafeKey (VbV/MCSC/SafeKey)

Authenticates the cardholder at the time of an online transaction.

Card Validation Digit (CVD)

Validates that cardholder is in possession of a genuine credit card during the transaction.

Note that all responses that are returned from these verification methods are intended to provide added security and fraud prevention. The response itself does not affect the completion of a transaction. Upon receiving a response, the choice to proceed with a transaction is left entirely to the merchant.

13.1 Implementation Options for TRMT

Option A

Process a Transaction Risk Management Tool query and obtain the response. You can then decide whether to continue with the transaction, abort the transaction, or use additional eFraud features.

If you want to use additional eFraud features, perform one or both of the following to help make your decision about whether to continue with the transaction or abort it:

- Process a VbV/MCSC/SafeKey transaction and obtain the response. The merchant then makes the decision whether to continue with the transaction or to abort it.
- Process a financial transaction including AVS/CVD details and obtain the response. The merchant then makes a decision whether to continue with the transaction or to abort it.

Option B

1. Process a Transaction Risk Management Tool query and obtain the response.
2. Process a VbV/MCSC/SafeKey transaction and obtain the response.
3. Process a financial transaction including AVS/CVD details and obtain the response.
4. Merchant then makes a one-time decision based on the responses received from the eFraud tools.

13.2 Implementation Checklist

The following checklists provide high-level tasks that are required as part of your implementation of the Transaction Risk Management Tool. Because each organization has certain project requirements for

implementing system and process changes, this list is only a guideline, and does not cover all aspects of your project.

Download and review all of the applicable APIs and Integration Guides

Please review the sections outlined within this document that refers to the following feature

Table 83: API documentation

| Document/API | Use the document if you are.... |
|--|--|
| Transaction Risk Management Tool Integration Guide (Section #) | Implementing or updating your integration for the Transaction Risk Management Tool |
| Moneris MPI – Verified by Visa/MasterCard SecureCode/American Express SafeKey – Java API Integration Guide | Implementing or updating Verified by Visa, MasterCard SecureCode or American Express SafeKey |
| Basic transaction with VS and CVD (Section#) | Implementing or updating transaction processing, AVS or CVD |

Design your transaction flow and business processes

When designing your transaction flow, think about which scenarios you would like to have automated, and which scenarios you would like to have handled manually by your employees.

The “Understand Transaction Risk Management Transaction Flow” and Handling Response Information (page 146) sections can help you work through the design of your transaction and process flows.

Things to consider when designing your process flows:

- Processes for notifying people within your organization when there is scheduled maintenance for Moneris Gateway.
- Handling refunds, canceled orders and so on.
- Communicating with customers when you will not be shipping the goods because of suspected fraud, back-ordered goods and so on.

Complete your development and testing

- The Moneris Gateway API - Integration Guide provides the technical details required for the development and testing. Ensure that you follow the testing instructions and data provided.

If you are an integrator

- Ensure that your solution meets the requirements for PCI-DSS/PA-DSS as applicable.
- Send an email to eproducts@moneris.com with the subject line “Certification Request”.

- Develop material to set up your customers as quickly as possible with your solution and a Moneris account. Include information such as:
 - Steps they must take to enter their store ID or API token information into your solution.
 - Any optional services that you support via Moneris Gateway (such as TRMT, AVS, CVD, VBV/MCSC/SafeKey and so on) so that customers can request these features.

13.3 Making a Decision

Depending on your business policies and processes, the information obtained from the fraud tools (such as AVS, CVD, VbV/MCSC/SafeKey and TRMT) can help you make an informed decision about whether to accept a transaction or deny it because it is potentially fraudulent.

If you do not want to continue with a likely fraudulent transaction, you must inform the customer that you are not proceeding with their transaction.

If you are attempting to do further authentication by using the available fraud tools, but you have received an approval response instead, cancel the financial transaction by doing one of the following:

- If the original transaction is a Purchase, use a Purchase Correction or Refund transaction. You will need the original order ID and transaction number.
- If the original transaction is a Pre-Authorization, use a Completion transaction for \$0.00.

Appendix A Definition of Request Fields

This appendix deals with values that belong to transaction objects. For information on values that belong to the (HttpPostRequest) connection object, see "Processing a Transaction" on page 282.

NOTE:

Alphanumeric fields allow the following characters: a-z A-Z 0-9 _ - : . @ spaces

All other request fields allow the following characters: a-z A-Z 0-9 _ - : . @ \$ = /

Note that the values listed in Appendix A are not mandatory for **every** transaction. Check the transaction definition. If it says that a value is mandatory, a further description is found here.

Table 84: Request fields

| Value | Type | Limits | Sample code variable definition |
|----------------------------|---|---------------------------|---------------------------------|
| | Description | | |
| General transaction values | | | |
| Order ID | String | 50-character alphanumeric | <code>String order_id;</code> |
| | <p>Merchant-defined transaction identifier that must be unique for every Purchase, PreAuth and Independent Refund transaction. No two transactions of these types may have the same order ID.</p> <p>For Refund, Completion and Purchase Correction transactions, the order ID must be the same as that of the original transaction.</p> <p>The last 10 characters of the order ID are displayed in the “Invoice Number” field on the Merchant Direct Reports. However only letters, numbers and spaces are sent to Merchant Direct.</p> <p>A minimum of 3 and a maximum of 10 valid characters are sent to Merchant Direct. Only the last characters beginning after any invalid characters are sent. For example, if the order ID is 1234-567890, only 567890 is sent to Merchant Direct.</p> <p>If the order ID has fewer than 3 characters, it may display a blank or 0000000000 in the Invoice Number field.</p> | | |

Table 84: Request fields (continued)

| Value | Type | Limits | Sample code variable definition |
|--------------------|---|---|----------------------------------|
| | Description | | |
| Amount | String | 9-character decimal | <code>String amount;</code> |
| | <p>Transaction amount. Used in a number of transactions. Note that this is different from the amount used in a Completion transaction, which is an alphanumeric value.</p> <p>This must contain at least 3 digits, two of which are penny values.</p> <p>The minimum allowable value is \$0.01, and the maximum allowable value is 999 999.99. Transaction amounts of \$0.00 are not allowed.</p> | | |
| Credit card number | String | 20-character numeric (no spaces or dashes) | <code>String pan;</code> |
| | <p>Most credit card numbers today are 16 digits, but some 13-digit numbers are still accepted by some issuers. This field has been intentionally expanded to 20 digits in consideration for future expansion and potential support of private label card ranges.</p> | | |
| Expiry date | String | 4-character numeric (YYMM format) | <code>String expiry_date;</code> |
| | <p>Note: This is the reverse of the date displayed on the physical card, which is MMY.</p> | | |

Table 84: Request fields (continued)

| Value | Type | Limits | Sample code variable definition |
|----------------------|--|---------------------------|----------------------------------|
| | Description | | |
| E-Commerce indicator | String | 1-character alpha-numeric | <code>String crypt;</code> |
| | <p>1: Mail Order / Telephone Order—Single</p> <p>2: Mail Order / Telephone Order—Recurring</p> <p>3: Mail Order / Telephone Order—Instalment</p> <p>4: Mail Order / Telephone Order—Unknown classification</p> <p>5: Authenticated e-commerce transaction (VbV/MCSC/SafeKey)</p> <p>6: Non-authenticated e-commerce transaction (VbV/MCSC/SafeKey)</p> <p>7: SSL-enabled merchant</p> <p>8: Non-secure transaction (web- or email-based)</p> <p>9: SET non-authenticated transaction</p> <div style="border: 1px solid black; padding: 10px; margin-top: 20px;"> <p>NOTE:</p> <p>When processing a Cavv Purchase or Pre-Authorization for Apple Pay or Android Pay transactions whereby the merchant is using their own API to decrypt the payload, this field is mandatory.</p> <p>For Apple Pay or Android Pay, send the value returned in the <code>eciIndicator</code> or <code>3dsEciIndicator</code> respectively. If the value is not present, please send the value as 7.</p> <p>Supported values for Apple Pay and Android Pay are:</p> <p>5: Authenticated e-commerce transaction</p> <p>7: SSL-enabled merchant</p> </div> | | |
| Completion Amount | String | 9-character decimal | <code>String comp_amount;</code> |
| | Amount of a Completion transaction. This may not be equal to the amount value (described on page 302), which appeared in the original Pre-Authorization transaction. | | |

Table 84: Request fields (continued)

| Value | Type | Limits | Sample code variable definition |
|---------------------------------|---|----------------------------|-------------------------------------|
| | Description | | |
| Shipping Indicator ¹ | String | 1-character alpha-numeric | <code>String ship_indicator;</code> |
| | Used to identify completion transactions that require multiple shipments, also referred to as multiple completions. By default, if the shipping indicator is not passed, all completions are listed as final completions. To indicate that the completion is to be left open by the issuer as supplemental shipments or completions are pending, a value of P is submitted. Possible values: P = Partial F = Final | | |
| Transaction number | String | 255-character alphanumeric | <code>String txn_number;</code> |
| | Used when performing follow-on transactions. (That is, Completion, Purchase Correction or Refund.) This must be the value that was returned as the transaction number in the response of the original transaction. When performing a Completion, this value must reference the Pre-Authorization. When performing a Refund or a Purchase Correction, this value must reference the Completion or the Purchase. | | |
| Authorization code | String | 8-character alpha-numeric | <code>String auth_code;</code> |
| | Authorization code provided in the transaction response from the issuing bank. This is required for Force Post transactions. | | |
| ECR number | String | 8-character alpha-numeric | <code>String ecr_no;</code> |
| | Electronic cash register number, also referred to as TID or Terminal ID. | | |
| MPI transaction values | | | |

¹Available to Canadian integrations only.

Table 84: Request fields (continued)

| Value | Type | | Limits | Sample code variable definition |
|---|---|------------------------------|----------------------------------|---------------------------------|
| | Description | | | |
| XID | String | 20-character alpha-numeric | <code>String xid;</code> | |
| | Can also be used as your order ID when using Moneris Gateway. Fixed length — must be exactly 20 characters. | | | |
| MD (Merchant Data) | String | 1024-character alpha-numeric | <code>String MD;</code> | |
| | Information to be echoed back in the response. | | | |
| Merchant URL | String | Variable length | <code>String merchantUrl;</code> | |
| | URL to which the MPI response is to be sent. | | | |
| Accept | String | Variable length | <code>String accept;</code> | |
| | MIME types that the browser accepts | | | |
| User Agent | String | Variable length | <code>String userAgent;</code> | |
| | Browser details | | | |
| PAREs | String | Variable length | (Not shown) | |
| | Value passed back to the API during the TXN, and returned to the MPI when an ACS request is made. | | | |
| Cardholder Authentication Verification Value (CAVV) | String | 50-character alpha-numeric | <code>String cavv;</code> | |
| | Value provided by the Moneris MPI or by a third-party MPI. It is part of a Verified by Visa/MasterCard SecureCode/American Express SafeKey transaction. | | | |
| | NOTE: For Apple Pay and Android Pay Cavv Purchase and Cavv Pre-Authorization transactions, CAVV field contains the decrypted cryptogram. | | | |
| Vault transaction values | | | | |

Table 84: Request fields (continued)

| Value | Type | Limits | Sample code variable definition |
|------------------------------|--|----------------------------|--------------------------------------|
| | Description | | |
| Data key | String | 28-character alpha-numeric | <code>String data_key;</code> |
| | Profile identifier that all future financial Vault transactions (that is, they occur after the profile was registered by a Vault Add Credit Card - ResAddCC, Vault Encrypted Add Credit Card - EncResAddCC, Vault Tokenize Credit Card - ResTokenizeCC, Vault Add Temporary Token - ResTempAdd or Vault Add Token - ResAddToken transaction) will use to associate with the saved information. The data key is generated by Moneris, and is returned to the merchant (via the Receipt object) when the profile is first registered. | | |
| Duration | String | 3-character numeric | <code>String duration;</code> |
| | Amount of time the temporary token should be available, up to 900 seconds. | | |
| Data key format ¹ | String | 2-character alpha-numeric | <code>String data_key_format;</code> |
| | This field will specify the data key format being returned. If left blank, Data Key format will default to 25-character alphanumeric. Valid values: no value sent or 0 = 25-character alpha-numeric Data Key By using the following values, a unique token is generated specifically for the PAN that is presented for tokenization. Any subsequent tokenization requests for the same PAN will result in the same token 0U = 25-character alpha-numeric Data Key, Unique | | |
| Mag Swipe transaction values | | | |

¹Available to Canadian integrations only.

Table 84: Request fields (continued)

| Value | Type | Limits | Sample code variable definition |
|-----------------------|---|----------------------------|----------------------------------|
| | Description | | |
| POS code | String | 20-character numeric | <code>String pos_code;</code> |
| | <p>Under normal presentment situations, the value is 00.</p> <p>If a Pre-Authorization transaction was card-present and keyed-in, then the POS code for the corresponding Completion transaction is 71.</p> <p>In an unmanned kiosk environment where the card is present, the value is 27.</p> <p>If the solution is not “merchant and cardholder present”, contact Moneris for the proper POS code.</p> | | |
| Track2 data | String | 40-character alphanumeric | <code>String track2;</code> |
| | Retrieved from the mag stripe of a credit card by swiping it through a card reader, or the "fund guarantee" value returned by the INTERAC® Online Payment system. | | |
| Encrypted track2 data | String | Variable length | <code>String enc_track2;</code> |
| | String that is retrieved by swiping or keying in a credit card number through a Moneris-provided encrypted mag swipe card reader. It is part of an encrypted keyed or swiped transaction only. This string must be retrieved by a specific device. (See below for the list of current available devices.) | | |
| Device type | String | 30-character alpha-numeric | <code>String device_type;</code> |
| | <p>Type of encrypted mag swipe reader that was read the credit card. This must be a Moneris-provided device so that the values are properly encrypted and decrypted.</p> <p>This field is case-sensitive. Available values are:</p> <p>"idtech_bdk"</p> | | |

Note that the values listed in Appendix A are not supported by **every** transaction. Check the transaction definition. If it says that a value is optional, a further description is found here.

Table 85: Optional transaction values

| Value | Type | Limits | Sample code variable definition |
|--|--|---------------------------|---|
| | Description | | |
| General transaction values | | | |
| Customer ID | String | 30-character alphanumeric | <code>String cust_id;</code> |
| | This can be used for policy number, membership number, student ID, invoice number and so on. | | |
| | This field is searchable from the Moneris Merchant Resource Center. | | |
| Status Check | String | true/false | <code>String status_check;</code> |
| | See "Status Check" on page 324. | | |
| Dynamic descriptor | String | 20-character alphanumeric | <code>String dynamic_descriptor;</code> |
| | Combined with merchant's business name cannot exceed 25 characters. | | |
| Merchant-defined description sent on a per-transaction basis that will appear on the credit card statement appended to the merchant's business name. | | | |

Table 85: Optional transaction values (continued)

| Value | Type | Limits | Sample code variable definition |
|-------------------------------|--|---------------------------|---------------------------------------|
| | Description | | |
| Wallet indicator ¹ | String | 3-character alphanumeric | <code>String wallet_indicator;</code> |
| | Optional value to indicate when the credit card details were collected from a wallet such as Apple Pay, Android Pay, Visa Checkout, MasterCard MasterPass. | | |
| | This field is applicable to Apple Pay and Android Pay transactions whereby the merchant is using their own API to decrypt the payload. This is a mandatory field for these types of Apple Pay and Android Pay transactions. | | |
| | <ul style="list-style-type: none">• Apple Pay and Android Pay wallet indicator is applicable to Cavv Purchase - Apple Pay and Android Pay In-App (see page 173) and Cavv Pre-Authorization - Apple Pay and Android Pay (see page 176)• Visa Checkout and MasterCard MasterPass wallet indicator is applicable to basic Purchase and Pre-Authorization | | |
| | Possible values are: | | |
| | <ul style="list-style-type: none">• APP = Apple Pay In-App• ANP = Android Pay In-App• VCO = Visa Checkout• MMP = MasterCard MasterPass | | |
| | <div>NOTE: Please note that if this field is included to indicate Apple Pay or Android Pay, then Convenience Fee is not supported.</div> | | |
| Vault transaction values | | | |
| Phone number | String | 30-character alphanumeric | <code>String phone;</code> |
| | Phone number of the customer. Can be sent in when creating or updating a Vault profile. | | |
| Email address | String | 30-character alphanumeric | <code>String email;</code> |
| | Email address of the customer. Can be sent in when creating or updating a Vault profile. | | |
| Additional notes | String | 30-character alphanumeric | <code>String note;</code> |
| | This optional field can be used for supplementary information to be sent in with the transaction. This field can be sent in when creating or updating a Vault profile. | | |

For information about Customer Information request fields see Appendix D Customer Information

¹Available to Canadian integrations only.

For information about Address Verification Service (AVS) request fields see Appendix E Address Verification Service

For information about Card Validation Digits (CVD) request fields see Appendix F Card Validation Digits

For information about Recurring Billing request fields see Appendix A Recurring Billing.

For information about Convenience Fee request fields see Appendix H Convenience Fee.

For information about Level 2/3 Visa, Level 2/3 MasterCard and Level 2/3 American Express, see Appendix J Definition of Request Fields for Level 2/3 - Visa, Appendix K Definition of Request Fields for Level 2/3 - Amex

Appendix B Definition of Response Fields

Table 86: Receipt object response values

| Value | Type | Limits | Get Method |
|-------------------------|---|---------------------------------|---|
| | Description | | |
| General response fields | | | |
| Card type | String | 2-character alphabetic (min. 1) | <code>receipt.getCardType()</code> ; |
| | Represents the type of card in the transaction, e.g., Visa, Mastercard. Possible values: <ul style="list-style-type: none">• V = Visa• M = Mastercard• AX = American Express• DC = Diner's Card• NO = Novus/Discover• SE = Sears• D = Debit• C1 = JCB | | |
| Transaction amount | String | 9-character decimal | <code>receipt.getTransAmount()</code> ; |
| | Transaction amount that was processed. | | |
| Transaction number | String | 255-character alphanumeric | <code>receipt.getTxnNumber()</code> ; |
| | Gateway Transaction identifier often needed for follow-on transactions (such as Refund and Purchase Correction) to reference the originally processed transaction. | | |
| Receipt ID | String | 50-character alphanumeric | <code>receipt.getReceiptId()</code> ; |
| | Order ID that was specified in the transaction request. | | |
| Transaction type | String | 2-character alphanumeric | <code>receipt.getTransType()</code> ; |
| | <ul style="list-style-type: none">• 0 = Purchase• 1 = Pre-Authorization• 2 = Completion• 4 = Refund• 11 = Void | | |

Table 86: Receipt object response values (continued)

| Value | Type Limits | | Get Method |
|--------------------|--|-----------------------------|--|
| | Description | | |
| Reference number | String | 18-character numeric | <code>receipt.getReferenceNum()</code> ; |
| | <p>Terminal used to process the transaction as well as the shift, batch and sequence number. This data is typically used to reference transactions on the host systems, and must be displayed on any receipt presented to the customer.</p> <p>This information is to be stored by the merchant.</p> <p>Example: 660123450010690030</p> <ul style="list-style-type: none"> • 66012345: Terminal ID • 001: Shift number • 069: Batch number • 003: Transaction number within the batch. | | |
| Response code | String | 3-character numeric | <code>receipt.getResponseCode()</code> ; |
| | <ul style="list-style-type: none"> • < 50: Transaction approved • ≥ 50: Transaction declined • Null: Transaction incomplete. <p>For further details on the response codes that are returned, see the Response Codes document at https://developer.moneris.com.</p> | | |
| ISO | String | 2-character numeric | <code>receipt.getISO()</code> ; |
| | ISO response code | | |
| Bank totals | Object | | <code>receipt.getBankTotals()</code> ; |
| | Response data returned in a Batch Close and Open Totals request. See "Definition of Response Fields" on the previous page. | | |
| Message | String | 100-character alpha-numeric | <code>receipt.getMessage()</code> ; |
| | <p>Response description returned from issuer.</p> <p>The message returned from the issuer is intended for merchant information only, and is not intended for customer receipts.</p> | | |
| Authorization code | String | 8-character alphanumeric | <code>receipt.getAuthCode()</code> ; |
| | Authorization code returned from the issuing institution. | | |

Table 86: Receipt object response values (continued)

| Value | Type Limits | | Get Method |
|---|---|---------------------------|--|
| | Description | | |
| Complete | String | true/false | <code>receipt.getComplete()</code> ; |
| | Transaction was sent to authorization host and a response was received | | |
| Transaction date | String | Format: yyyy-mm-dd | <code>receipt.getTransDate()</code> ; |
| | Processing host date stamp | | |
| Transaction time | String | Format: ##:##:## | <code>receipt.getTransTime()</code> ; |
| | Processing host time stamp | | |
| Ticket | String | N/A | <code>receipt.getTicket()</code> ; |
| | Reserved field. | | |
| Timed out | String | true/false | <code>receipt.getTimedOut()</code> ; |
| | Transaction failed due to a process timing out. | | |
| Is Visa Debit | String | true/false | <code>receipt.getIsVisaDebit()</code> ; |
| | Indicates whether the card processed is a Visa Debit. | | |
| | | | |
| Batch Close/Open Totals response fields | | | |
| Processed card types | String Array | N/A | <code>receipt.getCreditCards(ecr_no)</code> ; |
| | Returns all of the processed card types in the current batch for the terminal ID/ECR Number from the request. | | |
| Terminal IDs | String | 8-character alpha-numeric | <code>receipt.getTerminalIDs()</code> ; |
| | Returns the terminal ID/ECR Number from the request. | | |
| Purchase count | String | 4-character numeric | <code>receipt.getPurchaseCount(ecr, cardType)</code> ; |
| | Indicates the # of Purchase, Pre-Authorization Completion and Force Post transactions processed. If none were processed in the batch, then the value returned will be 0000. | | |

Table 86: Receipt object response values (continued)

| Value | Type | Limits | Get Method |
|--|---|----------------------------|--|
| | Description | | |
| Purchase amount | String | 11-character alpha-numeric | <code>receipt.getPurchaseAmount(ecr, cardType);</code> |
| | Indicates the dollar amount processed for Purchase, Pre-Authorization Completion or Force Post transactions. This field begins with a + and is followed by 10 numbers, the first 8 indicate the amount and the last 2 indicate the penny value. | | |
| | EXAMPLE: +0000000000 = 0.00 and +0000041625 = 416.25 | | |
| Refund count | String | 4-character numeric | <code>receipt.getRefundCount(ecr, cardType);</code> |
| | Indicates the # of Refund or Independent Refund transactions processed. If none were processed in the batch, then the value returned will be 0000. | | |
| Refund amount | String | 11-character alpha-numeric | <code>receipt.getRefundAmount(ecr, cardType);</code> |
| | Indicates the dollar amount processed for Refund, Independent Refund or ACH Credit transactions. This field begins with a + and is followed by 10 numbers, the first 8 indicate the amount and the last 2 indicate the penny value. | | |
| | Example, +0000000000 = 0.00 and +0000041625 = 416.25 | | |
| Correction count | String | 4-character numeric | <code>receipt.getCorrectionCount(ecr, cardType);</code> |
| | Indicates the # of Purchase Correction transactions processed. If none were processed in the batch, then the value returned will be 0000. | | |
| Correction amount | String | 11-character alpha-numeric | <code>receipt.getCorrectionAmount(ecr, cardType);</code> |
| | Indicates the dollar amount processed for Purchase Correction transactions. This field begins with a + and is followed by 10 numbers, the first 8 indicate the amount and the last 2 indicate the penny value. | | |
| | EXAMPLE: +0000000000 = 0.00 and +0000041625 = 416.25 | | |
| Recurring Billing Response Fields (see Appendix A, page 1) | | | |
| Recurring billing success | String | true/false | <code>receipt.getRecurSuccess();</code> |
| | Indicates whether the recurring billing transaction has been successfully set up for future billing. | | |

Table 86: Receipt object response values (continued)

| Value | Type | Limits | Get Method |
|---|---|---------------------------|----------------------------------|
| | Description | | |
| Recur update success | String | true/false | receipt.getRecurUpdateSuccess(); |
| | Indicates recur update success. | | |
| Next recur date | String | yyyy-mm-dd | receipt.getNextRecurDate(); |
| | Indicates next recur billing date. | | |
| Recur end date | String | yyyy-mm-dd | receipt.getRecurEndDate(); |
| | Indicates final recur billing date. | | |
| Status Check response fields (see Appendix C, page 324) | | | |
| Status code | String | 3-character alpha-numeric | receipt.getStatusCode(); |
| | <ul style="list-style-type: none">< 50: Transaction found and successful≥ 50: Transaction not found and not successful | | |
| | <div>NOTE: the status code is only populated if the connection object's Status Check property is set to true.</div> | | |
| Status message | String | found/not found | receipt.getStatusMessage(); |
| | <ul style="list-style-type: none">Found: $0 \leq \text{Status Code} \leq 49$Not Found or null: $50 \leq \text{Status Code} \leq 999$. | | |
| | <div>NOTE: The status message is only populated if the connection object's Status Check property is set to true.</div> | | |
| AVS response fields (see Appendix E, page 334) | | | |
| AVS result code | String | 1-character alpha-numeric | receipt.getAvsResultCode(); |
| | Indicates the address verification result. For a full list of possible response codes refer to Section Appendix B. | | |
| CVD response fields (see Appendix F, page 340) | | | |
| CVD result code | String | 2-character alpha-numeric | receipt.getCvdResultCode(); |
| | Indicates the CVD validation result. The first byte is the numeric CVD indicator sent in the request; the second byte is the response code. Possible response codes are shown in Appendix B | | |
| MPI response fields (see "MPI" on page 1) | | | |

Table 86: Receipt object response values (continued)

| Value | Type Limits | | Get Method |
|----------|---|-----------------------------|--|
| | Description | | |
| Type | String | 99-character alpha-numeric | |
| | VERes, PAREs or error defines what type of response you are receiving . | | |
| Success | Boolean | true/false | <code>receipt.getMpiSuccess()</code> ; |
| | True if attempt was successful, false if attempt was unsuccessful. | | |
| Message | String | 100-character alpha-betic | <code>receipt.getMpiMessage()</code> ; |
| | <p>MPI TXN transactions can produce the following values:</p> <ul style="list-style-type: none"> • Y: Create VBV verification form popup window. • N: Send purchase or preauth with crypt type 6 • U: Send purchase or preauth with crypt type 7. <p>MPI ACS transactions can produce the following values:</p> <ul style="list-style-type: none"> • Y or A: (Also <code>receipt.getMpiSuccess()=true</code>) Proceed with cavv purchase or cavv preauth. • N: Authentication failed or high-risk transaction. It is recommended that you do not to proceed with the transaction. Depending on a merchant's risk tolerance and results from other methods of fraud detection, transaction may proceed with crypt type 7. • U or time out: Send purchase or preauth as crypt type 7. | | |
| Term URL | String | 255-character alpha-numeric | |
| | URL to which the PAREs is returned | | |
| MD | String | 1024-character alphanumeric | |
| | Merchant-defined data that was echoed back | | |
| ACS URL | String | 255-character alpha-numeric | |
| | URL that will be for the generated pop-up | | |

Table 86: Receipt object response values (continued)

| Value | Type | Limits | Get Method |
|--|--|----------------------------|------------------------------|
| | Description | | |
| MPI CAVV | String | 28-character alpha-numeric | receipt.getMpiCavv(); |
| | VbV/MCSC/American Express SafeKey authentication data | | |
| MPI E-Commerce Indicator | String | 1-character alpha-numeric | receipt.getMPIEci(); |
| CAVV result code | String | 1-character alpha-numeric | receipt.getCavvResultCode(); |
| | <p>Indicates the Visa CAVV result. For more information, see 3.6.7 Cavv Result Codes for Verified by Visa.</p> <ul style="list-style-type: none">0 = CAVV authentication results invalid1 = CAVV failed validation; authentication2 = CAVV passed validation; authentication3 = CAVV passed validation; attempt4 = CAVV failed validation; attempt7 = CAVV failed validation; attempt (US issued cards only)8 = CAVV passed validation; attempt (US issued cards only)The CAVV result code indicates the result of the CAVV validation. | | |
| MPI inline form | | | receipt.getMpiInLineForm(); |
| | | | |
| Vault response fields (see 5.1, page 80) | | | |
| Data key | String | 28-character alpha-numeric | receipt.getDataKey(); |
| | The data key response field is populated when you send a Vault Add Credit Card-ResAddCC (page 83), Vault Encrypted Add Credit Card - EncResAddCC (page 86), Vault Tokenize Credit Card - ResTokenizeCC (page 106), Vault Temporary Token Add - ResTempAdd (page 88) or Vault Add Token - ResAddToken (page 104) transaction. It is the profile identifier that all future financial Vault transactions will use to associate with the saved information. | | |
| Vault payment type | String | cc/ach | receipt.getPaymentType(); |
| | Indicates the payment type associated with a Vault profile | | |
| Expiring card's Payment type | String | cc | receipt.getExpPaymentType(); |
| | Indicates the payment type associated with a Vault profile. Applicable to Vault Get Expiring transaction type. | | |

Table 86: Receipt object response values (continued)

| Value | Type Limits | | Get Method |
|------------------------------|---|----------------------------|--|
| | Description | | |
| Vault masked PAN | String | 20-character numeric | <code>receipt.getResMaskedPan()</code> ; |
| | Returns the first 4 and/or last 4 of the card number saved in the profile. | | |
| Expiring card's Masked PAN | String | 20-character numeric | <code>receipt.getExpMaskedPan()</code> ; |
| | Returns the first 4 and/or last 4 of the card number saved in the profile. Applicable to Vault Get Expiring transaction type. | | |
| Vault success | String | true/false | <code>receipt.getResSuccess()</code> ; |
| | Indicates whether Vault transaction was successful. | | |
| Vault customer ID | String | 30-character alpha-numeric | <code>receipt.getResCustId()</code> ; |
| | Returns the customer ID saved in the profile. | | |
| Expiring card's customer ID | String | 30-character alpha-numeric | <code>receipt.getExpCustId()</code> ; |
| | Returns the customer ID saved in the profile. Applicable to Vault Get Expiring transaction type. | | |
| Vault phone number | String | 30-character alpha-numeric | <code>receipt.getResPhone()</code> ; |
| | Returns the phone number saved in the profile. | | |
| Expiring card's phone number | String | 30-character alpha-numeric | <code>receipt.getExpPhone()</code> ; |
| | Returns the phone number saved in the profile. Applicable to Vault Get Expiring transaction type. | | |
| Vault email address | String | 30-character alpha-numeric | <code>receipt.getResEmail()</code> ; |
| | Returns the email address saved in the profile. | | |

Table 86: Receipt object response values (continued)

| Value | Type Limits | | Get Method |
|--------------------------------------|---|----------------------------|--|
| | Description | | |
| Expiring card's email address | String | 30-character alpha-numeric | <code>receipt.getExpEmail()</code> ; |
| | Returns the email address saved in the profile. Applicable to Vault Get Expiring transaction type. | | |
| Vault note | String | 30-character alpha-numeric | <code>receipt.getResNote()</code> ; |
| | Returns the note saved in the profile. | | |
| Expiring card's note | String | 30-character alpha-numeric | <code>receipt.getExpNote()</code> ; |
| | Returns the note saved in the profile. Applicable to Vault Get Expiring transaction type. | | |
| Vault expiry date | String | 4-character numeric | <code>receipt.getResExpdate()</code> ; |
| | Returns the expiry date of the card number saved in the profile. YYMM format. | | |
| Expiring card's expiry date | String | 4-character numeric | <code>receipt.getExpExpdate()</code> ; |
| | Returns the expiry date of the card number saved in the profile. YYMM format. Applicable to Vault Get Expiring transaction type. | | |
| Vault E-commerce indicator | String | 1-character numeric | <code>receipt.getResCryptType()</code> ; |
| | Returns the e-commerce indicator saved in the profile. | | |
| Expiring card's E-commerce indicator | String | 1-character numeric | <code>receipt.getExpCryptType()</code> ; |
| | Returns the e-commerce indicator saved in the profile. Applicable to Vault Get Expiring transaction type. | | |
| Vault AVS street number | String | 19-character alpha-numeric | <code>receipt.getResAvsStreetNumber()</code> ; |
| | Returns the AVS street number saved in the profile. If no other AVS street number is passed in the transaction request, this value will be submitted along with the financial transaction to the issuer. | | |
| Expiring card's AVS street number | String | 19-character alpha-numeric | <code>receipt.getExpAvsStreetNumber()</code> ; |
| | Returns the AVS street number saved in the profile. If no other AVS street number is passed in the transaction request, this value will be submitted along with the financial transaction to the issuer. Applicable to Vault Get Expiring transaction type. | | |

Table 86: Receipt object response values (continued)

| Value | Type | Limits | Get Method |
|---|---|----------------------------|--|
| | Description | | |
| Vault AVS street name | String | 19-character alpha-numeric | <code>receipt.getResAvsStreetName()</code> ; |
| | Returns the AVS street name saved in the profile. If no other AVS street number is passed in the transaction request, this value will be submitted along with the financial transaction to the issuer. | | |
| Expiring card's AVS street name | String | 19-character alpha-numeric | <code>receipt.getExpAvsStreetName()</code> ; |
| | Returns the AVS street name saved in the profile. If no other AVS street number is passed in the transaction request, this value will be submitted along with the financial transaction to the issuer. Applicable to Vault Get Expiring transaction type. | | |
| Vault AVS ZIP code | String | 9-character alpha-numeric | <code>receipt.getResAvsZipcode()</code> ; |
| | Returns the AVS zip/postal code saved in the profile. If no other AVS street number is passed in the transaction request, this value will be submitted along with the financial transaction to the issuer. | | |
| Expiring card's AVS ZIP code | String | 9-character alpha-numeric | <code>receipt.getExpAvsZipcode()</code> ; |
| | Returns the AVS zip/postal code saved in the profile. If no other AVS street number is passed in the transaction request, this value will be submitted along with the financial transaction to the issuer. Applicable to Vault Get Expiring transaction type. | | |
| Vault credit card number | String | 20-character numeric | <code>receipt.getResPan()</code> ; |
| | Returns the full credit card number saved in the Vault profile. Applicable to Vault Lookup Full transaction only. | | |
| Corporate card | String | true/false | <code>receipt.getCorporateCard()</code> ; |
| | Indicates whether the card associated with the Vault profile is a corporate card. | | |
| Encrypted Mag Swipe response fields (see Section 1, page 1) | | | |
| Masked credit card number | String | 20-character alpha-numeric | <code>receipt.getMskedPan()</code> ; |
| | | | |
| Convenience Fee response fields (see Appendix H, page 352) | | | |
| Convenience fee success | String | true/false | <code>receipt.getCfSuccess()</code> ; |
| | Indicates whether the Convenience Fee transaction processed successfully. | | |

Table 86: Receipt object response values (continued)

| Value | Type Limits | | Get Method |
|------------------------|--|---------------------------|---------------------------------------|
| | Description | | |
| Convenience fee status | String | 2-character alpha-numeric | <code>receipt.getCfStatus()</code> ; |
| | <p>Indicates the status of the merchant and convenience fee transactions. The CfStatus field provides details about the transaction behavior and should be referenced when contacting Moneris Customer Support.</p> <p>Possible values are:</p> <ul style="list-style-type: none"> • 1 or 1F – Completed 1st purchase transaction • 2 or 2F – Completed 2nd purchase transaction • 3 – Completed void transaction • 4A or 4D – Completed refund transaction • 7 or 7F – Completed merchant independent refund transaction • 8 or 8F – Completed merchant refund transaction • 9 or 9F – Completed 1st void transaction • 10 or 10F – Completed 2nd void transaction • 11A or 11D – Completed refund transaction | | |
| Convenience fee amount | String | 9-character decimal | <code>receipt.getFeeAmount()</code> ; |
| | The expected Convenience Fee amount. This field will return the amount submitted by the merchant for a successful transaction. For an unsuccessful transaction, it will return the expected convenience fee amount | | |
| Convenience fee rate | String | 9-character decimal | <code>receipt.getFeeRate()</code> ; |
| | <p>The convenience fee rate that has been defined on the merchant's profile. For example:</p> <p>1.00 – a fixed amount or</p> <p>10.0 - a percentage amount</p> | | |
| Convenience fee type | String | AMT/PCT | <code>receipt.getFeeType()</code> ; |
| | <p>The type of convenience fee that has been defined on the merchant's profile.</p> <p>Available options are:</p> <p>AMT – fixed amount</p> <p>PCT – percentage</p> | | |

Table 87: Financial transaction response codes

| Code | Description |
|------|--|
| < 50 | Transaction approved |
| ≥ 50 | Transaction declined |
| NULL | Transaction was not sent for authorization |

For more details on the response codes that are returned, see the Response Codes document available at <https://developer.moneris.com>

Table 88: Vault Admin Responses

| Code | Description |
|------|--|
| 001 | Successfully registered CC details. Successfully updated CC details. Successfully deleted CC details. Successfully located CC details. Successfully located # expiring cards. (NOTE: # = the number of cards located) |
| 983 | Cannot find previous |
| 986 | Incomplete: timed out |
| 987 | Invalid transaction |
| 988 | Cannot find expiring cards |
| Null | Error: Malformed XML |

Appendix C Status Check

• C.1 Using Status Check Response Fields

Status Check is a connection object value that allows merchants to verify whether a previously sent transaction was processed successfully.

To submit a Status Check request, resend the original transaction with all the same parameter values, but set the status check value to either `true` or `false`.

Once set to “true”, the gateway will check the status of a transaction that has an `order_id` that matches the one passed.

- If the transaction is found, the gateway will respond with the specifics of that transaction.
- If the transaction is not found, the gateway will respond with a not found message.

Once it is set to “false”, the transaction will process as a new transaction.

For example, if you send a Purchase transaction with Status Check, include the same values as the original Purchase such as the order ID and the amount.

The feature must be enabled in your merchant profile. To have it enabled, contact Moneris.

Things to Consider:

- The Status Check request should only be used once and immediately (within 2 minutes) after the last transaction that had failed.
- The Status Check request should not be used to check `openTotals` & `batchClose` requests.
- Do not resend the Status Check request if it has timed out. Additional investigation is required.

C.1 Using Status Check Response Fields

After you have used the connection object to send a Status Check request, you can use the Receipt object to obtain the information you want regarding the success of the original transaction.

The status response fields related to the status check are Status Code and Status Message.

Possible Status Code response values:

- 0-49: successful transaction
- 50-999: unsuccessful transaction.

Possible Status Message response values:

- Found: Status code is 0-49
- Not found or Null: Status code is 50-999)

If the Status Message is Found, all other response fields are the same as those from the original transaction.

If the Status Message is Not found, all other response fields will be Null.

Sample Purchase transaction with Status Check

```
public class TestCanadaPurchase
{
    public static void main(String[] args)
    {
        boolean status_check = false;
        Purchase purchase = new Purchase();

        HttpsPostRequest mpgReq = new HttpsPostRequest();
        mpgReq.setTransaction(purchase);
        mpgReq.setStatusCheck(status_check);
        mpgReq.send();
        try
        {
            Receipt receipt = mpgReq.getReceipt();
            System.out.println("StatusCode = " + receipt.getStatusCode());
            System.out.println("StatusMessage = " + receipt.getStatusMessage());
        }
        catch (Exception e)
        {
            e.printStackTrace();
        }
    }
}
```

Appendix D Customer Information

- Appendix D Customer Information
- D.2 Customer Information Sample Code

An optional add-on to a number of transactions the Customer Information object. The Customer Information object offers a number of fields to be submitted as part of the financial transaction, and stored by Moneris. These details may be viewed in the future in the Merchant Resource Center.

The following transactions support the Customer Information object :

- Purchase (Basic, Interac Debit and Vault)
- Pre-Authorization (Basic and Vault)
- Re-Authorization (Basic)
- ACH Debit

The Customer Information object holds three types of information:

- Miscellaneous customer information properties (page 327)
- Billing/Shipping information (page 327)
- Item information (page 329).

Things to Consider:

- If you send characters that are not included in the allowed list, these extra transaction details may not be stored.
- All fields are alphanumeric and allow the following characters: a-z A-Z 0-9 _ - : . @ \$ = /
- All French accents should be encoded as HTML entities, such as é.
- The data sent in Billing and Shipping Address fields will not be used for any address verification.

D.1 Using the CustInfo object

- Miscellaneous Properties (page 327)
- "Billing/Shipping information" on the next page
- "Item Information" on page 329

In addition to instantiating a transaction object and a connection object (as you would for a normal transaction), you must instantiate a CustInfo object.

Any transaction that supports CustInfo has a setCustInfo method. This is used to write the customer information to the transaction object before writing the transaction object to the connection object.

CustInfo object definition

```
CustInfo customer = new CustInfo();
```

Transaction object set method

```
<transaction>.setCustInfo(customer);
```

D.1.1 Miscellaneous Properties

While most of the customer information data is organized into objects, there are some values that are properties of the CustInfo object itself. They are explained in Table 89

Table 89: CustInfo object miscellaneous properties

| Value | Type | Limits | Set method |
|---------------|--------|----------------------------|--|
| Email Address | String | 60-character alphanumeric | <code>customer.setEmail("nick@widget.com");</code> |
| Instructions | String | 100-character alphanumeric | <code>customer.setInstructions("Rush!");</code> |

D.1.2 Billing/Shipping information

Billing and shipping information is stored as part of the CustInfo object. They can be written to the object in one of two ways:

- Using set methods
- Using hash tables.

Whichever method you use, you will be writing the information found in Table 90 for both the billing information and the shipping information.

All values are alphanumeric strings. Their maximum lengths are given in the Limit column.

Table 90: Billing and shipping information values

| Value | Limit | Hash table key |
|--------------|-------|----------------|
| First name | 30 | "first_name" |
| Last name | 30 | "last_name" |
| Company name | 50 | "company_name" |
| Address | 70 | "address" |
| City | 30 | "city" |

Table 90: Billing and shipping information values (continued)

| Value | Limit | Hash table key |
|----------------------------|-------|-----------------|
| Province/State | 30 | "province" |
| Postal/Zip code | 30 | "postal_code" |
| Country | 30 | "country" |
| Phone number (voice) | 30 | "phone" |
| Fax number | 30 | "fax" |
| Federal tax | 10 | "tax1" |
| Provincial/State tax | 10 | "tax2" |
| County/Local/Specialty tax | 10 | "tax3" |
| Shipping cost | 10 | "shipping_cost" |

D.1.2.1 Set Methods

The billing information and the shipping information for a given CustInfo object are written by using the `customer.setBilling()` and `customer.setShipping()` methods respectively:

```
customer.setBilling(first_name, last_name, company_name, address, city,
province, postal_code, country, phone, fax, tax1, tax2, tax3, shipping_cost);
```

```
customer.setShipping(first_name, last_name, company_name, address, city,
province, postal_code, country, phone, fax, tax1, tax2, tax3, shipping_cost);
```

Both of these methods have the same set of mandatory arguments. They are explained in Table 90 (page 327).

For sample code, see D.2 (page 330).

D.1.2.2 Hash Tables

Writing billing or shipping information using hash tables is done as follows:

1. Instantiate a CustInfo object.
2. Instantiate a Hashtable object. (The sample code uses a different hash table for billing and shipping for clarity purposes. However, the skillful developer can re-use the same one.)
3. Build the hashtable using put methods with the hash table keys in Table 90 (page 327).
4. Call the CustInfo object's setBilling/setShipping method to pass the hashtable information to the CustInfo object
5. Call the transaction object's setCustInfo method to write the CustInfo object (with the billing/-shipping information to the transaction object.

For sample code, see D.2 (page 330).

D.1.3 Item Information

The CustInfo object can hold information about multiple items. For each item, the values in Table 91 can be written.

All values are strings, but note the guidelines in the Limits column.

Table 91: Item information values

| Value | Limits | Hash table key |
|----------------------|--|-------------------|
| Item name | 45-character alphanumeric | "name" |
| Item quantity | 5-character numeric | "quantity" |
| Item product code | 20-character alphanumeric | "product_code" |
| Item extended amount | 9-character decimal with at least 3 digits and 2 penny values. 0.01-999999.99 | "extended_amount" |

One way of representing multiple items is with four arrays. This is the method used in the sample code. However, there are two ways to write the item information to the CustInfo object:

- Set methods
- Hash tables.

D.1.3.1 Set Methods

All the item information in Table 91 is written to the CustInfo in one instruction for a given item. Such as:

```
customer.setItem(item_description, item_quantity, item_product_code, item_extended_amount);
```

For sample code (showing how to use arrays to write information about two items), see D.2 (page 330).

D.1.3.2 Hash Tables

Writing item information using hash tables is done as follows:

1. Instantiate a CustInfo object.
2. Instantiate a Hashtable object. (The sample code uses a different hash table for each item for clarity purposes. However, the skillful developer can re-use the same one.)
3. Build the hashtable using put methods with the hash table keys in Table 90 (page 327).
4. Call the CustInfo object's setItem method to pass the hashtable information to the CustInfo object
5. Call the transaction object's setCustInfo method to write the CustInfo object (with the item information to the transaction object.

For sample code (showing how to use arrays to write information about two items), see D.2 (page 330).

D.2 Customer Information Sample Code

Below are 2 examples of a Basic Purchase Transaction with Customer Information. Both samples start by declaring the same variables. Therefore, that part will only be shown once. Values that are not involved in the Customer Information feature are not shown.

Note that the two items ordered are represented by four arrays, and the billing and shipping details are the same.

```

/***** Billing/Shipping Variables *****/
String first_name = "Bob";
String last_name = "Smith";
String company_name = "ProLine Inc.";
String address = "623 Bears Ave";
String city = "Chicago";
String province = "Illinois";
String postal_code = "M1M2M1";
String country = "Canada";
String phone = "777-999-7777";
String fax = "777-999-7778";
String tax1 = "10.00";
String tax2 = "5.78";
String tax3 = "4.56";
String shipping_cost = "10.00";

/***** Order Line Item Variables *****/
String[] item_description = new String[] { "Chicago Bears Helmet", "Soldier Field Poster" };
String[] item_quantity = new String[] { "1", "1" };
String[] item_product_code = new String[] { "CB3450", "SF998S" };
String[] item_extended_amount = new String[] { "150.00", "19.79" };
/*****

```

Sample Purchase with Customer Information—Set method version

```

CustInfo customer = new CustInfo();

/***** Miscellaneous Customer Information Methods *****/
customer.setEmail("nick@widget.com");
customer.setInstructions("Make it fast!");

/***** Set Customer Billing Information *****/
customer.setBilling(first_name, last_name, company_name, address, city, province, postal_code,
    country, phone, fax, tax1, tax2, tax3, shipping_cost);

/***** Set Customer Shipping Information *****/
customer.setShipping(first_name, last_name, company_name, address, city, province, postal_code,
    country, phone, fax, tax1, tax2, tax3, shipping_cost);

/***** Order Line Items *****/
customer.setItem(item_description[0], item_quantity[0], item_product_code[0], item_extended_amount
    [0]);
customer.setItem(item_description[1], item_quantity[1], item_product_code[1], item_extended_amount
    [1]);

Purchase purchase = new Purchase();
purchase.setCustInfo(customer);

HttpPostRequest mpgReq = new HttpPostRequest();
mpgReq.setTransaction(purchase);
mpgReq.send();

```

Sample Purchase with Customer Information—Hash table version

```

CustInfo customer2 = new CustInfo();
/***** Miscellaneous Customer Information Methods *****/
customer2.setEmail("nick@widget.com");
customer2.setInstructions("Make it fast!");
/***** Billing Hashtable *****/
Hashtable<String, String> b = new Hashtable<String, String>(); //billing hashtable
b.put("first_name", first_name);
b.put("last_name", last_name);
b.put("company_name", company_name);
b.put("address", address);
b.put("city", city);
b.put("province", province);
b.put("postal_code", postal_code);
b.put("country", country);
b.put("phone", phone);
b.put("fax", fax);
b.put("tax1", tax1); //federal tax
b.put("tax2", tax2); //prov tax
b.put("tax3", tax3); //luxury tax
b.put("shipping_cost", shipping_cost); //shipping cost
customer2.setBilling(b);
/***** Shipping Hashtable *****/
Hashtable<String, String> s = new Hashtable<String, String>(); //shipping hashtable
s.put("first_name", first_name);
s.put("last_name", last_name);
s.put("company_name", company_name);
s.put("address", address);
s.put("city", city);
s.put("province", province);

```

Sample Purchase with Customer Information—Hash table version

```

s.put("postal_code", postal_code);
s.put("country", country);
s.put("phone", phone);
s.put("fax", fax);
s.put("tax1", tax1); //federal tax
s.put("tax2", tax2); //prov tax
s.put("tax3", tax3); //luxury tax
s.put("shipping_cost", shipping_cost); //shipping cost
customer2.setShipping(s);
/***** Order Line Item1 Hashtable *****/
Hashtable<String, String> i1 = new Hashtable<String, String>(); //item hashtable #1
i1.put("name", item_description[0]);
i1.put("quantity", item_quantity[0]);
i1.put("product_code", item_product_code[0]);
i1.put("extended_amount", item_extended_amount[0]);
customer2.setItem(i1);
/***** Order Line Item2 Hashtable *****/
Hashtable<String, String> i2 = new Hashtable<String, String>(); //item hashtable #2
i2.put("name", "item2's name");
i2.put("quantity", "7");
i2.put("product_code", "item2's product code");
i2.put("extended_amount", "5.01");
customer2.setItem(i2);

Purchase purchase = new Purchase();
purchase.setCustInfo(customer);
HttpPostRequest mpgReq = new HttpsPostRequest();
mpgReq.setTransaction(purchase);
mpgReq.send();

```


Appendix E Address Verification Service

- Appendix E Address Verification Service
- Appendix E Address Verification Service
- Appendix E Address Verification Service
- Appendix E Address Verification Service

Address Verification Service (AVS) is an optional fraud-prevention tool offered by issuing banks whereby a cardholder's address is submitted as part of the transaction authorization. The AVS address is then compared to the address kept on file at the issuing bank. AVS checks whether the street number, street name and zip/postal code match. The issuing bank returns an AVS result code indicating whether the data was matched successfully. Regardless of the AVS result code returned, the credit card is authorized by the issuing bank.

The response that is received from AVS verification is intended to provide added security and fraud prevention, but the response itself does not affect the completion of a transaction. Upon receiving a response, the choice to proceed with a transaction is left entirely to the merchant. The responses is **not** a strict guideline of whether a transaction will be approved or declined.

The following transactions support AVS:

- Purchase (Basic and Mag Swipe)
- Pre-Authorization (Basic)
- Re-Authorization (Basic)
- ResAddCC (Vault)
- ResUpdateCC (Vault)

Things to Consider:

- AVS is only supported by Visa, MasterCard, Discover and American Express.
- When testing AVS, you must **only** use the Visa test card numbers 4242424242424242 or 4005554444444403, and the amounts described in the Simulator eFraud Response Codes document available at the Moneris developer portal (<https://developer-moneris.com>).
- Store ID "store5" is set up to support AVS testing.

E.1 Using AVS

In addition to instantiating a transaction object and a connection object (as you would for a normal transaction), you must instantiate an `AvsInfo` object. This object has a number of mandatory values that must be set (Appendix E, page 334) and optional values that may be set (Appendix E, page 334).

Any transaction that supports AVS has a `setAvsInfo` method. This is used to write the AVS information to the transaction object before writing the transaction object to the connection object.

AVSInfo object definition

```
AvsInfo avsCheck = new AvsInfo();
```

Transaction object set method

```
<transaction>.setAvsInfo (avsCheck) ;
```

E.2 AVS Request Fields**Table 92: AvsInfo object mandatory values**

| Value | Type | Limits | Set method |
|---------------------|-----------------------------|--|--|
| | Description | | |
| AVS street number | String | 19-character alphanumeric ¹ | <code>avsCheck.setAvsStreetNumber ("212") ;</code> |
| | Cardholder street number. | | |
| AVS street name | String | See AVS street number | <code>avsCheck.setAvsStreetName ("Payton Street") ;</code> |
| | Cardholder street name. | | |
| AVS zip/postal code | String | 9-character alphanumeric | <code>avsCheck.setAvsZipCode ("M1M1M1") ;</code> |
| | Cardholder zip/postal code. | | |

Table 93: AvsInfo object optional values

| Value | Type | Limits | Set method |
|-------------------|---|---------------------------|---|
| | Description | | |
| AVS email address | String | 60-character alphanumeric | <code>avsCheck.setAvsEmail ("test@host.com") ;</code> |
| | Email address provided by the customer at the point of sale. Applicable for American Express and JCB only. | | |
| AVS host name | String | 60-character alphanumeric | <code>avsCheck.setAvsHostname ("host-name") ;</code> |
| | Applicable for American Express and JCB only. | | |

¹19 characters is the combined limit between AVS street number and AVS street name.

Table 93: AvsInfo object optional values (continued)

| Value | Type | Limits | Set method |
|-----------------------------|--|---------------------------|--|
| | Description | | |
| AVS browser type | String | 60-character alphabetic | <code>avsCheck.setAvsBrowser("Mozilla");</code> |
| | Web browser used to make the purchase. Applicable for American Express and JCB only. | | |
| AVS ship-to-country code | String | 3-character alphabetic | <code>avsCheck.setAvsShiptoCountry("CAN");</code> |
| | Applicable for AmEx and JCB only. | | |
| AVS Shipping Method | String | X-character alphanumeric | <code>avsCheck.setAvsShipMethod("G");</code> |
| | | | |
| Merchant product SKU | String | 15-character alphanumeric | <code>avsCheck.setAvsMerchProdSku("123456");</code> |
| | For multiple items, the SKU of the most expensive item should be entered. Applicable for AmEx and JCB only. | | |
| AVS customer's IP address | String | 15-character alphanumeric | <code>avsCheck.setAvsCustIp("192.168.0.1");</code> |
| | IP address of device from which transaction is being sent. Applicable for AmEx and JCB only. | | |
| AVS customer's phone number | String | 10-character numeric | <code>avsCheck.setAvsCustPhone("5556667777");</code> |
| | Telephone number provided at point of sale. Applicable for American Express and JCB only. | | |

E.3 AVS Result Codes

Below is a full list of possible AVS response codes. These can be returned when you call the `receipt.getAvsResultCode()` method.

Table 94: AVS result codes

| Value | Visa | MasterCard/Discover | Amex/JCB |
|-------|--|---|--|
| A | Street address matches, zip/postal code does not. Acquirer rights not implied. | Address matches, zip/-postal code does not. | Billing address matches, zip/postal code does not. |

Table 94: AVS result codes (continued)

| Value | Visa | MasterCard/Discover | Amex/JCB |
|-------|---|--|--|
| B | Street address matches. Zip/Postal code not verified due to incompatible formats. (Acquirer sent both street address and zip/-postal code.) | N/A | N/A |
| C | Street address not verified due to incompatible formats. (Acquirer sent both street address and zip/postal code.) | N/A | N/A |
| D | Street address and zip/postal code match. | N/A | Customer name incorrect, zip/postal code matches |
| E | N/A | N/A | Customer name incorrect, billing address and zip/postal code match |
| F | (Applies to UK only) Street address and zip/-postal code match. | N/A | Customer name incorrect, billing address matches. |
| G | Address information not verified for international transaction. Any of the following may be true: <ul style="list-style-type: none"> • Issuer is not an AVS participant. • AVS data was present in the request, but issuer did not return an AVS result. • Visa performs AVS on behalf of the issuer and there was no address record on file for this account. | N/A | N/A |
| I | Address information not verified. | N/A | N/A |
| K | N/A | N/A | Customer name matches. |
| L | N/A | N/A | Customer name and postal code match. |
| N/A | N/A | Customer name and zip/postal code match. | |
| M | Street address and zip/postal code match. | N/A | Customer name, billing address, and zip/postal code match. |

Table 94: AVS result codes (continued)

| Value | Visa | MasterCard/Discover | Amex/JCB |
|-------|--|--|--|
| N | No match. Also used when acquirer requests AVS but sends no AVS data. | Neither address nor postal code matches. | Billing address and postal code do not match. |
| O | N/A | N/A | Customer name and billing address match |
| P | Postal code matches. Acquirer sent both postal code and street address, but street address not verified due to incompatible formats. | N/A | N/A |
| R | Retry: System unavailable or timed out. Issuer ordinarily performs AVS, but was unavailable. The code R is used by Visa when issuers are unavailable. Issuers should refrain from using this code. | Retry. System unable to process. | Retry. System unavailable. |
| S | N/A | AVS currently not supported. | AVS currently not supported. |
| T | N/A | Nine-digit zip/postal code matches, address does not match. | N/A |
| U | Address not verified for domestic transaction. One of the following is true: <ul style="list-style-type: none"> • Issuer is not an AVS participant • AVS data was present in the request, but issuer did not return an AVS result • Visa performs AVS on behalf of the issuer and there was no address record on file for this account. | No data from Issuer/Authorization system. | Information is unavailable. |
| W | Not applicable. If present, replaced with 'Z' by Visa. Available for U.S. issuers only. | For US Addresses, nine-digit zip/postal code matches, address does not. For addresses outside the US, zip/postal code matches, address does not. | Customer name, billing address, and zip/postal code are all correct. |

Table 94: AVS result codes (continued)

| Value | Visa | MasterCard/Discover | Amex/JCB |
|-------|--|--|--|
| X | N/A | For US addresses, nine-digit zip/postal code and address match. For addresses outside the US, zip/postal code and address match. | N/A |
| Y | Street address and zip/postal code match. | For US addresses, five-digit zip/postal code and address match. | Billing address and zip/-postal code match. |
| Z | Zip/postal code matches, but street address either does not match or street address was not included in request. | For U.S. addresses, five-digit zip code matches, address does not match. | Postal code matches, billing address does not match. |

E.4 AVS Sample Code

This is a sample of Java code illustrating how AVS is implemented with a Purchase transaction. Purchase object information that is not relevant to AVS has been removed.

Sample Purchase with AVS information

```

AvsInfo avsCheck = new AvsInfo();
avsCheck.setAvsStreetNumber("212");
avsCheck.setAvsStreetName("Payton Street");
avsCheck.setAvsZipCode("M1M1M1");
avsCheck.setAvsEmail("test@host.com");
avsCheck.setAvsHostname("hostname");
avsCheck.setAvsBrowser("Mozilla");
avsCheck.setAvsShiptoCountry("CAN");
avsCheck.setAvsShipMethod("G");
avsCheck.setAvsMerchProdSku("123456");
avsCheck.setAvsCustIp("192.168.0.1");
avsCheck.setAvsCustPhone("5556667777");

Purchase purchase = new Purchase();
purchase.setAvsInfo(avsCheck);

```

Appendix F Card Validation Digits

- F.1 Using CVD
- F.2 CVD Request Fields
- F.3 CVD Result Definitions
- F.4 CVD Sample Code

The Card Validation Digits (CVD) value refers to the numbers appearing on the back of the credit card rather than the numbers imprinted on the front¹. It is an optional fraud prevention tool that enables merchants to verify data provided by the cardholder at transaction time. This data is submitted along with the transaction to the issuing bank, which provides a response indicating whether the data is a match.

The response that is received from CVD verification is intended to provide added security and fraud prevention, but the response itself does not affect the completion of a transaction. Upon receiving a response, the choice whether to proceed with a transaction is left entirely to the merchant. The responses is **not** a strict guideline of which transaction will approve or decline.

The following transactions support CVD:

- Purchase (Basic, Vault and Mag Swipe)
- Pre-Authorization (Basic and Vault)
- Re-Authorization

Things to Consider:

- CVD is only supported by Visa, MasterCard and American Express.
- When testing CVD, you must **only** use the Visa test card numbers 4242424242424242 or 4005554444444403, and the amounts described in the Simulator eFraud Response Codes document available at the Moneris developer portal (<https://developer-moneris.com>).
- Test store_id "store5" is set up to support CVD testing.
- To have CVD for American Express added to your profile, contact American Express directly.

F.1 Using CVD



Security

The CVD value must only be passed to the payment gateway. Under **no** circumstances may it be stored for subsequent uses or displayed as part of the receipt information.

¹The exception to this rule is with American Express cards, which have the CVD printed on the front.

In addition to instantiating a transaction object and a connection object (as you would for a normal transaction), you must instantiate an CvdInfo object. This object has a number of mandatory values that must be set (Table 95, page 341).

Any transaction that supports CVD has a setCvdInfo method. This is used to write the CVD information to the transaction object before writing the transaction object to the connection object.

CvdInfo object definition

```
CvdInfo cvdCheck = new CvdInfo();
```

Transaction object set method

```
transaction.setCvdInfo(cvdCheck);
```

F.2 CVD Request Fields



Security

The CVD value must only be passed to the payment gateway. Under **no** circumstances may it be stored for subsequent uses or displayed as part of the receipt information.

Table 95: CvdInfo object mandatory values

| Value | Type | Limits | Set method |
|---------------|--|---------------------|---|
| | Description | | |
| CVD indicator | String | 1-character numeric | <code>cvdCheck.setCvdIndicator("1");</code> |
| | CVD presence indicator: 0: CVD value is deliberately bypassed or is not provided by the merchant. 1: CVD value is present. 2: CVD value is on the card, but is illegible. 9: Cardholder states that the card has no CVD imprint. | | |
| CVD value | String | 4-character numeric | <code>cvdCheck.setCvdValue("099");</code> |
| | CVD value located on credit card. The CVD value (supplied by the cardholder) must only be passed to the payment gateway. Under no circumstances may it be stored for subsequent use or displayed as part of the receipt information. | | |

F.3 CVD Result Definitions

Table 96: CVD result definitions

| Value | Definition |
|-------|--|
| M | Match |
| N | No Match |
| P | Not Processed |
| S | CVD should be on the card, but Merchant has indicated that CVD is not present. |
| U | Issuer is not a CVD participant |
| Y | Match for AmEx/JCB only |
| D | Invalid security code for AmEx/JCB |
| Other | Invalid response code |

F.4 CVD Sample Code

This is a sample of Java code illustrating how CVD is implemented with a Purchase transaction. Purchase object information that is not relevant to CVD has been removed.

| Sample purchase with CVD information |
|--|
| <pre>CvdInfo cvdCheck = new CvdInfo(); cvdCheck.setCvdIndicator("1"); cvdCheck.setCvdValue("099"); Purchase purchase = new Purchase(); purchase.setCvdInfo(cvdCheck);</pre> |

Appendix G Recurring Billing

- G.1 Setting Up a New Recurring Payment
- G.2 Updating a Recurring Payment
- G.3 Recurring Billing Response Fields and Codes

Recurring Billing allows you to set up payments whereby Moneris automatically processes the transactions and bills customers on your behalf based on the billing cycle information you provide.

G.1 Setting Up a New Recurring Payment outlines how to set up a new recurring payment when you submit a Purchase transaction (for various features), and G.2 Updating a Recurring Payment outlines how to update the details of a previously registered recurring payment by using the Recur Update transaction.

In addition to Recur Update, the features that support Purchase transactions with recurring billing are:

- Basic API transactions
- Vault

Things to Consider:

- To avoid shifting, do not set the `start_date` after the 28th if the `recur_unit` is `month`. To set the billing date for the last day of the month, set `recur_unit` to `eom`.
- When completing the update recurring billing portion please keep in mind that the recur bill dates cannot be changed to have an end date greater than 10 years from today and cannot be changed to have an end date end today or earlier.

G.1 Setting Up a New Recurring Payment

In addition to instantiating a transaction object and a `HttpPostRequest` connection object, you must instantiate a `Recur` object. This object has a number of mandatory properties that must be set.

Any transaction that supports Recurring Billing has a `setRecur` method. This is used to write the Recurring Billing information to the transaction object before writing the transaction object to the connection object.

Recur Object Definition

```
Recur recurring_cycle = new Recur(recur_unit, start_now, start_date, num_recur, period, recur_amount);
```

```
Recur recurInfo = new Recur(recurUnit, startNow, recurStartDateStr, period, numRecur, recurAmount);
```

```
transaction.setRecur(recurInfo);
```

For an explanation of these fields, see G.1 (page 343).

Transaction object set method

```
<transaction>.setRecur(recurring_cycle);
```

For Recurring Billing response fields, see page 1.

Table 97: Recur object mandatory arguments

| Value | Type | Limits | Variable Name |
|------------------|---|--|---------------|
| | Description | | |
| Recur unit | String | day, week, month or eom | recur_unit |
| | Unit to be used as a basis for the interval. This can be set as day, week, month or the end of the month. Works in conjunction with the <code>period</code> argument (see below) to define the billing frequency. | | |
| Start Now | String | true/false | start_now |
| | If a single charge is to be made against the card immediately, set this value to <code>true</code> . The amount to be billed immediately may differ from the amount billed on a regular basis thereafter. If the billing is to start in the future, set this value to <code>false</code> . | | |
| Start Date | String | YYYY/MM/DD format | start_date |
| | Date of the first future recurring billing transaction. This value must be a date in the future. If an additional charge is to be made immediately, the <code>start_now</code> argument must be set to <code>true</code> . | | |
| Number of Recurs | String | numeric 1-99 | num_recurs |
| | The number of times that the transaction must recur. | | |
| Period | String | numeric 1-999 | period |
| | Number of recur units that must pass between recurring billings. | | |
| Recurring Amount | String | 9-character decimal 0.01-99999999.99. | recur_amount |
| | Amount of the recurring transaction. This must contain at least three digits, two of which are penny values. This is the amount that will be billed on the <code>start_date</code> , and then billed repeatedly based on the interval defined by <code>period</code> and <code>recur_unit</code> . | | |

Recurring billing examples

```
Recur recurring_cycle = new Recur(recur_unit, start_now, start_date, num_rekurs, period, recur_amount);
```

Given a Recur object with the above syntax, G.1 shows how the transaction is interpreted for different argument values.

Table 98: Recurring Billing examples

| Argument | Values | Description |
|--------------|--------------|---|
| recur_unit | "month"; | The first transaction occurs on January 2, 2030 (because start_now="false"). The card is billed \$30.00 every 2 months on the 2nd of each month. The card will be billed a total of 12 times. This includes the transaction on January 2, 2030 |
| start_date | "2030/01/02" | |
| num_rekurs | "12" | |
| start_now | "false" | |
| period | "2" | |
| recur_amount | "30.00" | The first charge is billed immediately (because start_now=true). The initial charge is \$15.00. Beginning on January 2, 2030 the credit card will be billed \$30.00 every 2 weeks for 26 recurring charges. Therefore, the card will be billed a total of 27 times. (1 immediate and 26 recurring.) |
| recur_unit | "week"; | |
| start_date | "2030/01/02" | |
| num_rekurs | "26" | |
| start_now | "true" | |
| period | "2" | |
| recur_amount | "30.00" | |

Sample Android Pay Purchase with Recurring Billing

(missing or bad snippet)

Sample Purchase with Recurring Billing

```
public class TestPurchaseRecur
{
    public static void main(String[] args)
    {
        /**Purchase transaction arguments removed for space

        /***** Recur Variables *****/
        String recur_unit = "month"; //eom = end of month
        String start_now = "true";
        String start_date = "2016/07/28";
        String num_recur = "12";
        String period = "1";
        String recur_amount = "30.00";
        /***** Recur Object Option1 *****/
        Recur recurring_cycle = new Recur(recur_unit, start_now, start_date, num_recur, period, recur_
            amount);
        /***** Recur Object Option2 *****/
        Hashtable<String, String> recur_hash = new Hashtable<String, String>();
        recur_hash.put("recur_unit", recur_unit);
        recur_hash.put("start_now", start_now);
        recur_hash.put("start_date", start_date);
        recur_hash.put("num_recur", num_recur);
        recur_hash.put("period", period);
        recur_hash.put("recur_amount", recur_amount);
        /***** Transactional Object *****/
        Purchase purchase = new Purchase();
        /**Purchase transaction arguments removed for space
        /***** Set Recur *****/
        purchase.setRecur(recurring_cycle);
        /***** Https Post Request *****/
        HttpsPostRequest mpgReq = new HttpsPostRequest();
        /**Connection object arguments removed for space

        mpgReq.send();
        catch (Exception e)
        }
    }
}
```

G.2 Updating a Recurring Payment

After you have set up a Recurring Billing transaction, you can change the details of it. The RecurUpdate transaction object works like any of the basic transactions. That is, you must instantiate the RecurUpdate object, instantiate a connection object, update the connection object with the Recur Update transaction object, invoke the connection object's send method.

RecurUpdate transaction object definition

```
RecurUpdate recurUpdate = new RecurUpdate();
```

HttpPostRequest object for recurring billing update transaction

```
HttpPostRequest mpgReq = new HttpPostRequest();
mpgReq.setTransaction(recurUpdate);
```

Table 99: RecurUpdate transaction object mandatory values

| Value | Type Limits | | Set method |
|----------|--|---------------------------|--|
| | Description | | |
| Order ID | String | 50-character alphanumeric | <code>recurUpdate.setOrderId(order_id);</code> |
| | Order ID of the previously registered recurring billing transaction. | | |

With the exception of Status Check, the values/actions in G.2 are optional because they are the values that were specified in the original Recurring Billing transaction that you may now update. You can update any or all of them.

Status Check is used to determine whether a previous Recur Update transaction was properly processed.

Table 100: RecurUpdate transaction optional values

| Value/Action | Type | Limits | Set method |
|---|----------------------|--|--|
| | Description (if any) | | |
| Non-recurring billing values (see "Definition of Request Fields" on page 1 for more details). | | | |
| Customer ID | String | 50-character alphanumeric | <code>recurUpdate.setCustId (cust_id) ;</code> |
| Credit card number | String | 20-character alphanumeric | <code>recurUpdate.setPan (pan) ;</code> |
| Credit card expiry date | String | 4-character alphanumeric (YYMM format) | <code>recurUpdate.setExpdate (expiry_date) ;</code> |
| Recurring billing values | | | |
| Recurring amount | String | 9-character decimal At least 3 digits with two penny values. (0.01-9999999.99). | <code>recurUpdate.setRecurAmount (recur_amount) ;</code> |
| | | Changes the amount that is billed recurrently. The change takes effect on the next charge. | |

Table 100: RecurUpdate transaction optional values (continued)

| Value/Action | Type | Limits | Set method |
|---------------------------------|--|------------------|--|
| | Description (if any) | | |
| Add number of recurs | String | Numeric 1-999 | <code>recurUpdate.setAddNumRecurs(add_num);</code> |
| | <p>Adds to the given number of recurring transactions to the current (remaining) number.</p> <p>This can be used if a customer decides to extend a membership/subscription. However, because this must be a positive number, it cannot be used to decrease the current number of recurring transactions. For that, use the <code>setTotalNumRecurs</code> method below.</p> | | |
| Change number of recurs | String | Numeric 1-999 | <code>recurUpdate.setTotalNumRecurs(total_num);</code> |
| | <p>Replaces the current (remaining) number of recurring transactions. Note how this differs from the <code>setAddNumRecurs</code> method above.</p> | | |
| Hold recurring billing | String | true/false | <code>recurUpdate.setHold(hold);</code> |
| | <p>Temporarily pauses recurring billing.</p> <p>While a transaction is on hold, it is not billed for the recurring amount. However, the number of remaining recurs continues to be decremented during that time.</p> | | |
| Terminate recurring transaction | String | true/false | <code>recurUpdate.setTerminate(terminate);</code> |
| | <p>Terminates recurring billing.</p> <p>Note: After it has been terminated, a recurring transaction cannot be reactivated. A new purchase transaction with recurring billing must be submitted.</p> | | |

Sample Purchase with Recurring Billing

```

public class TestCanadaRecurUpdate
{
    public static void main(String[] args)
    {
        String store_id = "store5";
        String api_token = "yesguy";
        String order_id = "Test155409282";
        String cust_id = "antonio";
        String recur_amount = "1.50";
        String pan = "4242424242424242";
        String expiry_date = "1902";
        //String add_num = "";
        //String total_num = "";
        //String hold = "";
    }
}

```

Sample Purchase with Recurring Billing

```

//String terminate = "";
String processing_country_code = "CA";
boolean status_check = false;

RecurUpdate recurUpdate = new RecurUpdate();
recurUpdate.setOrderId(order_id);
recurUpdate.setCustId(cust_id);
recurUpdate.setRecurAmount(recur_amount);
recurUpdate.setPan(pan);
recurUpdate.setExpdate(expiry_date);
//recurUpdate.setAddNumRecurs(add_num);
//recurUpdate.setTotalNumRecurs(total_num);
//recurUpdate.setHold(hold);
//recurUpdate.setTerminate(terminate);

HttpPostRequest mpgReq = new HttpPostRequest();
mpgReq.setProcCountryCode(processing_country_code);
mpgReq.setTestMode(true); //false or comment out this line for production transactions
mpgReq.setStoreId(store_id);
mpgReq.setApiToken(api_token);
mpgReq.setTransaction(recurUpdate);
mpgReq.setStatusCheck(status_check);
mpgReq.send();

catch (Exception e)
{
    e.printStackTrace();
}
}

```

G.3 Recurring Billing Response Fields and Codes

Table 101 outlines the response fields that are part of recurring billing. Some are available when you set up recurring billing (such as with a Purchase transaction), and some are available when you update an existing transaction with the Recurring Billing transaction.

Receipt object definition

```
Receipt receipt = mpgReq.getReceipt();
```

Table 101: Recurring Billing response fields

| Value | Type | Limits | Get method |
|---|--|---------------------|--|
| | Description | | |
| Transaction object with Recurring Billing response fields | | | |
| Response code | String | 3-character numeric | <code>receipt.getResponseCode()</code> ; |
| | See Table 102: for a description of possible response codes. | | |

Table 101: Recurring Billing response fields

| Value | Type | | Limits | Get method |
|-------------------------------------|--|-------------------|--------|---|
| | Description | | | |
| Recur success | String | TBD | | <code>receipt.getRecurSuccess () ;</code> |
| | Indicates whether the transaction successfully registered | | | |
| Recur update object response fields | | | | |
| Recur update success | String | true/false | | <code>receipt.getRecurUpdateSuccess () ;</code> |
| | Indicates whether the transaction successfully updated. | | | |
| Next recur date | String | yyyy-mm-dd format | | <code>receipt.getNextRecurDate () ;</code> |
| | Indicates when the transaction will be billed again. | | | |
| Recur end date | String | yyyy-mm-dd format | | <code>receipt.getRecurEndDate () ;</code> |
| | Indicates when the Recurring Billing Transaction will end. | | | |

The Recur Update response is a 3-digit numeric value. The following is a list of all possible responses after a Recur Update transaction has been sent.

Table 102: Recur update response codes

| Request Value | Definition |
|---------------|---|
| 001 | Recurring transaction successfully updated (optional: terminated) |
| 983 | Cannot find the previous transaction |
| 984 | Data error: (optional: field name) |
| 985 | Invalid number of recurs |
| 986 | Incomplete: timed out |
| null | Error: Malformed XML |

Appendix H Convenience Fee

- H.1 Using Convenience Fee
- H.2 Convenience Fee Request Fields
- H.3 Convenience Fee Sample Code

The Convenience Fee program allows merchants to apply an additional charge to a customer's bill (with their consent) for the convenience of being able to pay for goods and services using an alternative payment channel. This applies only when providing a true convenience in the form of a channel outside the merchant's customary face-to-face payment channels.

The convenience fee is a charge in addition to what the consumer is paying for the provided goods/services. This charge appears as a separate line item on the consumer's statement.

The Convenience Fee program provides several benefits. It may allow you an opportunity to reduce or eliminate credit card processing fees and improve customer satisfaction.

This document outlines how to use the Java API for processing Convenience Fee credit card and ACH transactions. In particular, it describes the format for sending transactions with the appropriate convenience fee amount and the corresponding responses you will receive.

It is supported by the following transactions:

- Basic Purchase
- CAVV Purchase
- ACH Debit.

H.1 Using Convenience Fee

In addition to instantiating a transaction object and a connection object (as you would for a normal transaction), you must instantiate a `ConvFeeInfo` object. This object has one mandatory value that must be set (Table 103, page 353).

Any transaction that supports Convenience Fee has a `setConvFeeInfo` method. This is used to write the Convenience Fee information to the transaction object before writing the transaction object to the connection object.

ConvFeeInfo object definition

```
ConvFeeInfo convFeeInfo = new ConvFeeInfo();
```

Transaction object set method

```
<transaction>.setConvFeeInfo(convFeeInfo);
```


H.2 Convenience Fee Request Fields

Table 103: ConvFeeInfo object mandatory values

| Value | Type | Limits | Set method |
|------------------------|--|--------------|--|
| | Description | | |
| Convenience fee amount | Decimal | 9 characters | convFeeInfo.setConvenienceFee("5.00"); |
| | Amount customer is being charged as a convenience fee. | | |

H.3 Convenience Fee Sample Code

This is a sample of Java code illustrating how the Convenience Fee option is implemented with a Purchase transaction. Purchase object information that is not relevant to Convenience Fee has been removed.

| Sample Purchase with Convenience Fee information |
|---|
| <pre>Purchase purchase = new Purchase(); ConvFeeInfo convFeeInfo = new ConvFeeInfo(); convFeeInfo.setConvenienceFee("5.00"); purchase.setConvFeeInfo(convFeeInfo);</pre> |

Appendix I Definition of Request Fields for Level 2/3 - MasterCard

Table 1: Objects - Level 2/3 MasterCard

| MCCorpais Objects | Description |
|-------------------|----------------------------|
| MCCorpac | Corporate Card Common data |
| MCCorpal | Line Item Details |

Table 2: MasterCard - Corporate Card Common Data (MCCorpac) - Level 2 Request Fields

| Req | Variable Name | Field Name | Size/Type | Description |
|-----|---------------------|-----------------------|---------------------------|---|
| N | AustinTetraNumber | Austin-Tetra Number | 15-character alphanumeric | Merchant's Austin-Tetra Number |
| N | NaicsCode | NAICS Code | 15-character alphanumeric | North American Industry Classification System (NAICS) code assigned to the merchant |
| N | CustomerCode | Customer Code | 25-character alphanumeric | A control number, such as purchase order number, project number, department allocation number or name that the purchaser supplied the merchant. Left-justified; may be spaces |
| N | UniqueInvoiceNumber | Unique Invoice Number | 17-character alphanumeric | Unique number associated with the individual transaction provided by the merchant |
| N | CommodityCode | Commodity Code | 15-character alphanumeric | Code assigned by the merchant that best categorizes the item |

| Req | Variable Name | Field Name | Size/Type | Description |
|-----|-------------------------|-----------------------------------|---------------------------|--|
| | | | | (s) being purchased |
| N | OrderDate | Order Date | 6-character numeric | The date the item was ordered. If present, must contain a valid date in the format YYMMDD. |
| N | CorporationVatNumber | Corporation VAT Number | 20-character alphanumeric | Contains a corporation's value added tax (VAT) number |
| N | CustomerVatNumber | Customer VAT Number | 20-character alphanumeric | Contains the VAT number for the customer/cardholder used to identify the customer when purchasing goods and services from the merchant |
| N | FreightAmount | Freight Amount | 9-character alphanumeric | The freight on the total purchase. Must have 2 decimals |
| N | DutyAmount | Duty Amount | 9-character alphanumeric | The duty on the total purchase, Must have 2 decimals |
| N | DestinationProvinceCode | Destination State / Province Code | 3-character alphanumeric | State or Province of the country where the goods will be delivered. Left justified with trailing spaces. e.g., ONT - Ontario |
| N | DestinationCountryCode | Destination Country Code | 3-character alphanumeric | The country code where goods will be delivered. Left justified with trailing spaces. e.g., CAN - Canada |
| N | ShipFromPosCode | Ship From Postal Code | 10-character alphanumeric | The postal code or zip code from which |

| Req | Variable Name | Field Name | Size/Type | Description |
|-----|----------------------------|-------------------------------|---------------------------|--|
| | | | | items were shipped |
| N | ShipToPosCode | Destination Postal Code | 10-character alphanumeric | The postal code or zip code where goods will be delivered |
| N | AuthorizedContactName | Authorized Contact Name | 36-character alphanumeric | Name of an individual or company contacted for company authorized purchases |
| N | AuthorizedContactPhone | Authorized Contact Phone | 17-character alphanumeric | Phone number of an individual or company contacted for company authorized purchases |
| N | AdditionalCardAcceptordata | Additional Card Acceptor Data | 40-character alphanumeric | Information pertaining to the card acceptor |
| N | CardAcceptorType | Card Acceptor Type | 8-character alphanumeric | <p>Various classifications of business ownership characteristics.</p> <p>First character represents 'Business Type'</p> <p>The second represents 'Business Owner Type'.</p> <p>The third represents 'Business Certification Type'.</p> <p>The fourth represents 'Business Racial/Ethnic Type'.</p> <p>The fifth represents 'Business Type Provided Code'.</p> <p>The sixth represents 'Business Owner Type Provided Code'.</p> |

| Req | Variable Name | Field Name | Size/Type | Description |
|-----|-----------------------------|--------------------------------|---------------------------|--|
| | | | | <p>The seventh represents 'Business Certification Type Provided Code'.</p> <p>The eighth represents 'Business Racial/Ethnic Type'</p> |
| N | CardAcceptorTaxId | Card Acceptor Tax ID | 20-character alphanumeric | US Federal tax ID number for value added tax (VAT) ID. |
| N | CardAcceptorReferenceNumber | Card Acceptor Reference Number | 25-character alphanumeric | Code that facilitates card acceptor/corporation communication and record keeping |
| N | CardAcceptorVatNumber | Card Acceptor VAT Number | 20-character alphanumeric | Value added tax (VAT) number for the card acceptor location used to identify the card acceptor when collecting and reporting taxes |
| M* | Tax | Tax | 6-character array | <p>Can have up to 6 arrays contains different tax details. See Tax Array below for each field description.</p> <p>*This field is conditionally mandatory — if you use this array, you must fill in all tax array fields as listed in the Tax Array Request Fields below.</p> |

Table 3: MasterCard - Line Item Details (MCCorpal) - Level 3 Request Fields

| Req | Variable Name | Field Name | Size/Type | Description |
|-----|---------------|----------------|----------------------------|---|
| | CustomerCode | Customer Code | 25-character alpha-numeric | A control number, such as purchase order number, project number, department allocation number or name that the purchaser supplied the merchant. Left-justified; may be spaces |
| N | LineItemDate | Line Item Date | 6-character numeric | The purchase date of the line item referenced in the associated Corporate Card Line Item Detail. YYMMDD format |
| N | ShipDate | Ship Date | 6-character numeric | The date the merchandise was shipped to the destination. YYMMDD format |
| N | OrderDate | Order Date | 6-character numeric | The date the item was ordered YYMMDD format |
| N | ProductCode | Product Code | 12-character alpha-numeric | Line item Product Code (if this field is not sent, then itemComCode) If the order has a Freight/Shipping line item, the productCode value has to be "Freight/Shipping" If the order has a Discount line item, |

| Req | Variable Name | Field Name | Size/Type | Description |
|-----|-----------------|-------------------|---------------------------|---|
| | | | | the productCode value has to be "Discount" |
| N | ItemDescription | Item Description | 35-character alphanumeric | Line Item description |
| N | ItemQuantity | Item Quantity | 5-character alphanumeric | Quantity of line item |
| N | UnitCost | Unit Cost | 9-character decimal | Line item cost per unit. Must contain 2 decimal places |
| N | ItemUnitMeasure | Item Unit Measure | 12-character alphanumeric | The line item unit of measurement code |
| N | ExtItemAmount | Ext Item Amount | 9-character decimal | The discount amount can only be set when the product code is set to "Discount". When the product code is set to "Discount" then discount amount cannot be blank. Must contain 2 decimal places. |
| N | DiscountAmount | Discount Amount | 9-character decimal | The discount amount can only be set when the product code is set to "Discount". When the product code is set to "Discount" then discount amount cannot be blank. Must contain 2 decimal places. |
| N | CommodityCode | Commodity Code | 15-character alphanumeric | Code assigned to the merchant that best categorizes the item(s) being pur- |

| Req | Variable Name | Field Name | Size/Type | Description |
|-----|---------------|------------|-------------------|--|
| | | | | chased |
| M* | Tax | Tax | 6-character array | <p>Can have up to 6 arrays contains different tax details. See Tax Array below for each field description.</p> <p>*This field is conditionally mandatory — if you use this array, you must fill in all tax array fields as listed in the Tax Array Request Fields below.</p> |

Table 4: Tax Array Request Fields - MasterCard Level 2/3 Transactions

| Req | Variable Name | Field Name | Size/Type | Description |
|-----|---------------|------------|--------------------------|---|
| M | tax_amount | Tax Amount | 9-character decimal | Contains detail tax amount for purchase of goods or services. Must be 2 decimal places. Maximum 999999.99 |
| M | tax_rate | Tax Rate | 5-character numeric | Contains the detailed tax rate applied in relationship to a specific tax amount. Like 5% GST should be '5.0'. May contain upto 2 decimals with maximum upto to 999.99 |
| M | tax_type | Tax Type | 4-character alphanumeric | Contains tax type such as GST,QST,PST,HST |

| Req | Variable Name | Field Name | Size/Type | Description |
|-----|-----------------------|---------------------------------|----------------------------|---|
| M | tax_id | Tax ID | 20-character alpha-numeric | Provides an identification number used by the card acceptor with the tax authority in relationship to a specific tax amount such as GST/HST number |
| M | tax_included_in_sales | Tax included in sales indicator | 1-character alphanumeric | <p>This is the indicator used to reflect additional tax capture and reporting.</p> <p>Valid values are:</p> <p>Y = Tax included in total purchase amount</p> <p>N = Tax not included in total purchase amount</p> |

Table 5: MasterCard Level 3 Request Fields - DEPRECATED

| Req | Variable Name | Field Name | Size/Type | Description |
|-----|-----------------|------------------|----------------------------|---|
| Y | productCode | Product Code | 12-character alpha-numeric | <p>The product code of the individual item purchased</p> <p>Mandatory, cannot contain all spaces or all zeroes.</p> |
| Y | itemDescription | Item Description | 35-character alpha-numeric | <p>The description of the individual item purchased</p> <p>Mandatory, cannot contain</p> |

| Req | Variable Name | Field Name | Size/Type | Description |
|-----|---------------|----------------------|---------------------------|---|
| | | | | all spaces or all zeroes |
| Y | itemQuantity | Item Quantity | 5-character alpha-numeric | The quantity of the individual item purchased Mandatory, cannot contain all spaces or all zeroes |
| Y | itemUom | Item unit of measure | 3-character alpha-numeric | A three-position unit of measurement code Mandatory, cannot contain all spaces or all zeroes |
| Y | extItemAmount | Extended item amount | 9-character alpha-numeric | The amount of the item that is normally calculated as price x quantity Mandatory, cannot contain all spaces or all zeroes, must contain two decimals |
| N | discountInd | Discount indicator | 1-character alpha-numeric | Values: Y = Item amount includes tax amount N = Item amount does not include tax amount Space = not supported |

| Req | Variable Name | Field Name | Size/Type | Description |
|-----|------------------------|--|---------------------------|--|
| N | discountAmt | Discount amount | 9-character alpha-numeric | Leading zeros with 2 decimals |
| N | netGroIndForExtItemAmt | Net/gross indicator for extended item amount | 1-character alpha-numeric | Values: Y = Item amount includes tax amount N = Item amount does not include tax amount Space = not supported |
| N | taxRateApp | Tax rate applied | alphanumeric | This is a numeric decimal rate for GST/HST. May contain 2 decimals. |
| N | taxTypeApp | Tax type applied | alphanumeric | Description of tax applied as per tax type and tax amount. Use (GST) or (HST) |
| N | taxAmount | Tax Amount | alphanumeric | The GST/HST amount applied to item. Must have 2 decimals |
| N | debitCreditInd | Debit or Credit Indicator | alphanumeric | Values: D = extended item amount is a Debit C = extended item amount is a Credit Space = does |

| Req | Variable Name | Field Name | Size/Type | Description |
|-----|---------------|-----------------------------------|--------------|---|
| | | | | not apply |
| N | altTaxIdeAmt | Alternate Tax Identifier (Amount) | alphanumeric | Insert the QST/PST tax amount Must have 2 decimals |

Appendix J Definition of Request Fields for Level 2/3 - Visa

Table 1: Visa - Corporate Card Common Data - Level 2 Request Fields

| Req* | Value | Limits | Set Method | Description |
|------|---|----------------------------|-----------------|---|
| Y | National Tax | 12-character decimal | TRANSACTIONNAME | <p>Must reflect the amount of National Tax (GST or HST) appearing on the invoice.</p> <p>Minimum - 0.01 Maximum - 999999.99. Must have 2 decimal places.</p> |
| Y | Merchant VAT Registration/Single Business Reference | 20-character alpha-numeric | TRANSACTIONNAME | <p>Merchant's Tax Registration Number</p> <p>must be provided if tax is included on the invoice</p> <div> <p>NOTE: Must not be all spaces or all zeroes</p> </div> |
| C | Local Tax | 12-character decimal | TRANSACTIONNAME | <p>Must reflect the amount of Local Tax (PST or QST) appearing on the invoice</p> <p>If Local Tax included then</p> |

| Req* | Value | Limits | Set Method | Description |
|------|--|----------------------------|-----------------|--|
| | | | | <p>must not be all spaces or all zeroes; Must be provided if Local Tax (PST or QST) applies</p> <p>Minimum = 0.01</p> <p>Maximum = 999999.99</p> <p>Must have 2 decimal places</p> |
| C | Local Tax (PST or QST) Registration Number | 15-character alpha-numeric | TRANSACTIONNAME | <p>Merchant's Local Tax (PST/QST) Registration Number</p> <p>Must be provided if tax is included on the invoice; If Local Tax included then must not be all spaces or all zeroes</p> <p>Must be provided if Local Tax (PST or QST) applies</p> |
| C | Customer VAT Registration Number | 13-character alpha-numeric | TRANSACTIONNAME | <p>If the Customer's Tax Registration Number appears on the invoice to support tax exempt transactions it must be provided here</p> |

| Req* | Value | Limits | Set Method | Description |
|------|---|---------------------------|-----------------|---|
| C | Customer Code/Customer Reference Identifier (CRI) | 16-character alphanumeric | TRANSACTIONNAME | Value which the customer may choose to provide to the supplier at the point of sale – must be provided if given by the customer |
| N | Customer Code | 17-character alphanumeric | TRANSACTIONNAME | Optional customer code field that will not be passed along to Visa, but will be included on Moneris reporting |
| N | Invoice Number | 17-character alphanumeric | TRANSACTIONNAME | Optional invoice number field that will not be passed along to Visa, but will be included on Moneris reporting |

*Y = Required, N = Optional, C = Conditional

Table 2: Visa - Corporate Card Common Data- Level 2 Request Fields (VSPurcha)

| Req | Variable Name | Field Name | Size/Type | Description |
|-----|----------------|----------------|---------------------------|--|
| Y* | Buyer Name | buyer_name | 30-character alphanumeric | Buyer/Recipient Name *only required by CRA if transaction is >\$150 |
| N* | Local tax rate | local_tax_rate | 4-character numeric | Indicates the detailed tax rate applied in rela- |

| Req | Variable Name | Field Name | Size/Type | Description |
|-----|-------------------------------|--------------------|---------------------|--|
| | | | | <p>tionship to a local tax amount. e.g., 8% PST should be 8.0.</p> <p>maximum 99.99</p> <p>*Must be provided if Local Tax (PST or QST) applies.</p> |
| N | Duty Amount | duty_amount | 9-character decimal | <p>Duty on total purchase amount</p> <p>A minus sign means 'amount is a credit', plus sign or no sign means 'amount is a debit'</p> <p>maximum without sign is 999999.99</p> |
| N | Invoice Discount Treatment | discount_treatment | 1-character numeric | <p>Indicates how the merchant is managing discounts</p> <p>Must be one of the following values:</p> <p>0 - if no invoice level discounts apply for this invoice</p> <p>1 - if Tax was calculated on Post-Discount totals</p> <p>2 - if Tax was calculated on Pre-Discount totals</p> |
| N | Invoice Level Discount Amount | discount_amt | 9-character decimal | <p>Amount of discount (if provided at the invoice level according to the Invoice Discount Treatment)</p> |

| Req | Variable Name | Field Name | Size/Type | Description |
|-----|----------------------------------|--------------------|---------------------------|---|
| | | | | <p>Must be non-zero if Invoice Discount Treatment is 1 or 2</p> <p>Minimum amount is 0.00 and maximum is 999999.99</p> |
| N* | Ship To Postal Code / Zip Code | ship_to_pos_code | 10-character alphanumeric | <p>The postal code or zip code for the destination where goods will be delivered</p> <p>*Required if shipment is involved</p> <p>Full alpha postal code - Valid ANA<space>NAN format required if shipping to an address within Canada</p> |
| N | Ship From Postal Code / Zip Code | ship_from_pos_code | 10-character alphanumeric | <p>The postal code or zip code from which items were shipped</p> <p>For Canadian addresses, requires full alpha postal code for the merchant with Valid ANA<space>NAN format</p> |
| N* | Destination Country Code | des_cou_code | 2-character alphanumeric | <p>Code of country where purchased goods will be delivered</p> <p>*Required if it appears on the invoice for an international transaction</p> |

| Req | Variable Name | Field Name | Size/Type | Description |
|-----|---------------------------------------|----------------|----------------------------|---|
| Y | Unique VAT Invoice Reference Number | vat_ref_num | 25-character alpha-numeric | <p>Unique Value Added Tax Invoice Reference Number</p> <p>Must be populated with the invoice number and this cannot be all spaces or zeroes</p> |
| N | Tax Treatment | tax_treatment | 1-character numeric | <p>Must be one of the following values:</p> <p>0 = Net Prices with tax calculated at line item level;</p> <p>1 = Net Prices with tax calculated at invoice level;</p> <p>2 = Gross prices given with tax information provided at line item level;</p> <p>3 = Gross prices given with tax information provided at invoice level;</p> <p>4 = No tax applies (small merchant) on the invoice for the transaction</p> |
| N | Freight/Shipping Amount (Ship Amount) | freight_amount | 9-character decimal | <p>Freight charges on total purchase</p> <p>If shipping is not provided as a line item it must be provided here, if applicable</p> <p>Signed monetary amount: minus</p> |

| Req | Variable Name | Field Name | Size/Type | Description |
|-----|------------------------|------------------------|---------------------|--|
| | | | | sign means 'amount is a credit', plus sign or no sign means 'amount is a debit', maximum without sign is 999999.99 |
| N | GST HST Freight Rate | gst_hst_freight_rate | 4-character decimal | <p>Rate of GST (excludes PST) or HST charged on the shipping amount (in accordance with the Tax Treatment)</p> <p>If Freight/Shipping Amount is provided then this (National GST or HST) tax rate must be provided.</p> <p>Monetary amount, maximum is 99.99. Such as 13% HST is 13.00</p> |
| N | GST HST Freight Amount | gst_hst_freight_amount | 9-character decimal | <p>Amount of GST (excludes PST) or HST charged on the shipping amount</p> <p>If Freight/Shipping Amount is provided then this (National GST or HST) tax amount must be provided if taxTreatment is 0 or 2</p> <p>Signed monetary amount: maximum without sign is 999999.99.</p> |

Table 3: Visa - Line Item Details - Level 3 Request Fields (VSPurchI)

| Req | Variable Name | Field Name | Size/Type | Description |
|-----|----------------------|------------------|----------------------------|--|
| N | Item Commodity Code | item_com_code | 12-character alpha-numeric | Line item Commodity Code (if this field is not sent, then productCode must be sent) |
| N | Product Code | product_code | 12-character alpha-numeric | Line item Product Code (if this field is not sent, then itemComCode) If the order has a Freight/Shipping line item, the productCode value has to be "Freight/Shipping" If the order has a Discount line item, the productCode value has to be "Discount" |
| N | Item Description | item_description | 26-character alpha-numeric | Line item description |
| N | Item Quantity | item_quantity | 12-character decimal | Quantity of line item Max Value 9999999.9999 |
| N | Item Unit of Measure | item_uom | 3-character alphanumeric | Unit of Measure Use ANSI X-12 EDI Allowable Units of Measure and Codes |
| N | Item Unit Cost | unit_cost | 9-character decimal | Line item cost per unit 2-4 decimal places accepted Minimum = 0.0001 |

| Req | Variable Name | Field Name | Size/Type | Description |
|-----|--------------------|---------------------|---------------------|---|
| | | | | Maximum = 999999.9999 |
| N | VAT Tax Amount | vat_tax_amt | 9-character decimal | <p>Any value-added tax or other sales tax amount</p> <p>Must have 2 decimal places</p> <p>Minimum = 0.01</p> <p>Maximum = 999999.99</p> |
| N | VAT Tax Rate | vat_tax_rate | 4-character decimal | <p>Sales tax rate</p> <div>EXAMPLE: 8% PST should be 8.0</div> <p>maximum 99.99</p> |
| N | Discount Treatment | discount_treatmentL | 1-character numeric | <p>Must be one of the following values:</p> <p>0 if no invoice level discounts apply for this invoice</p> <p>1 if Tax was calculated on Post-Discount totals</p> <p>2 if Tax was calculated on Pre-Discount totals.</p> |
| N | discountAmtL | discount_amtL | 9-character decimal | <p>Amount of discount, if provided for this line item according to the Line Item Discount Treatment</p> <p>Must be non-zero if Line Item Discount Treatment is 1 or 2</p> <p>Must have 2</p> |

| Req | Variable Name | Field Name | Size/Type | Description |
|-----|---------------|------------|-----------|---|
| | | | | decimal places Minimum = 0.01 Maximum = 999999.99 |

Appendix K Definition of Request Fields for Level 2/3 - Amex

Table 1: Amex- Level 2/3 Request Fields - Heading Fields

| Req | Variable Name | Field Name | Size/Type | Description | | | | | | | | | | | | |
|--------------|----------------------|----------------------------|--------------------------------|--|--------------|--------------|----|-------------------|----|----------------------|----|-------------------|----|--------------|----|---------------|
| N | big04 | Purchase Order Num- ber | 22-character alpha- numeric | | | | | | | | | | | | | |
| N | big05 | Release Number | 30-character alpha- numeric | | | | | | | | | | | | | |
| N | big10 | Invoice Number | 10-character alpha- numeric | | | | | | | | | | | | | |
| Y | n101 | Entity Identifier Code | 2-character alpha- numeric | ‘R6’ - Requester (required) ‘BG’ - Buying Group (optional) ‘SF’ - Ship From (optional) ‘ST’ - Ship To (optional) ‘40’ - Receiver (optional) | | | | | | | | | | | | |
| Y | n102 | Name | 40-character alpha- numeric | <table><tr><th>n101 code</th><th>n102 meaning</th></tr><tr><td>R6</td><td>Requester Name</td></tr><tr><td>BG</td><td>Buying Group Name</td></tr><tr><td>SF</td><td>Ship From Name</td></tr><tr><td>ST</td><td>Ship To Name</td></tr><tr><td>40</td><td>Receiver Name</td></tr></table> | n101 code | n102 meaning | R6 | Requester Name | BG | Buying Group Name | SF | Ship From Name | ST | Ship To Name | 40 | Receiver Name |
| n101 code | n102 meaning | | | | | | | | | | | | | | | |
| R6 | Requester Name | | | | | | | | | | | | | | | |
| BG | Buying Group Name | | | | | | | | | | | | | | | |
| SF | Ship From Name | | | | | | | | | | | | | | | |
| ST | Ship To Name | | | | | | | | | | | | | | | |
| 40 | Receiver Name | | | | | | | | | | | | | | | |
| N | n301 | Address | 40-character alpha- numeric | Address | | | | | | | | | | | | |
| N | n401 | City | 30-character alpha- | City | | | | | | | | | | | | |

| Req | Variable Name | Field Name | Size/Type | Description | | | | | | | | | | | | | | | | | | | | | | |
|------------|--|------------------------------------|---|--|-----------------|----|----|----|----|----|----|----|---|----|----|--|------------|---------------|----|----------------------------|----|----------------------------|----|--|----|--|
| | | | numeric | | | | | | | | | | | | | | | | | | | | | | | |
| N | n402 | State or Province | 2-character alpha-numeric | State or Province | | | | | | | | | | | | | | | | | | | | | | |
| N | n403 | Postal Code | 15-character alpha-numeric | Postal Code | | | | | | | | | | | | | | | | | | | | | | |
| Y | ref01 | Reference Identification Qualifier | 2-character alpha-numeric | ‘VR’ – Vendor ID Number ‘14’ – Master Account Number ‘12’ – Billing Account ‘4C’ – Shipment Destination Code (required) ‘CR’ – Customer Reference Number | | | | | | | | | | | | | | | | | | | | | | |
| Y | ref02 | Reference Identification | alphanumeric, # of characters depend on the value entered for ref01, as follows: <table><thead><tr><th>ref01 code</th><th>character limit</th></tr></thead><tbody><tr><td>VR</td><td>10</td></tr><tr><td>14</td><td>10</td></tr><tr><td>12</td><td>30</td></tr><tr><td>4C</td><td>6</td></tr><tr><td>CR</td><td>17</td></tr></tbody></table> | ref01 code | character limit | VR | 10 | 14 | 10 | 12 | 30 | 4C | 6 | CR | 17 | VR is the Vendor ID Number, other codes describe the following: <table><thead><tr><th>ref01 code</th><th>ref02 meaning</th></tr></thead><tbody><tr><td>14</td><td>Amex CAP number (optional)</td></tr><tr><td>12</td><td>Billing Account (optional)</td></tr><tr><td>4C</td><td>Ship to Zip or Canadian Postal Code (required)</td></tr><tr><td>CR</td><td>Cardmember Reference Number (optional)</td></tr></tbody></table> | ref01 code | ref02 meaning | 14 | Amex CAP number (optional) | 12 | Billing Account (optional) | 4C | Ship to Zip or Canadian Postal Code (required) | CR | Cardmember Reference Number (optional) |
| ref01 code | character limit | | | | | | | | | | | | | | | | | | | | | | | | | |
| VR | 10 | | | | | | | | | | | | | | | | | | | | | | | | | |
| 14 | 10 | | | | | | | | | | | | | | | | | | | | | | | | | |
| 12 | 30 | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4C | 6 | | | | | | | | | | | | | | | | | | | | | | | | | |
| CR | 17 | | | | | | | | | | | | | | | | | | | | | | | | | |
| ref01 code | ref02 meaning | | | | | | | | | | | | | | | | | | | | | | | | | |
| 14 | Amex CAP number (optional) | | | | | | | | | | | | | | | | | | | | | | | | | |
| 12 | Billing Account (optional) | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4C | Ship to Zip or Canadian Postal Code (required) | | | | | | | | | | | | | | | | | | | | | | | | | |
| CR | Cardmember Reference Number (optional) | | | | | | | | | | | | | | | | | | | | | | | | | |

Table 2: Amex - Level 2/3 Request Fields - Detail Fields

| Req | Variable Name | Field Name | Size/Type | Description |
|-----|---------------|--------------------|----------------|-------------|
| Y | it102 | Line Item Quantity | 10-character R | |

| Req | Variable Name | Field Name | Size/Type | Description | | | | | | | | |
|--------------|-----------------|------------------------------------|---|--|-----------------|----|----|----|----|-------|----|--|
| | | Invoiced | | | | | | | | | | |
| Y | it103 | Unit or Basis for Measurement Code | 2-character alphanumeric | | | | | | | | | |
| Y | it104 | Unit Price | 15-character R | | | | | | | | | |
| N | it105 | Basis or Unit Price Code | 2-character alphanumeric | | | | | | | | | |
| N | it10618 | Product/Service ID Qualifier | 2-character alphanumeric | ‘MG’ - Manufacturer’s Part Number ‘VC’ - Supplier Catalog Number ‘SK’ - Supplier Stock Keeping Unit Number ‘UP’ - Universal Product Code ‘VP’ – Vendor Part Number ‘PO’ – Purchase Order Number ‘AN’ – Client Defined Asset Code | | | | | | | | |
| N | it10719 | Product/Service ID | <table><tr><th>it10618 code</th><th>character limit</th></tr><tr><td>VC</td><td>20</td></tr><tr><td>PO</td><td>22</td></tr><tr><td>other</td><td>30</td></tr></table> | it10618 code | character limit | VC | 20 | PO | 22 | other | 30 | |
| it10618 code | character limit | | | | | | | | | | | |
| VC | 20 | | | | | | | | | | | |
| PO | 22 | | | | | | | | | | | |
| other | 30 | | | | | | | | | | | |
| Y | txi01 | Tax Type code | 2-character alphanumeric | ‘CA’ – City Tax (optional) ‘CP’ – County/Parish Sales Tax (optional) ‘CT’ – County/Tax | | | | | | | | |

| Req | Variable Name | Field Name | Size/Type | Description |
|-----|---------------|-----------------|--------------------------|--|
| | | | | (optional) 'EV' – Environmental Tax (optional) 'GS' – Good and Services Tax (GST) (optional) 'LS' – State and Local Sales Tax (optional) 'LT' – Local Sales Tax (optional) 'PG' – Provincial Sales Tax (PST) (optional) 'SP' – State/Provincial Tax a.k.a. Quebec Sales Tax (QST) (optional) 'ST' – State Sales Tax (optional) 'TX' – All Taxes (required) 'VA' – Value-Added Tax a.k.a. Canadian Harmonized Sales Tax (HST) (optional) |
| N | txi02 | Monetary Amount | 6-character decimal | |
| N | txi03 | Percent | 10-character decimal | |
| N | txi06 | Tax Exempt Code | 1-character alphanumeric | '1' – Yes (Tax Exempt) '2' – No (Not Tax Exempt) 'A' – Labor Taxable, Material Exempt |

| Req | Variable Name | Field Name | Size/Type | Description |
|-----|---------------|---------------------------|---------------------------|---|
| | | | | 'B' – Material Taxable, Labor Exempt 'C' – Not Taxable 'F' – Exempt (Goods/Services Tax) 'G' – Exempt (Provincial Sales Tax) 'L' – Exempt Local Service 'R' – Recurring Exempt 'U' – Usage Exempt |
| Y | pam05 | Line Item Extended Amount | 8-character decimal | |
| Y | pid06 | Line Item Description | 80-character alphanumeric | |

Table 3: Amex - Level 2/3 Request Fields - Summary Fields

| Req | Variable Name | Field Name | Size/Type | Description |
|-----|---------------|---------------|--------------------------|---|
| Y | txi01 | Tax Type code | 2-character alphanumeric | 'CA' – City Tax (optional) 'CP' – County/Parish Sales Tax (optional) 'CT' – County/Tax (optional) 'EV' – Environmental Tax (optional) 'GS' – Good and Services Tax (GST) (optional) 'LS' – State and Local Sales Tax |

| Req | Variable Name | Field Name | Size/Type | Description |
|-----|---------------|-----------------|--------------------------|---|
| | | | | (optional) 'LT' – Local Sales Tax (optional) 'PG' – Provincial Sales Tax (PST) (optional) 'SP' – State/Provincial Tax a.k.a. Quebec Sales Tax (QST) (optional) 'ST' – State Sales Tax (optional) 'TX' – All Taxes (required) 'VA' – Value-Added Tax a.k.a. Canadian Harmonized Sales Tax (HST) (optional) |
| N | txi02 | Monetary Amount | 6-character decimal | |
| N | txi03 | Percent | 10-character decimal | |
| N | txi06 | Tax Exempt Code | 1-character alphanumeric | '1' – Yes (Tax Exempt) '2' – No (Not Tax Exempt) 'A' – Labor Taxable, Material Exempt 'B' – Material Taxable, Labor Exempt 'C' – Not Taxable 'F' – Exempt (Goods/Services Tax) 'G' – Exempt (Provincial Sales Tax) 'L' – Exempt Local Service |

| Req | Variable Name | Field Name | Size/Type | Description |
|-----|---------------|------------|-----------|--|
| | | | | 'R' – Recurring Exempt 'U' – Usage Exempt |

Appendix L Error Messages

Error messages that are returned if the gateway is unreachable

Global Error Receipt

You are not connecting to our servers. This can be caused by a firewall or your internet connection.

Response Code = NULL

The response code can be returned as null for a variety of reasons. The majority of the time, the explanation is contained within the Message field.

When a 'NULL' response is returned, it can indicate that the issuer, the credit card host, or the gateway is unavailable. This may be because they are offline or because you are unable to connect to the internet.

A 'NULL' can also be returned when a transaction message is improperly formatted.

Error messages that are returned in the Message field of the response

XML Parse Error in Request: <System specific detail>

An improper XML document was sent from the API to the servlet.

XML Parse Error in Response: <System specific detail>

An improper XML document was sent back from the servlet.

Transaction Not Completed Timed Out

Transaction timed out before the host responds to the gateway.

Request was not allowed at this time

The host is disconnected.

Could not establish connection with the gateway: <System specific detail>

Gateway is not accepting transactions or server does not have proper access to internet.

Input/Output Error: <System specific detail>

Servlet is not running.

The transaction was not sent to the host because of a duplicate order id

Tried to use an order id which was already in use.

The transaction was not sent to the host because of a duplicate order id

Expiry Date was sent in the wrong format.

Vault error messages

Can not find previous

Data key provided was not found in our records or profile is no longer active.

Invalid Transaction

Transaction cannot be performed because improper data was sent.

or

Mandatory field is missing or an invalid SEC code was sent.

Malformed XML

Parse error.


Incomplete

Timed out.

or

Cannot find expiring cards.

Appendix M Process Flow for Basic PreAuth, ReAuth and Completion Transactions

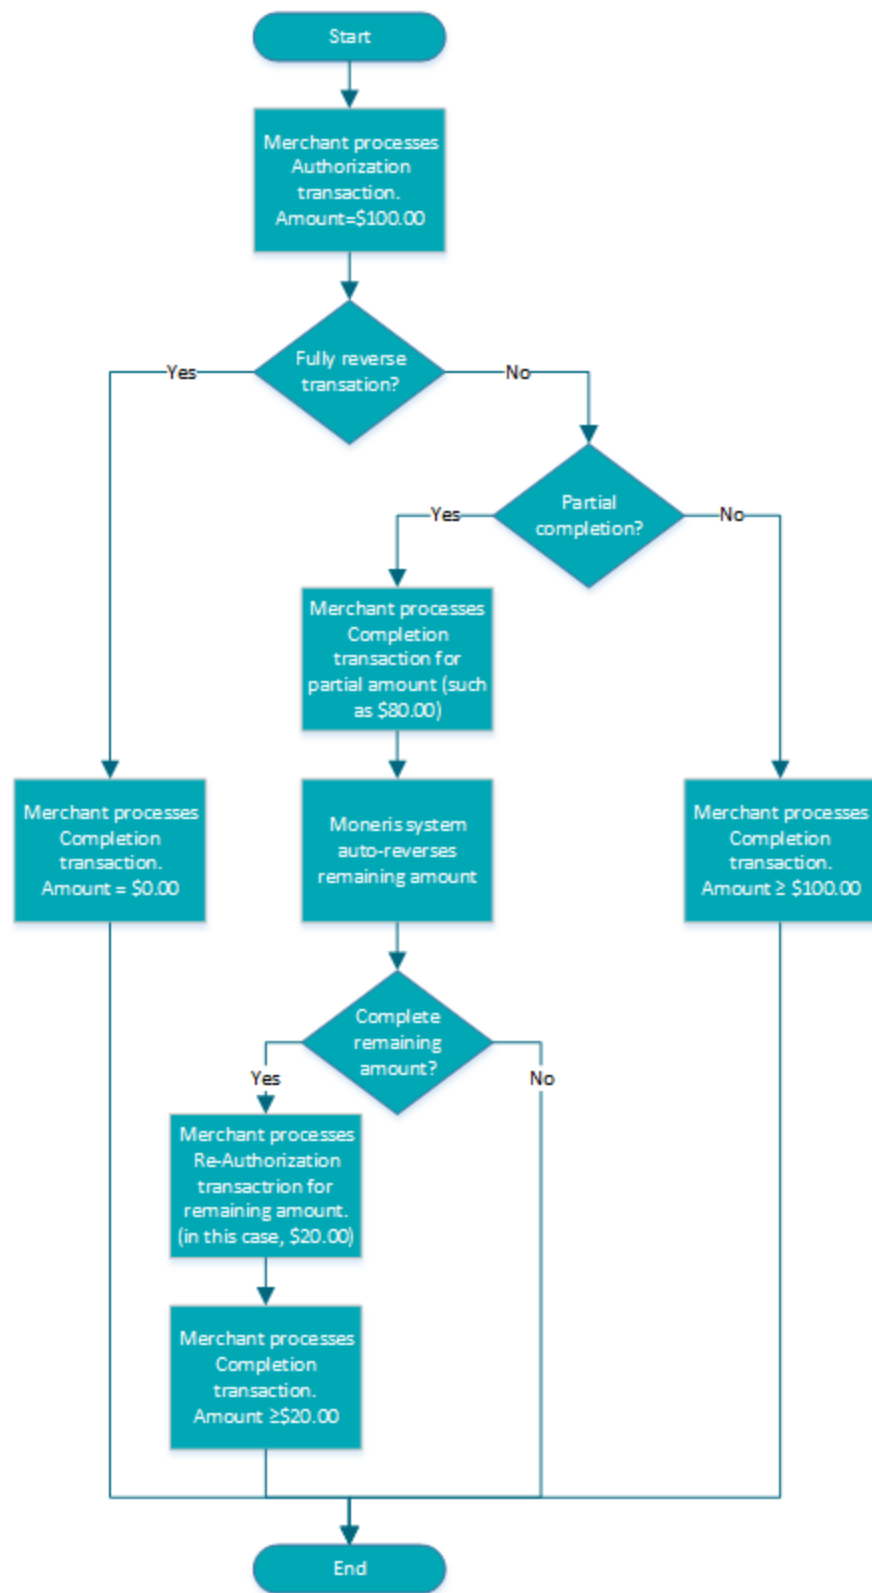

Appendix N Merchant Checklists for INTERAC® Online Payment Certification Testing

Merchant Information

| | | |
|--|------------------------------------|--|
| Name and URL | Merchant Name (English) | |
| | Homepage URL (English) | |
| | Merchant Name (French) | |
| | Homepage URL (French) | |
| Number | Merchant Number | |
| Transaction fee category (Circle one) | Government Education General | |

Checklist for Front-End Tests

| Case # | Date Completed | Remarks |
|--------|----------------|---------|
| 1 | | |
| 2 | | |
| 3 | | |
| 4 | | |
| 5 | | |
| 6 | | |
| 7 | | |
| 8 | | |
| 9 | | |
| 10 | | |
| 11 | | |
| 12 | | |
| 13 | | |
| 14 | | |
| 15 | | |

| Case # | Date Completed | Remarks |
|--------|----------------|---------|
| 16 | | |
| 17 | | |
| 18 | | |
| 19 | | |
| 20 | | |
| 21 | | |
| 22 | | |
| 23 | | |
| 24 | | |
| 25 | | |
| 26 | | |
| 27 | | |
| 28 | | |
| 29 | | |
| 30 | | |
| 31 | | |
| 32 | | |
| 33 | | |
| 34 | | |
| 35 | | |
| 36 | | |
| 37 | | |
| 38 | | |
| 39 | | |

Merchant Requirements

Table 104: Checklist for web display requirements

| Done | Requirement |
|------|---------------|
| | Checkout page |

Table 104: Checklist for web display requirements (continued)

| Done | Requirement |
|--|---|
| | Displays the INTERAC Online design (logo), wordmark (text "INTERAC Online) or both |
| Design and Wordmark Requirements (any page) | |
| | <p>Other payment option logos:</p> <ul style="list-style-type: none"> Displays the INTERAC Online design (logo) if the merchant displays the trademarks or logos of other payment options. Design is equal in size and no less prominent than other payment option trademarks. |
| | <p>INTERAC wordmark:</p> <ul style="list-style-type: none"> INTERAC is always either in capital letters or italics (as in "the INTERAC Online service") In the first use of the INTERAC Online wordmark, INTERAC is followed by the ® notation in superscript. For example, "<i>Interac</i>[®]" (English) or "<<<i>Interac</i>^{MD}>>" (French). On the same page as the first occurrence of the wordmark, the following language-appropriate footnote appears: <ul style="list-style-type: none"> ® Trademark of Interac Inc. Used under licence" ^{MD} Marque de commerce d'Interac Inc. Utilisée sous licence |
| Version of design | |
| | <p>Uses the two-colour design on the web:</p> <ul style="list-style-type: none"> Horizontal version—height no shorter than 25 pixels (width-to-height ratio of 2:37:1) Vertical version—width no narrower than 30 pixels (width-to-height ratio of 1:1:37) |
| "Learn more" information | |
| | Provides consumers with a link to www.interaonline.com/learn (preferably on the checkout page) |
| Confirmation page | |
| | States that the transaction is successful |
| | Displays the financial institution's name and confirmation number |
| | Provides ability to print |

Table 104: Checklist for web display requirements (continued)

| Done | Requirement |
|------------------------|---|
| Error page | |
| | Indicates that payment was unsuccessful |
| | States that the order is cancelled or displays other payment options |
| Timeout message | |
| | Is displayed if consumer has less than 30 minutes to complete payment |
| Payment | |
| | Displays the total in Canadian dollars |

Table 105: Checklist for security/privacy requirements

| Done | Requirement |
|-----------------------------|--|
| Merchant | |
| | Uses no less than 128-bit SSL encryption when collecting personal information |
| | Protects consumer information in accordance with applicable federal and provincial privacy legislation |
| | Adheres to the Canadian Code of Practice for Consumer Protection in Electronic Commerce |
| Provided screenshots | |
| | Checkout page (where customer selects INTERAC Online option) |
| | Confirmation page (one of the test case 1, 2, or 3) |
| | Error page (test case 4) |

Appendix O Third-Party Service Provider Checklists for INTERAC® Online Payment Certification Testing

Third-Party Service Provider Information

| | | |
|--------------------------|---------------|--|
| Name | English | |
| | French | |
| Merchant Web Application | Solution Name | |
| | Version | |
| Acquirer | | |

Interaconline.com/Interacnlgne.com Web Site Listing Information

See http://www.interaconline.com/merchants_thirdparty.php for examples.

| | |
|-----------------------------|---|
| English contact information | 5 lines maximum. 35 characters/line maximum. For example, contact name and title, department, telephone, web site, email. |
| English logo | File type: PNG. Maximum size: 120x120 pixels. |
| French contact information | 5 lines maximum. 35 characters/line maximum. For example, contact name and title, department, telephone, web site, email. |
| French logo | File type: PNG. Maximum size: 120x120 pixels. |

Table 106: Checklist for front-end tests

| Case # | Date Completed | Remarks |
|--------|----------------|---------|
| 1 | | |
| 2 | | |
| 3 | | |
| 4 | | |
| 5 | | |
| 6 | | |
| 7 | | |
| 8 | | |
| 9 | | |
| 10 | | |
| 11 | | |
| 12 | | |
| 13 | | |
| 14 | | |
| 15 | | |
| 16 | | |
| 17 | | |
| 18 | | |
| 19 | | |
| 20 | | |
| 21 | | |
| 22 | | |
| 23 | | |
| 24 | | |
| 25 | | |
| 26 | | |
| 27 | | |
| 28 | | |
| 29 | | |

Table 106: Checklist for front-end tests

| Case # | Date Completed | Remarks |
|--------|----------------|---------|
| 30 | | |
| 31 | | |
| 32 | | |
| 33 | | |
| 34 | | |
| 35 | | |
| 36 | | |
| 37 | | |
| 38 | | |
| 39 | | |

Merchant Requirements

Table 107: Checklist for web display requirements

| Done | Requirement |
|--|--|
| Checkout page | |
| | Displays the INTERAC Online design (logo), wordmark (text "INTERAC Online) or both |
| Design and Wordmark Requirements (any page) | |
| | <p>Other payment option logos:</p> <ul style="list-style-type: none"> • Displays the INTERAC Online design (logo) if the merchant displays the trademarks or logos of other payment options. • Design is equal in size and no less prominent than other payment option trademarks. |

Table 107: Checklist for web display requirements (continued)

| Done | Requirement |
|---------------------------------|---|
| | <p>INTERAC wordmark:</p> <ul style="list-style-type: none"> • INTERAC is always either in capital letters or italics (as in "the INTERAC Online service") • In the first use of the INTERAC Online wordmark, INTERAC is followed by the ® notation in superscript. For example, "<i>Interac</i>[®]" (English) or "<<<i>Interac</i>^{MD}>>" (French). • On the same page as the first occurrence of the wordmark, the following language-appropriate footnote appears: <ul style="list-style-type: none"> • ® Trademark of Interac Inc. Used under licence" • ^{MD} Marque de commerce d'Interac Inc. Utilisée sous licence |
| Version of design | |
| | <p>Uses the two-colour design on the web:</p> <ul style="list-style-type: none"> • Horizontal version—height no shorter than 25 pixels (width-to-height ratio of 2:37:1) • Vertical version—width no narrower than 30 pixels (width-to-height ratio of 1:1:37) |
| "Learn more" information | |
| | Provides consumers with a link to www.interaonline.com/learn (preferably on the checkout page) |
| Confirmation page | |
| | States that the transaction is successful |
| | Displays the financial institution's name and confirmation number |
| | Provides the ability to print |
| Error page | |
| | Indicates that payment was unsuccessful |
| | States that the order is cancelled or displays other payment options |
| Timeout message | |
| | Is displayed if consumer has less than 30 minutes to complete payment |
| Payment | |
| | Displays the total in Canadian dollars |

Table 108: Checklist for security/privacy requirements

| Done | Requirement |
|----------|--|
| Merchant | |
| | Uses no less than 128-bit SSL encryption when collecting personal information |
| | Protects consumer information in accordance with applicable federal and provincial privacy legislation |
| | Adheres to the Canadian Code of Practice for Consumer Protection in Electronic Commerce |

Table 109: Checklist for required screenshots

| Done | Requirement |
|----------------------|--|
| Provided screenshots | |
| | Checkout page (where customer selects INTERAC Online option) |
| | Confirmation page (one of the test case 1, 2, or 3) |
| | Error page (test case 4) |

Appendix P Merchant Checklists for INTERAC® Online Payment Certification

Merchant Information

| | | |
|---|------------------------------------|--|
| Name and URL | Merchant Name (English) | |
| | Homepage URL (English) | |
| | Merchant Name (French) | |
| | Homepage URL (French) | |
| Number | Merchant Number | |
| Transaction fee category (Circle one) | Government Education General | |
| Third-party service provider | Company name | |
| Service provider's merchant web application | Solution name | |
| | Version | |

Merchant Requirements

Table 110: Checklist for web display requirements

| Done | Requirement |
|--|---|
| Checkout page | |
| | Displays the INTERAC Online design (logo), wordmark (text "INTERAC Online) or both |
| Design and Wordmark Requirements (any page) | |
| | Other payment option logos: <ul style="list-style-type: none"> Displays the INTERAC Online design (logo) if the merchant displays the trademarks or logos of other payment options. Design is equal in size and no less prominent than other payment option trademarks. |

Table 110: Checklist for web display requirements (continued)

| Done | Requirement |
|---------------------------------|---|
| | <p>INTERAC wordmark:</p> <ul style="list-style-type: none"> • INTERAC is always either in capital letters or italics (as in "the INTERAC Online service") • In the first use of the INTERAC Online wordmark, INTERAC is followed by the ® notation in superscript. For example, "<i>Interac</i>[®]" (English) or "<<<i>Interac</i>^{MD}>>" (French). • On the same page as the first occurrence of the wordmark, the following language-appropriate footnote appears: <ul style="list-style-type: none"> • ® Trademark of Interac Inc. Used under licence" • ^{MD} Marque de commerce d'Interac Inc. Utilisée sous licence |
| Version of design | |
| | <p>Uses the two-colour design on the web:</p> <ul style="list-style-type: none"> • Horizontal version—height no shorter than 25 pixels (width-to-height ratio of 2:37:1) • Vertical version—width no narrower than 30 pixels (width-to-height ratio of 1:1:37) |
| "Learn more" information | |
| | Provides consumers with a link to www.interaonline.com/learn (preferably on the checkout page) |
| Confirmation page | |
| | States that the transaction is successful |
| | Displays the financial institution's name and confirmation number |
| | Provides ability to print |
| Error page | |
| | Indicates that payment was unsuccessful |
| | States that the order is cancelled or displays other payment options |
| Timeout message | |
| | Is displayed if consumer has less than 30 minutes to complete payment |
| Payment | |
| | Displays the total in Canadian dollars |

Table 111: Checklist for security/privacy requirements

| Done | Requirement |
|-----------------------------|--|
| Merchant | |
| | Uses no less than 128-bit SSL encryption when collecting personal information |
| | Protects consumer information in accordance with applicable federal and provincial privacy legislation |
| | Adheres to the Canadian Code of Practice for Consumer Protection in Electronic Commerce |
| Provided screenshots | |
| | Checkout page (where customer selects INTERAC Online option) |
| | Confirmation page (one of the test case 1, 2, or 3) |
| | Error page (test case 4) |

Appendix Q INTERAC® Online Payment Certification

Test Case Detail

- Q.1 Common Validations
- Q.2 Test Cases
- Q.3 Merchant front-end test case values

Q.1 Common Validations

The Merchant sends a request to the INTERAC Online Merchant Test Tool, which validates the fields as follows:

- All mandatory fields are present.
- All fields are valid according to their definition in the *INTERAC Online Functional Specifications* (including field lengths, valid characters and so on).
- Merchant number is that of a valid registered merchant.
- Funded URL matches one of the merchant's registered funded URLs that were provided during merchant registration.
- The not funded URL matches one of the merchant's registered Not Funded URLs that were provided during merchant registration.
- No additional fields are present.

Q.2 Test Cases

Table 112: Cases 1-3

| | |
|------------------------|--|
| Objective | To test that the merchant can do all of the following: <ul style="list-style-type: none">• Send a valid request to the Gateway page• Receive a valid confirmation of funding from the Issuer Online Banking application• Issue a request for purchase completion to the acquirer• Receive an approved response from the acquirer. |
| Pre-requisites | None |
| Configuration | Merchant sends form posts to the Merchant Test Tool, which in turn responds to either the Funded or Not Funded URL. The Merchant is connected to an acquirer emulator, which can be set to confirm any request for payment confirmation. (That is, the back-end process of sending a 0200 Message to the issuer is emulated to always accept the purchase request). |
| Special tools required | None |

Table 112: Cases 1-3 (continued)

| | |
|-------------------------|---|
| Input data requirements | <p>Acquirer must have registered the merchant using the administration system, and have supplied the following:</p> <ul style="list-style-type: none"> • IDEBIT_FUNDEDURL(S) • IDEBIT_NOTFUNDEDURL(S) • HTTP REFERERURL(S) <p>Data will be provided by the Merchant Test Tool.</p> |
| Execution strategy | Initiate a payment at the merchant. The two least significant digits of the dollar amount must be equal to the test case number. For example, if you are executing test case 3, the format of the amount must be ### ##03.##. |
| Expected outcome | <p>The merchant indicates to the customer that the purchase was completed and presents a confirmation screen that includes (depending on the test case) the correct amount, the issuer name and the issuer confirmation number.</p> <p>Test case 1</p> <ul style="list-style-type: none"> • Issuer name: 123Bank • Issuer confirmation number: CONF#123 <p>Test case 2</p> <ul style="list-style-type: none"> • Issuer name: Bank Éàêë#\$,-/=?'@' • Issuer confirmation number: #\$,-/=?'@'UPdn9 <p>Test case 3</p> <ul style="list-style-type: none"> • Issuer name: B • Issuer confirmation number: C |
| Applicable logs | <ul style="list-style-type: none"> • Merchant Test Tool logs • Screen capture of the merchant's confirmation page. |

Table 113: Case 4

| | |
|----------------|--|
| Objective | To test that the merchant handles a rejection in response to the acquirer |
| Pre-requisites | None |
| Configuration | Same as test cases 1-3 except that the acquirer emulator must be set to decline the request for payment confirmation. (That is, to emulate the scenario in which an issuer sends a decline in the 0210 response to the acquirer's 0200 message.) |

Table 113: Case 4 (continued)

| | |
|-------------------------|---|
| Special tools required | None |
| Input data requirements | <p>Acquirer must have registered the merchant using the administration system, and have supplied the following:</p> <ul style="list-style-type: none"> • IDEBIT_FUNDEDURL(S) • IDEBIT_NOTFUNDEDURL(S) • HTTP REFERERURL(S) <p>Data will be provided by the Merchant Test Tool.</p> |
| Execution strategy | Initiate a payment at the merchant for any amount where the two least significant dollar digits are 04. (That is, of the form ### #04.##.) |
| Expected outcome | The merchant indicates to the customer that the purchase was declined. Neither the issuer name nor the issuer confirmation number are displayed. |
| Applicable logs | Merchant Test Tool logs |

Table 114: Cases 5-22

| | |
|-------------------------|---|
| Objective | To test that a merchant safely handles redirections to the Funded URL with invalid data, and treats the transaction as funded. |
| Pre-requisites | None |
| Configuration | <p>None.</p> <p>The acquirer emulator is not needed because the merchant does not submit any requests for payment confirmation.</p> |
| Special tools required | None |
| Input data requirements | <p>Acquirer must have registered the merchant using the administration system, and have supplied the following:</p> <ul style="list-style-type: none"> • IDEBIT_FUNDEDURL(S) • IDEBIT_NOTFUNDEDURL(S) • HTTP REFERERURL(S) <p>Data will be provided by the Merchant Test Tool.</p> |
| Execution strategy | Initiate a payment at the merchant. The two least significant digits of the dollar amount must be equal to the test case number. For example, if you are executing test case 13, the format of the amount must be ### #13.##. |

Table 114: Cases 5-22 (continued)

| | |
|------------------|--|
| Expected outcome | The merchant indicates to the customer that the purchase was declined. Neither the issuer name nor the issuer confirmation number are displayed. |
| Applicable logs | Merchant Test Tool logs |

Table 115: Case 23

| | |
|-------------------------|---|
| Objective | To test that a merchant can receive a valid redirection from the issuer that indicates the payment was not funded. |
| Pre-requisites | None |
| Configuration | None. The acquirer emulator is not needed because the merchant does not submit any requests for payment confirmation. |
| Special tools required | None |
| Input data requirements | Acquirer must have registered the merchant using the administration system, and have supplied the following: <ul style="list-style-type: none"> • IDEBIT_FUNDEDURL(S) • IDEBIT_NOTFUNDEDURL(S) • HTTP REFERERURL(S) Data is provided by the Merchant Test Tool. |
| Execution strategy | Initiate a payment at the merchant for any amount where the two least significant dollar digits are 23. (That is, of the form ### #23.##.) |
| Expected outcome | The merchant indicates to the customer that the purchase was declined. Neither the issuer name nor the issuer confirmation number are displayed. |
| Applicable logs | Merchant Test Tool logs |

Table 116: Cases 24-39

| | |
|----------------|--|
| Objective | To test that a merchant safely handles redirections to the Not Funded URL with invalid data, and treats the transaction as not funded. |
| Pre-requisites | None |
| Configuration | None. The acquirer emulator is not needed because the merchant does not submit any requests for payment confirmation. |

Table 116: Cases 24-39 (continued)

| | |
|-------------------------|--|
| Special tools required | None |
| Input data requirements | <p>Acquirer must have registered the merchant using the administration system, and have supplied the following:</p> <ul style="list-style-type: none"> • IDEBIT_FUNDEDURL(S) • IDEBIT_NOTFUNDEDURL(S) • HTTP_REFERERURL(S) <p>Data is provided by the Merchant Test Tool.</p> |
| Execution strategy | Initiate a payment at the merchant. The two least significant digits of the dollar amount must be equal to the test case number. For example, if you are executing test case 27, the format of the amount must be ### ## #27.##. |
| Expected outcome | The merchant indicates to the customer that the purchase was declined. Neither the issuer name nor the issuer confirmation number are displayed. |
| Applicable logs | Merchant Test Tool logs |

Q.3 Merchant front-end test case values

These values are automatically sent by the INTERAC Online Merchant Test Tool. They are provided here for reference only.

Table 117: Test cases 1 and 4—Funded URL

| | |
|-----------------|---------------------------------------|
| Redirection URL | Funded |
| ISSLANG | en |
| TRACK2 | 3728024906540591206=12010123456789XYZ |
| ISSCONF | CONF#123 |
| ISSNAME | 123Bank |
| INVOICE | (Same as supplied by merchant) |
| MERCHDATA | (Same as supplied by merchant) |
| VERSION | 1 |

Table 118: Test case 2—Funded URL

| | |
|-----------------|--------|
| Redirection URL | Funded |
| ISSLANG | en |

Table 118: Test case 2—Funded URL

| | |
|-----------|--|
| TRACK2 | 5268051119993326=291299999999999999000 |
| ISSCONF | #\$.,-/?@'UPdn9 |
| ISSNAME | 987Bank Éàêëï#\$.,-/?@'Àôùûüÿç |
| INVOICE | (Same as supplied by merchant) |
| MERCHDATA | (Same as supplied by merchant) |
| VERSION | 1 |

Table 119: Test case 3—Funded URL

| | |
|-----------------|---------------------------------------|
| Redirection URL | Funded |
| ISSLANG | fr |
| TRACK2 | 453781122255=1001ABC11223344550000000 |
| ISSCONF | C |
| ISSNAME | B |
| INVOICE | (Same as supplied by merchant) |
| MERCHDATA | (Same as supplied by merchant) |
| VERSION | 123 |

Table 120: Test cases 5-22—invalid fields, Funded URL

| Test case | Purpose | Field | Value |
|-----------|---------------|---|-----------|
| 5 | missing field | IDEBIT_INVOICE | (missing) |
| 6 | missing field | IDEBIT_MERCHDATA | (missing) |
| 7 | missing field | IDEBIT_ISSLANG | (missing) |
| 8 | missing field | IDEBIT_TRACK2 | (missing) |
| 9 | missing field | IDEBIT_ISSCONF | (missing) |
| 10 | missing field | IDEBIT_ISSNAME | (missing) |
| 11 | missing field | IDEBIT_VERSION | (missing) |
| 12 | missing field | IDEBIT_TRACK2, IDEBIT_ISSCONF, IDEBIT_ISSNAME | (missing) |
| 13 | wrong value | IDEBIT_INVOICE | XXX |
| 14 | wrong value | IDEBIT_MERCHDATA | XXX |

Table 120: Test cases 5-22—invalid fields, Funded URL (continued)

| Test case | Purpose | Field | Value |
|-----------|---------------------|----------------|--|
| 15 | invalid value | IDEBIT_ISSLANG | de |
| 16 | value too long | IDEBIT_TRACK2 | 3728024906540591206=12010123456789XYZA |
| 17 | invalid check digit | IDEBIT_TRACK2 | 3728024906540591207=12010123456789XYZ |
| 18 | field too long | IDEBIT_ISSCONF | Too long confirm |
| 19 | invalid character | IDEBIT_ISSCONF | CONF<123 |
| 20 | field too long | IDEBIT_ISSNAME | Very, very, very long issuer name |
| 21 | invalid character | IDEBIT_ISSNAME | 123<Bank |
| 22 | invalid value | IDEBIT_VERSION | 2 |

Table 121: Test case 23—valid data, Not Funded URL

| | |
|-----------------|--------------------------------|
| Redirection URL | Not funded |
| ISSLANG | en |
| INVOICE | (Same as supplied by merchant) |
| MERCHDATA | (Same as supplied by merchant) |
| VERSION | 1 |

Table 122: Test cases 5-22—invalid fields, Funded URL

| Test case | Purpose | Field | Value |
|-----------|-------------------------------------|------------------|---------------------------------------|
| 24 | missing field | IDEBIT_INVOICE | (missing) |
| 25 | missing field | IDEBIT_MERCHDATA | (missing) |
| 26 | missing field | IDEBIT_ISSLANG | (missing) |
| 27 | IDEBIT_TRACK2 is present and valid | IDEBIT_TRACK2 | 3728024906540591206=12010123456789XYZ |
| 28 | IDEBIT_ISSCONF is present and valid | IDEBIT_ISSCONF | CONF#123 |
| 29 | IDEBIT_ISSNAME is present and valid | IDEBIT_ISSNAME | 12Bank |
| 30 | missing field | IDEBIT_VERSION | (missing) |

Table 122: Test cases 5-22—invalid fields, Funded URL (continued)

| Test case | Purpose | Field | Value |
|-----------|-----------------------------------|------------------|--|
| 31 | wrong value | IDEBIT_INVOICE | XXX |
| 32 | invalid value | IDEBIT_INVOICE | invalid </html> tricky data |
| 33 | wrong value | IDEBIT_MERCHDATA | XXX |
| 34 | invalid value | IDEBIT_MERCHDATA | <2000 characters in the range hex 20-7E |
| 35 | invalid value | IDEBIT_ISSLANG | de |
| 36 | invalid IDEBIT_TRACK2 is present | IDEBIT_TRACK2 | INVALIDTRACK2, incorrect format and too long |
| 37 | invalid IDEBIT_ISSCONF is present | IDEBIT_ISSCONF | Too long confirm |
| 38 | invalid IDEBIT_ISSNAME is present | IDEBIT_ISSNAME | Very, very, very long issuer name |
| 39 | invalid value | IDEBIT_VERSION | 2 |

Copyright Notice

Copyright © 2017 Moneris Solutions, 3300 Bloor Street West, Toronto, Ontario, M8X 2X2

All Rights Reserved. This manual shall not wholly or in part, in any form or by any means, electronic, mechanical, including photocopying, be reproduced or transmitted without the authorized, written consent of Moneris Solutions.

This document has been produced as a reference guide to assist Moneris client's hereafter referred to as merchants. Every effort has been made to make the information in this reference guide as accurate as possible. The authors of Moneris Solutions shall have neither liability nor responsibility to any person or entity with respect to any loss or damage in connection with or arising from the information contained in this reference guide.

Trademarks

Moneris and the Moneris Solutions logo are registered trademarks of Moneris Solutions Corporation.

Any software, hardware and or technology products named in this document are claimed as trademarks or registered trademarks of their respective companies.

Printed in Canada.

10 9 8 7 6 5 4 3 2 1

