


Candidate-conditioned history selection

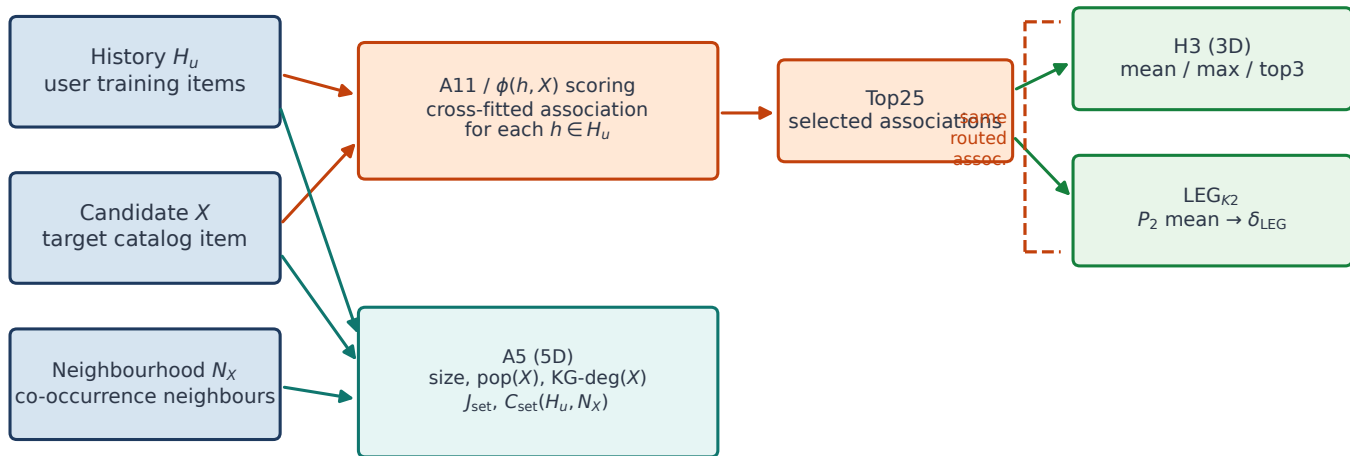

A5 uses $H_u + X + N_X$ (no Top25). H3 and LEG $_{K2}$ share the same Top25 associations; LEG enters only as residual δ_{LEG} .

Inputs A11/ ϕ routing + Top25 A5 whole-history context

H3 / LEG $_{K2}$ summaries