

# Biometric Evaluation Common Framework

Wayne Salamon and Greg Fiumara



# Contents

<b>1</b>	<b>Introduction</b>	<b>1</b>
<b>2</b>	<b>Overview</b>	<b>3</b>
<b>3</b>	<b>Utility Classes</b>	<b>5</b>
<b>4</b>	<b>Error Handling</b>	<b>7</b>
4.1	Biometric Evaluation Exceptions . . . . .	7
4.2	Signal Handling . . . . .	7
<b>5</b>	<b>Input/Output</b>	<b>11</b>
5.1	Utility . . . . .	11
5.2	Record Management . . . . .	11
5.3	Logging . . . . .	12
<b>6</b>	<b>Time and Timing</b>	<b>15</b>
6.1	Elapsed Time . . . . .	15
6.2	Limiting Execution Time . . . . .	16
<b>7</b>	<b>Image</b>	<b>17</b>
<b>A</b>	<b>Todo List</b>	<b>21</b>
<b>B</b>	<b>Namespace Index</b>	<b>23</b>
B.1	Namespace List . . . . .	23

<b>C</b>	<b>Class Index</b>	<b>25</b>
C.1	Class Hierarchy . . . . .	25
<b>D</b>	<b>Class Index</b>	<b>27</b>
D.1	Class List . . . . .	27
<b>E</b>	<b>Namespace Documentation</b>	<b>29</b>
E.1	BiometricEvaluation::Image Namespace Reference . . . . .	29
E.1.1	Detailed Description . . . . .	29
E.2	BiometricEvaluation::Process Namespace Reference . . . . .	30
E.2.1	Detailed Description . . . . .	30
E.3	BiometricEvaluation::System Namespace Reference . . . . .	30
E.3.1	Detailed Description . . . . .	30
E.3.2	Function Documentation . . . . .	31
E.3.2.1	getCPUCount . . . . .	31
E.3.2.2	getRealMemorySize . . . . .	31
E.3.2.3	getLoadAverage . . . . .	31
E.4	BiometricEvaluation::Time Namespace Reference . . . . .	32
E.4.1	Detailed Description . . . . .	32
<b>F</b>	<b>Class Documentation</b>	<b>33</b>
F.1	BiometricEvaluation::IO::ArchiveRecordStore Class Reference . . . . .	33
F.1.1	Detailed Description . . . . .	34
F.1.2	Constructor & Destructor Documentation . . . . .	35
F.1.2.1	ArchiveRecordStore . . . . .	35
F.1.2.2	ArchiveRecordStore . . . . .	35
F.1.2.3	~ArchiveRecordStore . . . . .	35
F.1.3	Member Function Documentation . . . . .	36
F.1.3.1	getSpaceUsed . . . . .	36
F.1.3.2	sync . . . . .	36
F.1.3.3	insert . . . . .	36
F.1.3.4	remove . . . . .	37

F.1.3.5	read	37
F.1.3.6	replace	38
F.1.3.7	length	38
F.1.3.8	flush	38
F.1.3.9	setCursor	39
F.1.3.10	changeName	39
F.1.3.11	needsVacuum	40
F.1.3.12	needsVacuum	40
F.1.3.13	vacuum	40
F.1.3.14	getArchiveName	41
F.1.3.15	getManifestName	41
F.2	BiometricEvaluation::Utility::AutoArray< T > Class Template Reference	41
F.3	be_workorder Struct Reference	42
F.4	BiometricEvaluation::Error::ConversionError Class Reference	42
F.4.1	Detailed Description	43
F.4.2	Constructor & Destructor Documentation	43
F.4.2.1	ConversionError	43
F.4.2.2	ConversionError	43
F.5	BiometricEvaluation::IO::DBRecordStore Class Reference	44
F.5.1	Detailed Description	45
F.5.2	Constructor & Destructor Documentation	45
F.5.2.1	DBRecordStore	45
F.5.2.2	DBRecordStore	45
F.5.3	Member Function Documentation	46
F.5.3.1	getSpaceUsed	46
F.5.3.2	sync	46
F.5.3.3	insert	46
F.5.3.4	remove	47
F.5.3.5	read	47
F.5.3.6	replace	48

F.5.3.7	length	48
F.5.3.8	flush	48
F.5.3.9	setCursor	49
F.5.3.10	changeName	49
F.6	BiometricEvaluation::Error::Exception Class Reference	50
F.6.1	Detailed Description	51
F.6.2	Constructor & Destructor Documentation	51
F.6.2.1	Exception	51
F.6.2.2	Exception	51
F.6.3	Member Function Documentation	51
F.6.3.1	getInfo	51
F.7	BiometricEvaluation::IO::Factory Class Reference	52
F.7.1	Detailed Description	52
F.7.2	Member Function Documentation	52
F.7.2.1	openRecordStore	52
F.7.2.2	createRecordStore	53
F.8	BiometricEvaluation::Error::FileError Class Reference	54
F.8.1	Detailed Description	54
F.8.2	Constructor & Destructor Documentation	54
F.8.2.1	FileError	54
F.8.2.2	FileError	54
F.9	BiometricEvaluation::IO::FileRecordStore Class Reference	55
F.9.1	Detailed Description	56
F.9.2	Constructor & Destructor Documentation	56
F.9.2.1	FileRecordStore	56
F.9.2.2	FileRecordStore	56
F.9.3	Member Function Documentation	57
F.9.3.1	getSpaceUsed	57
F.9.3.2	insert	57
F.9.3.3	remove	58
F.9.3.4	read	58

---

F.9.3.5	replace . . . . .	59
F.9.3.6	length . . . . .	59
F.9.3.7	flush . . . . .	59
F.9.3.8	setCursor . . . . .	60
F.9.3.9	changeName . . . . .	60
F.10	BiometricEvaluation::Image::Image Class Reference . . . . .	61
F.10.1	Detailed Description . . . . .	62
F.10.2	Constructor & Destructor Documentation . . . . .	62
F.10.2.1	Image . . . . .	62
F.10.3	Member Function Documentation . . . . .	62
F.10.3.1	getXResolution . . . . .	62
F.10.3.2	getYResolution . . . . .	63
F.10.3.3	getRawData . . . . .	63
F.10.3.4	getWidth . . . . .	63
F.10.3.5	getHeight . . . . .	63
F.10.3.6	getDepth . . . . .	64
F.11	BiometricEvaluation::Process::Limits Class Reference . . . . .	64
F.11.1	Detailed Description . . . . .	64
F.11.2	Constructor & Destructor Documentation . . . . .	65
F.11.2.1	Limits . . . . .	65
F.11.3	Member Function Documentation . . . . .	65
F.11.3.1	getMaxResidentSetSize . . . . .	65
F.12	BiometricEvaluation::IO::LogCabinet Class Reference . . . . .	65
F.12.1	Detailed Description . . . . .	66
F.12.2	Constructor & Destructor Documentation . . . . .	66
F.12.2.1	LogCabinet . . . . .	66
F.12.2.2	LogCabinet . . . . .	67
F.12.3	Member Function Documentation . . . . .	67
F.12.3.1	newLogSheet . . . . .	67
F.12.3.2	getName . . . . .	68
F.12.3.3	getDescription . . . . .	68

---

F.12.3.4	getCount . . . . .	68
F.12.3.5	remove . . . . .	68
F.13	BiometricEvaluation::IO::LogSheet Class Reference . . . . .	69
F.13.1	Detailed Description . . . . .	70
F.13.2	Constructor & Destructor Documentation . . . . .	70
F.13.2.1	LogSheet . . . . .	70
F.13.2.2	LogSheet . . . . .	71
F.13.3	Member Function Documentation . . . . .	71
F.13.3.1	write . . . . .	71
F.13.3.2	writeComment . . . . .	72
F.13.3.3	newEntry . . . . .	72
F.13.3.4	getCurrentEntry . . . . .	72
F.13.3.5	resetCurrentEntry . . . . .	72
F.13.3.6	getCurrentEntryNumber . . . . .	73
F.13.3.7	sync . . . . .	73
F.13.3.8	setAutoSync . . . . .	73
F.13.4	Member Data Documentation . . . . .	73
F.13.4.1	CommentDelimiter . . . . .	73
F.13.4.2	EntryDelimiter . . . . .	73
F.13.4.3	DescriptionTag . . . . .	74
F.14	BiometricEvaluation::IO::ManifestEntry Struct Reference . . . . .	74
F.15	BiometricEvaluation::Error::MemoryError Class Reference . . . . .	74
F.15.1	Detailed Description . . . . .	75
F.15.2	Constructor & Destructor Documentation . . . . .	75
F.15.2.1	MemoryError . . . . .	75
F.15.2.2	MemoryError . . . . .	75
F.16	BiometricEvaluation::Error::NotImplemented Class Reference . . . . .	75
F.16.1	Detailed Description . . . . .	76
F.16.2	Constructor & Destructor Documentation . . . . .	76
F.16.2.1	NotImplemented . . . . .	76
F.16.2.2	NotImplemented . . . . .	76



F.17 BiometricEvaluation::Error::ObjectDoesNotExist Class Reference . . .	76
F.17.1 Detailed Description . . . . .	77
F.17.2 Constructor & Destructor Documentation . . . . .	77
F.17.2.1 ObjectDoesNotExist . . . . .	77
F.17.2.2 ObjectDoesNotExist . . . . .	77
F.18 BiometricEvaluation::Error::ObjectExists Class Reference . . . . .	78
F.18.1 Detailed Description . . . . .	78
F.18.2 Constructor & Destructor Documentation . . . . .	78
F.18.2.1 ObjectExists . . . . .	78
F.18.2.2 ObjectExists . . . . .	78
F.19 BiometricEvaluation::Error::ObjectIsClosed Class Reference . . . . .	79
F.19.1 Detailed Description . . . . .	79
F.19.2 Constructor & Destructor Documentation . . . . .	79
F.19.2.1 ObjectIsClosed . . . . .	79
F.19.2.2 ObjectIsClosed . . . . .	80
F.20 BiometricEvaluation::Error::ObjectIsOpen Class Reference . . . . .	80
F.20.1 Detailed Description . . . . .	80
F.20.2 Constructor & Destructor Documentation . . . . .	80
F.20.2.1 ObjectIsOpen . . . . .	80
F.20.2.2 ObjectIsOpen . . . . .	81
F.21 BiometricEvaluation::Error::ParameterError Class Reference . . . . .	81
F.21.1 Detailed Description . . . . .	81
F.21.2 Constructor & Destructor Documentation . . . . .	82
F.21.2.1 ParameterError . . . . .	82
F.21.2.2 ParameterError . . . . .	82
F.22 BiometricEvaluation::IO::Properties Class Reference . . . . .	82
F.22.1 Detailed Description . . . . .	83
F.22.2 Constructor & Destructor Documentation . . . . .	83
F.22.2.1 Properties . . . . .	83
F.22.3 Member Function Documentation . . . . .	84
F.22.3.1 setProperty . . . . .	84

F.22.3.2	<a href="#">setPropertyFromInteger</a> . . . . .	84
F.22.3.3	<a href="#">removeProperty</a> . . . . .	85
F.22.3.4	<a href="#">getProperty</a> . . . . .	85
F.22.3.5	<a href="#">getPropertyAsInteger</a> . . . . .	85
F.22.3.6	<a href="#">sync</a> . . . . .	86
F.22.3.7	<a href="#">changeName</a> . . . . .	86
F.23	<a href="#">BiometricEvaluation::Image::RawImage Class Reference</a> . . . . .	86
F.23.1	<a href="#">Constructor &amp; Destructor Documentation</a> . . . . .	87
F.23.1.1	<a href="#">RawImage</a> . . . . .	87
F.23.2	<a href="#">Member Function Documentation</a> . . . . .	87
F.23.2.1	<a href="#">getWidth</a> . . . . .	87
F.23.2.2	<a href="#">getHeight</a> . . . . .	88
F.23.2.3	<a href="#">getDepth</a> . . . . .	88
F.23.2.4	<a href="#">getXResolution</a> . . . . .	88
F.23.2.5	<a href="#">getYResolution</a> . . . . .	88
F.23.2.6	<a href="#">getRawData</a> . . . . .	89
F.24	<a href="#">BiometricEvaluation::IO::RecordStore Class Reference</a> . . . . .	89
F.24.1	<a href="#">Detailed Description</a> . . . . .	91
F.24.2	<a href="#">Constructor &amp; Destructor Documentation</a> . . . . .	91
F.24.2.1	<a href="#">RecordStore</a> . . . . .	91
F.24.2.2	<a href="#">RecordStore</a> . . . . .	92
F.24.3	<a href="#">Member Function Documentation</a> . . . . .	92
F.24.3.1	<a href="#">getName</a> . . . . .	92
F.24.3.2	<a href="#">getDescription</a> . . . . .	92
F.24.3.3	<a href="#">getCount</a> . . . . .	93
F.24.3.4	<a href="#">changeName</a> . . . . .	93
F.24.3.5	<a href="#">changeDescription</a> . . . . .	93
F.24.3.6	<a href="#">getSpaceUsed</a> . . . . .	93
F.24.3.7	<a href="#">sync</a> . . . . .	94
F.24.3.8	<a href="#">insert</a> . . . . .	94
F.24.3.9	<a href="#">remove</a> . . . . .	95

---

F.24.3.10	read	95
F.24.3.11	replace	96
F.24.3.12	length	96
F.24.3.13	flush	97
F.24.3.14	setCursor	97
F.24.3.15	removeRecordStore	97
F.24.4	Member Data Documentation	98
F.24.4.1	CONTROLFILENAME	98
F.24.4.2	NAMEPROPERTY	98
F.24.4.3	BERKELEYDBTYPE	98
F.24.4.4	BE_RECSTORE_SEQ_START	98
F.25	BiometricEvaluation::Error::SignalManager Class Reference	99
F.25.1	Detailed Description	100
F.25.2	Constructor & Destructor Documentation	100
F.25.2.1	SignalManager	100
F.25.3	Member Function Documentation	101
F.25.3.1	setSignalSet	101
F.25.3.2	clearSignalSet	101
F.25.3.3	setDefaultSignalSet	101
F.25.3.4	sigHandled	101
F.25.3.5	start	101
F.25.3.6	stop	102
F.25.3.7	setSigHandled	102
F.25.3.8	clearSigHandled	102
F.25.4	Member Data Documentation	102
F.25.4.1	_canSigJump	102
F.25.4.2	_sigJumpBuf	102
F.26	BiometricEvaluation::Process::Statistics Class Reference	103
F.26.1	Detailed Description	104
F.26.2	Constructor & Destructor Documentation	104
F.26.2.1	Statistics	104

F.26.2.2	Statistics . . . . .	104
F.26.3	Member Function Documentation . . . . .	105
F.26.3.1	getCPUTimes . . . . .	105
F.26.3.2	getMemorySizes . . . . .	105
F.26.3.3	getNumThreads . . . . .	106
F.26.3.4	logStats . . . . .	106
F.26.3.5	startAutoLogging . . . . .	106
F.26.3.6	stopAutoLogging . . . . .	107
F.26.3.7	callStatistics_logStats . . . . .	107
F.27	BiometricEvaluation::Error::StrategyError Class Reference . . . . .	107
F.27.1	Detailed Description . . . . .	108
F.27.2	Constructor & Destructor Documentation . . . . .	108
F.27.2.1	StrategyError . . . . .	108
F.27.2.2	StrategyError . . . . .	108
F.28	BiometricEvaluation::Time::Timer Class Reference . . . . .	109
F.28.1	Detailed Description . . . . .	109
F.28.2	Constructor & Destructor Documentation . . . . .	109
F.28.2.1	Timer . . . . .	109
F.28.3	Member Function Documentation . . . . .	109
F.28.3.1	start . . . . .	109
F.28.3.2	stop . . . . .	110
F.28.3.3	elapsed . . . . .	110
F.29	BiometricEvaluation::IO::Utility Class Reference . . . . .	110
F.29.1	Detailed Description . . . . .	111
F.29.2	Member Function Documentation . . . . .	111
F.29.2.1	removeDirectory . . . . .	111
F.29.2.2	getFileSize . . . . .	111
F.29.2.3	fileExists . . . . .	112
F.29.2.4	validateRootName . . . . .	112
F.29.2.5	constructAndCheckPath . . . . .	112
F.30	BiometricEvaluation::Time::Watchdog Class Reference . . . . .	113

---

F.30.1 Detailed Description . . . . .	114
F.30.2 Constructor & Destructor Documentation . . . . .	114
F.30.2.1 Watchdog . . . . .	114
F.30.3 Member Function Documentation . . . . .	115
F.30.3.1 setInterval . . . . .	115
F.30.3.2 start . . . . .	115
F.30.3.3 stop . . . . .	115
F.30.3.4 expired . . . . .	116
F.30.3.5 setCanSigJump . . . . .	116
F.30.3.6 clearCanSigJump . . . . .	116
F.30.3.7 setExpired . . . . .	116
F.30.3.8 clearExpired . . . . .	116
F.30.4 Member Data Documentation . . . . .	116
F.30.4.1 PROCESSTIME . . . . .	116
F.30.4.2 REALTIME . . . . .	116



# **Chapter 1**

## **Introduction**

This document describes the framework and application programming interfaces (API) used to support the evaluation of biometric software within the Image Group at NIST. An evaluation consists of the testing of vendor-supplied software that implements certain biometric algorithms, such as fingerprint matching or face recognition. The NIST Image Group defines a test process and API for each evaluation that vendors implement in their software, which is delivered to NIST as a software library. A common test driver is used to call the vendor library to perform the biometric operation. In order to support the common functionality used across all evaluations, such as logging, file input/output, etc., a common framework is used.





## Chapter 2

# Overview

The Biometric Evaluation Framework (BECommon ) is a set of C++[\[1\]](#) classes, error codes, and design patterns used to create a common environment to provide logging, data management, error handling, and other functionality that is needed for many applications used in the testing of biometric software. The goals of the framework include:

- Reduce the amount of I/O error handling implemented by applications;
- Provide standard interfaces for data management and logging;
- Remove the need for applications to handle low-level events from the operating system (signals, etc.);
- Provide services for timing the execution of code blocks;
- Allow applications to constrain the amount of processing time used by a block of code.

BECommon is divided into several packages, each providing a set of related functionality, such as error handling and timing operations. The packages are an informal concept, mapped to formal C++ name spaces, e.g. *IO* and *Time*. All classes within BECommon belong to the top-level *BiometricEvaluation* name space.



## **Chapter 3**

# **Utility Classes**



## Chapter 4

# Error Handling

Within the Biometric Evaluation Framework , Error handling has two aspects: One for communicating error conditions out of the framework and back to applications; the other for handling error signals from the environment and operating system. Classes and other code to implement error processing are described in this chapter.

### 4.1 Biometric Evaluation Exceptions

The Biometric Evaluation Framework contains a set of classes used to report errors to applications. Objects of these class types are thrown and contain descriptive information as to the nature of the error. Applications must handle the errors in a manner that makes sense for the application.

Applications should catch objects of the type specified in the API for the class being called. The type of object caught indicates the nature of the error that occurred, while the informational string stored within that object provides more information on the error.

Listing [5.1](#) shows an example of exception handling when using the logging classes described in Section [5.3](#).

### 4.2 Signal Handling

When the application process executes in a POSIX environment, signals to the process can be generated by the operating system. In many cases, if the signal is not handled by the process, execution terminates. Because the Biometric Evaluation Framework was designed to be used with software libraries for which no source code is available, changes to the code in these libraries cannot be made, and any faults in that code cannot be

fixed. A common problem is that a function in the “black box” library dereferences a bad pointer, resulting in a segmentation violation signal being sent by the operating system.

To prevent termination of the application process, signal handling must be installed. The Biometric Evaluation Framework provides a class, *SignalManager*, to simplify the installation of a signal handler in order to allow the program to continue running. For example, when extracting a fingerprint minutia template from an image, often the library call will fault on a certain image. By using the *SignalManager*, the application can log that fault, and continue on to the next image.

Signal handling in a POSIX environment covers the bare essentials, and one of two actions is usually taken. The signal can be handled and processing continues at the location the signal was generated. The second action is that, in addition to signal handling, the process continues from a different location. It is the second action that is implemented by the *SignalManager* class. The rationale for this type of signal handling is so the call to the faulting function can be aborted, but the caller can detect that the signal was handled and take action, usually by logging the fault.

By default, the *SignalManager* class installs a handler for the SIGSEGV and SIGBUS signals. However, other signals can be handled as desired.

One restriction on the use of *SignalManager* is that the POSIX calls for signal management (*signal(3)*, *sigaction(2)*, etc.) cannot be invoked inside of the watchdog block.

The example in Listing 4.2 shows application use of the *SignalManager* class.

Listing 4.1: Using the SignalManger

```

1  #include <be_error_signal_manager.h>
2  using namespace BiometricEvaluation;
3
4  int main(int argc, char *argv[])
5  {
6      Error::SignalManager *sigmgr = new Error::SignalManager();
7
8      BEGIN_SIGNAL_BLOCK(sigmgr, sigblock1);
9      // code that may result in signal generation
10     END_SIGNAL_BLOCK(sigmgr, sigblock1);
11     if (sigmgr->sigHandled()) {
12         // log the event, etc.
13     }
14 }
```

Within the *SignalManager* header file, two macros are defined: *BEGIN\_SIGNAL\_BLOCK()* and *END\_SIGNAL\_BLOCK()*, each taking the *SignalManager* object and label as parameters. The label must be unique for each signal block. These macros insert the jump buffer into the code, which is the location where the signal handler will jump to after handling the signal. The use of these macros greatly simplifies signal handling for the application, and it is recommended that applications use these macros instead of directly invoking the methods of the *SignalManger* class, except for changing the set of handled signals.

Listing ?? shows how an application can indicate what signals to handle. In this example, only the `SIGUSR1` signal would be handled.

Listing 4.2: Using the SignalManger

```
1 #include <be_error_signal_manager.h>
2 using namespace BiometricEvaluation;
3
4 int main(int argc, char *argv[])
5 {
6     Error::SignalManager *sigmgr = new Error::SignalManager();
7
8     sigset_t sigset;
9     sigemptyset(&sigset);
10    sigaddset(&sigset, SIGUSR1);
11    sigmgr->setSignalSet(sigset);
12
13    BEGIN_SIGNAL_BLOCK(sigmgr, sigblock2);
14    // code that may result in signal generation
15    END_SIGNAL_BLOCK(sigmgr, sigblock2);
16    if (sigmgr->sigHandled()) {
17        cout << "SIGUSR1_occurred." << endl;
18    }
19 }
```





## Chapter 5

# Input/Output

The *BiometricEvaluation::IO* classes are used by applications for the common types of input and output: managing stores of data, log files, and individual file management. The goal of using the IO API is to relieve applications of the need to manage low-level I/O operations such as file opening, writing, and error handling. Furthermore, by using the classes defined in *IO*, the actual storage mechanism used for data can be managed efficiently and placed in a consistent location for all applications.

Many classes manage persistent storage within the file system, taking care of file open and close operations, as well as error handling. When errors do occur, exceptions are thrown, which then must be handled by the application.

### 5.1 Utility

The *IO::Utility* class provides static methods that are used to manipulate the file system and other low-level mechanisms. These methods can be used by applications in addition to being used by other classes within the Biometric Evaluation framework.

### 5.2 Record Management

The *IO::RecordStore* class provides an abstraction for performing record-oriented input and output to an underlying storage system. Each implementation of the *RecordStore* provides a self-contained entity to manage data on behalf of the application in a reliable, efficient manner.

Many biometric evaluations generate thousands of files in the form of processed images and biometric templates, in addition to consuming large numbers of files as input. In many file systems, managing large numbers of files is not efficient, and leads to longer

run times as well as difficulties in backing up and processing these files outside of the actual evaluation.

The *RecordStore* abstraction de-couples the application from the underlying storage, enabling the implementation of different strategies for data management. One simple strategy is to store each record into a separate file, reproducing what has typically been done in the evaluation software itself. Archive files and small databases are other implementation strategies that have been used.

Use of the *RecordStore* abstraction allows applications to switch storage strategy by changing a few lines of code. Furthermore, error handling is consistent for all strategies by the use of common exceptions.

Record stores provide no semantic meaning to the nature of the data that passes through the store. Each record is an opaque object, given to the store as a pointer and data length, and is associated with a string, the key. Keys must be unique and are associated with a single record. Attempts to insert multiple records with the same key result in an exception being thrown.

## 5.3 Logging

Many applications are required to log information during their processing. In particular, the evaluation test drivers often create a log record for each call to the software under test. There is a need for the log entries to be consistent, yet any logging facility must be flexible in accepting the type of data that is to be written to the log file.

The logging classes in the *IO* package provide a straight-forward method for applications to record their progress without the need to manage the low-level output details. There are two classes, *IO::LogCabinet* and *IO::LogSheet* that are used to perform consistent logging of information by applications. A *LogCabinet* contains a set of *LogSheets*.

A *LogSheet* is an output stream (subclass of *std::ostream*), and therefore can handle built-in types and any class that supports streaming. The example code in 5.1 shows how an application can use a *LogSheet*, contained within a *LogCabinet*, to record operational information.

Log sheets are simple text files, with each entry numbered by the *LogSheet* class when written to the file. The description of the sheet is placed at the top of the file during construction of the *LogSheet* object. A call to the *newEntry()* method commits the current entry to the log file, and resets the write position to the beginning of the entry buffer.

In addition to streaming by using the *LogSheet::«* operator, applications can directly commit an entry to the log file by calling the *write()* method, thereby not disrupting the entry that is being formed. After an entry is committed, the entry number is automatically incremented.

The example in Listing 5.1 shows application use of the logging facility.

Listing 5.1: Using a LogSheet within a LogCabinet

```

1  #include <be_io_logcabinet.h>
2  using namespace BiometricEvaluation;
3  using namespace BiometricEvaluation::IO;
4
5  LogCabinet *lc;
6  try {
7      lc = new LogCabinet(lcname, "A_Log_Cabinet", "");
8  } catch (Error::ObjectExists &e) {
9      cout << "The_Log_Cabinet_already_exists." << endl;
10     return (-1);
11 } catch (Error::StrategyError& e) {
12     cout << "Caught_" << e.getInfo() << endl;
13     return (-1);
14 }
15 auto_ptr<LogCabinet> alc(lc);
16 try {
17     ls = alc->newLogSheet(lcname, "Log_Sheet_in_Cabinet");
18 } catch (Error::ObjectExists &e) {
19     cout << "The_Log_Sheet_already_exists." << endl;
20     return (-1);
21 } catch (Error::StrategyError& e) {
22     cout << "Caught_" << e.getInfo() << endl;
23     return (-1);
24 }
25 ls->setAutoSync(true); // Force write of every entry when finished
26 int i = ...
27 *ls << "Adding_an_integer_value_" << i << "_to_the_log." << endl;
28 ls->newEntry(); // Forces the write of the current entry
29 .....
30 delete ls;
31 return; // The LogCabinet is destructed by the auto_ptr

```



## Chapter 6

# Time and Timing

The *Time* package within the Biometric Evaluation Framework provides a set of classes for performing timing-related operations, such as elapsed time and limiting execution time.

### 6.1 Elapsed Time

The *Timer* class provides applications a method to determine how long a block of code takes to execute. On many systems (e.g. Linux) the timer resolution is in microseconds.

Listing 6.1 shows how an application can use a *Timer* object to limit obtain the amount of time used for the execution of a block of code.

Listing 6.1: Using the Timer

```
1  #include <be_time_timer.h>
2
3  int main(int argc , char *argv [])
4  {
5      Time::Timer timer = new Time::Timer();
6
7      try {
8          atimer->start();
9          // do something useful , or not
10         atimer->stop();
11         cout << "Elapsed_time:_" << atimer->elapsed() << endl;
12     } catch (Error::StrategyError &e) {
13         cout << "Failed_to_create_timer." << endl;
14     }
15 }
```

## 6.2 Limiting Execution Time

The *Watchdog* class allows applications to control the amount of time that a block of code has to execute. The time can be *real* (i.e. “wall”) time, or *process* time (not available on Windows). One typical usage for a watchdog timer is when a call is made to a function that may never return, due to problems processing an input biometric image.

Watch dog timers can be used in conjunction with *SignalManager* in order to both limit the processing time of a call, and handle all signals generated as a result of that call. See 4.2 for information on the *SignalManager* class.

One restriction on the use of *Watchdog* is that the POSIX calls for signal management (*signal(3)*, *sigaction(2)*, etc.) cannot be invoked inside of the watchdog block. This restriction includes calls to *sleep(3)* because it is based on signal handling as well.

Listing 6.2 shows how an application can use a *Watchdog* object to limit the about of process time for a block of code.

Listing 6.2: Using the Watchdog

```

1  #include <be_time_watchdog.h>
2  int main(int argc, char *argv[])
3
4      Time::Watchdog theDog = new
5          Time::Watchdog(Time::Watchdog::PROCESSTIME);
6      theDog->setInterval(300);           // 300 microseconds
7      BEGIN_WATCHDOG_BLOCK(theDog, watchdogblock1);
8          // Do something that may take more than 300 usecs
9      END_WATCHDOG_BLOCK(theDog, watchdogblock1);
10     if (theDog->expired()) {
11         cout << "That_took_too_long." << endl;
12         // further processing
13     }
14 }
```

Within the *Watchdog* header file, two macros are defined: *BEGIN\_WATCHDOG\_BLOCK()* and *END\_WATCHDOG\_BLOCK()*, each taking the *Watchdog* object and label as parameters. The label must be unique for each watch dog block. The use of these macros greatly simplifies watchdog timers for the application, and it is recommended that applications use these macros instead of directly invoking the methods of the *Watchdog* class, except for setting the timeout value.

## **Chapter 7**

### **Image**





# Bibliography

- [1] Bjarne Stroustrup. *The C++ Programming Language*. Addison Wesley, special edition, 2000. [3](#)



# Appendix A

## Todo List

Namespace **BiometricEvaluation::Image** Add more detail.

Class **BiometricEvaluation::Image::Image** Add more info on the image data, and what conversions are possible.



# Appendix B

## Namespace Index

### B.1 Namespace List

Here is a list of all documented namespaces with brief descriptions:

<a href="#">BiometricEvaluation::Image</a> (A class representing a raw image ) . . . . .	29
<a href="#">BiometricEvaluation::Process</a> . . . . .	30
<a href="#">BiometricEvaluation::System</a> . . . . .	30
<a href="#">BiometricEvaluation::Time</a> . . . . .	32



# Appendix C

## Class Index

### C.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

BiometricEvaluation::Utility::AutoArray< T > . . . . .	41
be_workorder . . . . .	42
BiometricEvaluation::Error::Exception . . . . .	50
BiometricEvaluation::Error::ConversionError . . . . .	42
BiometricEvaluation::Error::FileError . . . . .	54
BiometricEvaluation::Error::MemoryError . . . . .	74
BiometricEvaluation::Error::NotImplemented . . . . .	75
BiometricEvaluation::Error::ObjectDoesNotExist . . . . .	76
BiometricEvaluation::Error::ObjectExists . . . . .	78
BiometricEvaluation::Error::ObjectIsClosed . . . . .	79
BiometricEvaluation::Error::ObjectIsOpen . . . . .	80
BiometricEvaluation::Error::ParameterError . . . . .	81
BiometricEvaluation::Error::StrategyError . . . . .	107
BiometricEvaluation::IO::Factory . . . . .	52
BiometricEvaluation::Image::Image . . . . .	61
BiometricEvaluation::Image::RawImage . . . . .	86
BiometricEvaluation::Process::Limits . . . . .	64
BiometricEvaluation::IO::LogCabinet . . . . .	65
BiometricEvaluation::IO::LogSheet . . . . .	69
BiometricEvaluation::IO::ManifestEntry . . . . .	74
BiometricEvaluation::IO::Properties . . . . .	82
BiometricEvaluation::IO::RecordStore . . . . .	89
BiometricEvaluation::IO::ArchiveRecordStore . . . . .	33
BiometricEvaluation::IO::DBRecordStore . . . . .	44
BiometricEvaluation::IO::FileRecordStore . . . . .	55

BiometricEvaluation::Error::SignalManager . . . . .	99
BiometricEvaluation::Process::Statistics . . . . .	103
BiometricEvaluation::Time::Timer . . . . .	109
BiometricEvaluation::IO::Utility . . . . .	110
BiometricEvaluation::Time::Watchdog . . . . .	113



# Appendix D

## Class Index

### D.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

<a href="#">BiometricEvaluation::IO::ArchiveRecordStore</a> (This class implements the <a href="#">IO::RecordStore</a> interface by storing data items in single file, with an associated manifest file ) . . . . .	33
<a href="#">BiometricEvaluation::Utility::AutoArray&lt; T &gt;</a> . . . . .	41
<a href="#">be_workorder</a> . . . . .	42
<a href="#">BiometricEvaluation::Error::ConversionError</a> (Error when converting one object into another, a property value from string to int, for example ) . . . . .	42
<a href="#">BiometricEvaluation::IO::DBRecordStore</a> (A class that implements <a href="#">IO::RecordStore</a> using a Berkeley DB database as the underlying record storage system ) . . . . .	44
<a href="#">BiometricEvaluation::Error::Exception</a> (The parent class of all BiometricEvaluation exceptions ) . . . . .	50
<a href="#">BiometricEvaluation::IO::Factory</a> . . . . .	52
<a href="#">BiometricEvaluation::Error::FileError</a> (File error when opening, reading, writing, etc ) . . . . .	54
<a href="#">BiometricEvaluation::IO::FileRecordStore</a> . . . . .	55
<a href="#">BiometricEvaluation::Image::Image</a> (A abstract class to represent images and their attributes ) . . . . .	61
<a href="#">BiometricEvaluation::Process::Limits</a> (The <a href="#">Statistics</a> class provides an interface for gathering process limits, such as memory maximums, etc ) . . . . .	64
<a href="#">BiometricEvaluation::IO::LogCabinet</a> . . . . .	65
<a href="#">BiometricEvaluation::IO::LogSheet</a> (A class to represent a single logging mechanism ) . . . . .	69
<a href="#">BiometricEvaluation::IO::ManifestEntry</a> . . . . .	74

<a href="#">BiometricEvaluation::Error::MemoryError</a> (An error occurred when allocating an object ) . . . . .	74
<a href="#">BiometricEvaluation::Error::NotImplemented</a> (A <a href="#">NotImplemented</a> object is thrown when the underlying implementation of this interface has not or could not be created ) . . . . .	75
<a href="#">BiometricEvaluation::Error::ObjectDoesNotExist</a> (The named object does not exist ) . . . . .	76
<a href="#">BiometricEvaluation::Error::ObjectExists</a> (The named object exists and will not be replaced ) . . . . .	78
<a href="#">BiometricEvaluation::Error::ObjectIsClosed</a> (The object is closed ) . . . . .	79
<a href="#">BiometricEvaluation::Error::ObjectIsOpen</a> (The object is already opened ) . . . . .	80
<a href="#">BiometricEvaluation::Error::ParameterError</a> (An invalid parameter was passed to a constructor or method ) . . . . .	81
<a href="#">BiometricEvaluation::IO::Properties</a> (A <a href="#">Properties</a> class is used to maintain key/value pairs of strings, with each property matched to one value ) . . . . .	82
<a href="#">BiometricEvaluation::Image::RawImage</a> . . . . .	86
<a href="#">BiometricEvaluation::IO::RecordStore</a> (A class to represent a data storage mechanism ) . . . . .	89
<a href="#">BiometricEvaluation::Error::SignalManager</a> (A <a href="#">SignalManager</a> object is used to handle signals that come from the operating system ) . . . . .	99
<a href="#">BiometricEvaluation::Process::Statistics</a> (Interface for gathering process statistics, such as memory usage, system time, etc ) . . . . .	103
<a href="#">BiometricEvaluation::Error::StrategyError</a> (A <a href="#">StrategyError</a> object is thrown when the underlying implementation of this interface encounters an error ) . . . . .	107
<a href="#">BiometricEvaluation::Time::Timer</a> (This class can be used by applications to report the amount of time a block of code takes to execute ) . . . . .	109
<a href="#">BiometricEvaluation::IO::Utility</a> . . . . .	110
<a href="#">BiometricEvaluation::Time::Watchdog</a> (A <a href="#">Watchdog</a> object can be used by applications to limit the amount of processing time taken by a block of code ) . . . . .	113

## Appendix E

# Namespace Documentation

### E.1 BiometricEvaluation::Image Namespace Reference

A class representing a raw image.

#### Classes

- class [Image](#)

*A abstract class to represent images and their attributes.*

- class [RawImage](#)

#### E.1.1 Detailed Description

A class representing a raw image.

#### Todo

Add more detail.

## E.2 BiometricEvaluation::Process Namespace Reference

### Classes

- class [Limits](#)

*The [Statistics](#) class provides an interface for gathering process limits, such as memory maximums, etc.*

- class [Statistics](#)

*The [Statistics](#) class provides an interface for gathering process statistics, such as memory usage, system time, etc.*

### E.2.1 Detailed Description

The [Process](#) name space gathers all process related matters, such as resource usage statistics.

## E.3 BiometricEvaluation::System Namespace Reference

### Functions

- uint32\_t [getCPUCount](#) () throw (Error::NotImplemented)

*Obtain the number of central processing units that are online. Typically, this is the total CPU core count for the system.*

- uint64\_t [getRealMemorySize](#) () throw (Error::NotImplemented)

*Obtain the amount of real memory in the system.*

- double [getLoadAverage](#) () throw (Error::NotImplemented)

*Obtain the system load average for the last minute.*

### E.3.1 Detailed Description

The [System](#) name space gathers all system related matters, such as the operating system name, number of CPUs, etc.

## E.3.2 Function Documentation

### E.3.2.1 uint32\_t BiometricEvaluation::System::getCPUCount ( ) throw (Error::NotImplemented)

Obtain the number of central processing units that are online. Typically, this is the total CPU core count for the system.

#### Returns

The number of processing units.

#### Exceptions

*Error::NotImplemented* Not implemented for this operating system, or the underlying OS feature is not installed.

### E.3.2.2 uint64\_t BiometricEvaluation::System::getRealMemorySize ( ) throw (Error::NotImplemented)

Obtain the amount of real memory in the system.

#### Returns

The real memory size, in kilobytes.

#### Exceptions

*Error::NotImplemented* Not implemented for this operating system, or the underlying OS feature is not installed.

### E.3.2.3 double BiometricEvaluation::System::getLoadAverage ( ) throw (Error::NotImplemented)

Obtain the system load average for the last minute.

#### Returns

The system load average.

#### Exceptions

*Error::NotImplemented* Not implemented for this operating system, or the underlying OS feature is not installed.

## E.4 BiometricEvaluation::Time Namespace Reference

### Classes

- class [Timer](#)

*This class can be used by applications to report the amount of time a block of code takes to execute.*

- class [Watchdog](#)

*A [Watchdog](#) object can be used by applications to limit the amount of processing time taken by a block of code.*

### Functions

- void **WatchdogSignalHandler** (int signo, siginfo\_t \*info, void \*uap)

### Variables

- const uint64\_t **OneSecond** = 1000000
- const uint64\_t **OneHalfSecond** = 500000
- const uint64\_t **OneQuarterSecond** = 250000
- const uint64\_t **OneEighthSecond** = 125000
- const int **MicrosecondsPerSecond** = 1000000
- const int **MillisecondsPerSecond** = 1000

#### E.4.1 Detailed Description

The [Time](#) name space gathers all timing relating matters, such as Timers, [Watchdog](#) timers, etc. [Time](#) values are in microsecond units.

# Appendix F


## Class Documentation

### F.1 BiometricEvaluation::IO::ArchiveRecordStore Class Reference

This class implements the [IO::RecordStore](#) interface by storing data items in single file, with an associated manifest file.

```
#include <be_io_archiverecstore.h>
```

Inheritance diagram for BiometricEvaluation::IO::ArchiveRecordStore:



#### Public Member Functions

- [ArchiveRecordStore](#) (const string &name, const string &description, const string &parentDir) throw (Error::ObjectExists, Error::StrategyError)
- [ArchiveRecordStore](#) (const string &name, const string &parentDir, uint8\_t mode=IO::READWRITE) throw (Error::ObjectDoesNotExist, Error::StrategyError)
- [~ArchiveRecordStore](#) ()
- uint64\_t [getSpaceUsed](#) () throw (Error::StrategyError)
- void [sync](#) () throw (Error::StrategyError)
- void [insert](#) (const string &key, const void \*const data, const uint64\_t size) throw (Error::ObjectExists, Error::StrategyError)

- void [remove](#) (const string &key) throw (Error::ObjectDoesNotExist, Error::StrategyError)
- uint64\_t [read](#) (const string &key, void \*const data) throw (Error::ObjectDoesNotExist, Error::StrategyError)
- void [replace](#) (const string &key, const void \*const data, const uint64\_t size) throw (Error::ObjectDoesNotExist, Error::StrategyError)
- uint64\_t [length](#) (const string &key) throw (Error::ObjectDoesNotExist)
- void [flush](#) (const string &key) throw (Error::ObjectDoesNotExist, Error::StrategyError)
- uint64\_t [sequence](#) (string &key, void \*const data, int cursor=BE\_RECSTORE\_SEQ\_NEXT) throw (Error::ObjectDoesNotExist, Error::StrategyError)
- void [setCursor](#) (string &key) throw (Error::ObjectDoesNotExist, Error::StrategyError)
- void [changeName](#) (const string &name) throw (Error::ObjectExists, Error::StrategyError)
- bool [needsVacuum](#) ()
- string [getArchiveName](#) ()
- string [getManifestName](#) ()

## Static Public Member Functions

- static bool [needsVacuum](#) (const string &name, const string &parentDir) throw (Error::ObjectDoesNotExist, Error::StrategyError)
- static void [vacuum](#) (const string &name, const string &parentDir) throw (Error::ObjectDoesNotExist, Error::StrategyError)

### F.1.1 Detailed Description

This class implements the [IO::RecordStore](#) interface by storing data items in single file, with an associated manifest file. Archives consist of binary records written back to back of each other. To pull information out of an archive, a manifest file is written in the same directory as the archive file.

Each record is assigned a string key, which will be required for retrieving the data. As the data is written, a plain text entry is entered into the manifest in the format:

key offset size

where offset is the offset into the archive file key's data chunk resides and size is the length of key's data chunk.

By default, information is not removed when updated in the archive, rather the old information is ignored. Therefore, it is possible to have multiple entries in the manifest for one key. The last entry for the key is considered accurate. If the last offset for a key is ARCHIVE\_RECORD\_REMOVED, the information is treated as unavailable.



## F.1.2 Constructor & Destructor Documentation

### F.1.2.1 BiometricEvaluation::IO::ArchiveRecordStore::ArchiveRecordStore ( const string & *name*, const string & *description*, const string & *parentDir* ) throw (Error::ObjectExists, Error::StrategyError)

Create a new [ArchiveRecordStore](#), read/write mode.

#### Parameters

*name[in]* The name of the store.

*description[in]* The store's description.

*parentDir[in]* The directory where the store is to be created.

#### Exceptions

[Error::ObjectExists](#) The store already exists.

[Error::StrategyError](#) An error occurred when accessing the underlying file system.

### F.1.2.2 BiometricEvaluation::IO::ArchiveRecordStore::ArchiveRecordStore ( const string & *name*, const string & *parentDir*, uint8\_t *mode* = *IO::READWRITE* ) throw (Error::ObjectDoesNotExist, Error::StrategyError)

Open an existing [ArchiveRecordStore](#).

#### Parameters

*name[in]* The name of the store.

*parentDir[in]* The directory where the store is to be created.

*mode[in]* Open mode, read-only or read-write.

#### Exceptions

[Error::ObjectDoesNotExist](#) The store does not exist.

[Error::StrategyError](#) An error occurred when accessing the underlying file system.

### F.1.2.3 BiometricEvaluation::IO::ArchiveRecordStore::~~ArchiveRecordStore ( )

Destructor.

### F.1.3 Member Function Documentation

#### F.1.3.1 `uint64_t BiometricEvaluation::IO::ArchiveRecordStore::getSpaceUsed ( ) throw (Error::StrategyError) [virtual]`

Obtain the amount of real storage utilization, the amount of disk space used, for example. This is the actual space allocated by the underlying storage mechanism, in bytes.

##### Returns

The amount of backing storage used by the [RecordStore](#).

##### Exceptions

[Error::StrategyError](#) An error occurred when using the underlying storage system.

Reimplemented from [BiometricEvaluation::IO::RecordStore](#).

#### F.1.3.2 `void BiometricEvaluation::IO::ArchiveRecordStore::sync ( ) throw (Error::StrategyError) [virtual]`

Synchronize the entire record store to persistent storage.

##### Exceptions

[Error::StrategyError](#) An error occurred when using the underlying storage system.

Reimplemented from [BiometricEvaluation::IO::RecordStore](#).

#### F.1.3.3 `void BiometricEvaluation::IO::ArchiveRecordStore::insert ( const string & key, const void *const data, const uint64_t size ) throw (Error::ObjectExists, Error::StrategyError) [virtual]`

Insert a record into the store.

##### Parameters

*key[in]* The key of the record to be flushed.

*data[in]* The data for the record.

*size[in]* The size, in bytes, of the record.

##### Exceptions

[Error::ObjectExists](#) A record with the given key is already present.

**Error::StrategyError** An error occurred when using the underlying storage system.

Implements [BiometricEvaluation::IO::RecordStore](#).

**F.1.3.4** `void BiometricEvaluation::IO::ArchiveRecordStore::remove ( const string & key ) throw (Error::ObjectDoesNotExist, Error::StrategyError) [virtual]`

Remove a record from the store.

#### Parameters

*key[in]* The key of the record to be removed.

#### Exceptions

**Error::ObjectDoesNotExist** A record for the key does not exist.

**Error::StrategyError** An error occurred when using the underlying storage system.

Implements [BiometricEvaluation::IO::RecordStore](#).

**F.1.3.5** `uint64_t BiometricEvaluation::IO::ArchiveRecordStore::read ( const string & key, void *const data ) throw (Error::ObjectDoesNotExist, Error::StrategyError) [virtual]`

Read a complete record from a store. Applications are responsible for allocating storage for the record's data.

#### Parameters

*key[in]* The key of the record to be read. *[in]* Pointer to where the data is to be written.

#### Returns

The size of the record.

#### Exceptions

**Error::ObjectDoesNotExist** A record for the key does not exist.

**Error::StrategyError** An error occurred when using the underlying storage system.

Implements [BiometricEvaluation::IO::RecordStore](#).

**F.1.3.6** `void BiometricEvaluation::IO::ArchiveRecordStore::replace ( const string & key, const void *const data, const uint64_t size ) throw (Error::ObjectDoesNotExist, Error::StrategyError) [virtual]`

Replace a complete record in a store.

#### Parameters

*key[in]* The key of the record to be replaced.

*data[in]* The data for the record.

#### Exceptions

*Error::ObjectDoesNotExist* A record for the key does not exist.

*Error::StrategyError* An error occurred when using the underlying storage system.

Implements [BiometricEvaluation::IO::RecordStore](#).

**F.1.3.7** `uint64_t BiometricEvaluation::IO::ArchiveRecordStore::length ( const string & key ) throw (Error::ObjectDoesNotExist) [virtual]`

Return the length of a record.

#### Parameters

*key[in]* The key of the record.

#### Returns

The record length.

#### Exceptions

*Error::ObjectDoesNotExist* A record for the key does not exist.

*Error::StrategyError* An error occurred when using the underlying storage system.

Implements [BiometricEvaluation::IO::RecordStore](#).

**F.1.3.8** `void BiometricEvaluation::IO::ArchiveRecordStore::flush ( const string & key ) throw (Error::ObjectDoesNotExist, Error::StrategyError) [virtual]`

Commit the record's data to storage.

### Parameters

*key[in]* The key of the record to be flushed.

### Exceptions

*Error::ObjectDoesNotExist* A record for the key does not exist.

*Error::StrategyError* An error occurred when using the underlying storage system.

Implements [BiometricEvaluation::IO::RecordStore](#).

**F.1.3.9** `void BiometricEvaluation::IO::ArchiveRecordStore::setCursor ( string & key ) throw (Error::ObjectDoesNotExist, Error::StrategyError) [virtual]`

Set the sequence cursor to an arbitrary position within the [RecordStore](#), starting at key. Key will be the first record returned from the next call to `sequence()`.

### Parameters

*key[in]* The key of the record which will be returned by the first subsequent call to `sequence()`.

### Exceptions

*Error::ObjectDoesNotExist* A record for the key does not exist.

*Error::StrategyError* An error occurred when using the underlying storage system.

Implements [BiometricEvaluation::IO::RecordStore](#).

**F.1.3.10** `void BiometricEvaluation::IO::ArchiveRecordStore::changeName ( const string & name ) throw (Error::ObjectExists, Error::StrategyError) [virtual]`

Change the name of the [RecordStore](#).

### Parameters

*name[in]* The new name for the [RecordStore](#).

### Exceptions

*Error::StrategyError* An error occurred when using the underlying storage system, or the name is malformed.

Reimplemented from [BiometricEvaluation::IO::RecordStore](#).

### F.1.3.11 `bool BiometricEvaluation::IO::ArchiveRecordStore::needsVacuum ( )`

See if the [ArchiveRecordStore](#) would benefit from calling [vacuum\(\)](#) to remove deleted entries, since [vacuum\(\)](#) is an expensive operation.

#### Returns

true if [vacuum\(\)](#) would be beneficial false otherwise

### F.1.3.12 `static bool BiometricEvaluation::IO::ArchiveRecordStore::needsVacuum ( const string & name, const string & parentDir ) throw (Error::ObjectDoesNotExist, Error::StrategyError) [static]`

See if the [ArchiveRecordStore](#) would benefit from calling [vacuum\(\)](#) to remove deleted entries, since [vacuum\(\)](#) is an expensive operation.

#### Parameters

*name[in]* The name of the existing [RecordStore](#).

*parentDir[in]* Where, in the filesystem, the store is rooted.

#### Exceptions

[Error::ObjectDoesNotExist](#) A record with the given key does not exist.

[Error::StrategyError](#) An error occurred when using the underlying storage system.

#### Returns

true if [vacuum\(\)](#) would be beneficial false otherwise

### F.1.3.13 `static void BiometricEvaluation::IO::ArchiveRecordStore::vacuum ( const string & name, const string & parentDir ) throw (Error::ObjectDoesNotExist, Error::StrategyError) [static]`

Remove deleted entries from the manifest and archive files to save space on disk.

#### Parameters

*name[in]* The name of the existing [RecordStore](#).

*parentDir[in]* Where, in the file system, the store is rooted.

## **F.2 BiometricEvaluation::Utility::AutoArray< T > Class Template Reference 41**

### **Exceptions**

*Error::ObjectDoesNotExist* A record with the given key does not exist.

*Error::StrategyError* An error occurred when using the underlying storage system.

### **Note**

This is an expensive operation.

#### **F.1.3.14 string BiometricEvaluation::IO::ArchiveRecordStore::getArchiveName ( )**

Obtain the name of the file storing the data for this store.

### **Returns**

Path to archive file.

#### **F.1.3.15 string BiometricEvaluation::IO::ArchiveRecordStore::getManifestName ( )**

Obtain the name of the file storing the manifest data data for this store.

### **Returns**

Path to manifest file.

The documentation for this class was generated from the following file:

- be\_io\_archiverecstore.h

## **F.2 BiometricEvaluation::Utility::AutoArray< T > Class Template Reference**

### **Public Types**

- typedef T **value\_type**
- typedef T \* **iterator**
- typedef const T \* **const\_iterator**
- typedef T & **reference**
- typedef const T & **const\_reference**

## Public Member Functions

- **operator T \* ()**
- reference **operator[]** (ptrdiff\_t i)
- const\_reference **operator[]** (ptrdiff\_t i) const
- [AutoArray](#) & **operator=** (const [AutoArray](#) &other)
- iterator **begin** ()
- const\_iterator **begin** () const
- iterator **end** ()
- const\_iterator **end** () const
- size\_t **size** () const
- **AutoArray** (size\_t size)
- **AutoArray** (const [AutoArray](#) &copy)

**template<class T> class BiometricEvaluation::Utility::AutoArray< T >**

The documentation for this class was generated from the following file:

- be\_utility\_autoarray.h

## F.3 be\_workorder Struct Reference

### Public Attributes

- int **sockfd**
- void \* **stateData**

The documentation for this struct was generated from the following file:

- be\_netsdk.h


## F.4 BiometricEvaluation::Error::ConversionError Class Reference

Error when converting one object into another, a property value from string to int, for example.

```
#include <be_error_exception.h>
```

Inheritance diagram for BiometricEvaluation::Error::ConversionError:





## Public Member Functions

- [ConversionError](#) ()
- [ConversionError](#) (string info)

### F.4.1 Detailed Description

Error when converting one object into another, a property value from string to int, for example.

### F.4.2 Constructor & Destructor Documentation

#### F.4.2.1 BiometricEvaluation::Error::ConversionError::ConversionError ( )

Construct a [ConversionError](#) object with the default information string.

##### Returns

The [ConversionError](#) object.

#### F.4.2.2 BiometricEvaluation::Error::ConversionError::ConversionError (string *info* )

Construct a [ConversionError](#) object with an information string appended to the default information string.

##### Returns

The [ConversionError](#) object.

The documentation for this class was generated from the following file:


- `be_error_exception.h`

## F.5 BiometricEvaluation::IO::DBRecordStore Class Reference

A class that implements [IO::RecordStore](#) using a Berkeley DB database as the underlying record storage system.

```
#include <be_io_dbrecstore.h>
```

Inheritance diagram for BiometricEvaluation::IO::DBRecordStore:



### Public Member Functions

- [DBRecordStore](#) (const string &name, const string &description, const string &parentDir) throw (Error::ObjectExists, Error::StrategyError)
- [DBRecordStore](#) (const string &name, const string &parentDir, uint8\_t mode=IO::READWRITE) throw (Error::ObjectDoesNotExist, Error::StrategyError)
- uint64\_t [getSpaceUsed](#) () throw (Error::StrategyError)
- void [sync](#) () throw (Error::StrategyError)
- void [insert](#) (const string &key, const void \*const data, const uint64\_t size) throw (Error::ObjectExists, Error::StrategyError)
- void [remove](#) (const string &key) throw (Error::ObjectDoesNotExist, Error::StrategyError)
- uint64\_t [read](#) (const string &key, void \*const data) throw (Error::ObjectDoesNotExist, Error::StrategyError)
- virtual void [replace](#) (const string &key, const void \*const data, const uint64\_t size) throw (Error::ObjectDoesNotExist, Error::StrategyError)
- virtual uint64\_t [length](#) (const string &key) throw (Error::ObjectDoesNotExist, Error::StrategyError)
- void [flush](#) (const string &key) throw (Error::ObjectDoesNotExist, Error::StrategyError)
- uint64\_t [sequence](#) (string &key, void \*const data, int cursor=BE\_RECSTORE\_SEQ\_NEXT) throw (Error::ObjectDoesNotExist, Error::StrategyError)
- void [setCursor](#) (string &key) throw (Error::ObjectDoesNotExist, Error::StrategyError)
- void [changeName](#) (const string &name) throw (Error::ObjectExists, Error::StrategyError)

## F.5.1 Detailed Description

A class that implements [IO::RecordStore](#) using a Berkeley DB database as the underlying record storage system.

## F.5.2 Constructor & Destructor Documentation

### F.5.2.1 BiometricEvaluation::IO::DBRecordStore::DBRecordStore ( *const* string & *name*, *const* string & *description*, *const* string & *parentDir* ) throw (Error::ObjectExists, Error::StrategyError)

Create a new [DBRecordStore](#), read/write mode.

#### Parameters

*name[in]* The name of the store.

*description[in]* The store's description.

*parentDir[in]* The directory where the store is to be created.

#### Exceptions

[Error::ObjectExists](#) The store already exists.

[Error::StrategyError](#) An error occurred when accessing the underlying file system.

### F.5.2.2 BiometricEvaluation::IO::DBRecordStore::DBRecordStore ( *const* string & *name*, *const* string & *parentDir*, *uint8\_t mode* = *IO::READWRITE* ) throw (Error::ObjectDoesNotExist, Error::StrategyError)

Open an existing [DBRecordStore](#).

#### Parameters

*name[in]* The name of the store.

*parentDir[in]* The directory where the store is to be created.

*mode[in]* Open mode, read-only or read-write.

#### Exceptions

[Error::ObjectDoesNotExist](#) The store does not exist.

[Error::StrategyError](#) An error occurred when accessing the underlying file system.

### F.5.3 Member Function Documentation

#### F.5.3.1 `uint64_t BiometricEvaluation::IO::DBRecordStore::getSpaceUsed ( ) throw (Error::StrategyError) [virtual]`

Obtain the amount of real storage utilization, the amount of disk space used, for example. This is the actual space allocated by the underlying storage mechanism, in bytes.

##### Returns

The amount of backing storage used by the [RecordStore](#).

##### Exceptions

[Error::StrategyError](#) An error occurred when using the underlying storage system.

Reimplemented from [BiometricEvaluation::IO::RecordStore](#).

#### F.5.3.2 `void BiometricEvaluation::IO::DBRecordStore::sync ( ) throw (Error::StrategyError) [virtual]`

Synchronize the entire record store to persistent storage.

##### Exceptions

[Error::StrategyError](#) An error occurred when using the underlying storage system.

Reimplemented from [BiometricEvaluation::IO::RecordStore](#).

#### F.5.3.3 `void BiometricEvaluation::IO::DBRecordStore::insert ( const string & key, const void *const data, const uint64_t size ) throw (Error::ObjectExists, Error::StrategyError) [virtual]`

Insert a record into the store.

##### Parameters

*key[in]* The key of the record to be flushed.

*data[in]* The data for the record.

*size[in]* The size, in bytes, of the record.

##### Exceptions

[Error::ObjectExists](#) A record with the given key is already present.

*Error::StrategyError* An error occurred when using the underlying storage system.

Implements [BiometricEvaluation::IO::RecordStore](#).

**F.5.3.4** `void BiometricEvaluation::IO::DBRecordStore::remove ( const string & key ) throw (Error::ObjectDoesNotExist, Error::StrategyError) [virtual]`

Remove a record from the store.

#### Parameters

*key[in]* The key of the record to be removed.

#### Exceptions

*Error::ObjectDoesNotExist* A record for the key does not exist.

*Error::StrategyError* An error occurred when using the underlying storage system.

Implements [BiometricEvaluation::IO::RecordStore](#).

**F.5.3.5** `uint64_t BiometricEvaluation::IO::DBRecordStore::read ( const string & key, void *const data ) throw (Error::ObjectDoesNotExist, Error::StrategyError) [virtual]`

Read a complete record from a store. Applications are responsible for allocating storage for the record's data.

#### Parameters

*key[in]* The key of the record to be read. *[in]* Pointer to where the data is to be written.

#### Returns

The size of the record.

#### Exceptions

*Error::ObjectDoesNotExist* A record for the key does not exist.

*Error::StrategyError* An error occurred when using the underlying storage system.

Implements [BiometricEvaluation::IO::RecordStore](#).

**F.5.3.6** `virtual void BiometricEvaluation::IO::DBRecordStore::replace ( const string & key, const void *const data, const uint64_t size ) throw (Error::ObjectDoesNotExist, Error::StrategyError) [virtual]`

Replace a complete record in a store.

#### Parameters

*key[in]* The key of the record to be replaced.

*data[in]* The data for the record.

#### Exceptions

*Error::ObjectDoesNotExist* A record for the key does not exist.

*Error::StrategyError* An error occurred when using the underlying storage system.

Implements [BiometricEvaluation::IO::RecordStore](#).

**F.5.3.7** `virtual uint64_t BiometricEvaluation::IO::DBRecordStore::length ( const string & key ) throw (Error::ObjectDoesNotExist, Error::StrategyError) [virtual]`

Return the length of a record.

#### Parameters

*key[in]* The key of the record.

#### Returns

The record length.

#### Exceptions

*Error::ObjectDoesNotExist* A record for the key does not exist.

*Error::StrategyError* An error occurred when using the underlying storage system.

Implements [BiometricEvaluation::IO::RecordStore](#).

**F.5.3.8** `void BiometricEvaluation::IO::DBRecordStore::flush ( const string & key ) throw (Error::ObjectDoesNotExist, Error::StrategyError) [virtual]`

Commit the record's data to storage.

### Parameters

*key[in]* The key of the record to be flushed.

### Exceptions

*Error::ObjectDoesNotExist* A record for the key does not exist.

*Error::StrategyError* An error occurred when using the underlying storage system.

Implements [BiometricEvaluation::IO::RecordStore](#).

**F.5.3.9** `void BiometricEvaluation::IO::DBRecordStore::setCursor ( string & key ) throw (Error::ObjectDoesNotExist, Error::StrategyError) [virtual]`

Set the sequence cursor to an arbitrary position within the [RecordStore](#), starting at key. Key will be the first record returned from the next call to `sequence()`.

### Parameters

*key[in]* The key of the record which will be returned by the first subsequent call to `sequence()`.

### Exceptions

*Error::ObjectDoesNotExist* A record for the key does not exist.

*Error::StrategyError* An error occurred when using the underlying storage system.

Implements [BiometricEvaluation::IO::RecordStore](#).

**F.5.3.10** `void BiometricEvaluation::IO::DBRecordStore::changeName ( const string & name ) throw (Error::ObjectExists, Error::StrategyError) [virtual]`

Change the name of the [RecordStore](#).

### Parameters

*name[in]* The new name for the [RecordStore](#).

### Exceptions

*Error::StrategyError* An error occurred when using the underlying storage system, or the name is malformed.

Reimplemented from [BiometricEvaluation::IO::RecordStore](#).

The documentation for this class was generated from the following file:


- `be_io_dbrecstore.h`

## F.6 BiometricEvaluation::Error::Exception Class Reference

The parent class of all BiometricEvaluation exceptions.

```
#include <be_error_exception.h>
```

Inheritance diagram for BiometricEvaluation::Error::Exception:

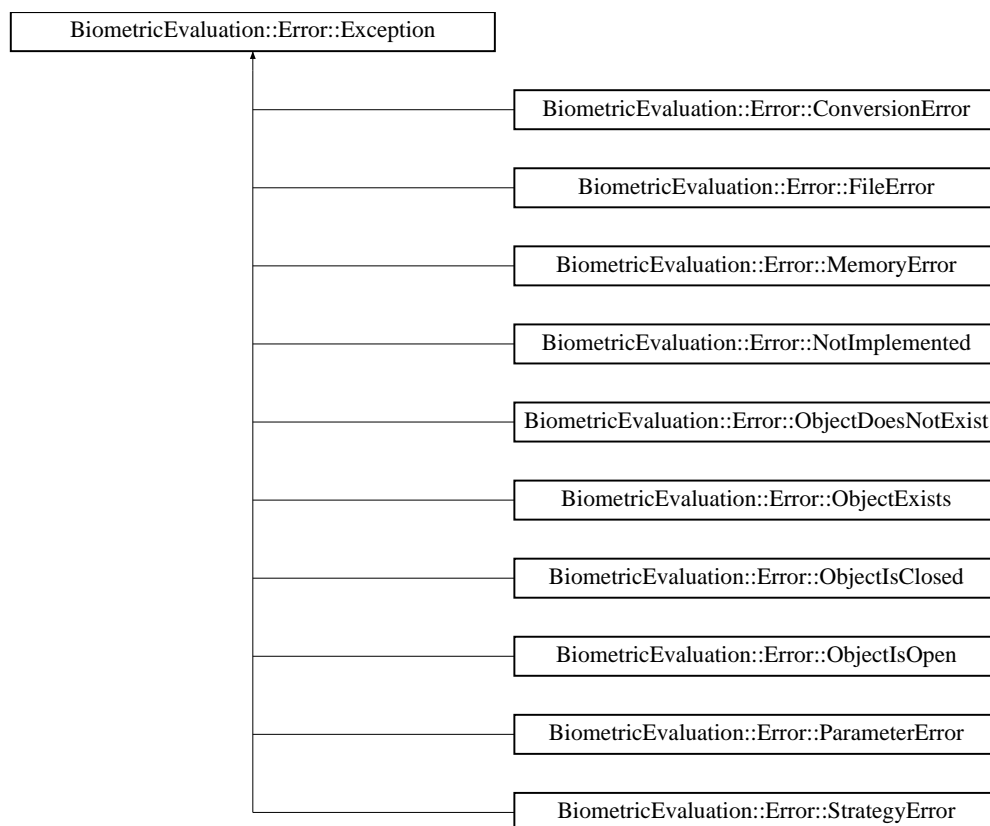



## Public Member Functions

- [Exception](#) ()
- [Exception](#) (string info)
- string [getInfo](#) ()

### F.6.1 Detailed Description

The parent class of all BiometricEvaluation exceptions. The classes derived from this class will have a default information string set indicating the type of exception. Any additional information string is appended to that string.

### F.6.2 Constructor & Destructor Documentation

#### F.6.2.1 BiometricEvaluation::Error::Exception::Exception ( )

Construct an [Exception](#) object without an information string.

##### Returns

The [Exception](#) object.

#### F.6.2.2 BiometricEvaluation::Error::Exception::Exception ( string *info* )

Construct an [Exception](#) object with an information string.

##### Parameters

*info[in]* The information string associated with the exception.

##### Returns

The [Exception](#) object.

### F.6.3 Member Function Documentation

#### F.6.3.1 string BiometricEvaluation::Error::Exception::getInfo ( )

Obtain the information string associated with the exception.

##### Returns

The information string.

The documentation for this class was generated from the following file:

- `be_error_exception.h`

## F.7 BiometricEvaluation::IO::Factory Class Reference

```
#include <be_io_factory.h>
```

### Static Public Member Functions

- static `tr1::shared_ptr< RecordStore > openRecordStore` (const string &name, const string &parentDir, uint8\_t mode=READWRITE) throw (Error::ObjectDoesNotExist, Error::StrategyError)

*Open an existing [RecordStore](#) and return a managed pointer to the the object representing that store.*

- static `tr1::shared_ptr< RecordStore > createRecordStore` (const string &name, const string &description, const string &type, const string &destDir) throw (Error::ObjectExists, Error::StrategyError)

*Create a new [RecordStore](#) and return a managed pointer to the the object representing that store.*

### F.7.1 Detailed Description

A class to provide constructed objects of classes defined in the BiometricEvaluation::IO package, RecordStores, etc.

### F.7.2 Member Function Documentation

**F.7.2.1** static `tr1::shared_ptr<RecordStore> BiometricEvaluation::IO::Factory::openRecordStore` ( const string & *name*, const string & *parentDir*, uint8\_t *mode* = *READWRITE* ) throw (Error::ObjectDoesNotExist, Error::StrategyError) [static]

Open an existing [RecordStore](#) and return a managed pointer to the the object representing that store.

Applications can open existing record stores without the need to know what type of [RecordStore](#) it is.

The allocated object will be automatically freed when the returned pointer goes out of scope. Applications should not delete the object.

### Parameters

*name[in]* The name of the store to be opened.  
*parentDir[in]* Where, in the file system, the store is rooted.  
*mode[in]* The type of access a client of this [RecordStore](#) has.

### Returns

An object representing the existing store.

### Exceptions

[Error::ObjectDoesNotExist](#) The [RecordStore](#) does not exist.  
[Error::StrategyError](#) An error occurred when using the underlying storage system, or the name is malformed.

**F.7.2.2** `static tr1::shared_ptr<RecordStore> BiometricEvaluation::IO::Factory::createRecordStore ( const string & name, const string & description, const string & type, const string & destDir ) throw (Error::ObjectExists, Error::StrategyError) [static]`

Create a new [RecordStore](#) and return a managed pointer to the the object representing that store.

The allocated object will be automatically freed when the returned pointer goes out of scope. Applications should not delete the object.

### Parameters

*name[in]* The name of the store to be created.  
*description[in]* The description of the store to be created.  
*type[in]* The type of the store to be created.  
*destDir[in]* Where, in the file system, the store will be created.

### Returns

An auto\_ptr to the object representing the created store.

### Exceptions

[Error::ObjectDoesNotExist](#) The [RecordStore](#) does not exist.  
[Error::StrategyError](#) An error occurred when using the underlying storage system, or the name is malformed.

The documentation for this class was generated from the following file:


- be\_io\_factory.h

## F.8 BiometricEvaluation::Error::FileError Class Reference

File error when opening, reading, writing, etc.

```
#include <be_error_exception.h>
```

Inheritance diagram for BiometricEvaluation::Error::FileError:



### Public Member Functions

- [FileError](#) ()
- [FileError](#) (string info)

### F.8.1 Detailed Description

File error when opening, reading, writing, etc.

### F.8.2 Constructor & Destructor Documentation

#### F.8.2.1 BiometricEvaluation::Error::FileError::FileError ( )

Construct a [FileError](#) object with the default information string.

##### Returns

The [FileError](#) object.

#### F.8.2.2 BiometricEvaluation::Error::FileError::FileError ( string *info* )

Construct a [FileError](#) object with an information string appended to the default information string.

##### Returns

The [FileError](#) object.


The documentation for this class was generated from the following file:

- be\_error\_exception.h

## F.9 BiometricEvaluation::IO::FileRecordStore Class Reference

```
#include <be_io_filerecstore.h>
```

Inheritance diagram for BiometricEvaluation::IO::FileRecordStore:



### Public Member Functions

- [FileRecordStore](#) (const string &name, const string &description, const string &parentDir) throw (Error::ObjectExists, Error::StrategyError)
- [FileRecordStore](#) (const string &name, const string &parentDir, uint8\_t mode=IO::READWRITE) throw (Error::ObjectDoesNotExist, Error::StrategyError)
- uint64\_t [getSpaceUsed](#) () throw (Error::StrategyError)
- void [insert](#) (const string &key, const void \*const data, const uint64\_t size) throw (Error::ObjectExists, Error::StrategyError)
- void [remove](#) (const string &key) throw (Error::ObjectDoesNotExist, Error::StrategyError)
- uint64\_t [read](#) (const string &key, void \*const data) throw (Error::ObjectDoesNotExist, Error::StrategyError)
- virtual void [replace](#) (const string &key, const void \*const data, const uint64\_t size) throw (Error::ObjectDoesNotExist, Error::StrategyError)
- virtual uint64\_t [length](#) (const string &key) throw (Error::ObjectDoesNotExist, Error::StrategyError)
- void [flush](#) (const string &key) throw (Error::ObjectDoesNotExist, Error::StrategyError)
- uint64\_t [sequence](#) (string &key, void \*const data, int cursor=BE\_RECSTORE\_SEQ\_NEXT) throw (Error::ObjectDoesNotExist, Error::StrategyError)
- void [setCursor](#) (string &key) throw (Error::ObjectDoesNotExist, Error::StrategyError)
- void [changeName](#) (const string &name) throw (Error::ObjectExists, Error::StrategyError)

## Protected Member Functions

- string **canonicalName** (const string &name)

### F.9.1 Detailed Description

Class to represent the record store data storage mechanism implemented as files for each record.

#### Note

For the methods that take a key parameter, [Error::StrategyError](#) will be thrown if the key string is not compliant. A [FileRecordStore](#) has the additional requirement that a key name may not contain path delimiter characters ('/' and '\'), or begin with whitespace.

### F.9.2 Constructor & Destructor Documentation

**F.9.2.1** [BiometricEvaluation::IO::FileRecordStore::FileRecordStore](#) ( const string & *name*, const string & *description*, const string & *parentDir* ) throw (Error::ObjectExists, Error::StrategyError)

Create a new [FileRecordStore](#), read/write mode.

#### Parameters

*name[in]* The name of the store.

*description[in]* The store's description.

*parentDir[in]* The directory where the store is to be created.

#### Exceptions

[Error::ObjectExists](#) The store already exists.

[Error::StrategyError](#) An error occurred when accessing the underlying file system.

**F.9.2.2** [BiometricEvaluation::IO::FileRecordStore::FileRecordStore](#) ( const string & *name*, const string & *parentDir*, uint8\_t *mode* = *IO::READWRITE* ) throw (Error::ObjectDoesNotExist, Error::StrategyError)

Open an existing [FileRecordStore](#).

### Parameters

*name[in]* The name of the store.

*parentDir[in]* The directory where the store is to be created.

*mode[in]* Open mode, read-only or read-write.

### Exceptions

*Error::ObjectDoesNotExist* The store does not exist.

*Error::StrategyError* An error occurred when accessing the underlying file system.

## F.9.3 Member Function Documentation

### F.9.3.1 uint64\_t BiometricEvaluation::IO::FileRecordStore::getSpaceUsed ( ) throw (Error::StrategyError) [virtual]

Obtain the amount of real storage utilization, the amount of disk space used, for example. This is the actual space allocated by the underlying storage mechanism, in bytes.

### Returns

The amount of backing storage used by the [RecordStore](#).

### Exceptions

*Error::StrategyError* An error occurred when using the underlying storage system.

Reimplemented from [BiometricEvaluation::IO::RecordStore](#).

### F.9.3.2 void BiometricEvaluation::IO::FileRecordStore::insert ( const string & key, const void \*const data, const uint64\_t size ) throw (Error::ObjectExists, Error::StrategyError) [virtual]

Insert a record into the store.

### Parameters

*key[in]* The key of the record to be flushed.

*data[in]* The data for the record.

*size[in]* The size, in bytes, of the record.

### Exceptions

*Error::ObjectExists* A record with the given key is already present.

***Error::StrategyError*** An error occurred when using the underlying storage system.

Implements [BiometricEvaluation::IO::RecordStore](#).

**F.9.3.3** `void BiometricEvaluation::IO::FileRecordStore::remove ( const string & key ) throw (Error::ObjectDoesNotExist, Error::StrategyError) [virtual]`

Remove a record from the store.

#### Parameters

*key[in]* The key of the record to be removed.

#### Exceptions

***Error::ObjectDoesNotExist*** A record for the key does not exist.

***Error::StrategyError*** An error occurred when using the underlying storage system.

Implements [BiometricEvaluation::IO::RecordStore](#).

**F.9.3.4** `uint64_t BiometricEvaluation::IO::FileRecordStore::read ( const string & key, void *const data ) throw (Error::ObjectDoesNotExist, Error::StrategyError) [virtual]`

Read a complete record from a store. Applications are responsible for allocating storage for the record's data.

#### Parameters

*key[in]* The key of the record to be read. [in] Pointer to where the data is to be written.

#### Returns

The size of the record.

#### Exceptions

***Error::ObjectDoesNotExist*** A record for the key does not exist.

***Error::StrategyError*** An error occurred when using the underlying storage system.

Implements [BiometricEvaluation::IO::RecordStore](#).



**F.9.3.5** `virtual void BiometricEvaluation::IO::FileRecordStore::replace ( const string & key, const void *const data, const uint64_t size ) throw (Error::ObjectDoesNotExist, Error::StrategyError) [virtual]`

Replace a complete record in a store.

#### Parameters

*key[in]* The key of the record to be replaced.

*data[in]* The data for the record.

#### Exceptions

*Error::ObjectDoesNotExist* A record for the key does not exist.

*Error::StrategyError* An error occurred when using the underlying storage system.

Implements [BiometricEvaluation::IO::RecordStore](#).

**F.9.3.6** `virtual uint64_t BiometricEvaluation::IO::FileRecordStore::length ( const string & key ) throw (Error::ObjectDoesNotExist, Error::StrategyError) [virtual]`

Return the length of a record.

#### Parameters

*key[in]* The key of the record.

#### Returns

The record length.

#### Exceptions

*Error::ObjectDoesNotExist* A record for the key does not exist.

*Error::StrategyError* An error occurred when using the underlying storage system.

Implements [BiometricEvaluation::IO::RecordStore](#).

**F.9.3.7** `void BiometricEvaluation::IO::FileRecordStore::flush ( const string & key ) throw (Error::ObjectDoesNotExist, Error::StrategyError) [virtual]`

Commit the record's data to storage.

**Parameters**

*key[in]* The key of the record to be flushed.

**Exceptions**

*Error::ObjectDoesNotExist* A record for the key does not exist.

*Error::StrategyError* An error occurred when using the underlying storage system.

Implements [BiometricEvaluation::IO::RecordStore](#).

**F.9.3.8** `void BiometricEvaluation::IO::FileRecordStore::setCursor ( string & key ) throw (Error::ObjectDoesNotExist, Error::StrategyError) [virtual]`

Set the sequence cursor to an arbitrary position within the [RecordStore](#), starting at key. Key will be the first record returned from the next call to `sequence()`.

**Parameters**

*key[in]* The key of the record which will be returned by the first subsequent call to `sequence()`.

**Exceptions**

*Error::ObjectDoesNotExist* A record for the key does not exist.

*Error::StrategyError* An error occurred when using the underlying storage system.

Implements [BiometricEvaluation::IO::RecordStore](#).

**F.9.3.9** `void BiometricEvaluation::IO::FileRecordStore::changeName ( const string & name ) throw (Error::ObjectExists, Error::StrategyError) [virtual]`

Change the name of the [RecordStore](#).

**Parameters**

*name[in]* The new name for the [RecordStore](#).

**Exceptions**

*Error::StrategyError* An error occurred when using the underlying storage system, or the name is malformed.

Reimplemented from [BiometricEvaluation::IO::RecordStore](#).

The documentation for this class was generated from the following file:


- `be_io_filerecstore.h`

## F.10 BiometricEvaluation::Image::Image Class Reference

A abstract class to represent images and their attributes.

```
#include <be_image_image.h>
```

Inheritance diagram for BiometricEvaluation::Image::Image:



### Public Member Functions

- [Image](#) (uint8\_t \*data, uint64\_t size, uint64\_t width, uint64\_t height, unsigned int depth, unsigned int XResolution, unsigned int YResolution)
- virtual unsigned int [getXResolution](#) () const =0
- virtual unsigned int [getYResolution](#) () const =0
- virtual [Utility::AutoArray](#)< uint8\_t > [getRawData](#) () const =0
- virtual uint64\_t [getWidth](#) () const =0
- virtual uint64\_t [getHeight](#) () const =0
- virtual unsigned int [getDepth](#) () const =0

### Protected Attributes

- uint64\_t **\_width**
- uint64\_t **\_height**
- unsigned int **\_depth**
- unsigned int **\_XResolution**
- unsigned int **\_YResolution**
- [Utility::AutoArray](#)< uint8\_t > **\_data**

### F.10.1 Detailed Description

A abstract class to represent images and their attributes. Images are represented by their size, depth, and resolution on the X and Y axes. The image data can be of any format, raw, JPEG, etc. Implementations of this abstraction provide the [getRawData\(\)](#) method to convert image data to 'raw' format.

[Image](#) resolution is in pixels per centimeter, while the coordinate system has the origin at the upper left of the image.

#### Todo

Add more info on the image data, and what conversions are possible.

### F.10.2 Constructor & Destructor Documentation

#### F.10.2.1 `BiometricEvaluation::Image::Image ( uint8_t * data, uint64_t size, uint64_t width, uint64_t height, unsigned int depth, unsigned int XResolution, unsigned int YResolution )`

Parent constructor for all [Image](#) classes.

#### Parameters

*data[in]* The image data.

*size[in]* The size of the image data, in bytes.

*width[in]* The width of the image, in pixels.

*height[in]* The height of the image, in pixels.

*depth[in]* The image depth, in bits-per-pixel.

*XResolution[in]* The resolution of the image in the horizontal direction, in pixels-per-centimeter.

*YResolution[in]* The resolution of the image in the horizontal direction, in pixels-per-centimeter.

### F.10.3 Member Function Documentation

#### F.10.3.1 `virtual unsigned int BiometricEvaluation::Image::Image::getXResolution ( ) const [pure virtual]`

Accessor for the X-resolution of the image in terms of pixels per centimeter.

#### Returns

X-resolution (pixel/cm).

Implemented in [BiometricEvaluation::Image::RawImage](#).

**F.10.3.2** `virtual unsigned int BiometricEvaluation::Image::Image::getYResolution ( ) const [pure virtual]`

Accessor for the Y-resolution of the image in terms of pixels per centimeter.

#### Returns

Y-resolution (pixel/cm).

Implemented in [BiometricEvaluation::Image::RawImage](#).

**F.10.3.3** `virtual Utility::AutoArray<uint8_t> BiometricEvaluation::Image::Image::getRawData ( ) const [pure virtual]`

Accessor for the raw image data. The data returned should not be compressed or encoded.

#### Returns

Raw image data.

Implemented in [BiometricEvaluation::Image::RawImage](#).

**F.10.3.4** `virtual uint64_t BiometricEvaluation::Image::Image::getWidth ( ) const [pure virtual]`

Accessor for the width of the image in pixels.

#### Returns

Width of image (pixel).

Implemented in [BiometricEvaluation::Image::RawImage](#).

**F.10.3.5** `virtual uint64_t BiometricEvaluation::Image::Image::getHeight ( ) const [pure virtual]`

Accessor for the height of the image in pixels.

**Returns**

Height of image (pixel).

Implemented in [BiometricEvaluation::Image::RawImage](#).

**F.10.3.6 virtual unsigned int BiometricEvaluation::Image::Image::getDepth ( ) const [pure virtual]**

Accessor for the color depth of the image in bits.

**Returns**

The color depth of the image (bit).

Implemented in [BiometricEvaluation::Image::RawImage](#).

The documentation for this class was generated from the following file:

- [be\\_image\\_image.h](#)

## F.11 BiometricEvaluation::Process::Limits Class Reference

The [Statistics](#) class provides an interface for gathering process limits, such as memory maximums, etc.

```
#include <be_process_limits.h>
```

**Public Member Functions**

- [Limits](#) ()
- `uint64_t getMaxResidentSetSize ()` throw (Error::StrategyError)

### F.11.1 Detailed Description

The [Statistics](#) class provides an interface for gathering process limits, such as memory maximums, etc. The information gathered by objects of this class are for the current process.

**Note**

The resolution of a returned value for many methods may not match the resolution allowed by the interface. For example, the operating system may allow for kilobyte resolution whereas the interface allows byte resolution.

## F.11.2 Constructor & Destructor Documentation

### F.11.2.1 BiometricEvaluation::Process::Limits::Limits ( )

Constructor with no parameters.

## F.11.3 Member Function Documentation

### F.11.3.1 uint64\_t BiometricEvaluation::Process::Limits::getMaxResidentSetSize ( ) throw (Error::StrategyError)

Obtain the maximum current resident set size for the process, in bytes.

#### Exceptions

**Error::StrategyError** An error occurred when obtaining the process info from the operating system. The exception information string contains the error reason.

The documentation for this class was generated from the following file:

- be\_process\_limits.h

## F.12 BiometricEvaluation::IO::LogCabinet Class Reference

```
#include <be_io_logcabinet.h>
```

### Public Member Functions

- [LogCabinet](#) (const string &name, const string &description, const string &parentDir) throw (Error::ObjectExists, Error::StrategyError)
- [LogCabinet](#) (const string &name, const string &parentDir) throw (Error::ObjectDoesNotExist, Error::StrategyError)
- [LogSheet](#) \* [newLogSheet](#) (const string &name, const string &description) throw (Error::ObjectExists, Error::StrategyError)
- string [getName](#) ()
- string [getDescription](#) ()
- unsigned int [getCount](#) ()

## Static Public Member Functions

- static void [remove](#) (const string &name, const string &parentDir) throw (Error::ObjectDoesNotExist, Error::StrategyError)

## Protected Member Functions

- string **canonicalName** (const string &name)
- void **readControlFile** () throw (Error::StrategyError)
- void **writeControlFile** () throw (Error::StrategyError)

## Protected Attributes

- string **\_name**
- string **\_parentDir**
- string **\_directory**
- string **\_description**
- unsigned int **\_count**
- int **\_cursor**

## F.12.1 Detailed Description

A class to represent a collection of log sheets.

## F.12.2 Constructor & Destructor Documentation

### F.12.2.1 BiometricEvaluation::IO::LogCabinet::LogCabinet ( const string & *name*, const string & *description*, const string & *parentDir* ) throw (Error::ObjectExists, Error::StrategyError)

Create a new [LogCabinet](#) in the file system.

#### Parameters

*name[in]* The name of the [LogCabinet](#) to be created.

*description[in]* The text used to describe the cabinet.

*parentDir[in]* Where, in the file system, the cabinet is to be stored. This directory must exist.

#### Returns

An object representing the new log cabinet.



### Exceptions

*Error::ObjectExists* The cabinet was previously created.

*Error::StrategyError*

*Error::StrategyError* An error occurred when using the underlying file system, or name or parentDir is malformed.

**F.12.2.2** BiometricEvaluation::IO::LogCabinet::LogCabinet ( const string & *name*, const string & *parentDir* ) throw (Error::ObjectDoesNotExist, Error::StrategyError)

Open an existing [LogCabinet](#).

### Parameters

*name[in]* The name of the [LogCabinet](#) to be created.

*description[in]* The text used to describe the cabinet.

*parentDir[in]* Where, in the file system, the cabinet is to be stored. This directory must exist.

### Returns

An object representing the log cabinet.

### Exceptions

*Error::ObjectDoesNotExist* The cabinet does not exist in the file system.

*Error::StrategyError* An error occurred when using the underlying file system, or name or parentDir is malformed.

## F.12.3 Member Function Documentation

**F.12.3.1** LogSheet\* BiometricEvaluation::IO::LogCabinet::newLogSheet ( const string & *name*, const string & *description* ) throw (Error::ObjectExists, Error::StrategyError)

Create a new [LogSheet](#) within the [LogCabinet](#).

### Parameters

*name[in]* The name of the [LogSheet](#) to be created.

*description[in]* The text used to describe the sheet. This text is written into the log file prior to any entries.

*parentDir[in]* Where, in the file system, the sheet is to be stored. This directory must exist.

### Returns

An object pointer to the new log sheet.

### Exceptions

*Error::ObjectExists* The sheet was previously created.

*Error::StrategyError* An error occurred when using the underlying file system, or name or parentDir is malformed.

#### F.12.3.2 string BiometricEvaluation::IO::LogCabinet::getName ( )

Obtain the name of the [LogCabinet](#).

@ returns The name of the [LogCabinet](#).

#### F.12.3.3 string BiometricEvaluation::IO::LogCabinet::getDescription ( )

Obtain the description of the [LogCabinet](#).

@ returns The description of the [LogCabinet](#).

#### F.12.3.4 unsigned int BiometricEvaluation::IO::LogCabinet::getCount ( )

Obtain the number of items in the [LogCabinet](#).

@ returns The number of LogSheets manages by the cabinet.

#### F.12.3.5 static void BiometricEvaluation::IO::LogCabinet::remove ( const string & name, const string & parentDir ) throw (Error::ObjectDoesNotExist, Error::StrategyError) [static]

Remove a [LogCabinet](#).

### Parameters

*name[in]* The name of the [LogCabinet](#) to be removed.

*parentDir[in]* Where, in the file system, the sheet is to be stored. This directory must exist.

### Exceptions

*Error::ObjectDoesNotExist* The [LogCabinet](#) does not exist.

**Error::StrategyError** An error occurred when using the underlying file system, or name or parentDir is malformed.

The documentation for this class was generated from the following file:

- be\_io\_logcabinet.h

## F.13 BiometricEvaluation::IO::LogSheet Class Reference

A class to represent a single logging mechanism.

```
#include <be_io_logcabinet.h>
```

### Public Member Functions

- **LogSheet** (const string &name, const string &description, const string &parentDir) throw (Error::ObjectExists, Error::StrategyError)  
*Create a new log sheet.*
- **LogSheet** (const string &name, const string &parentDir) throw (Error::ObjectDoesNotExist, Error::StrategyError)  
*Open an existing new log sheet for appending.*
- void **write** (const string &entry) throw (Error::StrategyError)
- void **writeComment** (const string &comment) throw (Error::StrategyError)
- void **newEntry** () throw (Error::StrategyError)
- string **getCurrentEntry** ()
- void **resetCurrentEntry** ()
- uint32\_t **getCurrentEntryNumber** ()
- void **sync** () throw (Error::StrategyError)
- void **setAutoSync** (bool state)

### Static Public Attributes

- static const char **CommentDelimiter** = '#'
- static const char **EntryDelimiter** = 'E'
- static const string **DescriptionTag**

### F.13.1 Detailed Description

A class to represent a single logging mechanism. A [LogSheet](#) is a string stream, so applications can write into the stream as a staging area using the << operator, then start a new entry by calling [newEntry\(\)](#). Entries in the log file are prefixed with an entry number, which is incremented when the entry is written (either by directly calling [write\(\)](#), or calling [newEntry\(\)](#)).

A [LogSheet](#) object can be constructed and passed back to the client by the [LogCabinet](#) object. All sheets created in the manner are placed in a common area maintained by the cabinet.

#### Note

By default, the entries in the [LogSheet](#) may not be immediately written to the file system, depending on the buffering behavior of the operating system. Applications can force a write by invoking [sync\(\)](#), or force a write at every new log entry by invoking [setAutoSync\(true\)](#).

Entries created by applications may be composed of more than one line (each separated by the newline character). The text at the beginning of a line should not "look like" an entry number:

Edddd

i.e. the entry delimiter followed by some digits. [LogSheet](#) won't check for that condition, but any existing [LogSheet](#) that is re-opened for append may have an incorrect starting entry number.

### F.13.2 Constructor & Destructor Documentation

**F.13.2.1** [BiometricEvaluation::IO::LogSheet::LogSheet](#) ( *const* string & *name*, *const* string & *description*, *const* string & *parentDir* ) throw (Error::ObjectExists, Error::StrategyError)

Create a new log sheet.

#### Parameters

*name[in]* The name of the [LogSheet](#) to be created.

*description[in]* The text used to describe the sheet. This text is written into the log file prior to any entries.

*parentDir[in]* Where, in the file system, the sheet is to be stored. This directory must exist.

#### Returns

An object representing the new log sheet.

## Exceptions

***Error::ObjectExists*** The sheet was previously created.

***Error::StrategyError*** An error occurred when using the underlying file system, or name or parentDir is malformed.

### F.13.2.2 BiometricEvaluation::IO::LogSheet::LogSheet ( const string & *name*, const string & *parentDir* ) throw (Error::ObjectDoesNotExist, Error::StrategyError)

Open an existing new log sheet for appending.

On open, the current entry counter is set to the last entry number plus one.

## Note

Opening a large [LogSheet](#) may be a costly operation.

## Parameters

*name[in]* The name of the [LogSheet](#) to be opened.

*parentDir[in]* Where, in the file system, the sheet is stored. This directory must exist.

## Returns

An object representing the new log sheet.

## Exceptions

***Error::ObjectDoesNotExist*** The sheet does not exist.

***Error::StrategyError*** An error occurred when using the underlying file system, or name or parentDir is malformed.

## F.13.3 Member Function Documentation

### F.13.3.1 void BiometricEvaluation::IO::LogSheet::write ( const string & *entry* ) throw (Error::StrategyError)

Write a string as an entry to the log file. This does not affect the current log entry buffer, but does increment the entry number.

## Parameters

*entry[in]* The text of the log entry.

**Exceptions**

*[Error::StrategyError](#)* An error occurred when using the underlying file system.

**F.13.3.2 void BiometricEvaluation::IO::LogSheet::writeComment ( const string & *comment* ) throw (Error::StrategyError)**

Write a string as a comment to the log file. This does not affect the current log entry buffer, and does not increment the entry number. A comment line is prefixed with CommentDelimiter followed by a space by this method.

**Parameters**

*comment[in]* The text of the comment.

**Exceptions**

*[Error::StrategyError](#)* An error occurred when using the underlying file system.

**F.13.3.3 void BiometricEvaluation::IO::LogSheet::newEntry ( ) throw (Error::StrategyError)**

Start a new entry, causing the existing entry to be closed. Applications do not have to call this method for the first entry, however, as the stream is ready for writing upon construction.

**Exceptions**

*[Error::StrategyError](#)* An error occurred when using the underlying file system.

**F.13.3.4 string BiometricEvaluation::IO::LogSheet::getCurrentEntry ( )**

Obtain the contents of the current entry currently under construction.

**Returns**

The text of the current entry.

**F.13.3.5 void BiometricEvaluation::IO::LogSheet::resetCurrentEntry ( )**

Reset the current entry buffer to the beginning.

**F.13.3.6** `uint32_t BiometricEvaluation::IO::LogSheet::getCurrentEntryNumber ( )`

Obtain the current entry number.

**Returns**

The current entry number.

**F.13.3.7** `void BiometricEvaluation::IO::LogSheet::sync ( ) throw (Error::StrategyError)`

Synchronize any buffered data to the underlying log file. This syncing is dependent on the behavior of the underlying filesystem and operating system.

**Exceptions**

*[Error::StrategyError](#)* An error occurred when using the underlying file system.

**F.13.3.8** `void BiometricEvaluation::IO::LogSheet::setAutoSync ( bool state )`

Turn on/off auto-sync of the data. Applications can gain login performance by turning off auto-sync, or gain reliability by turning it on.

**Parameters**

*state* When true, the data is sync'd whenever [newEntry\(\)](#) is or [write\(\)](#) is called. When false, [sync\(\)](#) must be called to force a write.

**F.13.4 Member Data Documentation****F.13.4.1** `const char BiometricEvaluation::IO::LogSheet::CommentDelimiter = '#' [static]`

The delimiter for a comment line in the log sheet.

**F.13.4.2** `const char BiometricEvaluation::IO::LogSheet::EntryDelimiter = 'E' [static]`

The delimiter for an entry line in the log sheet.

#### F.13.4.3 `const string BiometricEvaluation::IO::LogSheet::DescriptionTag` `[static]`

The tag for the description string.

The documentation for this class was generated from the following file:

- `be_io_logcabinet.h`

### F.14 `BiometricEvaluation::IO::ManifestEntry` Struct Reference

#### Public Attributes

- `long offset`
- `uint64_t size`

The documentation for this struct was generated from the following file:


- `be_io_archiverecstore.h`

### F.15 `BiometricEvaluation::Error::MemoryError` Class Reference

An error occurred when allocating an object.

```
#include <be_error_exception.h>
```

Inheritance diagram for `BiometricEvaluation::Error::MemoryError`:



#### Public Member Functions

- [MemoryError](#) ()
- [MemoryError](#) (string info)



### F.15.1 Detailed Description

An error occurred when allocating an object.

### F.15.2 Constructor & Destructor Documentation

#### F.15.2.1 BiometricEvaluation::Error::MemoryError::MemoryError ( )

Construct a [MemoryError](#) object with the default information string.

##### Returns

The [MemoryError](#) object.

#### F.15.2.2 BiometricEvaluation::Error::MemoryError::MemoryError ( string *info* )

Construct a [MemoryError](#) object with an information string appended to the default information string.

##### Returns

The [MemoryError](#) object.

The documentation for this class was generated from the following file:


- `be_error_exception.h`

## F.16 BiometricEvaluation::Error::NotImplemented Class Reference

A [NotImplemented](#) object is thrown when the underlying implementation of this interface has not or could not be created.

```
#include <be_error_exception.h>
```

Inheritance diagram for BiometricEvaluation::Error::NotImplemented:



## Public Member Functions

- [NotImplemented](#) ()
- [NotImplemented](#) (string info)

### F.16.1 Detailed Description

A [NotImplemented](#) object is thrown when the underlying implementation of this interface has not or could not be created.

### F.16.2 Constructor & Destructor Documentation

#### F.16.2.1 `BiometricEvaluation::Error::NotImplemented::NotImplemented ( )`

Construct a [NotImplemented](#) object with the default information string.

##### Returns

The [NotImplemented](#) object.

#### F.16.2.2 `BiometricEvaluation::Error::NotImplemented::NotImplemented ( string info )`

Construct a [NotImplemented](#) object with an information string appended to the default information string.

##### Returns

The [NotImplemented](#) object.

The documentation for this class was generated from the following file:


- `be_error_exception.h`

## F.17 `BiometricEvaluation::Error::ObjectDoesNotExist` Class Reference

The named object does not exist.

```
#include <be_error_exception.h>
```

Inheritance diagram for `BiometricEvaluation::Error::ObjectDoesNotExist`:



## Public Member Functions

- [ObjectDoesNotExist](#) ()
- [ObjectDoesNotExist](#) (string info)

### F.17.1 Detailed Description

The named object does not exist.

### F.17.2 Constructor & Destructor Documentation

#### F.17.2.1 BiometricEvaluation::Error::ObjectDoesNotExist::ObjectDoesNotExist ( )

Construct a [ObjectDoesNotExist](#) object with the default information string.

##### Returns

The [ObjectDoesNotExist](#) object.

#### F.17.2.2 BiometricEvaluation::Error::ObjectDoesNotExist::ObjectDoesNotExist ( string info )

Construct a [ObjectDoesNotExist](#) object with an information string appended to the default information string.

##### Returns

The [ObjectDoesNotExist](#) object.

The documentation for this class was generated from the following file:


- `be_error_exception.h`

## F.18 BiometricEvaluation::Error::ObjectExists Class Reference

The named object exists and will not be replaced.

```
#include <be_error_exception.h>
```

Inheritance diagram for BiometricEvaluation::Error::ObjectExists:



### Public Member Functions

- [ObjectExists](#) ()
- [ObjectExists](#) (string info)

### F.18.1 Detailed Description

The named object exists and will not be replaced.

### F.18.2 Constructor & Destructor Documentation

#### F.18.2.1 BiometricEvaluation::Error::ObjectExists::ObjectExists ( )

Construct a [ObjectExists](#) object with the default information string.

##### Returns

The [ObjectExists](#) object.

#### F.18.2.2 BiometricEvaluation::Error::ObjectExists::ObjectExists ( string *info* )

Construct a [ObjectExists](#) object with an information string appended to the default information string.

##### Returns

The [ObjectExists](#) object.

The documentation for this class was generated from the following file:


- `be_error_exception.h`

## F.19 BiometricEvaluation::Error::ObjectIsClosed Class Reference

The object is closed.

```
#include <be_error_exception.h>
```

Inheritance diagram for BiometricEvaluation::Error::ObjectIsClosed:



### Public Member Functions

- [ObjectIsClosed](#) ()
- [ObjectIsClosed](#) (string info)

#### F.19.1 Detailed Description

The object is closed.

#### F.19.2 Constructor & Destructor Documentation

##### F.19.2.1 BiometricEvaluation::Error::ObjectIsClosed::ObjectIsClosed ( )

Construct a [ObjectIsClosed](#) object with the default information string.

##### Returns

The [ObjectIsClosed](#) object.

### F.19.2.2 BiometricEvaluation::Error::ObjectIsClosed::ObjectIsClosed ( string *info* )

Construct a [ObjectIsClosed](#) object with an information string appended to the default information string.

#### Returns

The [ObjectIsClosed](#) object.

The documentation for this class was generated from the following file:


- be\_error\_exception.h

## F.20 BiometricEvaluation::Error::ObjectIsOpen Class Reference

The object is already opened.

```
#include <be_error_exception.h>
```

Inheritance diagram for BiometricEvaluation::Error::ObjectIsOpen:



### Public Member Functions

- [ObjectIsOpen](#) ()
- [ObjectIsOpen](#) (string info)

### F.20.1 Detailed Description

The object is already opened.

### F.20.2 Constructor & Destructor Documentation

#### F.20.2.1 BiometricEvaluation::Error::ObjectIsOpen::ObjectIsOpen ( )

Construct a [ObjectIsOpen](#) object with the default information string.

**Returns**

The [ObjectIsOpen](#) object.

**F.20.2.2 BiometricEvaluation::Error::ObjectIsOpen::ObjectIsOpen ( string *info* )**

Construct a [ObjectIsOpen](#) object with an information string appended to the default information string.

**Returns**

The [ObjectIsOpen](#) object.

The documentation for this class was generated from the following file:


- `be_error_exception.h`

## F.21 BiometricEvaluation::Error::ParameterError Class Reference

An invalid parameter was passed to a constructor or method.

```
#include <be_error_exception.h>
```

Inheritance diagram for BiometricEvaluation::Error::ParameterError:

**Public Member Functions**

- [ParameterError](#) ()
- [ParameterError](#) (string info)

**F.21.1 Detailed Description**

An invalid parameter was passed to a constructor or method.

## F.21.2 Constructor & Destructor Documentation

### F.21.2.1 BiometricEvaluation::Error::ParameterError::ParameterError ( )

Construct a [ParameterError](#) object with the default information string.

#### Returns

The [ParameterError](#) object.

### F.21.2.2 BiometricEvaluation::Error::ParameterError::ParameterError ( string *info* )

Construct a [ParameterError](#) object with an information string appended to the default information string.

#### Returns

The [ParameterError](#) object.

The documentation for this class was generated from the following file:

- `be_error_exception.h`

## F.22 BiometricEvaluation::IO::Properties Class Reference

A [Properties](#) class is used to maintain key/value pairs of strings, with each property matched to one value.

```
#include <be_io_properties.h>
```

### Public Types

- typedef PropertiesMap::const\_iterator **Properties\_iter**

### Public Member Functions

- [Properties](#) (const string &filename, uint8\_t mode=IO::READWRITE) throw (Error::StrategyError, Error::FileError)
- void [setProperty](#) (const string &property, const string &value) throw (Error::StrategyError)



- void [setPropertyFromInteger](#) (const string &property, int64\_t value) throw (Error::StrategyError)
- void [removeProperty](#) (const string &property) throw (Error::ObjectDoesNotExist, Error::StrategyError)
- string [getProperty](#) (const string &property) throw (Error::ObjectDoesNotExist)
- int64\_t [getPropertyAsInteger](#) (const string &property) throw (Error::ObjectDoesNotExist, Error::ConversionError)
- void [sync](#) () throw (Error::FileError, Error::StrategyError)
- void [changeName](#) (const string &filename) throw (Error::StrategyError)

### F.22.1 Detailed Description

A [Properties](#) class is used to maintain key/value pairs of strings, with each property matched to one value. The properties are read from a file that is specified in the constructor, and will be created if it does not exist.

An example file might look like this:

```
*      Name = John Smith
*      Age = 32
*      Favorite Hex Number = 0xffff
*
```

For property keys and values, leading and trailing whitespace is removed, therefore a the call

```
props->setProperty(" My property ", " A Value ");
```

results in an entry in the property file as

```
*      My property = A value
*
```

Therefore, the property names "Foo", " Foo", "Foo " are equivalent.

### F.22.2 Constructor & Destructor Documentation

#### F.22.2.1 BiometricEvaluation::IO::Properties::Properties ( const string & filename, uint8\_t mode = IO::READWRITE ) throw (Error::StrategyError, Error::FileError)

Construct a new [Properties](#) object from an existing or to be created properties file. The constructor will create the file when it does not exist.

##### Parameters

*filename[in]* The name of the file to store the properties. This can be the empty string, meaning the properties are to be stored in memory only.

*mode[in]* The read/write mode of the object.

### Returns

An object representing the properties set.

### Exceptions

*Error::StrategyError* A line in the properties file is malformed.

*Error::FileError* An error occurred when using the underlying storage system.

## F.22.3 Member Function Documentation

### F.22.3.1 void BiometricEvaluation::IO::Properties::setProperty ( const string & *property*, const string & *value* ) throw (Error::StrategyError)

Set a property with a value. Both the property and value will have leading and trailing whitespace removed. If the property already exists in the set, its value will be replaced with the new value; otherwise, the property will be created.

### Parameters

*property[in]* The name of the property to set.

*value[in]* The value associated with the property.

### Exceptions

*Error::StrategyError* The [Properties](#) object is read-only.

### F.22.3.2 void BiometricEvaluation::IO::Properties::setPropertyFromInteger ( const string & *property*, int64\_t *value* ) throw (Error::StrategyError)

Set a property with an integer value. The property will have leading and trailing whitespace removed. If the property already exists in the set, its value will be replaced with the new value; otherwise the property will be created.

### Parameters

*property[in]* The name of the property to set.

*value[in]* The value associated with the property.

### Exceptions

*Error::StrategyError* The [Properties](#) object is read-only.

**F.22.3.3** void BiometricEvaluation::IO::Properties::removeProperty ( const string & *property* ) throw (Error::ObjectDoesNotExist, Error::StrategyError)

Remove a property.

#### Parameters

*property[in]* The name of the property to set.

#### Exceptions

[\*Error::ObjectDoesNotExist\*](#) The named property does not exist.

[\*Error::StrategyError\*](#) The [Properties](#) object is read-only.

**F.22.3.4** string BiometricEvaluation::IO::Properties::getProperty ( const string & *property* ) throw (Error::ObjectDoesNotExist)

Retrieve a property value as a string object.

#### Parameters

*property[in]* The name of the property to get.

#### Exceptions

[\*Error::ObjectDoesNotExist\*](#) The named property does not exist.

**F.22.3.5** int64\_t BiometricEvaluation::IO::Properties::getPropertyAsInteger ( const string & *property* ) throw (Error::ObjectDoesNotExist, Error::ConversionError)

Retrieve a property value as an integer value. Integer value strings for properties can represent either decimal or hexadecimal values, which must be preceded with either "0x" or "0X".

#### Parameters

*property[in]* The name of the property to get.

#### Exceptions

[\*Error::ObjectDoesNotExist\*](#) The named property does not exist.

[\*Error::ConversionError\*](#) The property value cannot be converted, usually due to non-numeric characters in the string.

### F.22.3.6 void BiometricEvaluation::IO::Properties::sync ( ) throw (Error::FileError, Error::StrategyError)

Write the properties to the underlying file, synchronizing the in-memory and on-disk versions.

#### Exceptions

**Error::FileError** An error occurred when using the underlying storage system.

**Error::StrategyError** The object was constructed with NULL as the file name, or is read-only.

### F.22.3.7 void BiometricEvaluation::IO::Properties::changeName ( const string & filename ) throw (Error::StrategyError)

Change the name of the [Properties](#), which means changing the name of the underlying file that stores the properties. The empty string ("") can be used to indicate no backing file.

#### Note

No check is made that the file is writeable at this time.

#### Parameters

*filename[in]* The name of the properties file.

#### Exceptions


**Error::StrategyError** The object is read-only.

The documentation for this class was generated from the following file:

- be\_io\_properties.h

## F.23 BiometricEvaluation::Image::RawImage Class Reference

Inheritance diagram for BiometricEvaluation::Image::RawImage:



## Public Member Functions

- [RawImage](#) (uint8\_t \*\_data, uint64\_t size, uint64\_t width, uint64\_t height, unsigned int depth, unsigned int XResolution, unsigned int YResolution)
- uint64\_t [getWidth](#) () const
- uint64\_t [getHeight](#) () const
- unsigned int [getDepth](#) () const
- unsigned int [getXResolution](#) () const
- unsigned int [getYResolution](#) () const
- [Utility::AutoArray](#)< uint8\_t > [getRawData](#) () const

### F.23.1 Constructor & Destructor Documentation

#### F.23.1.1 BiometricEvaluation::Image::RawImage ( uint8\_t \* \_data, uint64\_t size, uint64\_t width, uint64\_t height, unsigned int depth, unsigned int XResolution, unsigned int YResolution )

Construct a [RawImage](#) object.

##### Parameters

*data[in]* The image data.

*size[in]* The size of the image data, in bytes.

*width[in]* The width of the image, in pixels.

*height[in]* The height of the image, in pixels.

*depth[in]* The image depth, in bits-per-pixel.

*XResolution[in]* The resolution of the image in the horizontal direction, in pixels-per-centimeter.

*YResolution[in]* The resolution of the image in the horizontal direction, in pixels-per-centimeter.

### F.23.2 Member Function Documentation

#### F.23.2.1 uint64\_t BiometricEvaluation::Image::RawImage::getWidth ( ) const [virtual]

Accessor for the width of the image in pixels.

##### Returns

Width of image (pixel).

Implements [BiometricEvaluation::Image::Image](#).

**F.23.2.2** `uint64_t BiometricEvaluation::Image::RawImage::getHeight ( )  
const [virtual]`

Accessor for the height of the image in pixels.

**Returns**

Height of image (pixel).

Implements [BiometricEvaluation::Image::Image](#).

**F.23.2.3** `unsigned int BiometricEvaluation::Image::RawImage::getDepth ( )  
const [virtual]`

Accessor for the color depth of the image in bits.

**Returns**

The color depth of the image (bit).

Implements [BiometricEvaluation::Image::Image](#).

**F.23.2.4** `unsigned int BiometricEvaluation::Image::RawImage::getXResolution  
( ) const [virtual]`

Accessor for the X-resolution of the image in terms of pixels per centimeter.

**Returns**

X-resolution (pixel/cm).

Implements [BiometricEvaluation::Image::Image](#).

**F.23.2.5** `unsigned int BiometricEvaluation::Image::RawImage::getYResolution  
( ) const [virtual]`

Accessor for the Y-resolution of the image in terms of pixels per centimeter.

**Returns**

Y-resolution (pixel/cm).

Implements [BiometricEvaluation::Image::Image](#).

### F.23.2.6 Utility::AutoArray<uint8\_t> BiometricEvaluation::Image::RawImage::getRawData ( ) const [virtual]

Accessor for the raw image data. The data returned should not be compressed or encoded.

#### Returns

Raw image data.

Implements [BiometricEvaluation::Image::Image](#).

The documentation for this class was generated from the following file:


- be\_image\_rawimage.h

## F.24 BiometricEvaluation::IO::RecordStore Class Reference

A class to represent a data storage mechanism.

```
#include <be_io_recordstore.h>
```

Inheritance diagram for BiometricEvaluation::IO::RecordStore:



### Public Member Functions

- [RecordStore](#) (const string &name, const string &description, const string &type, const string &parentDir) throw (Error::ObjectExists, Error::StrategyError)
- [RecordStore](#) (const string &name, const string &parentDir, uint8\_t mode=READWRITE) throw (Error::ObjectDoesNotExist, Error::StrategyError)
- string [getName](#) ()
- string [getDescription](#) ()
- unsigned int [getCount](#) ()
- virtual void [changeName](#) (const string &name) throw (Error::ObjectExists, Error::StrategyError)
- virtual void [changeDescription](#) (const string &description) throw (Error::StrategyError)

- virtual uint64\_t [getSpaceUsed](#) () throw (Error::StrategyError)
- virtual void [sync](#) () throw (Error::StrategyError)
- virtual void [insert](#) (const string &key, const void \*const data, const uint64\_t size)=0 throw (Error::ObjectExists, Error::StrategyError)
- virtual void [remove](#) (const string &key)=0 throw (Error::ObjectDoesNotExist, Error::StrategyError)
- virtual uint64\_t [read](#) (const string &key, void \*const data)=0 throw (Error::ObjectDoesNotExist, Error::StrategyError)
- virtual void [replace](#) (const string &key, const void \*const data, const uint64\_t size)=0 throw (Error::ObjectDoesNotExist, Error::StrategyError)
- virtual uint64\_t [length](#) (const string &key)=0 throw (Error::ObjectDoesNotExist, Error::StrategyError)
- virtual void [flush](#) (const string &key)=0 throw (Error::ObjectDoesNotExist, Error::StrategyError)
- virtual uint64\_t [sequence](#) (string &key, void \*const data=NULL, int cursor=BE\_RECSTORE\_SEQ\_NEXT)=0 throw (Error::ObjectDoesNotExist, Error::StrategyError)
- virtual void [setCursor](#) (string &key)=0 throw (Error::ObjectDoesNotExist, Error::StrategyError)

### Static Public Member Functions

- static void [removeRecordStore](#) (const string &name, const string &parentDir) throw (Error::ObjectDoesNotExist, Error::StrategyError)

### Static Public Attributes

- static const string [CONTROLFILENAME](#)
- static const string [NAMEPROPERTY](#)
- static const string [DESCRIPTIONPROPERTY](#)
- static const string [COUNTPROPERTY](#)
- static const string [TYPEPROPERTY](#)
- static const string [BERKELEYDBTYPE](#)
- static const string [ARCHIVETYPE](#)
- static const string [FILETYPE](#)
- static const int [BE\\_RECSTORE\\_SEQ\\_START](#) = 1
- static const int [BE\\_RECSTORE\\_SEQ\\_NEXT](#) = 2

### Protected Member Functions

- string [canonicalName](#) (const string &name)
- void [readControlFile](#) () throw (Error::StrategyError)
- void [writeControlFile](#) () throw (Error::StrategyError)



## Protected Attributes

- string **\_name**
- string **\_description**
- string **\_type**
- string **\_directory**
- string **\_parentDir**
- unsigned int **\_count**
- int **\_cursor**
- uint8\_t **\_mode**

### F.24.1 Detailed Description

A class to represent a data storage mechanism. A [RecordStore](#) is an abstraction that associates keys with a specific record. Implementations of this abstraction can store the records in any format supported by the operating system, such as files or databases, rooted in the file system.

#### See also

[IO::ArchiveRecordStore](#), [IO::DBRecordStore](#), [IO::FileRecordStore](#).

### F.24.2 Constructor & Destructor Documentation

#### F.24.2.1 BiometricEvaluation::IO::RecordStore::RecordStore ( const string & *name*, const string & *description*, const string & *type*, const string & *parentDir* ) throw (Error::ObjectExists, Error::StrategyError)

Constructor to create a new [RecordStore](#).

#### Parameters

*name[in]* The name of the [RecordStore](#) to be created.

*description[in]* The text used to describe the store.

*type[in]* The type of [RecordStore](#).

*parentDir[in]* Where, in the file system, the store is to be rooted. This directory must exist.

#### Returns

An object representing the new, empty store.

#### Exceptions

[Error::ObjectExists](#) The store was previously created, or the directory where it would be created exists.

***Error::StrategyError*** An error occurred when using the underlying storage system, or the the name malformed.

**F.24.2.2 BiometricEvaluation::IO::RecordStore::RecordStore ( const string & name, const string & parentDir, uint8\_t mode = READWRITE ) throw (Error::ObjectDoesNotExist, Error::StrategyError)**

Constructor to open an existing [RecordStore](#).

#### Parameters

*name[in]* The name of the store to be opened.

*parentDir[in]* Where, in the file system, the store is rooted.

*mode[in]* The type of access a client of this [RecordStore](#) has.

#### Returns

An object representing the existing store.

#### Exceptions

***Error::ObjectDoesNotExist*** The [RecordStore](#) does not exist.

***Error::StrategyError*** An error occurred when using the underlying storage system, or the name is malformed.

### F.24.3 Member Function Documentation

**F.24.3.1 string BiometricEvaluation::IO::RecordStore::getName ( )**

Return the name of the [RecordStore](#).

#### Returns

The [RecordStore](#)'s name.

**F.24.3.2 string BiometricEvaluation::IO::RecordStore::getDescription ( )**

Obtain a textual description of the [RecordStore](#).

#### Returns

The [RecordStore](#)'s description.

**F.24.3.3 unsigned int BiometricEvaluation::IO::RecordStore::getCount ( )**

Obtain the number of items in the [RecordStore](#).

**Returns**

The number of items in the [RecordStore](#).

**F.24.3.4 virtual void BiometricEvaluation::IO::RecordStore::changeName ( const string & *name* ) throw (Error::ObjectExists, Error::StrategyError) [virtual]**

Change the name of the [RecordStore](#).

**Parameters**

*name[in]* The new name for the [RecordStore](#).

**Exceptions**

**Error::StrategyError** An error occurred when using the underlying storage system, or the name is malformed.

Reimplemented in [BiometricEvaluation::IO::ArchiveRecordStore](#), [BiometricEvaluation::IO::DBRecordStore](#), and [BiometricEvaluation::IO::FileRecordStore](#).

**F.24.3.5 virtual void BiometricEvaluation::IO::RecordStore::changeDescription ( const string & *description* ) throw (Error::StrategyError) [virtual]**

Change the description of the [RecordStore](#).

**Parameters**

*description[in]* The new description.

**Exceptions**

**Error::StrategyError** An error occurred when using the underlying storage system.

**F.24.3.6 virtual uint64\_t BiometricEvaluation::IO::RecordStore::getSpaceUsed ( ) throw (Error::StrategyError) [virtual]**

Obtain the amount of real storage utilization, the amount of disk space used, for example. This is the actual space allocated by the underlying storage mechanism, in bytes.

**Returns**

The amount of backing storage used by the [RecordStore](#).

**Exceptions**

**[Error::StrategyError](#)** An error occurred when using the underlying storage system.

Reimplemented in [BiometricEvaluation::IO::ArchiveRecordStore](#), [BiometricEvaluation::IO::DBRecordStore](#), and [BiometricEvaluation::IO::FileRecordStore](#).

**F.24.3.7 virtual void BiometricEvaluation::IO::RecordStore::sync ( ) throw (Error::StrategyError) [virtual]**

Synchronize the entire record store to persistent storage.

**Exceptions**

**[Error::StrategyError](#)** An error occurred when using the underlying storage system.

Reimplemented in [BiometricEvaluation::IO::ArchiveRecordStore](#), and [BiometricEvaluation::IO::DBRecordStore](#).

**F.24.3.8 virtual void BiometricEvaluation::IO::RecordStore::insert ( const string & key, const void \*const data, const uint64\_t size ) throw (Error::ObjectExists, Error::StrategyError) [pure virtual]**

Insert a record into the store.

**Parameters**

***key[in]*** The key of the record to be flushed.

***data[in]*** The data for the record.

***size[in]*** The size, in bytes, of the record.

**Exceptions**

**[Error::ObjectExists](#)** A record with the given key is already present.

**[Error::StrategyError](#)** An error occurred when using the underlying storage system.

Implemented in [BiometricEvaluation::IO::ArchiveRecordStore](#), [BiometricEvaluation::IO::DBRecordStore](#), and [BiometricEvaluation::IO::FileRecordStore](#).

**F.24.3.9** `virtual void BiometricEvaluation::IO::RecordStore::remove  
( const string & key ) throw (Error::ObjectDoesNotExist,  
Error::StrategyError) [pure virtual]`

Remove a record from the store.

#### Parameters

*key[in]* The key of the record to be removed.

#### Exceptions

*Error::ObjectDoesNotExist* A record for the key does not exist.

*Error::StrategyError* An error occurred when using the underlying storage system.

Implemented in [BiometricEvaluation::IO::ArchiveRecordStore](#), [BiometricEvaluation::IO::DBRecordStore](#), and [BiometricEvaluation::IO::FileRecordStore](#).

**F.24.3.10** `virtual uint64_t BiometricEvaluation::IO::RecordStore::read ( const  
string & key, void *const data ) throw (Error::ObjectDoesNotExist,  
Error::StrategyError) [pure virtual]`

Read a complete record from a store. Applications are responsible for allocating storage for the record's data.

#### Parameters

*key[in]* The key of the record to be read. *[in]* Pointer to where the data is to be written.

#### Returns

The size of the record.

#### Exceptions

*Error::ObjectDoesNotExist* A record for the key does not exist.

*Error::StrategyError* An error occurred when using the underlying storage system.

Implemented in [BiometricEvaluation::IO::ArchiveRecordStore](#), [BiometricEvaluation::IO::DBRecordStore](#), and [BiometricEvaluation::IO::FileRecordStore](#).

**F.24.3.11** `virtual void BiometricEvaluation::IO::RecordStore::replace ( const string & key, const void *const data, const uint64_t size ) throw (Error::ObjectDoesNotExist, Error::StrategyError) [pure virtual]`

Replace a complete record in a store.

#### Parameters

*key[in]* The key of the record to be replaced.

*data[in]* The data for the record.

#### Exceptions

*Error::ObjectDoesNotExist* A record for the key does not exist.

*Error::StrategyError* An error occurred when using the underlying storage system.

Implemented in [BiometricEvaluation::IO::ArchiveRecordStore](#), [BiometricEvaluation::IO::DBRecordStore](#), and [BiometricEvaluation::IO::FileRecordStore](#).

**F.24.3.12** `virtual uint64_t BiometricEvaluation::IO::RecordStore::length ( const string & key ) throw (Error::ObjectDoesNotExist, Error::StrategyError) [pure virtual]`

Return the length of a record.

#### Parameters

*key[in]* The key of the record.

#### Returns

The record length.

#### Exceptions

*Error::ObjectDoesNotExist* A record for the key does not exist.

*Error::StrategyError* An error occurred when using the underlying storage system.

Implemented in [BiometricEvaluation::IO::ArchiveRecordStore](#), [BiometricEvaluation::IO::DBRecordStore](#), and [BiometricEvaluation::IO::FileRecordStore](#).

**F.24.3.13** `virtual void BiometricEvaluation::IO::RecordStore::flush  
( const string & key ) throw (Error::ObjectDoesNotExist,  
Error::StrategyError) [pure virtual]`

Commit the record's data to storage.

#### Parameters

*key[in]* The key of the record to be flushed.

#### Exceptions

*Error::ObjectDoesNotExist* A record for the key does not exist.

*Error::StrategyError* An error occurred when using the underlying storage system.

Implemented in [BiometricEvaluation::IO::ArchiveRecordStore](#), [BiometricEvaluation::IO::DBRecordStore](#), and [BiometricEvaluation::IO::FileRecordStore](#).

**F.24.3.14** `virtual void BiometricEvaluation::IO::RecordStore::setCursor  
( string & key ) throw (Error::ObjectDoesNotExist,  
Error::StrategyError) [pure virtual]`

Set the sequence cursor to an arbitrary position within the [RecordStore](#), starting at key. Key will be the first record returned from the next call to [sequence\(\)](#).

#### Parameters

*key[in]* The key of the record which will be returned by the first subsequent call to [sequence\(\)](#).

#### Exceptions

*Error::ObjectDoesNotExist* A record for the key does not exist.

*Error::StrategyError* An error occurred when using the underlying storage system.

Implemented in [BiometricEvaluation::IO::ArchiveRecordStore](#), [BiometricEvaluation::IO::DBRecordStore](#), and [BiometricEvaluation::IO::FileRecordStore](#).

**F.24.3.15** `static void BiometricEvaluation::IO::RecordStore::removeRecordStore ( const  
string & name, const string & parentDir ) throw  
(Error::ObjectDoesNotExist, Error::StrategyError) [static]`

Remove a [RecordStore](#) by deleting all persistent data associated with the store.

**Parameters**

*name[in]* The name of the existing [RecordStore](#).

*parentDir[in]* Where, in the file system, the store is rooted.

**Exceptions**

*Error::ObjectDoesNotExist* A record with the given key does not exist.

*Error::StrategyError* An error occurred when using the underlying storage system.

**F.24.4 Member Data Documentation**

**F.24.4.1** `const string BiometricEvaluation::IO::RecordStore::CONTROLFILENAME`  
[static]

The name of the control file, a properties list.

**F.24.4.2** `const string BiometricEvaluation::IO::RecordStore::NAMEPROPERTY`  
[static]

Keys used in the [Properties](#) list for the [RecordStore](#).

"Name" - The name of the store "Description" - The description of the store "Count" - The number of items in the store "Type" - The type of [RecordStore](#).

**F.24.4.3** `const string BiometricEvaluation::IO::RecordStore::BERKELEYDBTYPE`  
[static]

The known [RecordStore](#) type strings: "BerkeleyDB" - Berkeley database "Archive" - Archive file "File" - One file per record

**F.24.4.4** `const int BiometricEvaluation::IO::RecordStore::BE_RECSTORE_SEQ_START = 1` [static]

Sequence through a [RecordStore](#), returning the key/data pairs. Sequencing means to start at some point in the store and return the record, then repeatedly calling the sequencer to return the next record. The starting point is typically the the first record, and is set to that when the [RecordStore](#) object is created. The starting point can be reset by calling this method with the cursor parameter set to BE\_RECSTORE\_SEQ\_START.



### Parameters

*key[out]* The key of the currently sequenced record.

*data[in]* Pointer to where the data is to be written. Applications can set data to NULL to indicate only the key is wanted.

*cursor[in]* The location within the sequence of the key/data pair to return.

### Returns

The length of the record currently in sequence.

### Exceptions

**Error::ObjectDoesNotExist** A record for the key does not exist.

**Error::StrategyError** An error occurred when using the underlying storage system.

The documentation for this class was generated from the following file:

- be\_io\_recordstore.h

## F.25 BiometricEvaluation::Error::SignalManager Class Reference

A [SignalManager](#) object is used to handle signals that come from the operating system.

```
#include <be_error_signal_manager.h>
```

### Public Member Functions

- [SignalManager](#) () throw (Error::StrategyError)
- **SignalManager** (const sigset\_t signalSet) throw (Error::ParameterError)
- void [setSignalSet](#) (const sigset\_t signalSet) throw (Error::ParameterError)
- void [clearSignalSet](#) ()
- void [setDefaultSignalSet](#) ()
- bool [sigHandled](#) ()
- void [start](#) () throw (Error::StrategyError)
- void [stop](#) () throw (Error::StrategyError)
- void [setSigHandled](#) ()
- void [clearSigHandled](#) ()

## Static Public Attributes

- static bool [\\_canSigJump](#)
- static sigjmp\_buf [\\_sigJumpBuf](#)

### F.25.1 Detailed Description

A [SignalManager](#) object is used to handle signals that come from the operating system. Applications typically do not invoke most methods of a [SignalManager](#), except the [setSignalSet\(\)](#), [setDefaultSignalSet\(\)](#), and [sigHandled\(\)](#). An application wishing to just catch memory errors can simply construct a [SignalManager](#) object, and invoke [sigHandled\(\)](#) at the end of the signal block to detect whether a signal was handled.

The `BEGIN_SIGNAL_BLOCK` macro sets up the jump block and tells the [SignalManager](#) object to start handling signals. Applications can call either [setSignalSet\(\)](#) or [setDefaultSignalSet\(\)](#) before invoking these macros to indicate which signals are to be handled.

The `END_SIGNAL_BLOCK()` macro clears the signal set, so from that point forward application code signals will be handled in the system's default manner until another signal block is created.

A [SignalManager](#) is passive (i.e. no signal handlers are installed) until that [start\(\)](#) method is called, and becomes passive when [stop\(\)](#) is invoked. The signals that are to be handled by the object are maintained as state, and the set of signals can be changed at any time, but are not in effect until [start\(\)](#) is called.

#### Attention

The [start\(\)](#), [stop\(\)](#), [setSigHandled\(\)](#) and [clearSigHandled\(\)](#) methods are not meant to be used directly by applications, which should use the `BEGIN_SIGNAL_BLOCK()/END_SIGNAL_BLOCK()` macro pair.

### F.25.2 Constructor & Destructor Documentation

#### F.25.2.1 [BiometricEvaluation::Error::SignalManager::SignalManager \( \)](#) [throw \(Error::StrategyError\)](#)

Construct a new [SignalManager](#) object with the default signal handling: SIGSEGV and SIGBUS.

#### Returns

The [SignalManager](#).

#### Exceptions

[Error::StrategyError](#) Could not register the signal handler.

## F.25.3 Member Function Documentation

### F.25.3.1 void BiometricEvaluation::Error::SignalManager::setSignalSet (const sigset\_t *signalSet* ) throw (Error::ParameterError)

Set the signals this object will manage.

#### Parameters

*signalSet* (in) The signal set; see sigaction(2), sigemptyset(3) and sigaddset(3).

#### Exceptions

*Error::ParameterError* One of the signals in *signalSet* cannot be handled (SIGKILL, SIGSTOP).

### F.25.3.2 void BiometricEvaluation::Error::SignalManager::clearSignalSet ( )

Clear all signal handling.

### F.25.3.3 void BiometricEvaluation::Error::SignalManager::setDefaultSignalSet ( )

Set the default signals this object will manage: SIGSEGV and SIGBUS.

### F.25.3.4 bool BiometricEvaluation::Error::SignalManager::sigHandled ( )

Indicate whether a signal was handled.

#### Returns

true if a signal was handled, false otherwise.

### F.25.3.5 void BiometricEvaluation::Error::SignalManager::start ( ) throw (Error::StrategyError)

Start handling signals of the current signal set.

#### Exceptions

*Error::StrategyError* Could not register the signal handler.

**Note**

If an application invokes `start()` without setting up a signal jump block, behavior is undefined, and can result in an infinite loop if further processing causes a signal to be raised.

**F.25.3.6 void BiometricEvaluation::Error::SignalManager::stop ( ) throw (Error::StrategyError)**

Stop handling signals of the current signal set.

**Exceptions**

*Error::StrategyError* Could not register the signal handler.

**F.25.3.7 void BiometricEvaluation::Error::SignalManager::setSigHandled ( )**

Set a flag to indicate a signal was handled.

**F.25.3.8 void BiometricEvaluation::Error::SignalManager::clearSigHandled ( )**

Clear the indication that a signal was handled.

**F.25.4 Member Data Documentation****F.25.4.1 bool BiometricEvaluation::Error::SignalManager::\_canSigJump [static]**

Flag indicating can jump after handling a signal.

**Note**

Should not be directly used by applications.

**F.25.4.2 sigjmp\_buf BiometricEvaluation::Error::SignalManager::\_sigJumpBuf [static]**

The jump buffer used by the signal handler.

**Note**

Should not be directly used by applications.

The documentation for this class was generated from the following file:

- `be_error_signal_manager.h`

## F.26 BiometricEvaluation::Process::Statistics Class Reference

The [Statistics](#) class provides an interface for gathering process statistics, such as memory usage, system time, etc.

```
#include <be_process_statistics.h>
```

### Public Member Functions

- [Statistics](#) ()
- [Statistics](#) ([IO::LogCabinet](#) \*const logCabinet) throw (Error::NotImplemented, Error::ObjectExists, Error::StrategyError)
- void [getCPUTimes](#) (uint64\_t \*usertime, uint64\_t \*systemtime) throw (Error::StrategyError, Error::NotImplemented)
- void [getMemorySizes](#) (uint64\_t \*vmrss, uint64\_t \*vmsize, uint64\_t \*vmpeak, uint64\_t \*vmdata, uint64\_t \*vmstack) throw (Error::StrategyError, Error::NotImplemented)
- uint32\_t [getNumThreads](#) () throw (Error::StrategyError, Error::NotImplemented)
- void [logStats](#) () throw (Error::ObjectDoesNotExist, Error::StrategyError, Error::NotImplemented)

*Create a snapshot of the current process statistics in the LogSheet created in the LogCabinet.*

- void [startAutoLogging](#) (int interval) throw (Error::ObjectDoesNotExist, Error::StrategyError, Error::NotImplemented)

*Start logging process statistics automatically, in intervals of seconds.*

- void [stopAutoLogging](#) () throw (Error::StrategyError)

*Stop the automatic logging of process statistics. Has no effect if not currently auto-logging.*

- void [callStatistics\\_logStats](#) ()

## F.26.1 Detailed Description

The [Statistics](#) class provides an interface for gathering process statistics, such as memory usage, system time, etc. The information gathered by objects of this class are for the current process, and can optionally be logged to a LogSheet object contained within the provided LogCabinet.

### Note

The resolution of a returned value for many methods may not match the resolution allowed by the interface. For example, the operating system may allow for second resolution whereas the interface allows microsecond resolution.

## F.26.2 Constructor & Destructor Documentation

### F.26.2.1 BiometricEvaluation::Process::Statistics::Statistics ( )

Constructor with no parameters.

### F.26.2.2 BiometricEvaluation::Process::Statistics::Statistics ( IO::LogCabinet \*const *logCabinet* ) throw (Error::NotImplemented, Error::ObjectExists, Error::StrategyError)

Construct a [Statistics](#) object with the associated LogCabinet.

### Parameters

*logCabinet[in]* The LogCabinet object where this object will create a LogSheet to contain the statistic information for the process.

### Exceptions

***Error::NotImplemented*** Logging is not supported on this OS. This exception can be thrown when any portion of the statistics gathering cannot be completed.

***Error::ObjectExists*** The LogSheet already exists. This exception should rarely, if ever, occur.

***Error::StrategyError*** Failure to create the LogSheet in the cabinet.

## F.26.3 Member Function Documentation

**F.26.3.1** `void BiometricEvaluation::Process::Statistics::getCPUTimes ( uint64_t * usertime, uint64_t * systemtime ) throw (Error::StrategyError, Error::NotImplemented)`

Obtain the total user and system times for the process, in microseconds. Any of the out parameters can be NULL, indicating non-interest in that statistic.

### Note

This method may not be implemented in all operating systems.

### Parameters

*usertime[out]* Pointer where to store the total user time.

*systemtime[out]* Pointer where to store the total system time.

### Exceptions

**Error::StrategyError** An error occurred when obtaining the process statistics from the operating system. The exception information string contains the error reason.

**Error::NotImplemented** This method is not implemented on this OS.

**F.26.3.2** `void BiometricEvaluation::Process::Statistics::getMemorySizes ( uint64_t * vmrss, uint64_t * vmsize, uint64_t * vmpeak, uint64_t * vmdata, uint64_t * vmstack ) throw (Error::StrategyError, Error::NotImplemented)`

Obtain the current memory set sizes for the process, in kilobytes. Any of the out parameters can be NULL, indicating non-interest in that statistic.

### Note

This method may not be implemented in all operating systems.

### Parameters

*vmrss[out]* Pointer where to store the current resident set size.

*vmsize[out]* Pointer where to store the current total virtual memory size.

*vmpeak[out]* Pointer where to store the peak total virtual memory size.

*vmdata[out]* Pointer where to store the current virtual memory data segment size.

*vmstack[out]* Pointer where to store the current virtual memory stack segment size.

**Exceptions**

***Error::StrategyError*** An error occurred when obtaining the process statistics from the operating system. The exception information string contains the error reason.

***Error::NotImplemented*** This method is not implemented on this OS.

### **F.26.3.3    uint32\_t BiometricEvaluation::Process::Statistics::getNumThreads ( ) throw (Error::StrategyError, Error::NotImplemented)**

Obtain the number of threads composing this process.

**Note**

This method may not be implemented in all operating systems.

**Exceptions**

***Error::StrategyError*** An error occurred when obtaining the process info from the operating system. The exception information string contains the error reason.

***Error::NotImplemented*** This method is not implemented on this OS.

### **F.26.3.4    void BiometricEvaluation::Process::Statistics::logStats ( ) throw (Error::ObjectDoesNotExist, Error::StrategyError, Error::NotImplemented)**

Create a snapshot of the current process statistics in the LogSheet created in the Log-Cabinet.

**Exceptions**

***Error::ObjectDoesNotExist*** The LogSheet does not exist; this object was not created with LogCabinet object.

***Error::StrategyError*** An error occurred when writing to the LogSheet.

***Error::NotImplemented*** The statistics gathering is not implemented for this operating system.

### **F.26.3.5    void BiometricEvaluation::Process::Statistics::startAutoLogging ( int interval ) throw (Error::ObjectDoesNotExist, Error::StrategyError, Error::NotImplemented)**

Start logging process statistics automatically, in intervals of seconds.



**Parameters**

*interval[in]* The gap between logging snapshots, in seconds.

**Exceptions**

*Error::ObjectDoesNotExist* The LogSheet does not exist; this object was not created with LogCabinet object.

*Error::StrategyError* An error occurred when writing to the LogSheet.

*Error::NotImplemented* The statistics gathering is not implemented for this operating system.

### F.26.3.6 void BiometricEvaluation::Process::Statistics::stopAutoLogging ( ) throw (Error::StrategyError)

Stop the automatic logging of process statistics. Has no effect if not currently auto-logging.

**Exceptions**

*Error::StrategyError* An error occurred when stopping, most likely because the logging thread died.

### F.26.3.7 void BiometricEvaluation::Process::Statistics::callStatistics\_logStats ( )

Helper function in C++ space that has access to this object, and is called from C space by the logging thread. Applications should not call this function.

The documentation for this class was generated from the following file:


- be\_process\_statistics.h

## F.27 BiometricEvaluation::Error::StrategyError Class Reference

A [StrategyError](#) object is thrown when the underlying implementation of this interface encounters an error.

```
#include <be_error_exception.h>
```

Inheritance diagram for BiometricEvaluation::Error::StrategyError:



## Public Member Functions

- [StrategyError](#) ()
- [StrategyError](#) (string info)

### F.27.1 Detailed Description

A [StrategyError](#) object is thrown when the underlying implementation of this interface encounters an error.

### F.27.2 Constructor & Destructor Documentation

#### F.27.2.1 `BiometricEvaluation::Error::StrategyError::StrategyError ( )`

Construct a [StrategyError](#) object with the default information string.

#### Returns

The [StrategyError](#) object.

#### F.27.2.2 `BiometricEvaluation::Error::StrategyError::StrategyError ( string info )`

Construct a [StrategyError](#) object with an information string appended to the default information string.

#### Returns

The [StrategyError](#) object.

The documentation for this class was generated from the following file:

- `be_error_exception.h`

## F.28 BiometricEvaluation::Time::Timer Class Reference

This class can be used by applications to report the amount of time a block of code takes to execute.

```
#include <be_time_timer.h>
```

### Public Member Functions

- [Timer](#) ()
- void [start](#) () throw (Error::StrategyError)
- void [stop](#) () throw (Error::StrategyError)
- uint64\_t [elapsed](#) () throw (Error::StrategyError)

### F.28.1 Detailed Description

This class can be used by applications to report the amount of time a block of code takes to execute. Applications wrap the block of code in the [Timer::start\(\)](#) and [Timer::stop\(\)](#) calls, then use [Timer::elapsed\(\)](#) to obtain the calculated time of the operation.

### F.28.2 Constructor & Destructor Documentation

#### F.28.2.1 BiometricEvaluation::Time::Timer::Timer ( )

Constructor for the [Timer](#) object.

### F.28.3 Member Function Documentation

#### F.28.3.1 void BiometricEvaluation::Time::Timer::start ( ) throw (Error::StrategyError)

Start tracking time.

#### Exceptions

**[Error::StrategyError](#)** This object is currently timing an operation or an error occurred when obtaining timing information.

### F.28.3.2 void BiometricEvaluation::Time::Timer::stop ( ) throw (Error::StrategyError)

Stop tracking time.

#### Exceptions

***Error::StrategyError*** This object is not currently timing an operation or an error occurred when obtaining timing information.

### F.28.3.3 uint64\_t BiometricEvaluation::Time::Timer::elapsed ( ) throw (Error::StrategyError)

Get the elapsed time in microseconds between calls to this object's [start\(\)](#) and [stop\(\)](#) methods.

#### Returns

The number of microseconds between calls to this object's [start\(\)](#) and [stop\(\)](#) methods.

#### Exceptions

***Error::StrategyError*** This object is currently timing an operation or an error occurred when obtaining timing information.

The documentation for this class was generated from the following file:

- `be_time_timer.h`

## F.29 BiometricEvaluation::IO::Utility Class Reference

```
#include <be_io_utility.h>
```

### Static Public Member Functions

- static void [removeDirectory](#) (const string &directory, const string &prefix) throw (Error::ObjectDoesNotExist, Error::StrategyError)
- static uint64\_t [getFileSize](#) (const string &pathname) throw (Error::ObjectDoesNotExist, Error::StrategyError)
- static bool [fileExists](#) (const string &pathname) throw (Error::StrategyError)
- static bool [pathIsDirectory](#) (const string &pathname) throw (Error::StrategyError)

- static bool [validateRootName](#) (const string &name)
- static bool [constructAndCheckPath](#) (const string &name, const string &parent-Dir, string &fullPath)

### F.29.1 Detailed Description

A class containing utility functions used for IO operations. These functions are class methods.

### F.29.2 Member Function Documentation

**F.29.2.1** static void BiometricEvaluation::IO::Utility::removeDirectory  
( const string & *directory*, const string & *prefix* ) throw  
(Error::ObjectDoesNotExist, Error::StrategyError) [**static**]

Remove a directory.

#### Parameters

*directory[in]* The name of the directory to be removed, without a preceding path.

*prefix[in]* The path leading to the directory.

#### Exceptions

[Error::ObjectDoesNotExist](#) The named directory does not exist.

[Error::StrategyError](#) An error occurred when using the underlying storage system, or the directory name or prefix is malformed.

**F.29.2.2** static uint64\_t BiometricEvaluation::IO::Utility::getFileSize ( const string & *pathname* ) throw (Error::ObjectDoesNotExist, Error::StrategyError) [**static**]

Get the size of a file.

#### Parameters

*pathname[in]* The name of the file to be sized; can be a complete path.

#### Returns

The file size.

#### Exceptions

[Error::ObjectDoesNotExist](#) The named directory does not exist.

***Error::StrategyError*** An error occurred when using the underlying storage system, or pathname is malformed.

**F.29.2.3** `static bool BiometricEvaluation::IO::Utility::fileExists ( const string & pathname ) throw (Error::StrategyError) [static]`

Indicate whether a file exists.

#### Parameters

*pathname[in]* The name of the file to be checked; can be a complete path.

#### Returns

true if the file exists, false otherwise.

#### Exceptions

***Error::StrategyError*** An error occurred when using the underlying storage system, or pathname is malformed.

**F.29.2.4** `static bool BiometricEvaluation::IO::Utility::validateRootName ( const string & name ) [static]`

Check whether or not a string is valid as a name for a rooted entity, such as a [Record-Store](#) or other type of container that is persistent within the file system. Notably, name cannot contain path name separators ('/' and '\') or begin with whitespace.

#### Parameters

*name[in]* The proposed name for the entity.

#### Returns

true if the name is acceptable, false otherwise.

**F.29.2.5** `static bool BiometricEvaluation::IO::Utility::constructAndCheckPath ( const string & name, const string & parentDir, string & fullPath ) [static]`

Construct a full path for a rooted entity, and return true if that path exists; false otherwise.

### Parameters

- name[in]* The proposed name for the entity; cannot be a pathname.
- parentDir[in]* The name of the directory to contain the entity.
- fullPath[out]* The complete path to the new entity, when true is returned; ambiguous when false is returned.

### Returns

true if the named entry is present in the file system, false otherwise.

The documentation for this class was generated from the following file:

- be\_io\_utility.h

## F.30 BiometricEvaluation::Time::Watchdog Class Reference

A [Watchdog](#) object can be used by applications to limit the amount of processing time taken by a block of code.

```
#include <be_time_watchdog.h>
```

### Public Member Functions

- [Watchdog](#) (const uint8\_t type) throw (Error::ParameterError)
- void [setInterval](#) (uint64\_t interval)
- void [start](#) () throw (Error::StrategyError)
- void [stop](#) () throw (Error::StrategyError)
- bool [expired](#) ()
- void [setCanSigJump](#) ()
- void [clearCanSigJump](#) ()
- void [setExpired](#) ()
- void [clearExpired](#) ()

### Static Public Attributes

- static const uint8\_t [PROCESSTIME](#) = 0
- static const uint8\_t [REALTIME](#) = 1
- static bool [\\_canSigJump](#)
- static sigjmp\_buf [\\_sigJumpBuf](#)

### F.30.1 Detailed Description

A [Watchdog](#) object can be used by applications to limit the amount of processing time taken by a block of code. A [Watchdog](#) object is used to set a timer that, upon expiration, will force a jump to a location within the process. An application can detect whether the timer expired at that point in the code. [Watchdog](#) builds on the POSIX `setitimer(2)` call. [Timer](#) intervals are in terms of process virtual time or real time, based on how the object is constructed.

Most applications will not directly invoke the methods of the `WatchDog` class, instead using the `BEGIN_WATCHDOG_BLOCK()` and `END_WATCHDOG_BLOCK()` macros. Applications should not install their own signal handlers, but use the `SignalManager` class instead.

The `BEGIN_WATCHDOG_BLOCK` macro sets up the jump block and tells the [Watchdog](#) object to start handling the alarm signal. Applications must call [setInterval\(\)](#) before invoking the `BEGIN_WATCHDOG_BLOCK()` macro.

The `END_WATCHDOG_BLOCK()` macro disables the watchdog timer, but doesn't affect the current interval value. Applications can set the interval once and use the `BEGIN/END` block macros repeatedly. Failure to call [setInterval\(\)](#) results in an effectively disabled timer, as does setting the interval to 0.

#### Note

[Process](#) virtual timing may not be available on all systems. In those cases, an application compilation error will occur because `PROCESSTIME` will not be defined.

#### Attention

On many systems, the `sleep(3)` call is implemented using alarm signals, the same technique used by the [Watchdog](#) class. Therefore, applications should not call `sleep(3)` inside the [Watchdog](#) block; behavior is undefined in that case, but usually results in cancellation of the [Watchdog](#) timer.

The [setCanSigJump\(\)](#), [clearCanSigJump\(\)](#), [setExpired\(\)](#) and [clearExpired\(\)](#) methods are not meant to be used directly by applications, which should use the `BEGIN_WATCHDOG_BLOCK()/END_WATCHDOG_BLOCK()` macro pair.

#### See also

[Error::SignalManager](#)

### F.30.2 Constructor & Destructor Documentation

#### F.30.2.1 `BiometricEvaluation::Time::Watchdog::Watchdog ( const uint8_t type ) throw (Error::ParameterError)`

Construct a new [Watchdog](#) object.



### Parameters

*type[in]* The type of timer, ProcessTime or RealTime.

### Returns

The [Watchdog](#) object.

### Exceptions

[Error::ParameterError](#) The type is invalid.

## F.30.3 Member Function Documentation

### F.30.3.1 void BiometricEvaluation::Time::Watchdog::setInterval ( uint64\_t interval )

Set the interval for the timer, but don't start the timer. Setting a value of 0 will essentially disable the timer. [Timer](#) intervals are in microseconds, however actual intervals are dependent on the resolution of the system clock, and may not be at microsecond resolution.

### Parameters

*interval[in]* The timer interval, in microseconds.

### F.30.3.2 void BiometricEvaluation::Time::Watchdog::start ( ) throw (Error::StrategyError)

Start a watchdog timer.

### Exceptions

[Error::StrategyError](#) Could not register the signal handler, or could not create the timer.

### F.30.3.3 void BiometricEvaluation::Time::Watchdog::stop ( ) throw (Error::StrategyError)

Stop a watchdog timer.

### Exceptions

[Error::StrategyError](#) Could not clear the timer.

**F.30.3.4 bool BiometricEvaluation::Time::Watchdog::expired ( )**

Indicate whether the watchdog timer expired.

**Returns**

true if the timer expired, false otherwise.

**F.30.3.5 void BiometricEvaluation::Time::Watchdog::setCanSigJump ( )**

Indicate that the signal handler can jump into the application code after handling the signal.

**F.30.3.6 void BiometricEvaluation::Time::Watchdog::clearCanSigJump ( )**

Clears the flag for the [Watchdog](#) object to indicate that the signal jump block is no longer valid.

**F.30.3.7 void BiometricEvaluation::Time::Watchdog::setExpired ( )**

Set a flag to indicate the timer expired.

**F.30.3.8 void BiometricEvaluation::Time::Watchdog::clearExpired ( )**

Clear the flag indicating the timer expired.

**F.30.4 Member Data Documentation****F.30.4.1 const uint8\_t BiometricEvaluation::Time::Watchdog::PROCESSTIME = 0  
[static]**

A [Watchdog](#) based on process time.

**F.30.4.2 const uint8\_t BiometricEvaluation::Time::Watchdog::REALTIME = 1  
[static]**

A [Watchdog](#) based on real (wall clock) time.

The documentation for this class was generated from the following file:

- be\_time\_watchdog.h

# Index

~ArchiveRecordStore  
    BiometricEvaluation::IO::ArchiveRecordStore, [35](#)  
\_canSigJump  
    BiometricEvaluation::Error::SignalManager, [102](#)  
\_sigJumpBuf  
    BiometricEvaluation::Error::SignalManager, [102](#)  
  
ArchiveRecordStore  
    BiometricEvaluation::IO::ArchiveRecordStore, [35](#)  
  
BE\_RECSTORE\_SEQ\_START  
    BiometricEvaluation::IO::RecordStore, [98](#)  
be\_workorder, [42](#)  
BERKELEYDBTYPE  
    BiometricEvaluation::IO::RecordStore, [98](#)  
BiometricEvaluation::Error::ConversionError, [42](#)  
    ConversionError, [43](#)  
BiometricEvaluation::Error::Exception, [50](#)  
    Exception, [51](#)  
    getInfo, [51](#)  
BiometricEvaluation::Error::FileError, [54](#)  
    FileError, [54](#)  
BiometricEvaluation::Error::MemoryError, [74](#)  
    MemoryError, [75](#)  
  
BiometricEvaluation::Error::NotImplemented, [75](#)  
    NotImplemented, [76](#)  
BiometricEvaluation::Error::ObjectDoesNotExist, [76](#)  
    ObjectDoesNotExist, [77](#)  
BiometricEvaluation::Error::ObjectExists, [78](#)  
    ObjectExists, [78](#)  
BiometricEvaluation::Error::ObjectIsClosed, [79](#)  
    ObjectIsClosed, [79](#)  
BiometricEvaluation::Error::ObjectIsOpen, [80](#)  
    ObjectIsOpen, [80](#), [81](#)  
BiometricEvaluation::Error::ParameterError, [81](#)  
    ParameterError, [82](#)  
BiometricEvaluation::Error::SignalManager, [99](#)  
    \_canSigJump, [102](#)  
    \_sigJumpBuf, [102](#)  
    clearSigHandled, [102](#)  
    clearSignalSet, [101](#)  
    setDefaultSignalSet, [101](#)  
    setSigHandled, [102](#)  
    setSignalSet, [101](#)  
    sigHandled, [101](#)  
    SignalManager, [100](#)  
    start, [101](#)  
    stop, [102](#)  
BiometricEvaluation::Error::StrategyError, [107](#)  
    StrategyError, [108](#)  
BiometricEvaluation::Image, [29](#)  
BiometricEvaluation::Image::Image, [61](#)  
    getDepth, [64](#)

- getHeight, [63](#)
  - getRawData, [63](#)
  - getWidth, [63](#)
  - getXResolution, [62](#)
  - getYResolution, [63](#)
  - Image, [62](#)
- BiometricEvaluation::Image::RawImage, [86](#)
  - getDepth, [88](#)
  - getHeight, [87](#)
  - getRawData, [88](#)
  - getWidth, [87](#)
  - getXResolution, [88](#)
  - getYResolution, [88](#)
  - RawImage, [87](#)
- BiometricEvaluation::IO::ArchiveRecordStore, [33](#)
  - ~ArchiveRecordStore, [35](#)
  - ArchiveRecordStore, [35](#)
  - changeName, [39](#)
  - flush, [38](#)
  - getArchiveName, [41](#)
  - getManifestName, [41](#)
  - getSpaceUsed, [36](#)
  - insert, [36](#)
  - length, [38](#)
  - needsVacuum, [39, 40](#)
  - read, [37](#)
  - remove, [37](#)
  - replace, [37](#)
  - setCursor, [39](#)
  - sync, [36](#)
  - vacuum, [40](#)
- BiometricEvaluation::IO::DBRecordStore, [44](#)
  - changeName, [49](#)
  - DBRecordStore, [45](#)
  - flush, [48](#)
  - getSpaceUsed, [46](#)
  - insert, [46](#)
  - length, [48](#)
  - read, [47](#)
  - remove, [47](#)
  - replace, [47](#)
  - setCursor, [49](#)
  - sync, [46](#)
- BiometricEvaluation::IO::Factory, [52](#)
  - createRecordStore, [53](#)
  - openRecordStore, [52](#)
- BiometricEvaluation::IO::FileRecordStore, [55](#)
  - changeName, [60](#)
  - FileRecordStore, [56](#)
  - flush, [59](#)
  - getSpaceUsed, [57](#)
  - insert, [57](#)
  - length, [59](#)
  - read, [58](#)
  - remove, [58](#)
  - replace, [58](#)
  - setCursor, [60](#)
- BiometricEvaluation::IO::LogCabinet, [65](#)
  - getCount, [68](#)
  - getDescription, [68](#)
  - getName, [68](#)
  - LogCabinet, [66, 67](#)
  - newLogSheet, [67](#)
  - remove, [68](#)
- BiometricEvaluation::IO::LogSheet, [69](#)
  - CommentDelimiter, [73](#)
  - DescriptionTag, [73](#)
  - EntryDelimiter, [73](#)
  - getCurrentEntry, [72](#)
  - getCurrentEntryNumber, [72](#)
  - LogSheet, [70, 71](#)
  - newEntry, [72](#)
  - resetCurrentEntry, [72](#)
  - setAutoSync, [73](#)
  - sync, [73](#)
  - write, [71](#)
  - writeComment, [72](#)
- BiometricEvaluation::IO::ManifestEntry, [74](#)
- BiometricEvaluation::IO::Properties, [82](#)
  - changeName, [86](#)
  - getProperty, [85](#)
  - getPropertyAsInteger, [85](#)
  - Properties, [83](#)
  - removeProperty, [84](#)
  - setProperty, [84](#)
  - setPropertyFromInteger, [84](#)
  - sync, [85](#)

- BiometricEvaluation::IO::RecordStore, 89
  - BE\_RECSTORE\_SEQ\_START, 98
  - BERKELEYDBTYPE, 98
  - changeDescription, 93
  - changeName, 93
  - CONTROLFILENAME, 98
  - flush, 96
  - getCount, 92
  - getDescription, 92
  - getName, 92
  - getSpaceUsed, 93
  - insert, 94
  - length, 96
  - NAMEPROPERTY, 98
  - read, 95
  - RecordStore, 91, 92
  - remove, 94
  - removeRecordStore, 97
  - replace, 95
  - setCursor, 97
  - sync, 94
- BiometricEvaluation::IO::Utility, 110
  - constructAndCheckPath, 112
  - fileExists, 112
  - getFileSize, 111
  - removeDirectory, 111
  - validateRootName, 112
- BiometricEvaluation::Process, 30
- BiometricEvaluation::Process::Limits, 64
  - getMaxResidentSetSize, 65
  - Limits, 65
- BiometricEvaluation::Process::Statistics, 103
  - callStatistics\_logStats, 107
  - getCPUTimes, 105
  - getMemorySizes, 105
  - getNumThreads, 106
  - logStats, 106
  - startAutoLogging, 106
  - Statistics, 104
  - stopAutoLogging, 107
- BiometricEvaluation::System, 30
  - getCPUCount, 31
  - getLoadAverage, 31
  - getRealMemorySize, 31
- BiometricEvaluation::Time, 32
- BiometricEvaluation::Time::Timer, 109
  - elapsed, 110
  - start, 109
  - stop, 109
  - Timer, 109
- BiometricEvaluation::Time::Watchdog, 113
  - clearCanSigJump, 116
  - clearExpired, 116
  - expired, 115
  - PROCESSTIME, 116
  - REALTIME, 116
  - setCanSigJump, 116
  - setExpired, 116
  - setInterval, 115
  - start, 115
  - stop, 115
  - Watchdog, 114
- BiometricEvaluation::Utility::AutoArray, 41
- callStatistics\_logStats
  - BiometricEvaluation::Process::Statistics, 107
- changeDescription
  - BiometricEvaluation::IO::RecordStore, 93
- changeName
  - BiometricEvaluation::IO::ArchiveRecordStore, 39
  - BiometricEvaluation::IO::DBRecordStore, 49
  - BiometricEvaluation::IO::FileRecordStore, 60
  - BiometricEvaluation::IO::Properties, 86
  - BiometricEvaluation::IO::RecordStore, 93
- clearCanSigJump
  - BiometricEvaluation::Time::Watchdog, 116
- clearExpired

- BiometricEvaluation::Time::Watchdog, [116](#)
- clearSigHandled
  - BiometricEvaluation::Error::SignalManager, [102](#)
- clearSignalSet
  - BiometricEvaluation::Error::SignalManager, [101](#)
- CommentDelimiter
  - BiometricEvaluation::IO::LogSheet, [73](#)
- constructAndCheckPath
  - BiometricEvaluation::IO::Utility, [112](#)
- CONTROLFILENAME
  - BiometricEvaluation::IO::RecordStore, [98](#)
- ConversionError
  - BiometricEvaluation::Error::ConversionError, [43](#)
- createRecordStore
  - BiometricEvaluation::IO::Factory, [53](#)
- DBRecordStore
  - BiometricEvaluation::IO::DBRecordStore, [45](#)
- DescriptionTag
  - BiometricEvaluation::IO::LogSheet, [73](#)
- elapsed
  - BiometricEvaluation::Time::Timer, [110](#)
- EntryDelimiter
  - BiometricEvaluation::IO::LogSheet, [73](#)
- Exception
  - BiometricEvaluation::Error::Exception, [51](#)
- expired
  - BiometricEvaluation::Time::Watchdog, [115](#)
- FileError
  - BiometricEvaluation::Error::FileError, [54](#)
- fileExists
  - BiometricEvaluation::IO::Utility, [112](#)
- FileRecordStore
  - BiometricEvaluation::IO::FileRecordStore, [56](#)
- flush
  - BiometricEvaluation::IO::ArchiveRecordStore, [38](#)
  - BiometricEvaluation::IO::DBRecordStore, [48](#)
  - BiometricEvaluation::IO::FileRecordStore, [59](#)
  - BiometricEvaluation::IO::RecordStore, [96](#)
- getArchiveName
  - BiometricEvaluation::IO::ArchiveRecordStore, [41](#)
- getCount
  - BiometricEvaluation::IO::LogCabinet, [68](#)
  - BiometricEvaluation::IO::RecordStore, [92](#)
- getCPUCount
  - BiometricEvaluation::System, [31](#)
- getCPUTimes
  - BiometricEvaluation::Process::Statistics, [105](#)
- getCurrentEntry
  - BiometricEvaluation::IO::LogSheet, [72](#)
- getCurrentEntryNumber
  - BiometricEvaluation::IO::LogSheet, [72](#)

- getDepth
  - BiometricEvaluation::Image::Image, 64
  - BiometricEvaluation::Image::RawImage, 88
- getDescription
  - BiometricEvaluation::IO::LogCabinet, 68
  - BiometricEvaluation::IO::RecordStore, 92
- getFileSize
  - BiometricEvaluation::IO::Utility, 111
- getHeight
  - BiometricEvaluation::Image::Image, 63
  - BiometricEvaluation::Image::RawImage, 87
- getInfo
  - BiometricEvaluation::Error::Exception, 51
- getLoadAverage
  - BiometricEvaluation::System, 31
- getManifestName
  - BiometricEvaluation::IO::ArchiveRecordStore, 41
- getMaxResidentSetSize
  - BiometricEvaluation::Process::Limits, 65
- getMemorySizes
  - BiometricEvaluation::Process::Statistics, 105
- getName
  - BiometricEvaluation::IO::LogCabinet, 68
  - BiometricEvaluation::IO::RecordStore, 92
- getNumThreads
  - BiometricEvaluation::Process::Statistics, 106
- getProperty
  - BiometricEvaluation::IO::Properties, 85
- getPropertyAsInteger
  - BiometricEvaluation::IO::Properties, 85
- getRawData
  - BiometricEvaluation::Image::Image, 63
  - BiometricEvaluation::Image::RawImage, 88
- getRealMemorySize
  - BiometricEvaluation::System, 31
- getSpaceUsed
  - BiometricEvaluation::IO::ArchiveRecordStore, 36
  - BiometricEvaluation::IO::DBRecordStore, 46
  - BiometricEvaluation::IO::FileRecordStore, 57
  - BiometricEvaluation::IO::RecordStore, 93
- getWidth
  - BiometricEvaluation::Image::Image, 63
  - BiometricEvaluation::Image::RawImage, 87
- getXResolution
  - BiometricEvaluation::Image::Image, 62
  - BiometricEvaluation::Image::RawImage, 88
- getYResolution
  - BiometricEvaluation::Image::Image, 63
  - BiometricEvaluation::Image::RawImage, 88
- Image
  - BiometricEvaluation::Image::Image, 62
- insert
  - BiometricEvaluation::IO::ArchiveRecordStore, 36
  - BiometricEvaluation::IO::DBRecordStore,

- 46
  - BiometricEvaluation::IO::FileRecordStore, 57
  - BiometricEvaluation::IO::RecordStore, 94
- length
  - BiometricEvaluation::IO::ArchiveRecordStore, 38
  - BiometricEvaluation::IO::DBRecordStore, 48
  - BiometricEvaluation::IO::FileRecordStore, 59
  - BiometricEvaluation::IO::RecordStore, 96
- Limits
  - BiometricEvaluation::Process::Limits, 65
- LogCabinet
  - BiometricEvaluation::IO::LogCabinet, 66, 67
- LogSheet
  - BiometricEvaluation::IO::LogSheet, 70, 71
- logStats
  - BiometricEvaluation::Process::Statistics, 106
- MemoryError
  - BiometricEvaluation::Error::MemoryError, 75
- NAMEPROPERTY
  - BiometricEvaluation::IO::RecordStore, 98
- needsVacuum
  - BiometricEvaluation::IO::ArchiveRecordStore, 39, 40
- newEntry
  - BiometricEvaluation::IO::LogSheet, 72
  - newLogSheet
    - BiometricEvaluation::IO::LogCabinet, 67
  - NotImplemented
    - BiometricEvaluation::Error::NotImplemented, 76
  - ObjectDoesNotExist
    - BiometricEvaluation::Error::ObjectDoesNotExist, 77
  - ObjectExists
    - BiometricEvaluation::Error::ObjectExists, 78
  - ObjectIsClosed
    - BiometricEvaluation::Error::ObjectIsClosed, 79
  - ObjectIsOpen
    - BiometricEvaluation::Error::ObjectIsOpen, 80, 81
  - openRecordStore
    - BiometricEvaluation::IO::Factory, 52
  - ParameterError
    - BiometricEvaluation::Error::ParameterError, 82
  - PROCESSTIME
    - BiometricEvaluation::Time::Watchdog, 116
  - Properties
    - BiometricEvaluation::IO::Properties, 83
  - RawImage
    - BiometricEvaluation::Image::RawImage, 87
  - read



- Generated on Tue Feb 22 2011 14:23:48 for Biometric Evaluation Common Framework by Doxygen

- BiometricEvaluation::Error::SignalManager, [102](#)
- setSignalSet
  - BiometricEvaluation::Error::SignalManager, [101](#)
- sigHandled
  - BiometricEvaluation::Error::SignalManager, [101](#)
- SignalManager
  - BiometricEvaluation::Error::SignalManager, [100](#)
- start
  - BiometricEvaluation::Error::SignalManager, [101](#)
  - BiometricEvaluation::Time::Timer, [109](#)
  - BiometricEvaluation::Time::Watchdog, [115](#)
- startAutoLogging
  - BiometricEvaluation::Process::Statistics, [106](#)
- Statistics
  - BiometricEvaluation::Process::Statistics, [104](#)
- stop
  - BiometricEvaluation::Error::SignalManager, [102](#)
  - BiometricEvaluation::Time::Timer, [109](#)
  - BiometricEvaluation::Time::Watchdog, [115](#)
- stopAutoLogging
  - BiometricEvaluation::Process::Statistics, [107](#)
- StrategyError
  - BiometricEvaluation::Error::StrategyError, [108](#)
- sync
  - BiometricEvaluation::IO::ArchiveRecordStore, [36](#)
  - BiometricEvaluation::IO::DBRecordStore, [46](#)
  - BiometricEvaluation::IO::LogSheet, [73](#)
  - BiometricEvaluation::IO::Properties, [85](#)
  - BiometricEvaluation::IO::RecordStore, [94](#)
- Timer
  - BiometricEvaluation::Time::Timer, [109](#)
- vacuum
  - BiometricEvaluation::IO::ArchiveRecordStore, [40](#)
- validateRootName
  - BiometricEvaluation::IO::Utility, [112](#)
- Watchdog
  - BiometricEvaluation::Time::Watchdog, [114](#)
- write
  - BiometricEvaluation::IO::LogSheet, [71](#)
- writeComment
  - BiometricEvaluation::IO::LogSheet, [72](#)