Vellore Institute of Technology
(Deemed to be University under section 3 of UGC Act, 1956)

SCHOOL OF COMPUTER SCIENCE AND ENGINEERING AND INFORMATION SYSTEM (SCORE)

WINTERSEMESTER-2025-26

ISWE406L-AGILE DEVELOPMENT AND DEVOPS

COURSEFACULTY–Prof.RAMALINGAM.M

SLOT:C1+TC1

BY

R.MONIKA(23MIS0075)

Appointment System — DevOps Pipeline Project

VS Code | GitHub | Jenkins | Docker | Kubernetes

VERSION1: Book – Schedule appointment

```
PS C:\Users\Monica\Downloads\appointment system> git init
Initialized empty Git repository in C:/Users/Monica/Downloads/appointment system/.git/
PS C:\Users\Monica\Downloads\appointment system> git add .
PS C:\Users\Monica\Downloads\appointment system> git commit -m "Initial commit"
[master (root-commit) a07bed1] Initial commit
 6 files changed, 0 insertions(+), 0 deletions(-)
 create mode 100644 Dockerfile
 create mode 100644 app.py
 create mode 100644 deployment.yaml
 create mode 100644 requirements.txt
 create mode 100644 static/style.css
 create mode 100644 templates/index.html
PS C:\Users\Monica\Downloads\appointment system> git branch -M main
PS C:\Users\Monica\Downloads\appointment system> git remote add origin "https://github.com/Monika-acn/Appointment-system123.git"
PS C:\Users\Monica\Downloads\appointment system> git push -u origin main
Enumerating objects: 5, done.
Counting objects: 100% (5/5), done.
Delta compression using up to 12 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (5/5), 423 bytes | 141.00 KiB/s, done.
Total 5 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/Monika-acn/Appointment-system123.git
 * [new branch]      main -> main
branch 'main' set up to track 'origin/main'.
PS C:\Users\Monica\Downloads\appointment system>
```

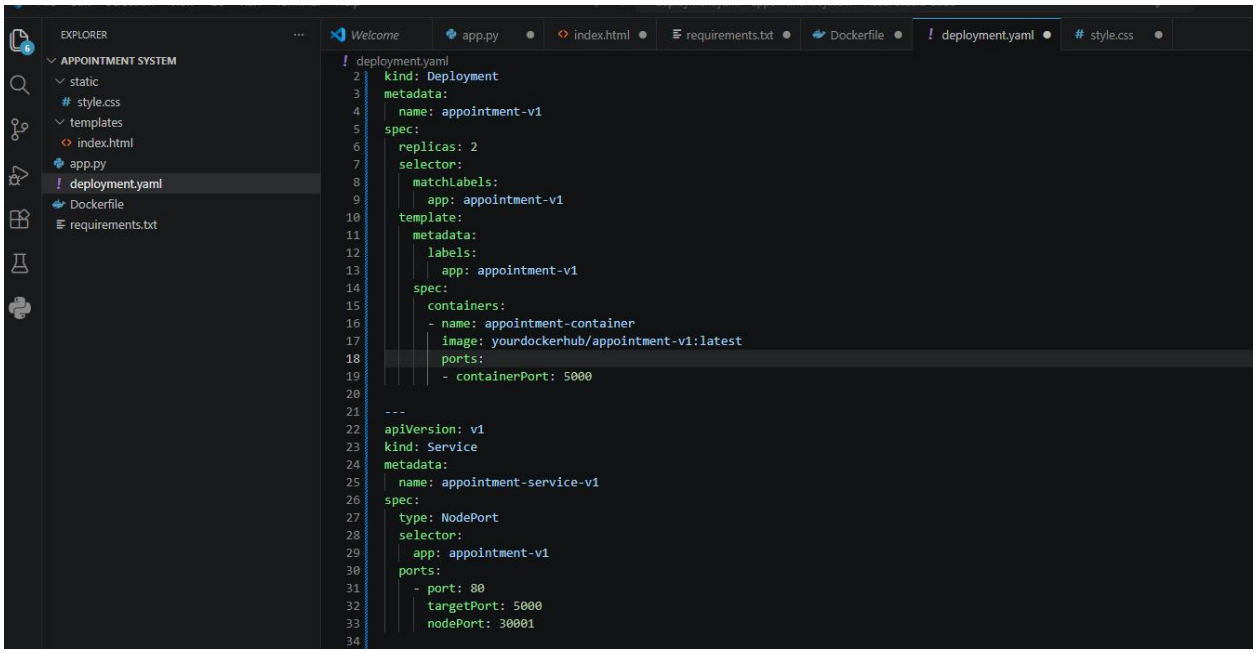

App.py

```
from flask import Flask, request, jsonify, render_template

app = Flask(__name__)

# In-memory storage
appointments = []

# Home Page
@app.route('/')
def home():
    return render_template('index.html')

# Book Appointment
@app.route('/book', methods=['POST'])
def book():
    data = request.json

    # Validation
    if not data.get("name") or not data.get("date") or not data.get("time"):
        return jsonify({"message": "All fields are required"}), 400

    appointment = {
        "id": len(appointments) + 1,
        "name": data["name"],
        "date": data["date"],
        "time": data["time"],
        "doctor": data.get("doctor", "General")
    }

    appointments.append(appointment)
```

```python
    return jsonify({
        "message": "Appointment booked successfully",
        "data": appointment
    })

# (Extra feature even in v1 → shows project quality)
@app.route('/all', methods=['GET'])
def view_all():
    return jsonify(appointments)

if __name__ == '__main__':
    app.run(host='0.0.0.0', port=5000)
```

deployment.yaml

```yaml
apiVersion: apps/v1
kind: Deployment
metadata:
  name: appointment-v1
spec:
  replicas: 2
  selector:
    matchLabels:
      app: appointment-v1
  template:
    metadata:
      labels:
        app: appointment-v1
    spec:
      containers:
      - name: appointment-container
        image: yourdockerhub/appointment-v1:latest
        ports:
        - containerPort: 5000

---
apiVersion: v1
kind: Service
metadata:
  name: appointment-service-v1
spec:
  type: NodePort
  selector:
    app: appointment-v1
  ports:
    - port: 80
      targetPort: 5000
      nodePort: 30001
```

Dockerfile:

```
FROM python:3.9

WORKDIR /app

COPY . .

RUN pip install -r requirements.txt

EXPOSE 5000

CMD ["python", "app.py"]
```

Requirements.txt:

```
flask
```

style.css:

```
body {
    font-family: Arial;
    background: #eef2f3;
}

.container {
    width: 350px;
    margin: auto;
    margin-top: 80px;
    padding: 20px;
    background: white;
    border-radius: 10px;
    text-align: center;
}

input, button {
    width: 90%;
    padding: 10px;
    margin: 8px;
}

button {
    background: #007bff;
    color: white;
    border: none;
}

ul {
    text-align: left;
}
```

Index.html:

```html
<!DOCTYPE html>
<html>
<head>
    <title>Appointment System</title>
    <link rel="stylesheet" href="/static/style.css">
</head>
<body>

<div class="container">
    <h2>Appointment Booking</h2>

    <form id="form">
        <input type="text" id="name" placeholder="Enter Name" required>
        <input type="date" id="date" required>
        <input type="time" id="time" required>
        <input type="text" id="doctor" placeholder="Doctor Name">

        <button type="submit">Book Appointment</button>
    </form>

    <p id="message"></p>

    <h3>Booked Appointments</h3>
    <ul id="list"></ul>
</div>

<script>
document.getElementById("form").addEventListener("submit", async function(e) {
    e.preventDefault();

    const data = {
        name: document.getElementById("name").value,
        date: document.getElementById("date").value,
        time: document.getElementById("time").value,
        doctor: document.getElementById("doctor").value
    };

    const res = await fetch('/book', {
        method: 'POST',
        headers: { 'Content-Type': 'application/json' },
        body: JSON.stringify(data)
    });

    const result = await res.json();
    document.getElementById("message").innerText = result.message;

    loadAppointments();
});

// Load appointments
async function loadAppointments() {
    const res = await fetch('/all');
    const data = await res.json();
```

```
    const list = document.getElementById("list");
    list.innerHTML = "";

    data.forEach(a => {
        const li = document.createElement("li");
        li.innerText = `${a.name} - ${a.date} ${a.time} (${a.doctor})`;
        list.appendChild(li);
    });
}

// Initial load
loadAppointments();
</script>

</body>
</html>
```

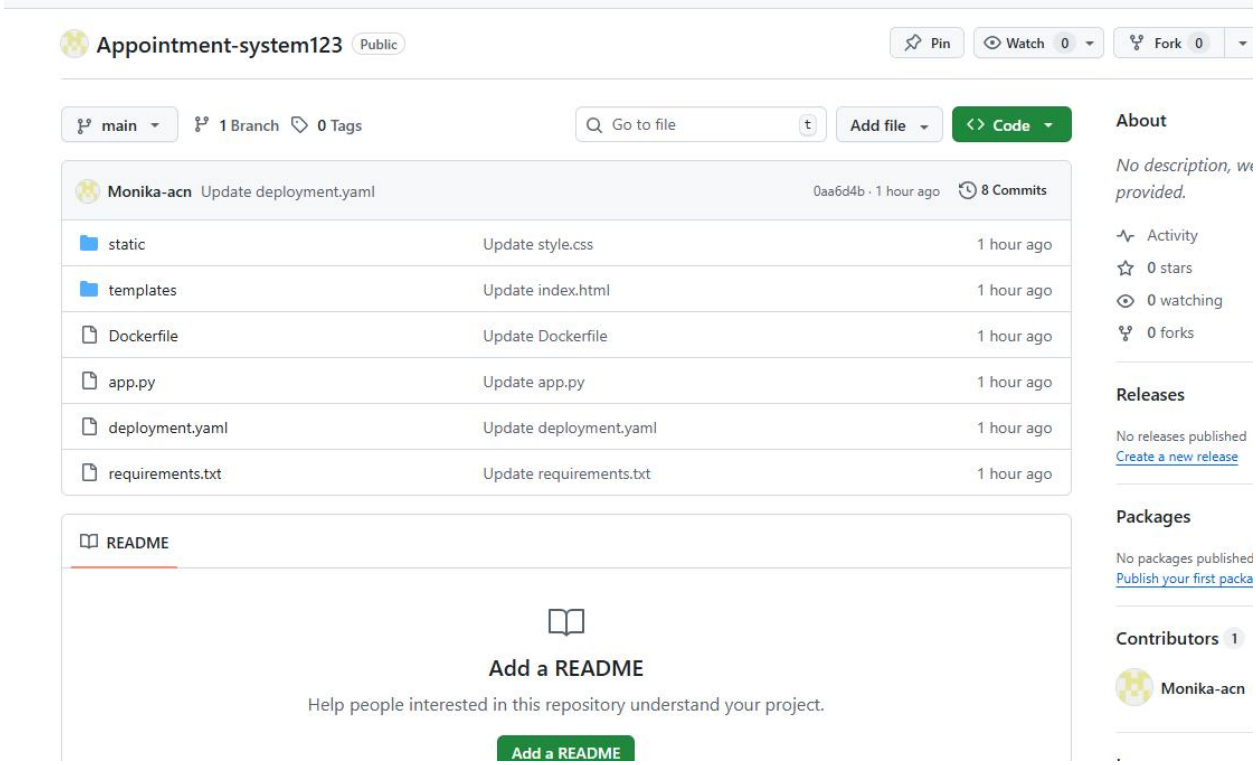

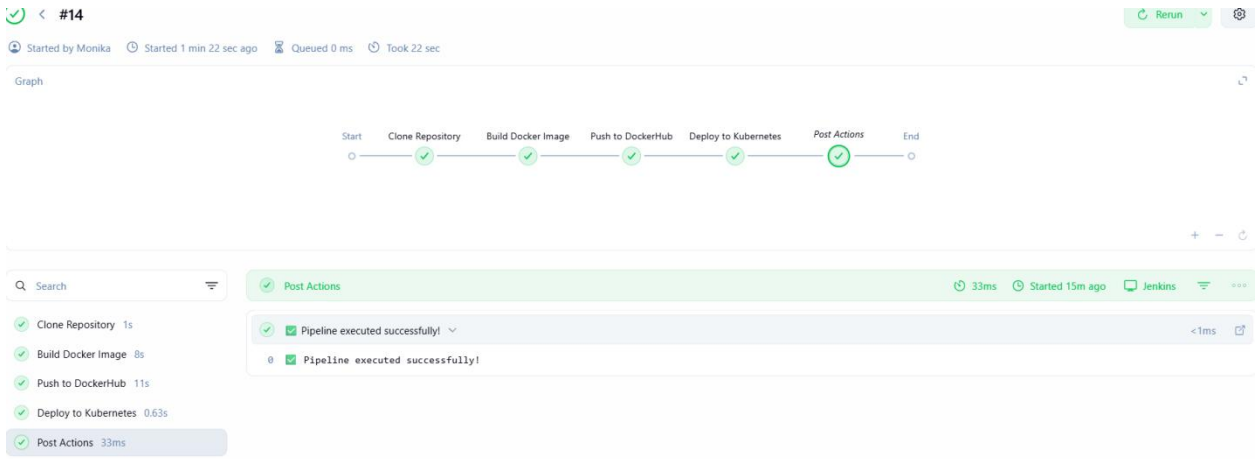

Pipeline script:

```
pipeline {
  agent any

  environment {
    DOCKER_IMAGE = "monikaraju/appointment-v1:latest"
  }

  stages {

    stage('Clone Repository') {
      steps {
        git branch: 'main',
          url: 'https://github.com/Monika-acn/Appointment-system123.git'
      }
    }
```

```
stage('Build Docker Image') {
    steps {
        bat 'docker build -t %DOCKER_IMAGE% .'
    }
}

stage('Push to DockerHub') {
    steps {
        withCredentials([usernamePassword(
            credentialsId: 'dockerhub-creds',
            usernameVariable: 'DOCKER_USER',
            passwordVariable: 'DOCKER_PASS'
        )]) {
            bat '''
            echo ===== Docker Login =====
            docker login -u %DOCKER_USER% -p %DOCKER_PASS%

            echo ===== Pushing Image =====
            docker push %DOCKER_IMAGE%
            '''
        }
    }
}
```

```
    stage('Deploy to Kubernetes') {
        steps {
            withCredentials([file(credentialsId: 'kubeconfig', variable: 'KUBECONFIG_FILE')]) {
                bat '''
                echo ===== Setting KUBECONFIG =====
                set KUBECONFIG=%KUBECONFIG_FILE%

                echo ===== Available Contexts =====
                kubectl --kubeconfig=%KUBECONFIG% config get-contexts

                echo ===== Switching to docker-desktop =====
                kubectl --kubeconfig=%KUBECONFIG% config use-context docker-desktop

                echo ===== Verifying Cluster =====
                kubectl --kubeconfig=%KUBECONFIG% get nodes

                echo ===== Deploying Application =====
                kubectl --kubeconfig=%KUBECONFIG% apply -f deployment.yaml --validate=false
                '''
            }
        }
    }
}

post {
```

```
    success {
        echo '✅ Pipeline executed successfully!'
    }
    failure {
        echo '❌ Pipeline Failed! Check Logs.'
    }
  }
}
```

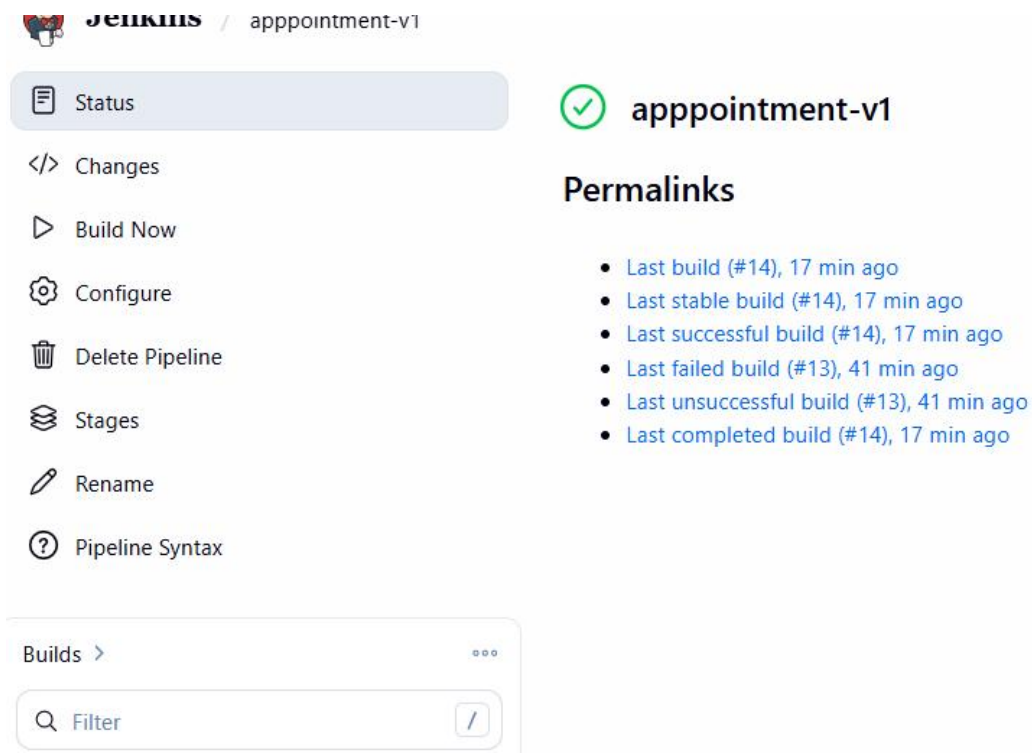

Console

Download Copy

```
Started by user Monika
[Pipeline] Start of Pipeline
[Pipeline] node
Running on Jenkins in C:\ProgramData\Jenkins\.jenkins\workspace\apppointment-v1
[Pipeline] {
[Pipeline] withEnv
[Pipeline] {
[Pipeline] stage
[Pipeline] { (Clone Repository)
[Pipeline] git
The recommended git tool is: NONE
No credentials specified
 > git.exe rev-parse --resolve-git-dir C:\ProgramData\Jenkins\.jenkins\workspace\apppointment-v1\.git # timeout=10
Fetching changes from the remote Git repository
 > git.exe config remote.origin.url https://github.com/Monika-acn/Appointment-system123.git # timeout=10
Fetching upstream changes from https://github.com/Monika-acn/Appointment-system123.git
 > git.exe --version # timeout=10
 > git --version # 'git version 2.52.0.windows.1'
 > git.exe fetch --tags --force --progress -- https://github.com/Monika-acn/Appointment-system123.git +refs/heads/*:refs/remotes/origin/* # timeout=10
 > git.exe rev-parse "refs/remotes/origin/main^{commit}" # timeout=10
Checking out Revision 0aa6d4b5404aa558661473daf1f0c2a000372208 (refs/remotes/origin/main)
 > git.exe config core.sparsecheckout # timeout=10
 > git.exe checkout -f 0aa6d4b5404aa558661473daf1f0c2a000372208 # timeout=10
 > git.exe branch -a -v --no-abbrev # timeout=10
 > git.exe branch -D main # timeout=10
 > git.exe checkout -b main 0aa6d4b5404aa558661473daf1f0c2a000372208 # timeout=10
Commit message: "Update deployment.yaml"
 > git.exe rev-list --no-walk 0aa6d4b5404aa558661473daf1f0c2a000372208 # timeout=10
[Pipeline] }
[Pipeline] // stage
[Pipeline] stage
```

```
C:\ProgramData\Jenkins\.jenkins\workspace\apppointment-v1>kubectl --kubeconfig=**** config use-context docker-desktop
Switched to context "docker-desktop".

C:\ProgramData\Jenkins\.jenkins\workspace\apppointment-v1>echo ===== Verifying Cluster =====
===== Verifying Cluster =====

C:\ProgramData\Jenkins\.jenkins\workspace\apppointment-v1>kubectl --kubeconfig=**** get nodes
NAME                   STATUS   ROLES           AGE   VERSION
desktop-control-plane  Ready    control-plane   35m   v1.34.3

C:\ProgramData\Jenkins\.jenkins\workspace\apppointment-v1>echo ===== Deploying Application =====
===== Deploying Application =====

C:\ProgramData\Jenkins\.jenkins\workspace\apppointment-v1>kubectl --kubeconfig=**** apply -f deployment.yaml --validate=false
deployment.apps/appointment-v1 created
service/appointment-service-v1 created
[Pipeline] }
[Pipeline] // withCredentials
[Pipeline] }
[Pipeline] // stage
[Pipeline] stage
[Pipeline] { (Declarative: Post Actions)
[Pipeline] echo
✅ Pipeline executed successfully!
[Pipeline] }
[Pipeline] // stage
[Pipeline] }
[Pipeline] // withEnv
[Pipeline] }
[Pipeline] // node
[Pipeline] End of Pipeline
Finished: SUCCESS
```

```
C:\Users\Monica>kubectl get pods
NAME                                READY   STATUS    RESTARTS   AGE
appointment-v1-754b554898-ng6sp     1/1     Running   0          113s
appointment-v1-754b554898-nknd4     1/1     Running   0          113s

C:\Users\Monica>kubectl get svc
NAME                      TYPE        CLUSTER-IP      EXTERNAL-IP   PORT(S)        AGE
appointment-service-v1    NodePort    10.96.218.219   <none>        80:30001/TCP   2m8s
kubernetes                ClusterIP   10.96.0.1       <none>        443/TCP        37m
```

```
C:\Users\Monica>kubectl port-forward service/appointment-service-v1 9090:80
Forwarding from 127.0.0.1:9090 -> 5000
Forwarding from [::1]:9090 -> 5000
Handling connection for 9090
Handling connection for 9090
Handling connection for 9090
Handling connection for 9090
Handling connection for 9090
Handling connection for 9090
```

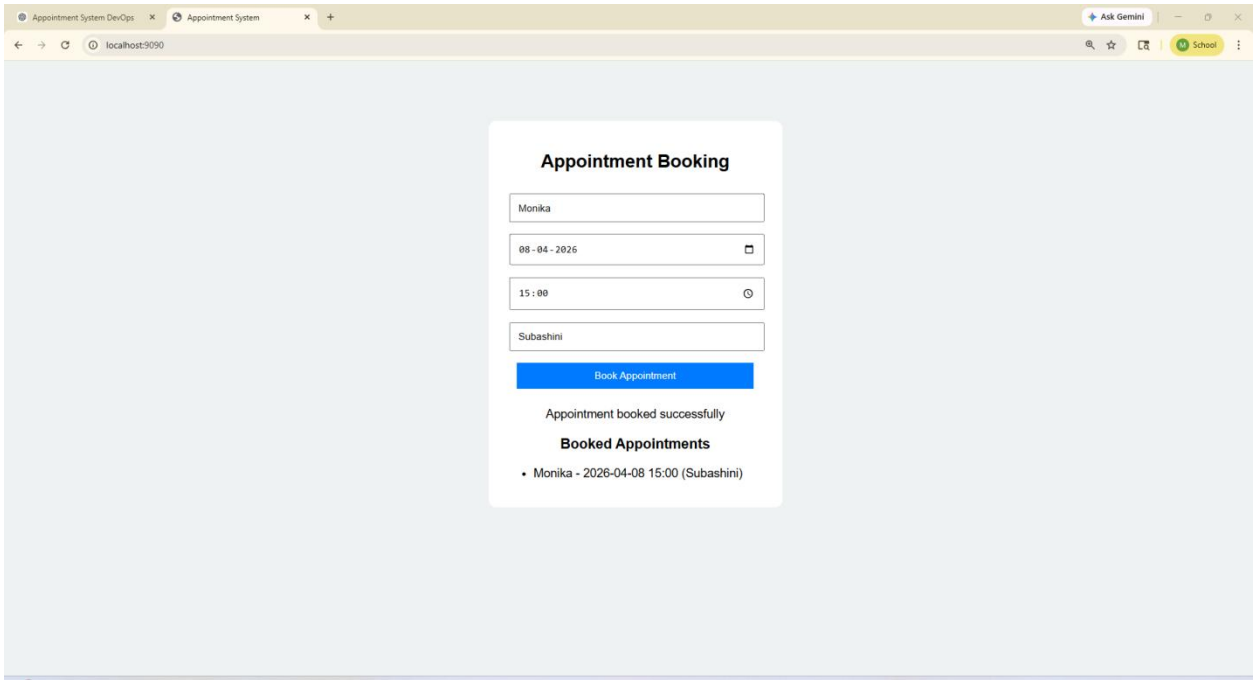

Version2: View – Show bookings

```
PS C:\Users\Monica\Downloads\appointment system> git checkout -b v2
Switched to a new branch 'v2'
PS C:\Users\Monica\Downloads\appointment system> git branch
  main
* v2
  version2
PS C:\Users\Monica\Downloads\appointment system> git add .
PS C:\Users\Monica\Downloads\appointment system> git commit -m "version-2 with search,delete,updated UI"
[v2 148339d] version-2 with search,delete,updated UI
 4 files changed, 226 insertions(+)
 create mode 100644 deployment-v2.yaml
PS C:\Users\Monica\Downloads\appointment system> git push origin v2
>>
Enumerating objects: 13, done.
Counting objects: 100% (13/13), done.
Delta compression using up to 12 threads
Compressing objects: 100% (8/8), done.
Writing objects: 100% (13/13), 2.66 KiB | 545.00 KiB/s, done.
Total 13 (delta 1), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (1/1), done.
remote:
remote: Create a pull request for 'v2' on GitHub by visiting:
remote:      https://github.com/Monika-acn/Appointment-system123/pull/new/v2
remote:
To https://github.com/Monika-acn/Appointment-system123.git
 * [new branch]      v2 -> v2
```

Index.html:

```html
<!DOCTYPE html>
<html>
<head>
    <title>Appointment System V2</title>
    <link rel="stylesheet" href="/static/style.css">
</head>
<body>

<div class="container">
    <h2>Appointment Booking (V2)</h2>

    <form id="form">
        <input type="text" id="name" placeholder="Name" required>
        <input type="date" id="date" required>
        <input type="time" id="time" required>
        <input type="text" id="doctor" placeholder="Doctor">
        <button type="submit">Book</button>
    </form>

    <p id="message"></p>

    <input type="text" id="search" placeholder="Search by name">
    <button onclick="search()">Search</button>

    <h3>Appointments</h3>
    <table border="1" width="100%">
        <thead>
            <tr>
                <th>Name</th>
                <th>Date</th>
                <th>Time</th>
                <th>Doctor</th>
                <th>Action</th>
            </tr>
        </thead>
        <tbody id="table"></tbody>
    </table>
</div>

<script>
document.getElementById("form").addEventListener("submit", async (e) => {
    e.preventDefault();

    const data = {
        name: name.value,
        date: date.value,
        time: time.value,
        doctor: doctor.value
    };

    const res = await fetch('/book', {
        method: 'POST',
        headers: {'Content-Type': 'application/json'},
        body: JSON.stringify(data)
```

```
    });

    const result = await res.json();
    message.innerText = result.message;

    load();
});

async function load() {
    const res = await fetch('/all');
    const data = await res.json();

    const table = document.getElementById("table");
    table.innerHTML = "";

    data.forEach(a => {
        table.innerHTML += `
        <tr>
            <td>${a.name}</td>
            <td>${a.date}</td>
            <td>${a.time}</td>
            <td>${a.doctor}</td>
            <td><button onclick="deleteAppt(${a.id})">Delete</button></td>
        </tr>`;
    });
}

async function deleteAppt(id) {
    await fetch('/delete/' + id, { method: 'DELETE' });
    load();
}

async function search() {
    const name = document.getElementById("search").value;

    const res = await fetch('/search?name=' + name);
    const data = await res.json();

    const table = document.getElementById("table");
    table.innerHTML = "";

    data.forEach(a => {
        table.innerHTML += `
        <tr>
            <td>${a.name}</td>
            <td>${a.date}</td>
            <td>${a.time}</td>
            <td>${a.doctor}</td>
            <td><button onclick="deleteAppt(${a.id})">Delete</button></td>
        </tr>`;
    });
}

load();
</script>

</body>
</html>
```

Style.css:

```
body {
    font-family: Arial;
    background: #eef2f3;
}

.container {
    width: 500px;
    margin: auto;
    margin-top: 50px;
    padding: 20px;
    background: white;
    border-radius: 10px;
}

input, button {
    width: 90%;
    padding: 8px;
    margin: 5px;
}

button {
    background: green;
    color: white;
    border: none;
}

table {
    margin-top: 15px;
}
```

app.py:

```
from flask import Flask, request, jsonify, render_template

app = Flask(__name__)

appointments = []

@app.route('/')
def home():
    return render_template('index.html')

# Book Appointment
@app.route('/book', methods=['POST'])
def book():
    data = request.json

    if not data.get("name") or not data.get("date") or not data.get("time"):
        return jsonify({"message": "All fields are required"}), 400

    appointment = {
        "id": len(appointments) + 1,
        "name": data["name"],
        "date": data["date"],
        "time": data["time"],
```

```
        "doctor": data.get("doctor", "General")
    }

    appointments.append(appointment)

    return jsonify({"message": "Appointment booked successfully"})

# View All
@app.route('/all', methods=['GET'])
def view_all():
    return jsonify(appointments)

#   NEW: Search Appointment
@app.route('/search', methods=['GET'])
def search():
    name = request.args.get('name')

    result = [a for a in appointments if name.lower() in a["name"].lower()]
    return jsonify(result)

#   NEW: Delete Appointment
@app.route('/delete/<int:id>', methods=['DELETE'])
def delete(id):
    global appointments
    appointments = [a for a in appointments if a["id"] != id]
    return jsonify({"message": "Deleted successfully"})

if __name__ == '__main__':
    app.run(host='0.0.0.0', port=5000)
```

deployment2.yaml:

```yaml
apiVersion: apps/v1
kind: Deployment
metadata:
  name: appointment-v2
spec:
  replicas: 2
  selector:
    matchLabels:
      app: appointment-v2
  template:
    metadata:
      labels:
        app: appointment-v2
    spec:
      containers:
      - name: appointment-container
        image: monikaraju/appointment-v2:latest
        ports:
        - containerPort: 5000

---
apiVersion: v1
kind: Service
metadata:
  name: appointment-service-v2
```

```yaml
spec:
  type: NodePort
  selector:
    app: appointment-v2
  ports:
    - port: 80
      targetPort: 5000
      nodePort: 30002
```

jenkin pipeline script:

```
pipeline {

   agent any


   environment {

      IMAGE_NAME = "monikaraju/appointment-v2"

   }


   stages {


      stage('Clone Repository') {

         steps {

            git branch: 'v2', url: 'https://github.com/Monika-acn/Appointment-system123.git'

         }

      }


      stage('Build Docker Image') {

         steps {

            bat "docker build -t %IMAGE_NAME%:latest ."

         }
```

```
    }

    stage('Push to DockerHub') {
      steps {
        withCredentials([usernamePassword(credentialsId: 'dockerhub-creds', usernameVariable:
'DOCKER_USER', passwordVariable: 'DOCKER_PASS')]) {
          bat "docker login -u %DOCKER_USER% -p %DOCKER_PASS%"
          bat "docker push %IMAGE_NAME%:latest"
        }
      }
    }

    stage('Deploy to Kubernetes') {
      steps {
        withCredentials([file(credentialsId: 'kubeconfig', variable: 'KUBECONFIG')]) {
          bat '''
          echo ===== USING KUBECONFIG =====
          echo %KUBECONFIG%

          echo ===== CHECK CONTEXT =====
          kubectl config current-context

          echo ===== CHECK CLUSTER =====
          kubectl get nodes

          echo ===== APPLY DEPLOYMENT =====
```

```
                kubectl apply -f deployment-v2.yaml --validate=false


                echo ===== APPLY SERVICE =====
                kubectl apply -f deployment-v2.yaml --validate=false


                echo ===== VERIFY =====
                kubectl get pods
                kubectl get svc
                '''
            }
        }
    }
}


    post {
        success {
            echo "✅ Version 2 deployed successfully!"
        }
        failure {
            echo "❌ Pipeline failed! Check logs."
        }
    }
}
```

Actions Projects Wiki Security and quality Insights Settings

Appointment-system123 Public

Pin | Watch 0

main | 2 Branches | 0 Tags | Go to file t | Add file | Code

Monika-acn Update index.html — ce35ac5 · 1 hour ago — 12 Commits

static	Merge branch 'main' into v2	1 hour ago
templates	Update index.html	1 hour ago
Dockerfile	Update Dockerfile	yesterday
app.py	Merge branch 'main' into v2	1 hour ago
deployment-v2.yaml	version-2 with search,delete,updated UI	2 hours ago
deployment.yaml	Update deployment.yaml	yesterday
requirements.txt	Update requirements.txt	yesterday

README

localhost:8080/job/appointment-v2/2/stages/

Jenkins / appointment-v2 / #2 / Stages

#2 — Rerun

Started by Monika · Started 1 hr 44 min ago · Queued 0 ms · Took 30 sec · Changes

Graph

Start → Clone Repository → Build Docker Image → Push to DockerHub → Deploy to Kubernetes → Post Actions → End

Search

- Clone Repository 2s
- Build Docker Image 11s
- Push to DockerHub 12s
- Deploy to Kubernetes 2s
- Post Actions 79ms

Post Actions — 79ms — Started 1h 44m ago — Jenkins

Version 2 deployed successfully! — 27ms

```
0 Version 2 deployed successfully!
```

Jenkins 2.541.1

localhost:8080/job/appointment-v2/

Jenkins / appointment-v2

- Status
- Changes
- Build Now
- Configure
- Delete Pipeline
- Stages
- Rename
- Pipeline Syntax

Builds

Filter /

Today

#2 18:29

#1 18:21

appointment-v2

Add description

Permalinks

- Last build (#2), 1 hr 45 min ago
- Last stable build (#2), 1 hr 45 min ago
- Last successful build (#2), 1 hr 45 min ago
- Last failed build (#1), 1 hr 53 min ago
- Last unsuccessful build (#1), 1 hr 53 min ago
- Last completed build (#2), 1 hr 45 min ago

localhost:8080/job/appointment-v2/2/console

Jenkins / appointment-v2 / #2

- Status
- Changes
- Console Output
- Edit Build Information
- Delete build '#2'
- Timings
- Git Build Data
- Pipeline Overview
- Restart from Stage
- Replay
- Pipeline Steps
- Workspaces
- Previous Build

Console

Download Copy View as plain text

```
Started by user Monika
[Pipeline] Start of Pipeline
[Pipeline] node
Running on Jenkins in C:\ProgramData\Jenkins\.jenkins\workspace\appointment-v2
[Pipeline] {
[Pipeline] withEnv
[Pipeline] {
[Pipeline] stage
[Pipeline] { (Clone Repository)
[Pipeline] git
The recommended git tool is: NONE
No credentials specified
 > git.exe rev-parse --resolve-git-dir C:\ProgramData\Jenkins\.jenkins\workspace\appointment-v2\.git # timeout=10
Fetching changes from the remote Git repository
 > git.exe config remote.origin.url https://github.com/Monika-acn/Appointment-system123.git # timeout=10
Fetching upstream changes from https://github.com/Monika-acn/Appointment-system123.git
 > git.exe --version # timeout=10
 > git --version # 'git version 2.52.0.windows.1'
 > git.exe fetch --tags --force --progress -- https://github.com/Monika-acn/Appointment-system123.git +refs/heads/*:refs/remotes/origin/* # timeout=10
 > git.exe rev-parse "refs/remotes/origin/v2^{commit}" # timeout=10
Checking out Revision 2283977b10f0de1123c4a4e33b8916b8558b7ede (refs/remotes/origin/v2)
 > git.exe config core.sparsecheckout # timeout=10
 > git.exe checkout -f 2283977b10f0de1123c4a4e33b8916b8558b7ede # timeout=10
 > git.exe branch -a -v --no-abbrev # timeout=10
 > git.exe branch -D v2 # timeout=10
 > git.exe checkout -b v2 2283977b10f0de1123c4a4e33b8916b8558b7ede # timeout=10
Commit message: "Merge branch 'main' into v2"
 > git.exe rev-list --no-walk 148339d57f9fbd787c2cea450480856a47e84be9 # timeout=10
[Pipeline] }
[Pipeline] // stage
[Pipeline] stage
```

Jenkins / appointment-v2 / #2

```
deployment.apps/appointment-v2 unchanged
service/appointment-service-v2 unchanged

C:\ProgramData\Jenkins\.jenkins\workspace\appointment-v2>echo ===== VERIFY =====
===== VERIFY =====

C:\ProgramData\Jenkins\.jenkins\workspace\appointment-v2>kubectl get pods
NAME                                READY   STATUS              RESTARTS      AGE
appointment-v1-754b554898-ng6sp     1/1     Running             1 (19m ago)   21h
appointment-v1-754b554898-nknd4     1/1     Running             1 (19m ago)   21h
appointment-v2-795c844cfd-9gkxb     0/1     ContainerCreating   0             1s
appointment-v2-795c844cfd-q9z69     0/1     ContainerCreating   0             1s

C:\ProgramData\Jenkins\.jenkins\workspace\appointment-v2>kubectl get svc
NAME                    TYPE        CLUSTER-IP      EXTERNAL-IP   PORT(S)        AGE
appointment-service-v1  NodePort    10.96.218.219   <none>        80:30001/TCP   21h
appointment-service-v2  NodePort    10.96.250.158   <none>        80:30002/TCP   1s
kubernetes              ClusterIP   10.96.0.1       <none>        443/TCP        21h
[Pipeline] }
[Pipeline] // withCredentials
[Pipeline] }
[Pipeline] // stage
[Pipeline] stage
[Pipeline] { (Declarative: Post Actions)
[Pipeline] echo
✅ Version 2 deployed successfully!
[Pipeline] }
[Pipeline] // stage
[Pipeline] }
[Pipeline] // withEnv
[Pipeline] }
[Pipeline] // node
[Pipeline] End of Pipeline
Finished: SUCCESS
```

Appointment Booking (V2)

Monika

09-04-2026

22:19

Premkumar

Book

Search by name

Search

Appointments

Name	Date	Time	Doctor	Action

VERSION 3: Cancel – Remove appointment

App.py:

```
from flask import Flask, request, jsonify, render_template

app = Flask(__name__)

appointments = []
id_counter = [1]

@app.route('/')
def home():
    return render_template('index.html')

# V1: Book Appointment
@app.route('/book', methods=['POST'])
def book():
    data = request.json
    if not data.get("name") or not data.get("date") or not data.get("time"):
        return jsonify({"success": False, "message": "Name, date and time are required."}),
400

    appointment = {
        "id": id_counter[0],
        "name": data["name"],
        "date": data["date"],
        "time": data["time"],
        "doctor": data.get("doctor", "General"),
        "reason": data.get("reason", ""),
        "status": "Confirmed"
    }
    id_counter[0] += 1
    appointments.append(appointment)
    return jsonify({"success": True, "message": f"Appointment booked successfully! ID:
{appointment['id']}"})

# V2: View All / Search
@app.route('/all', methods=['GET'])
def view_all():
    return jsonify(appointments)

@app.route('/search', methods=['GET'])
def search():
    name = request.args.get('name', '').lower()
    result = [a for a in appointments if name in a["name"].lower()]
    return jsonify(result)

# V3: Cancel Appointment (mark as cancelled, don't remove)
@app.route('/cancel/<int:appt_id>', methods=['PUT'])
def cancel(appt_id):
    for a in appointments:
        if a["id"] == appt_id:
            if a["status"] == "Cancelled":
```

```
                return jsonify({"success": False, "message": "Already cancelled."})
            a["status"] = "Cancelled"
            return jsonify({"success": True, "message": f"Appointment #{appt_id} cancelled
successfully."})
    return jsonify({"success": False, "message": "Appointment not found."}), 404

# V3: Delete Appointment (hard delete)
@app.route('/delete/<int:appt_id>', methods=['DELETE'])
def delete(appt_id):
    global appointments
    before = len(appointments)
    appointments = [a for a in appointments if a["id"] != appt_id]
    if len(appointments) < before:
        return jsonify({"success": True, "message": "Appointment deleted."})
    return jsonify({"success": False, "message": "Appointment not found."}), 404

# Stats endpoint for dashboard
@app.route('/stats', methods=['GET'])
def stats():
    total = len(appointments)
    confirmed = sum(1 for a in appointments if a["status"] == "Confirmed")
    cancelled = sum(1 for a in appointments if a["status"] == "Cancelled")
    return jsonify({"total": total, "confirmed": confirmed, "cancelled": cancelled})

if __name__ == '__main__':
    app.run(host='0.0.0.0', port=5000)
```

style.css:

```
* {
  box-sizing: border-box;
  margin: 0;
  padding: 0;
}

body {
  font-family: 'Segoe UI', Arial, sans-serif;
  background: #f0f4f8;
  color: #333;
  min-height: 100vh;
}

/* ── Header ──────────────────────────── */
.header {
  background: linear-gradient(135deg, #1a73e8, #0d47a1);
  color: white;
  padding: 24px 20px;
  text-align: center;
}
.header h1 { font-size: 28px; font-weight: 700; }
.header p  { font-size: 14px; opacity: 0.85; margin-top: 4px; }
.badge-v3  {
```

```
  background: #ff6f00;
  font-size: 13px;
  padding: 2px 10px;
  border-radius: 20px;
  margin-left: 8px;
  vertical-align: middle;
}

/* ── Stats Bar ──────────────────────────── */
.stats-bar {
  display: flex;
  justify-content: center;
  gap: 16px;
  padding: 16px 20px;
  background: white;
  border-bottom: 1px solid #e0e0e0;
  flex-wrap: wrap;
}
.stat-card {
  display: flex;
  flex-direction: column;
  align-items: center;
  background: #f8f9fa;
  border-radius: 10px;
  padding: 12px 28px;
  border: 1px solid #e0e0e0;
  min-width: 100px;
}
.stat-num { font-size: 28px; font-weight: 700; color: #1a73e8; }
.stat-label { font-size: 12px; color: #777; margin-top: 2px; }
.confirmed-card .stat-num { color: #2e7d32; }
.cancelled-card .stat-num  { color: #c62828; }

/* ── Main Container ─────────────────────── */
.container {
  max-width: 900px;
  margin: 28px auto;
  background: white;
  border-radius: 14px;
  box-shadow: 0 4px 20px rgba(0,0,0,0.08);
  overflow: hidden;
}

/* ── Tabs ───────────────────────────────── */
.tabs {
  display: flex;
  background: #f5f7fa;
  border-bottom: 2px solid #e0e0e0;
}
.tab {
  flex: 1;
  padding: 14px;
  border: none;
  background: transparent;
```

```
  font-size: 15px;
  font-weight: 600;
  color: #777;
  cursor: pointer;
  transition: all 0.2s;
  letter-spacing: 0.3px;
}
.tab:hover  { background: #e8edf5; color: #1a73e8; }
.tab.active { background: white; color: #1a73e8; border-bottom: 3px solid #1a73e8; }

/* ── Tab Panels ──────────────────────────── */
.tab-panel { display: none; padding: 28px; }
.tab-panel.active { display: block; }
.panel-title { font-size: 20px; font-weight: 700; color: #1a1a2e; margin-bottom: 20px; }

/* ── Form ────────────────────────────────── */
.form-row {
  display: grid;
  grid-template-columns: 1fr 1fr;
  gap: 16px;
  margin-bottom: 16px;
}
.form-group { display: flex; flex-direction: column; }
.form-group.full { margin-bottom: 16px; }
.form-group label {
  font-size: 13px;
  font-weight: 600;
  color: #555;
  margin-bottom: 6px;
}
.form-group input,
.form-group textarea,
#cancel-id {
  padding: 10px 14px;
  border: 1.5px solid #d0d7de;
  border-radius: 8px;
  font-size: 14px;
  outline: none;
  transition: border 0.2s;
  font-family: inherit;
  background: #fafafa;
  width: 100%;
}
.form-group input:focus,
.form-group textarea:focus,
#cancel-id:focus {
  border-color: #1a73e8;
  background: white;
}
.form-group textarea { resize: none; }

/* ── Buttons ─────────────────────────────── */
.btn {
  padding: 11px 22px;
```

```
  border: none;
  border-radius: 8px;
  font-size: 14px;
  font-weight: 600;
  cursor: pointer;
  transition: all 0.2s;
}
.btn-primary  { background: #1a73e8; color: white; width: 100%; margin-top: 8px; }
.btn-primary:hover  { background: #1557b0; }
.btn-outline  { background: white; color: #1a73e8; border: 1.5px solid #1a73e8; }
.btn-outline:hover  { background: #e8f0fe; }
.btn-danger   { background: #e53935; color: white; }
.btn-danger:hover   { background: #b71c1c; }

/* ── Search Bar ──────────────────────────── */
.search-bar {
  display: flex;
  gap: 10px;
  margin-bottom: 18px;
}
.search-bar input {
  flex: 1;
  padding: 10px 14px;
  border: 1.5px solid #d0d7de;
  border-radius: 8px;
  font-size: 14px;
  outline: none;
}
.search-bar input:focus { border-color: #1a73e8; }

/* ── Table ─────────────────────────────── */
.table-wrap { overflow-x: auto; }
table {
  width: 100%;
  border-collapse: collapse;
  font-size: 14px;
}
thead tr { background: #e8f0fe; }
th {
  padding: 12px 14px;
  text-align: left;
  font-size: 12px;
  font-weight: 700;
  color: #1a73e8;
  text-transform: uppercase;
  letter-spacing: 0.5px;
}
td {
  padding: 11px 14px;
  border-bottom: 1px solid #f0f0f0;
}
tr:hover td { background: #f9fbff; }
.row-cancelled td { color: #aaa; }
```

```
/* ── Status Badges ──────────────────────── */
.status-badge {
  display: inline-block;
  padding: 3px 12px;
  border-radius: 20px;
  font-size: 12px;
  font-weight: 600;
}
.status-confirmed { background: #e8f5e9; color: #2e7d32; }
.status-cancelled { background: #ffebee; color: #c62828; }

/* ── Small Delete Button ─────────────────── */
.btn-sm {
  padding: 5px 12px;
  font-size: 12px;
  border-radius: 6px;
  border: none;
  cursor: pointer;
  font-weight: 600;
}
.btn-del { background: #ffebee; color: #c62828; }
.btn-del:hover { background: #c62828; color: white; }

/* ── Cancel Tab ──────────────────────────── */
.sub-text { font-size: 13px; color: #666; margin-bottom: 18px; }
.cancel-box {
  display: flex;
  gap: 12px;
  align-items: center;
  margin-bottom: 20px;
}
#cancel-id { flex: 1; }
.divider { height: 1px; background: #eee; margin: 20px 0; }
.sub-heading { font-size: 15px; font-weight: 600; color: #444; margin-bottom: 14px; }
.cancel-list { display: flex; flex-direction: column; gap: 10px; }
.cancel-card {
  display: flex;
  justify-content: space-between;
  align-items: center;
  padding: 14px 18px;
  background: #fafafa;
  border: 1.5px solid #e8e8e8;
  border-radius: 10px;
  gap: 12px;
}
.cancel-card-info {
  display: flex;
  flex-direction: column;
  gap: 4px;
}
.cancel-card-info strong { font-size: 15px; color: #1a1a1a; }
.cancel-card-info span   { font-size: 13px; color: #777; }
.btn-sm-cancel { padding: 8px 18px; font-size: 13px; white-space: nowrap; }
```

```
/* ── Toast ──────────────────────────── */
.toast {
  display: none;
  padding: 12px 20px;
  border-radius: 8px;
  font-size: 14px;
  font-weight: 500;
  margin-bottom: 18px;
  text-align: center;
}
.toast.show   { display: block; }
.toast.success { background: #e8f5e9; color: #2e7d32; border: 1px solid #a5d6a7; }
.toast.error   { background: #ffebee; color: #c62828; border: 1px solid #ef9a9a; }

/* ── Empty Message ──────────────────── */
.empty-msg {
  text-align: center;
  color: #aaa;
  padding: 30px;
  font-size: 14px;
}

/* ── Responsive ─────────────────────── */
@media (max-width: 600px) {
  .form-row { grid-template-columns: 1fr; }
  .cancel-box { flex-direction: column; }
  .cancel-card { flex-direction: column; align-items: flex-start; }
  .container { margin: 10px; border-radius: 10px; }
}
```

Index.html:

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8" />
  <meta name="viewport" content="width=device-width, initial-scale=1.0"/>
  <title>Appointment System V3</title>
  <link rel="stylesheet" href="/static/style.css" />
</head>
<body>

<div class="header">
  <div class="header-inner">
    <h1>&#128197; Appointment System <span class="badge-v3">V3</span></h1>
    <p>Book &bull; View &bull; Cancel</p>
  </div>
</div>

<!-- Stats Bar -->
<div class="stats-bar" id="stats-bar">
```

```
  <div class="stat-card">
    <span class="stat-num" id="stat-total">0</span>
    <span class="stat-label">Total</span>
  </div>
  <div class="stat-card confirmed-card">
    <span class="stat-num" id="stat-confirmed">0</span>
    <span class="stat-label">Confirmed</span>
  </div>
  <div class="stat-card cancelled-card">
    <span class="stat-num" id="stat-cancelled">0</span>
    <span class="stat-label">Cancelled</span>
  </div>
</div>

<div class="container">

  <!-- Tabs -->
  <div class="tabs">
    <button class="tab active" onclick="showTab('book', this)">&#128203; Book</button>
    <button class="tab" onclick="showTab('view', this)">&#128065; View</button>
    <button class="tab" onclick="showTab('cancel', this)">&#10060; Cancel</button>
  </div>

  <!-- Toast -->
  <div id="toast" class="toast"></div>

  <!-- ===== TAB: BOOK ===== -->
  <div id="tab-book" class="tab-panel active">
    <h2 class="panel-title">Schedule Appointment</h2>
    <form id="book-form">
      <div class="form-row">
        <div class="form-group">
          <label>Patient Name *</label>
          <input type="text" id="name" placeholder="e.g. Arjun Kumar" required />
        </div>
        <div class="form-group">
          <label>Doctor</label>
          <input type="text" id="doctor" placeholder="e.g. Dr. Priya" />
        </div>
      </div>
      <div class="form-row">
        <div class="form-group">
          <label>Date *</label>
          <input type="date" id="date" required />
        </div>
        <div class="form-group">
          <label>Time *</label>
          <input type="time" id="time" required />
        </div>
      </div>
      <div class="form-group full">
        <label>Reason / Notes</label>
        <textarea id="reason" placeholder="e.g. Regular checkup, Fever..."
rows="2"></textarea>
```

```
      </div>
      <button type="submit" class="btn btn-primary">&#10003; Confirm Booking</button>
    </form>
  </div>

  <!-- ===== TAB: VIEW ===== -->
  <div id="tab-view" class="tab-panel">
    <h2 class="panel-title">All Appointments</h2>
    <div class="search-bar">
      <input type="text" id="search-input" placeholder="&#128269; Search by patient name..."
oninput="searchAppointments()" />
      <button class="btn btn-outline" onclick="loadAll()">Show All</button>
    </div>
    <div id="view-content">
      <p class="empty-msg">Click the View tab to load appointments.</p>
    </div>
  </div>

  <!-- ===== TAB: CANCEL ===== -->
  <div id="tab-cancel" class="tab-panel">
    <h2 class="panel-title">Cancel Appointment</h2>
    <p class="sub-text">Enter the Appointment ID to cancel it. The record stays in history
marked as "Cancelled".</p>
    <div class="cancel-box">
      <input type="number" id="cancel-id" placeholder="Enter Appointment ID" min="1" />
      <button class="btn btn-danger" onclick="cancelAppointment()">&#10060; Cancel
Appointment</button>
    </div>
    <div class="divider"></div>
    <h3 class="sub-heading">Or cancel directly from the list:</h3>
    <div id="cancel-content">
      <p class="empty-msg">Loading appointments...</p>
    </div>
  </div>

</div>

<script>
  // ── Tab switching ──────────────────────────────────────
  function showTab(name, btn) {
    document.querySelectorAll('.tab-panel').forEach(p => p.classList.remove('active'));
    document.querySelectorAll('.tab').forEach(t => t.classList.remove('active'));
    document.getElementById('tab-' + name).classList.add('active');
    btn.classList.add('active');
    if (name === 'view') loadAll();
    if (name === 'cancel') loadCancelList();
    loadStats();
  }

  // ── Toast ──────────────────────────────────────────────
  function showToast(msg, type = 'success') {
    const t = document.getElementById('toast');
    t.textContent = msg;
    t.className = 'toast show ' + type;
```

```
  setTimeout(() => t.className = 'toast', 3000);
}

// ─── Stats ──────────────────────────────────────────────
async function loadStats() {
  const res = await fetch('/stats');
  const data = await res.json();
  document.getElementById('stat-total').textContent = data.total;
  document.getElementById('stat-confirmed').textContent = data.confirmed;
  document.getElementById('stat-cancelled').textContent = data.cancelled;
}

// ─── BOOK ───────────────────────────────────────────────
document.getElementById('book-form').addEventListener('submit', async (e) => {
  e.preventDefault();
  const payload = {
    name: document.getElementById('name').value.trim(),
    date: document.getElementById('date').value,
    time: document.getElementById('time').value,
    doctor: document.getElementById('doctor').value.trim(),
    reason: document.getElementById('reason').value.trim()
  };
  const res = await fetch('/book', {
    method: 'POST',
    headers: { 'Content-Type': 'application/json' },
    body: JSON.stringify(payload)
  });
  const result = await res.json();
  if (result.success) {
    showToast(result.message, 'success');
    document.getElementById('book-form').reset();
    loadStats();
  } else {
    showToast(result.message, 'error');
  }
});

// ─── VIEW ───────────────────────────────────────────────
async function loadAll() {
  const res = await fetch('/all');
  const data = await res.json();
  renderTable(data, 'view-content', true);
  loadStats();
}

async function searchAppointments() {
  const name = document.getElementById('search-input').value.trim();
  if (!name) { loadAll(); return; }
  const res = await fetch('/search?name=' + encodeURIComponent(name));
  const data = await res.json();
  renderTable(data, 'view-content', true);
}

function renderTable(data, containerId, showDelete) {
```

```
    const container = document.getElementById(containerId);
    if (!data.length) {
      container.innerHTML = '<p class="empty-msg">No appointments found.</p>';
      return;
    }
    let html = `<div class="table-wrap"><table>
      <thead><tr>
        <th>ID</th><th>Name</th><th>Date</th><th>Time</th><th>Doctor</th><th>Reason</th><th>St
atus</th>
        ${showDelete ? '<th>Action</th>' : ''}
      </tr></thead><tbody>`;
    data.forEach(a => {
      const statusClass = a.status === 'Confirmed' ? 'status-confirmed' : 'status-cancelled';
      html += `<tr class="${a.status === 'Cancelled' ? 'row-cancelled' : ''}">
        <td>${a.id}</td>
        <td>${a.name}</td>
        <td>${a.date}</td>
        <td>${a.time}</td>
        <td>${a.doctor}</td>
        <td>${a.reason || '-'}</td>
        <td><span class="status-badge ${statusClass}">${a.status}</span></td>
        ${showDelete ? `<td><button class="btn-sm btn-del"
onclick="deleteAppt(${a.id})">Delete</button></td>` : ''}
      </tr>`;
    });
    html += '</tbody></table></div>';
    container.innerHTML = html;
  }

  async function deleteAppt(id) {
    if (!confirm('Permanently delete appointment #' + id + '?')) return;
    const res = await fetch('/delete/' + id, { method: 'DELETE' });
    const result = await res.json();
    showToast(result.message, result.success ? 'success' : 'error');
    loadAll();
  }

  // ── CANCEL ──────────────────────────────────────────
  async function loadCancelList() {
    const res = await fetch('/all');
    const data = await res.json();
    const container = document.getElementById('cancel-content');
    const active = data.filter(a => a.status === 'Confirmed');
    if (!active.length) {
      container.innerHTML = '<p class="empty-msg">No confirmed appointments to cancel.</p>';
      return;
    }
    let html = '<div class="cancel-list">';
    active.forEach(a => {
      html += `<div class="cancel-card">
        <div class="cancel-card-info">
          <strong>#${a.id} — ${a.name}</strong>
          <span>${a.date} at ${a.time} &bull; ${a.doctor}</span>
        </div>
```

```
        <button class="btn btn-danger btn-sm-cancel"
onclick="cancelById(${a.id})">Cancel</button>
      </div>`;
    });
    html += '</div>';
    container.innerHTML = html;
  }

  async function cancelAppointment() {
    const id = parseInt(document.getElementById('cancel-id').value);
    if (!id) { showToast('Please enter a valid Appointment ID.', 'error'); return; }
    await cancelById(id);
    document.getElementById('cancel-id').value = '';
  }

  async function cancelById(id) {
    const res = await fetch('/cancel/' + id, { method: 'PUT' });
    const result = await res.json();
    showToast(result.message, result.success ? 'success' : 'error');
    loadCancelList();
    loadStats();
  }

  // ─── Init ──────────────────────────────────────────────
  loadStats();
</script>
</body>
</html>
```

Deployment-v3.yaml:

```yaml
apiVersion: apps/v1
kind: Deployment
metadata:
  name: appointment-v3
  labels:
    app: appointment-v3
    version: v3
spec:
  replicas: 2
  selector:
    matchLabels:
      app: appointment-v3
  template:
    metadata:
      labels:
        app: appointment-v3
    spec:
      containers:
      - name: appointment-container
        image: monikaraju/appointment-v3:v3
        ports:
```

```yaml
        - containerPort: 5000
        resources:
          requests:
            memory: "64Mi"
            cpu: "100m"
          limits:
            memory: "128Mi"
            cpu: "200m"
---
apiVersion: v1
kind: Service
metadata:
  name: appointment-service-v3
spec:
  type: NodePort
  selector:
    app: appointment-v3
  ports:
    - port: 80
      targetPort: 5000
      nodePort: 30003        # Access via http://localhost:30003
```

Dockerfile:

```dockerfile
FROM python:3.9-slim

WORKDIR /app

COPY requirements.txt .
RUN pip install --no-cache-dir -r requirements.txt

COPY . .

EXPOSE 5000
sss
CMD ["python", "app.py"]
```

```
PS C:\Users\Monica\Downloads\appointment system> git stash
Saved working directory and index state WIP on v2: 148339d version-2 with search,delete,updated UI
PS C:\Users\Monica\Downloads\appointment system> git checkout main
Switched to branch 'main'
Your branch is behind 'origin/main' by 11 commits, and can be fast-forwarded.
  (use "git pull" to update your local branch)
PS C:\Users\Monica\Downloads\appointment system> git checkout -b v3
```

```
PS C:\Users\Monica\Downloads\appointment system> git add .
PS C:\Users\Monica\Downloads\appointment system> git commit -m "feat: V3 - Cancel appointment feature"
[v3 dd2cf43] feat: V3 - Cancel appointment feature
 7 files changed, 686 insertions(+)
 create mode 100644 deployment-v3.yaml
PS C:\Users\Monica\Downloads\appointment system> git push origin v3
Enumerating objects: 20, done.
Counting objects: 100% (15/15), done.
Delta compression using up to 12 threads
Compressing objects: 100% (8/8), done.
Writing objects: 100% (11/11), 6.44 KiB | 2.15 MiB/s, done.
Total 11 (delta 1), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (1/1), done.
remote:
remote: Create a pull request for 'v3' on GitHub by visiting:
remote:      https://github.com/Monika-acn/Appointment-system123/pull/new/v3
remote:
To https://github.com/Monika-acn/Appointment-system123.git
 * [new branch]      v3 -> v3
```

GITHUB:

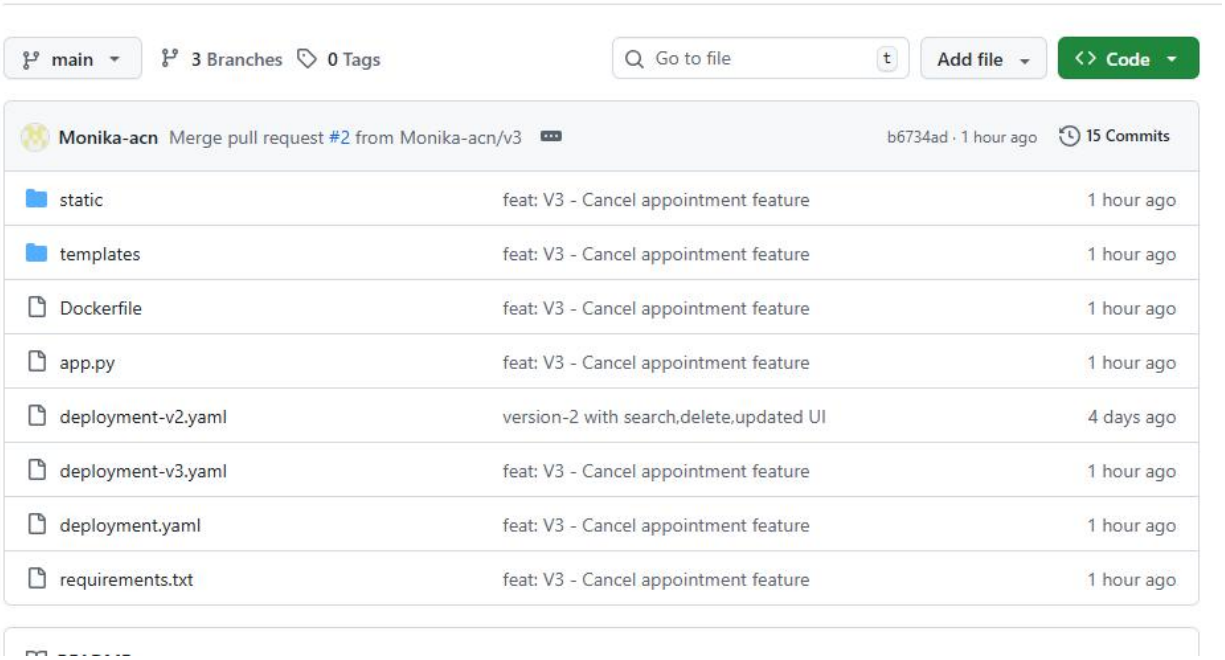

Jenkin:

Pipeline Script:

```
pipeline {

   agent any
```

```
    environment {
        IMAGE_NAME = "monikaraju/appointment-v3"
    }

    stages {

        stage('Clone Repository') {
            steps {
                git branch: 'v3', url: 'https://github.com/Monika-acn/Appointment-system123.git'
            }
        }

        stage('Build Docker Image') {
            steps {
                bat "docker build -t %IMAGE_NAME%:v3 ."
            }
        }

        stage('Push to DockerHub') {
            steps {
                withCredentials([usernamePassword(credentialsId: 'dockerhub-creds', usernameVariable:
'DOCKER_USER', passwordVariable: 'DOCKER_PASS')]) {
                    bat "docker login -u %DOCKER_USER% -p %DOCKER_PASS%"
                    bat "docker push %IMAGE_NAME%:v3"
                }
```

```
    }
}

stage('Deploy to Kubernetes') {
    steps {
        withCredentials([file(credentialsId: 'kubeconfig', variable: 'KUBECONFIG')]) {
            bat """
            echo ===== CHECK CONTEXT =====
            kubectl --kubeconfig="%KUBECONFIG%" config current-context

            echo ===== CHECK NODES =====
            kubectl --kubeconfig="%KUBECONFIG%" get nodes

            echo ===== APPLY DEPLOYMENT =====
            kubectl --kubeconfig="%KUBECONFIG%" apply -f deployment-v3.yaml --validate=false

            echo ===== VERIFY PODS =====
            kubectl --kubeconfig="%KUBECONFIG%" get pods

            echo ===== VERIFY SERVICES =====
            kubectl --kubeconfig="%KUBECONFIG%" get svc
            """
        }
    }
}
```

```
    }

    post {
        success {
            echo "✅ Version 3 deployed successfully! Access at http://localhost:30003"
        }
        failure {
            echo "❌ Pipeline failed! Check logs."
        }
    }
}
```

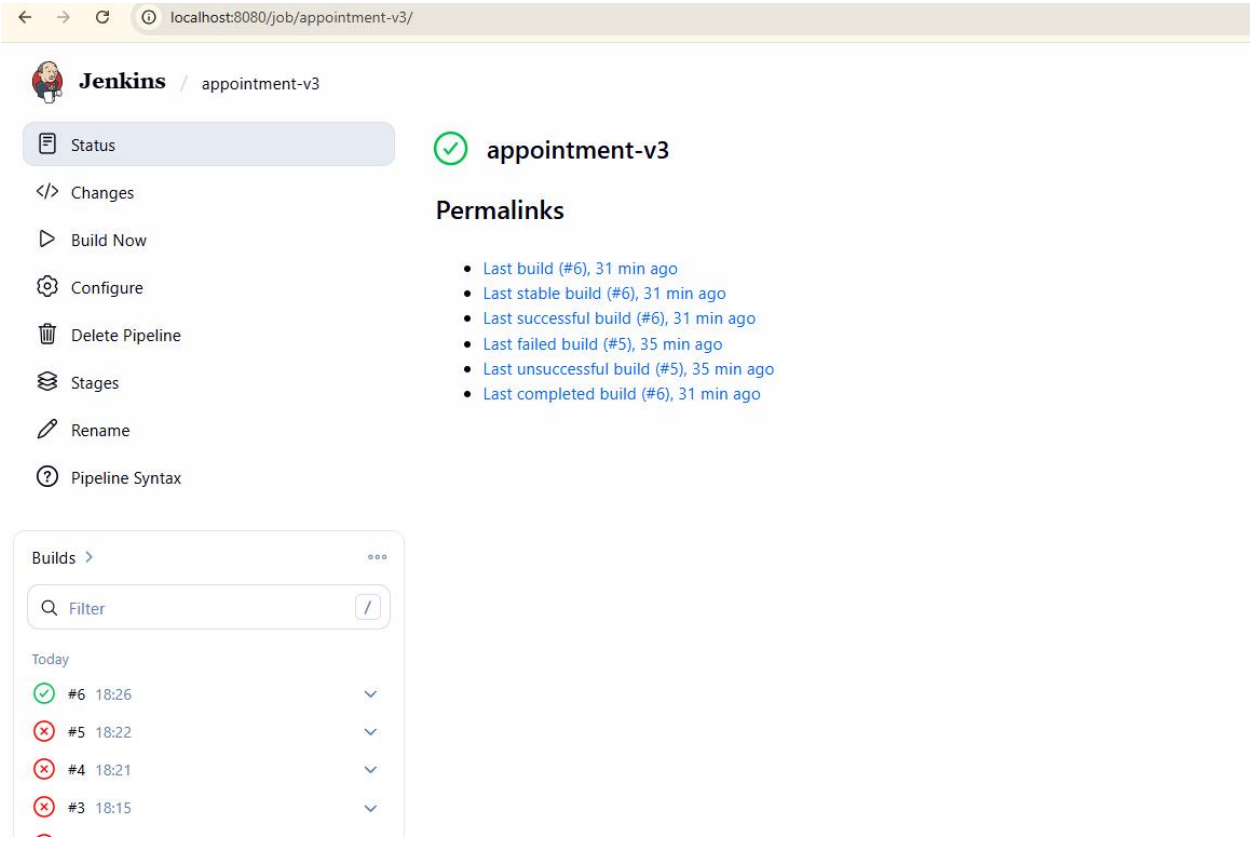

Console output:

Jenkins / appointment-v3 / #6

- Status
- Changes
- Console Output
- Edit Build Information
- Delete build '#6'
- Timings
- Git Build Data
- Pipeline Overview
- Replay
- Pipeline Steps
- Workspaces
- Previous Build

Console

Download | Copy | View as plain text

```
Started by user Monika
[Pipeline] Start of Pipeline
[Pipeline] node
Running on Jenkins in C:\ProgramData\Jenkins\.jenkins\workspace\appointment-v3
[Pipeline] {
[Pipeline] withEnv
[Pipeline] {
[Pipeline] stage
[Pipeline] { (Clone Repository)
[Pipeline] git
The recommended git tool is: NONE
No credentials specified
 > git.exe rev-parse --resolve-git-dir C:\ProgramData\Jenkins\.jenkins\workspace\appointment-v3\.git # timeout=10
Fetching changes from the remote Git repository
 > git.exe config remote.origin.url https://github.com/Monika-acn/Appointment-system123.git # timeout=10
Fetching upstream changes from https://github.com/Monika-acn/Appointment-system123.git
 > git.exe --version # timeout=10
 > git --version # 'git version 2.52.0.windows.1'
 > git.exe fetch --tags --force --progress -- https://github.com/Monika-acn/Appointment-system123.git +refs/heads/*:refs/remotes/origin/* # timeout=10
 > git.exe rev-parse "refs/remotes/origin/v3^{commit}" # timeout=10
Checking out Revision d3b12fffb7e6fdbb107500194ff7e35b8dfc2878 (refs/remotes/origin/v3)
 > git.exe config core.sparsecheckout # timeout=10
 > git.exe checkout -f d3b12fffb7e6fdbb107500194ff7e35b8dfc2878 # timeout=10
 > git.exe branch -a -v --no-abbrev # timeout=10
 > git.exe branch -D v3 # timeout=10
 > git.exe checkout -b v3 d3b12fffb7e6fdbb107500194ff7e35b8dfc2878 # timeout=10
Commit message: "Merge branch 'main' into v3"
 > git.exe rev-list --no-walk d3b12fffb7e6fdbb107500194ff7e35b8dfc2878 # timeout=10
[Pipeline] }
[Pipeline] // stage
[Pipeline] stage
```

Jenkins / appointment-v3 / #6

```
Masking supported pattern matches of %KUBECONFIG%
[Pipeline] {
[Pipeline] bat

C:\ProgramData\Jenkins\.jenkins\workspace\appointment-v3>echo ===== CHECK CONTEXT =====
===== CHECK CONTEXT =====

C:\ProgramData\Jenkins\.jenkins\workspace\appointment-v3>kubectl --kubeconfig="****" config current-context
docker-desktop

C:\ProgramData\Jenkins\.jenkins\workspace\appointment-v3>echo ===== CHECK NODES =====
===== CHECK NODES =====

C:\ProgramData\Jenkins\.jenkins\workspace\appointment-v3>kubectl --kubeconfig="****" get nodes
NAME                   STATUS   ROLES           AGE   VERSION
desktop-control-plane   Ready    control-plane   26m   v1.34.3

C:\ProgramData\Jenkins\.jenkins\workspace\appointment-v3>echo ===== APPLY DEPLOYMENT =====
===== APPLY DEPLOYMENT =====

C:\ProgramData\Jenkins\.jenkins\workspace\appointment-v3>kubectl --kubeconfig="****" apply -f deployment-v3.yaml --validate=false
deployment.apps/appointment-v3 created
service/appointment-service-v3 created

C:\ProgramData\Jenkins\.jenkins\workspace\appointment-v3>echo ===== VERIFY PODS =====
===== VERIFY PODS =====

C:\ProgramData\Jenkins\.jenkins\workspace\appointment-v3>kubectl --kubeconfig="****" get pods
NAME                              READY   STATUS              RESTARTS   AGE
appointment-v3-7988fcdbb9-4nhp7   0/1     ContainerCreating   0          0s
appointment-v3-7988fcdbb9-75k8c   0/1     ContainerCreating   0          0s

C:\ProgramData\Jenkins\.jenkins\workspace\appointment-v3>echo ===== VERIFY SERVICES =====
===== VERIFY SERVICES =====
```

```
C:\ProgramData\Jenkins\.jenkins\workspace\appointment-v3>echo ===== VERIFY PODS =====
===== VERIFY PODS =====

C:\ProgramData\Jenkins\.jenkins\workspace\appointment-v3>kubectl --kubeconfig="****" get pods
NAME                              READY   STATUS              RESTARTS   AGE
appointment-v3-7988fcdbb9-4nhp7   0/1     ContainerCreating   0          0s
appointment-v3-7988fcdbb9-75k8c   0/1     ContainerCreating   0          0s

C:\ProgramData\Jenkins\.jenkins\workspace\appointment-v3>echo ===== VERIFY SERVICES =====
===== VERIFY SERVICES =====

C:\ProgramData\Jenkins\.jenkins\workspace\appointment-v3>kubectl --kubeconfig="****" get svc
NAME                    TYPE        CLUSTER-IP     EXTERNAL-IP   PORT(S)        AGE
appointment-service-v3  NodePort    10.96.232.56   <none>        80:30003/TCP   0s
kubernetes              ClusterIP   10.96.0.1      <none>        443/TCP        26m
[Pipeline] }
[Pipeline] // withCredentials
[Pipeline] }
[Pipeline] // stage
[Pipeline] stage
[Pipeline] { (Declarative: Post Actions)
[Pipeline] echo
✅ Version 3 deployed successfully! Access at http://localhost:30003
[Pipeline] }
[Pipeline] // stage
[Pipeline] }
[Pipeline] // withEnv
[Pipeline] }
[Pipeline] // node
[Pipeline] End of Pipeline
Finished: SUCCESS
```

Pipeline overview:

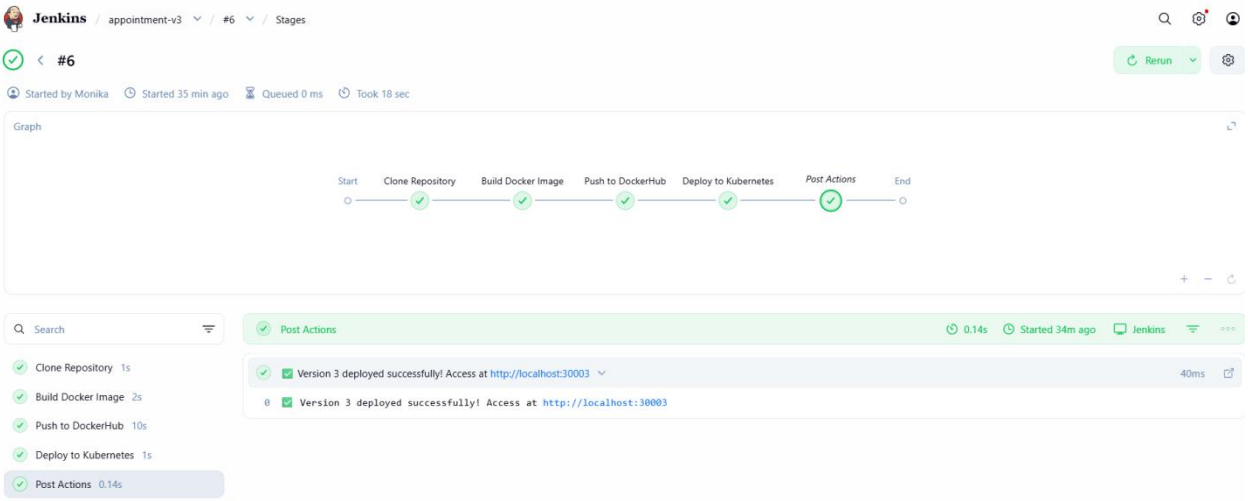

```
C:\Users\Monica>kubectl get pods
NAME                                READY   STATUS    RESTARTS   AGE
appointment-v3-7988fcdbb9-4nhp7     1/1     Running   0          84s
appointment-v3-7988fcdbb9-75k8c     1/1     Running   0          84s

C:\Users\Monica>kubectl get svc
NAME                    TYPE        CLUSTER-IP     EXTERNAL-IP   PORT(S)        AGE
appointment-service-v3  NodePort    10.96.232.56   <none>        80:30003/TCP   102s
kubernetes              ClusterIP   10.96.0.1      <none>        443/TCP        27m
```

BOOK APPOINTMENT:

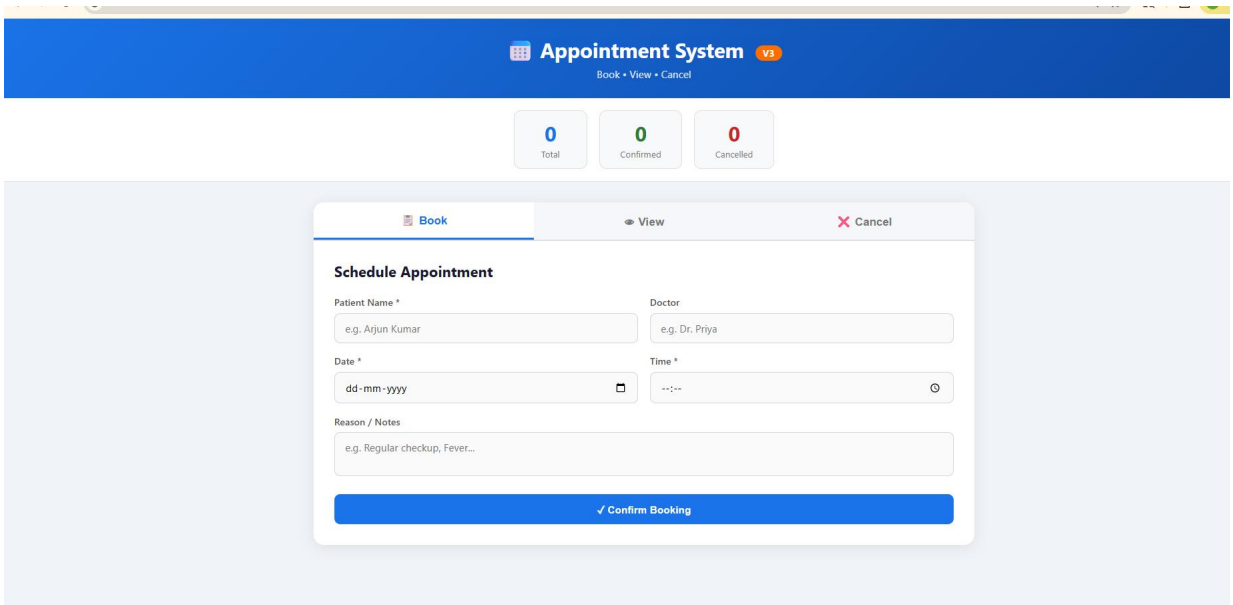

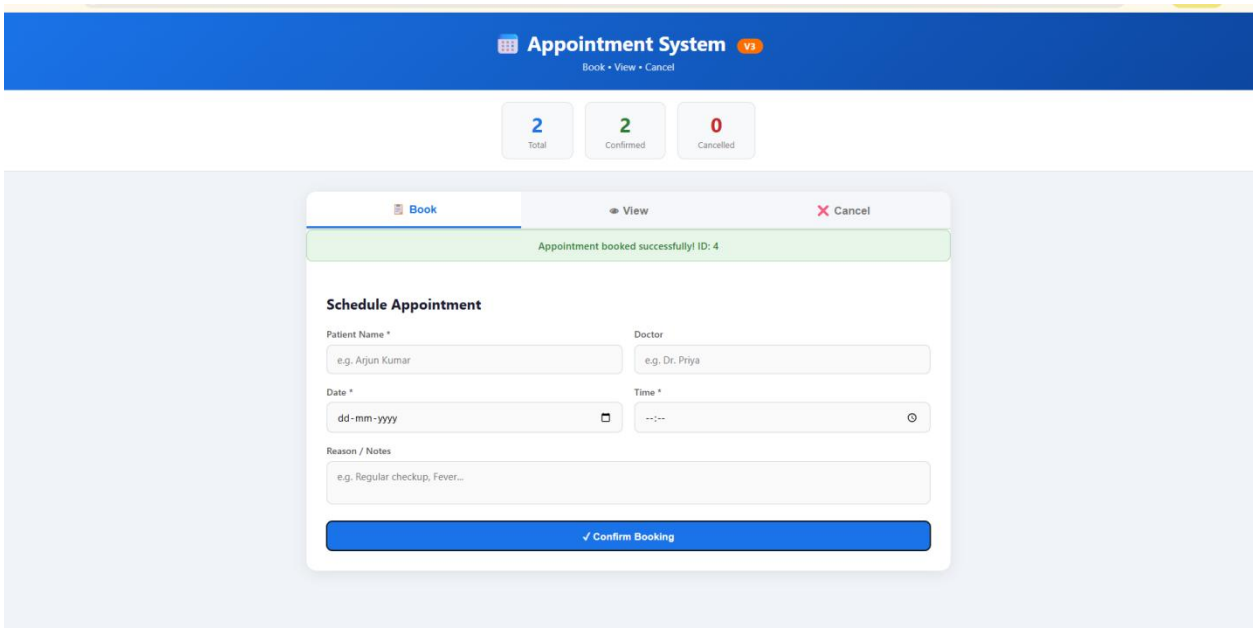

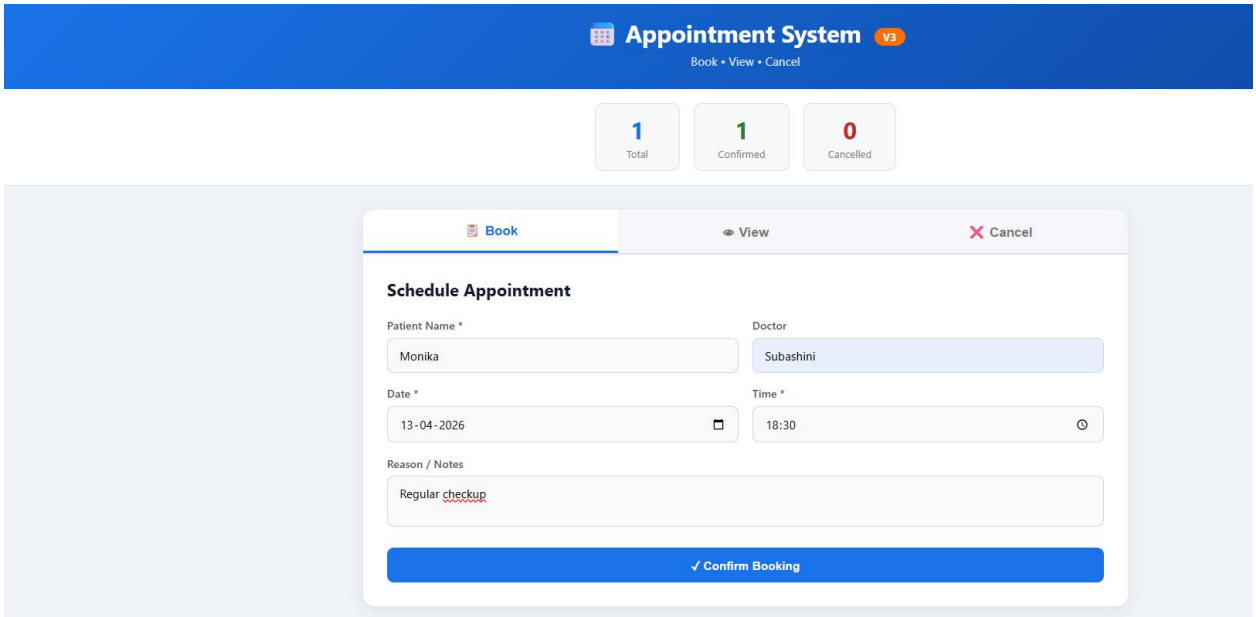

VIEW APPOINTMENT:

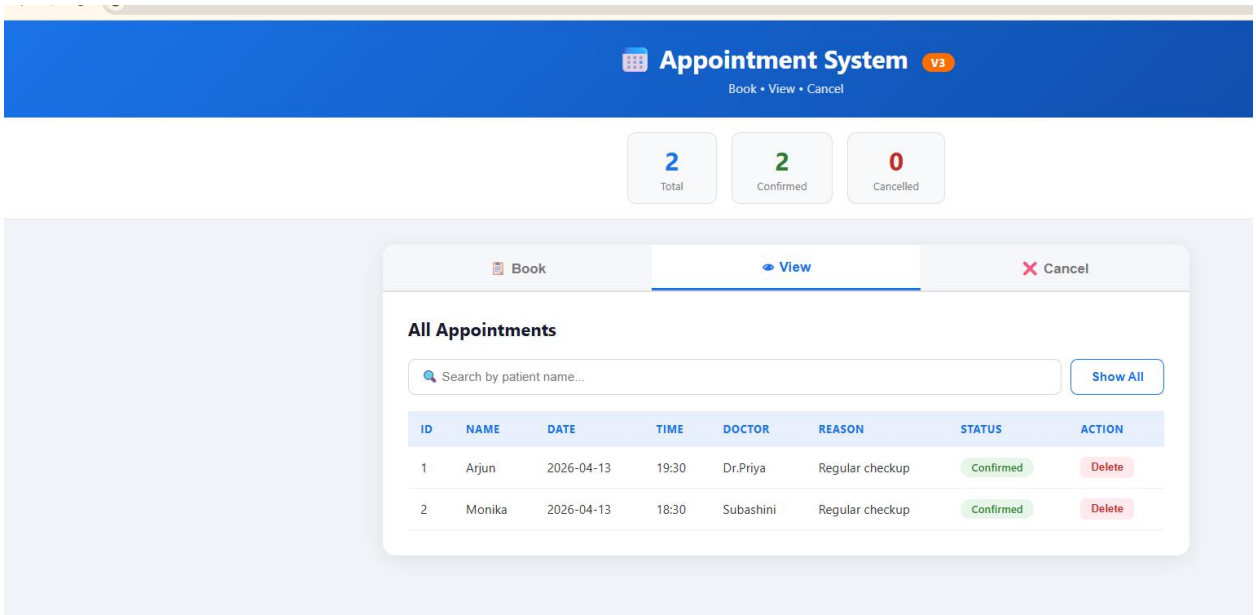

CANCEL-REMOVE APPOINTMENT:

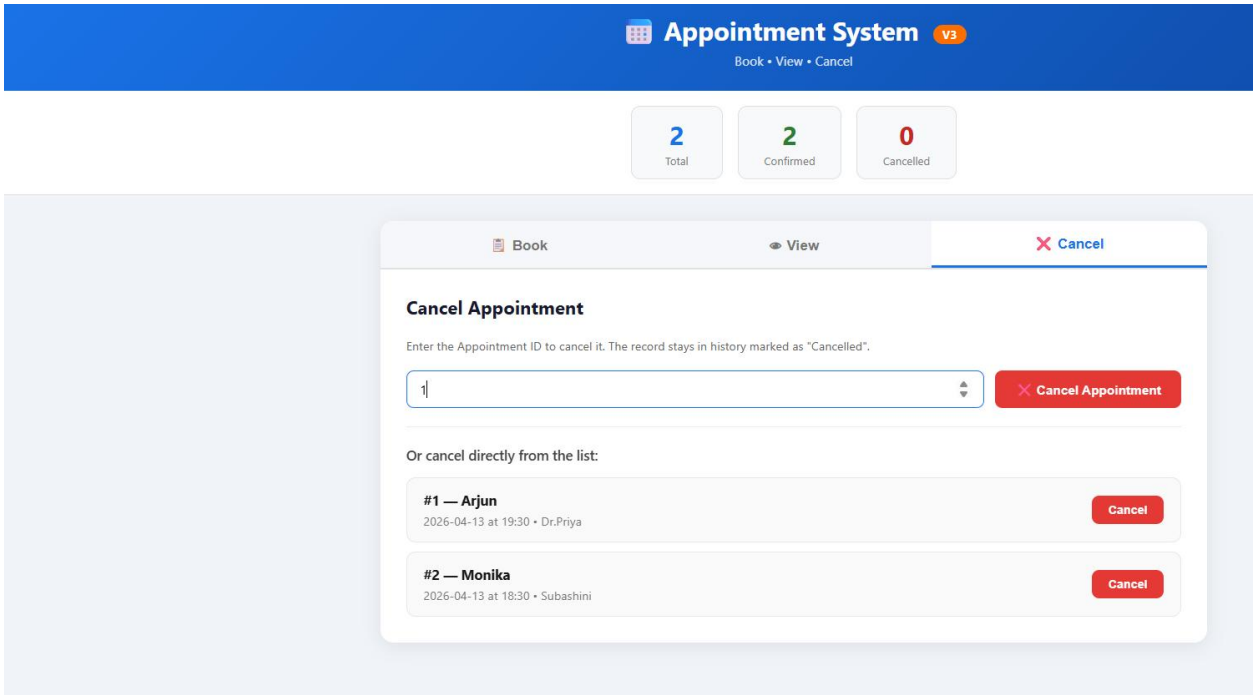

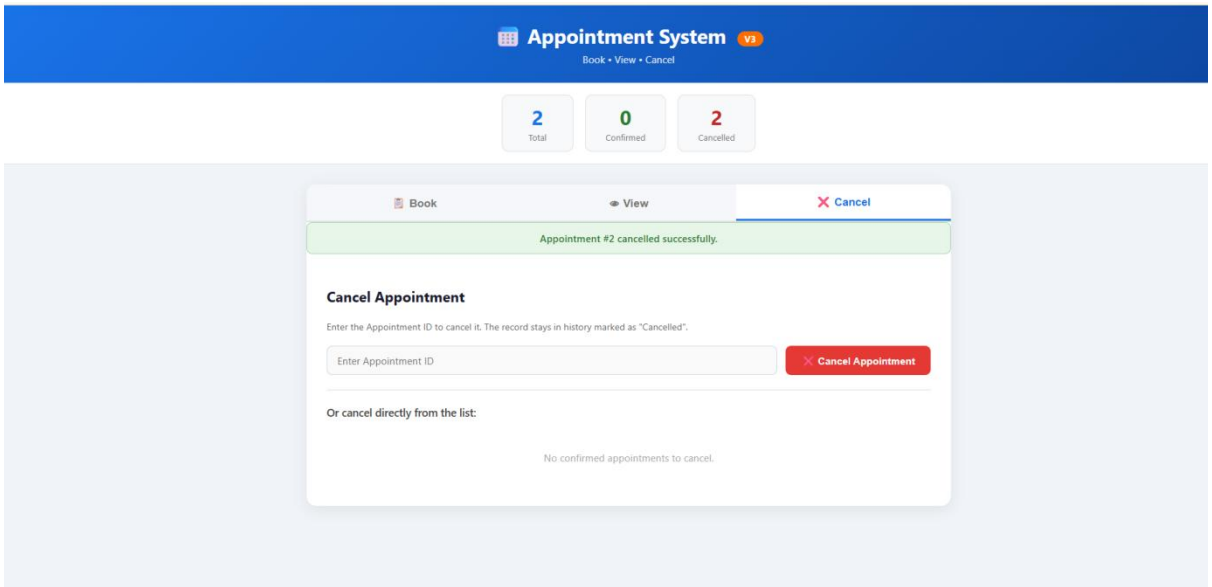

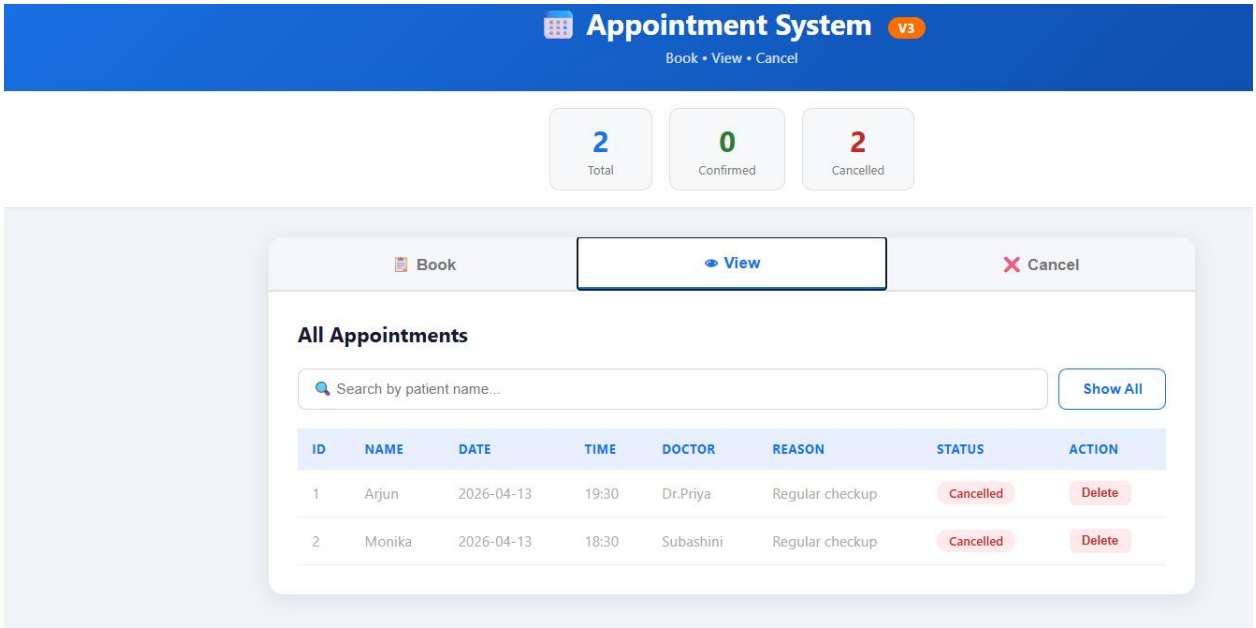
Appointment System
V3
Book • View • Cancel
2
Total
0
Confirmed
2
Cancelled
Book
View
Cancel
All Appointments
Search by patient name...
Show All
ID NAME DATE TIME DOCTOR REASON STATUS ACTION
1 Arjun 2026-04-13 19:30 Dr.Priya Regular checkup Cancelled Delete
2 Monika 2026-04-13 18:30 Subashini Regular checkup Cancelled Delete

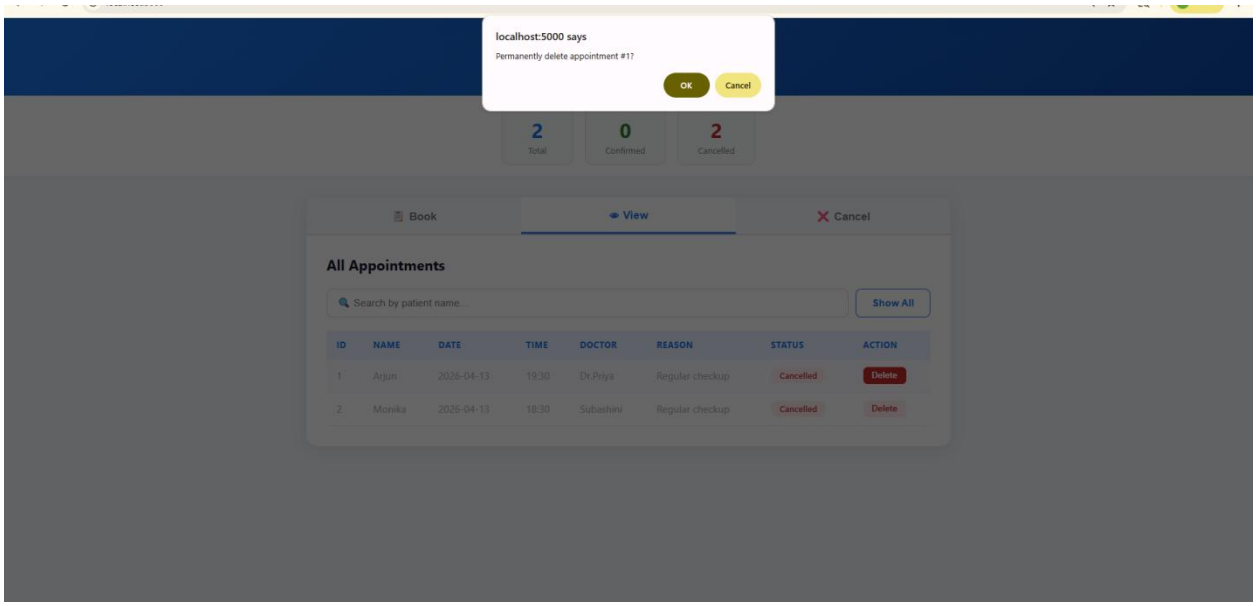
localhost:5000 says
Permanently delete appointment #1?
OK
Cancel

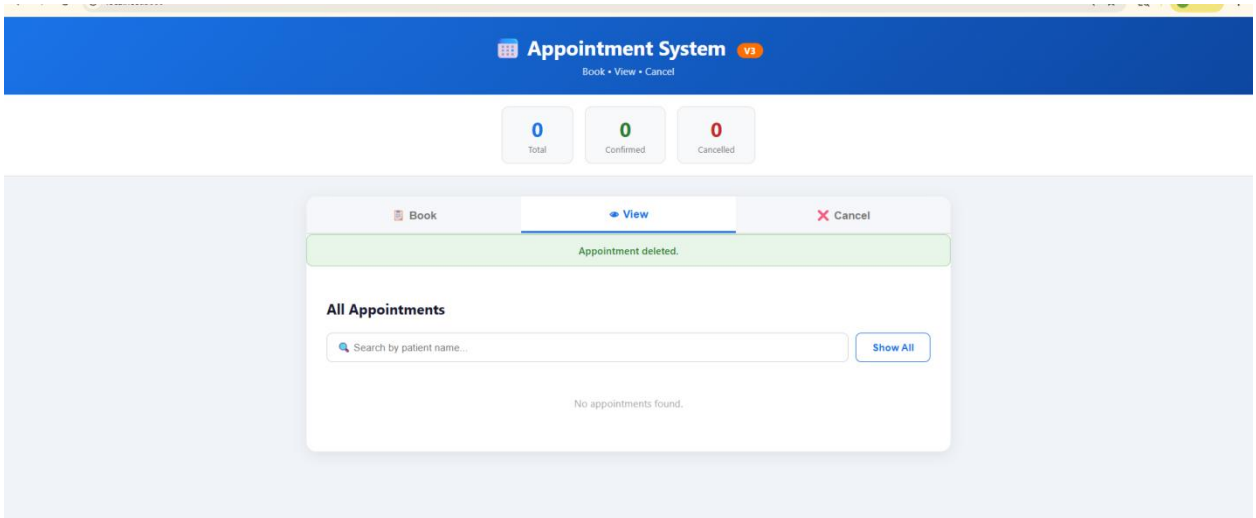
Appointment System
V3
Book • View • Cancel
0
Total
0
Confirmed
0
Cancelled
Book
View
Cancel
Appointment deleted.
All Appointments
Search by patient name...
Show All
No appointments found.