
covid | all 52 locations pooled | evaluation: Jun 2025 to Sep 2026 | loss in counts per 100k residents

op to bottom: the 10 best on this page (quantile loss after peak, all designs and ho

- Studentized median (base width)
- Studentized full base (level RMS)
- Fixed MultiQT
- Score experts: context vectors, no sharing (D)
- Score experts: context vectors, hard (D)
- Score experts: context vectors, blended (D)
- Score experts: soft switch, three signals, no sharing (B)
- Score experts: faster lambda in decline, no sharing (E)
- Score experts: one vector, no sharing (A)
- Score experts: faster lambda in decline (E)

in the trade-off plots of R/04.

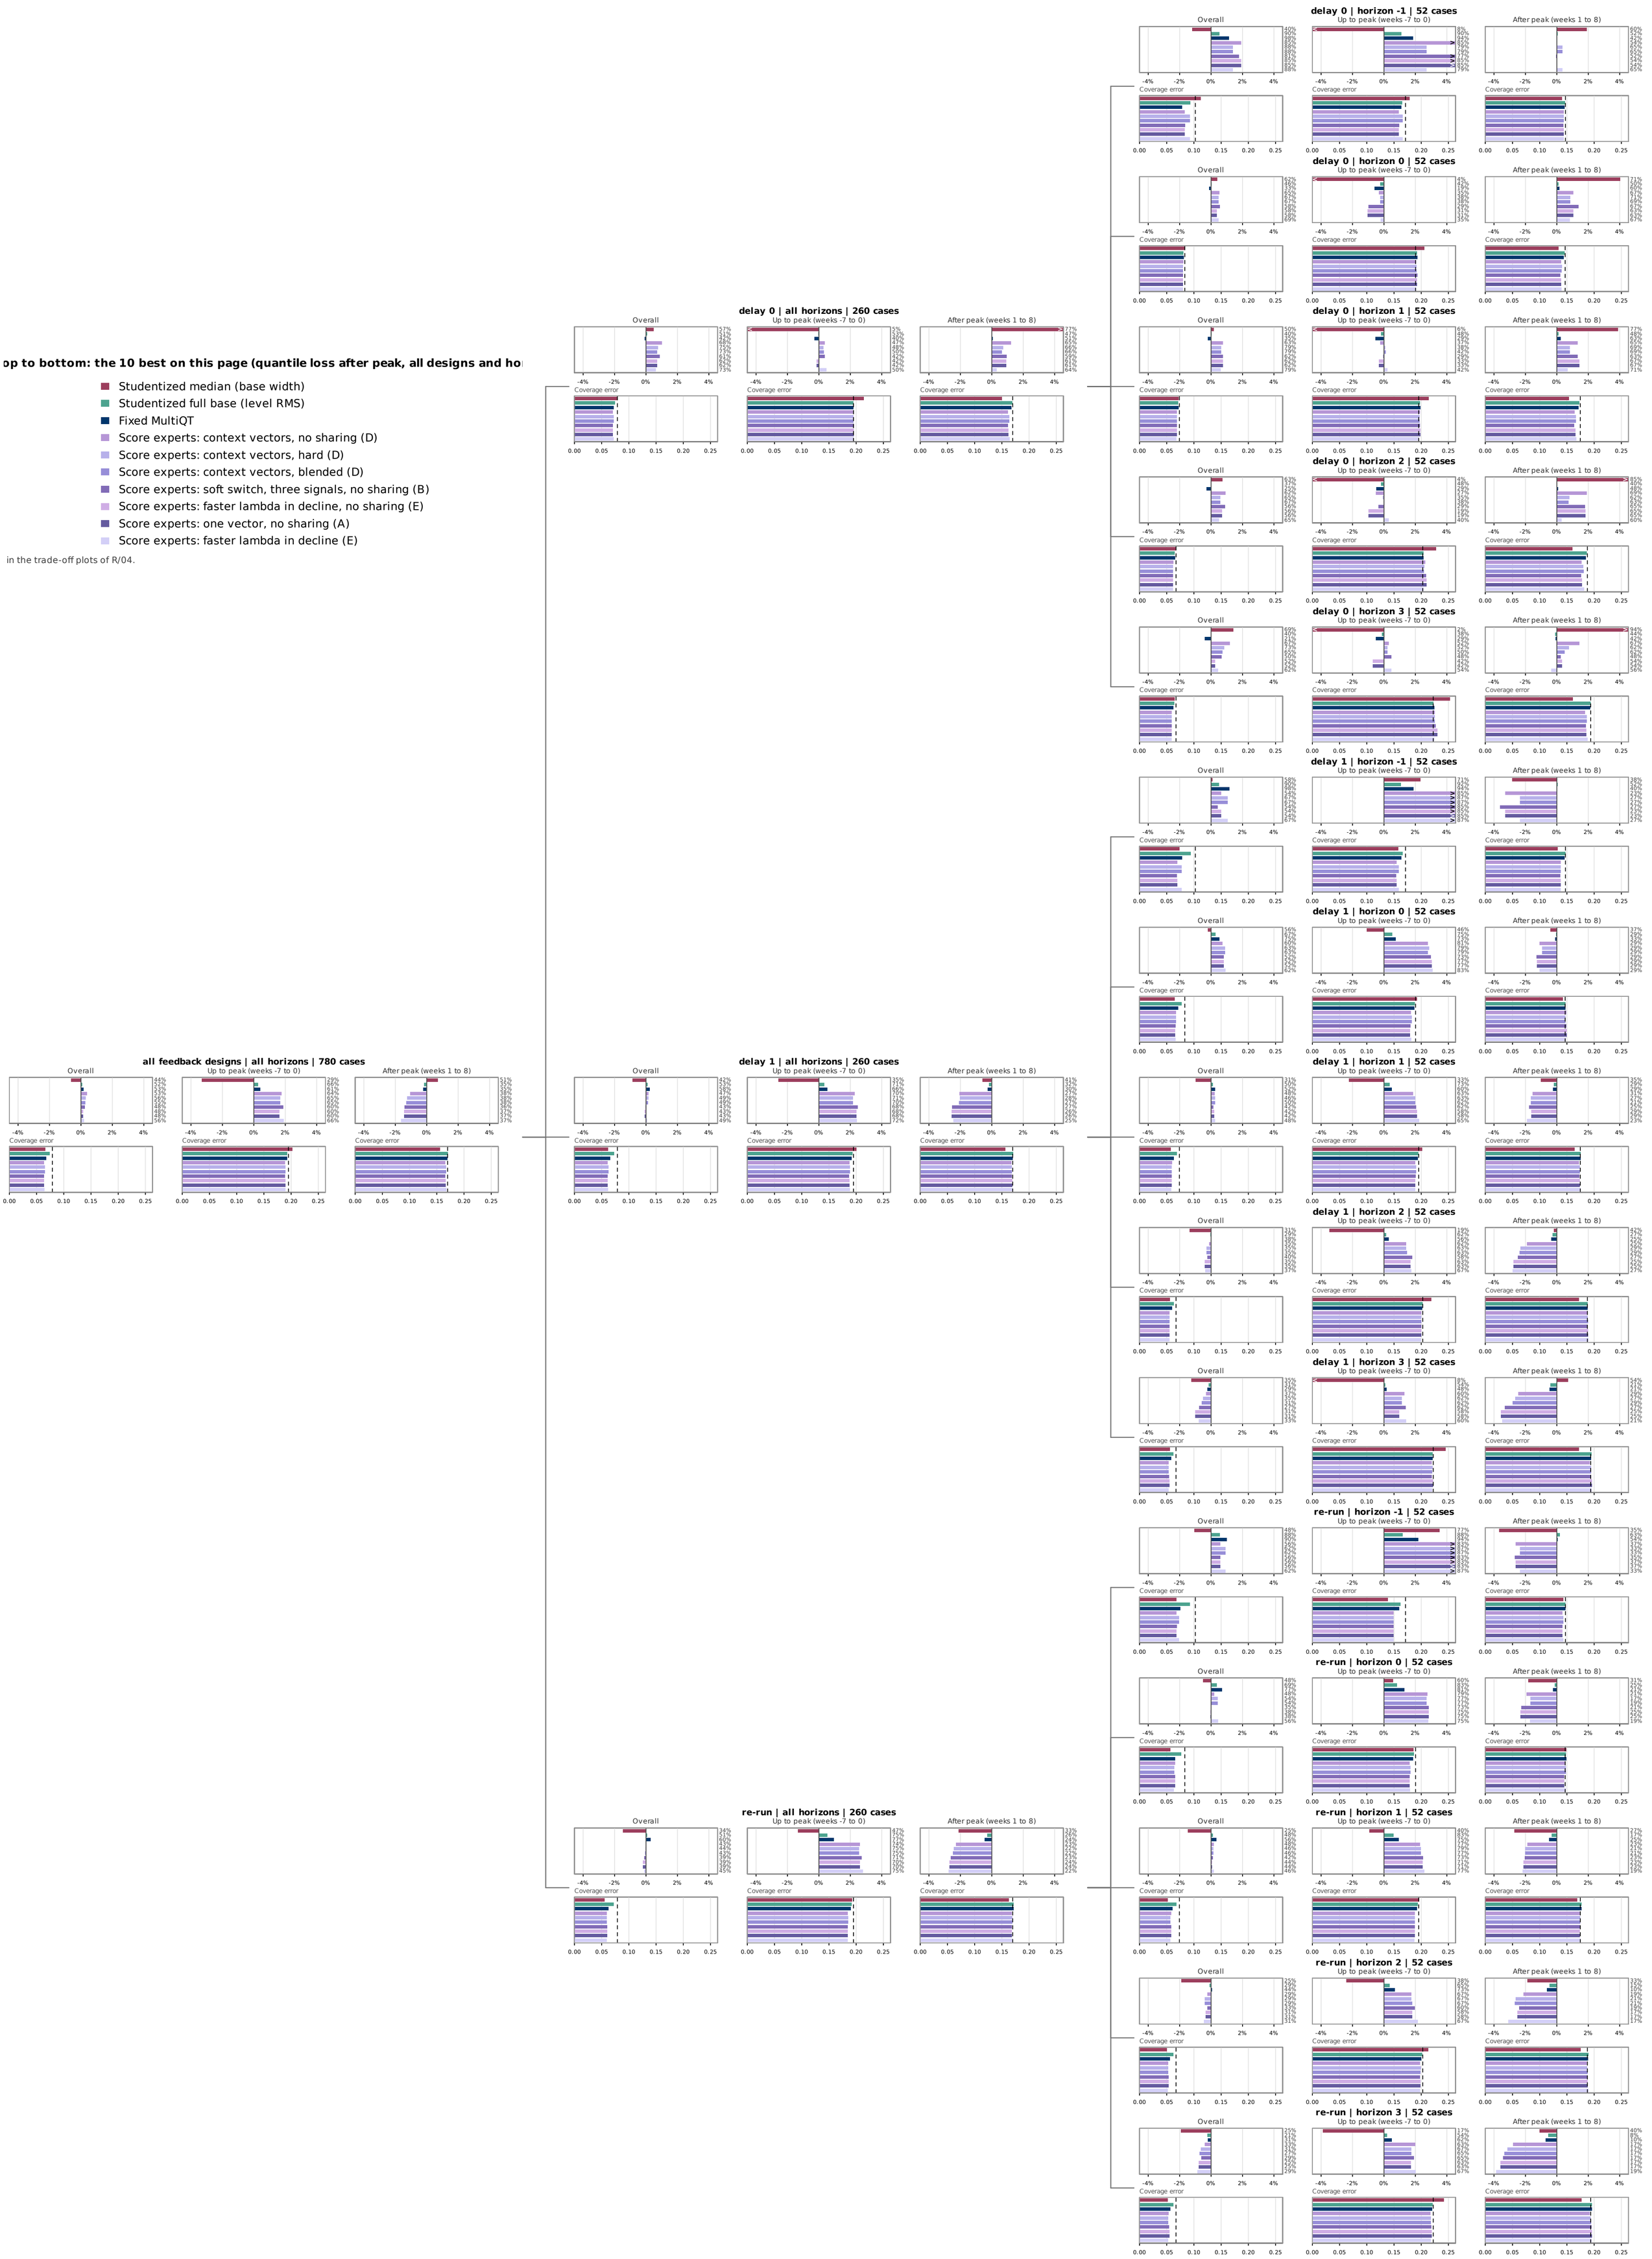


Loss bar: 100 * (1 - pooled loss / pooled loss of the original), pooled over the node's cases (location x horizon x feedback design), each case's mean loss weighted by its number of weeks; to the right: positive = smaller loss than the original.
Numbers right of each loss panel: share of the node's cases in which the method's loss is below the original's (nodes with at least 5 cases). Up to peak / after peak: the weeks around every local peak of the latest counts.
Below each loss panel: coverage error, the mean over the quantile levels of |coverage - alpha| over the weeks of the window, averaged over the cases of the node weighted by their weeks; dashed: the original forecasts.
Identical forecasts in every case of a design: Score experts: faster lambda in decline, no sharing (E) = Score experts: one vector, no sharing (A) (delay 0, delay 1, re-run)

covid | United States (US) | evaluation: Jun 2025 to Sep 2026 | loss in counts per 100k residents

op to bottom: the 10 best on this page (quantile loss after peak, all designs and ho

- Studentized median (base width)
- Studentized full base (level RMS)
- Score experts: soft switch, target signal, no sharing (C)
- Fixed MultiQT
- Score experts: soft switch, three signals, no sharing (B)
- Score experts: context vectors, no sharing (D)
- Score experts: faster lambda in decline, no sharing (E)
- Score experts: one vector, no sharing (A)
- Score experts: soft switch, three signals (B)
- Score experts: context vectors, hard (D)

in the trade-off plots of R/04.

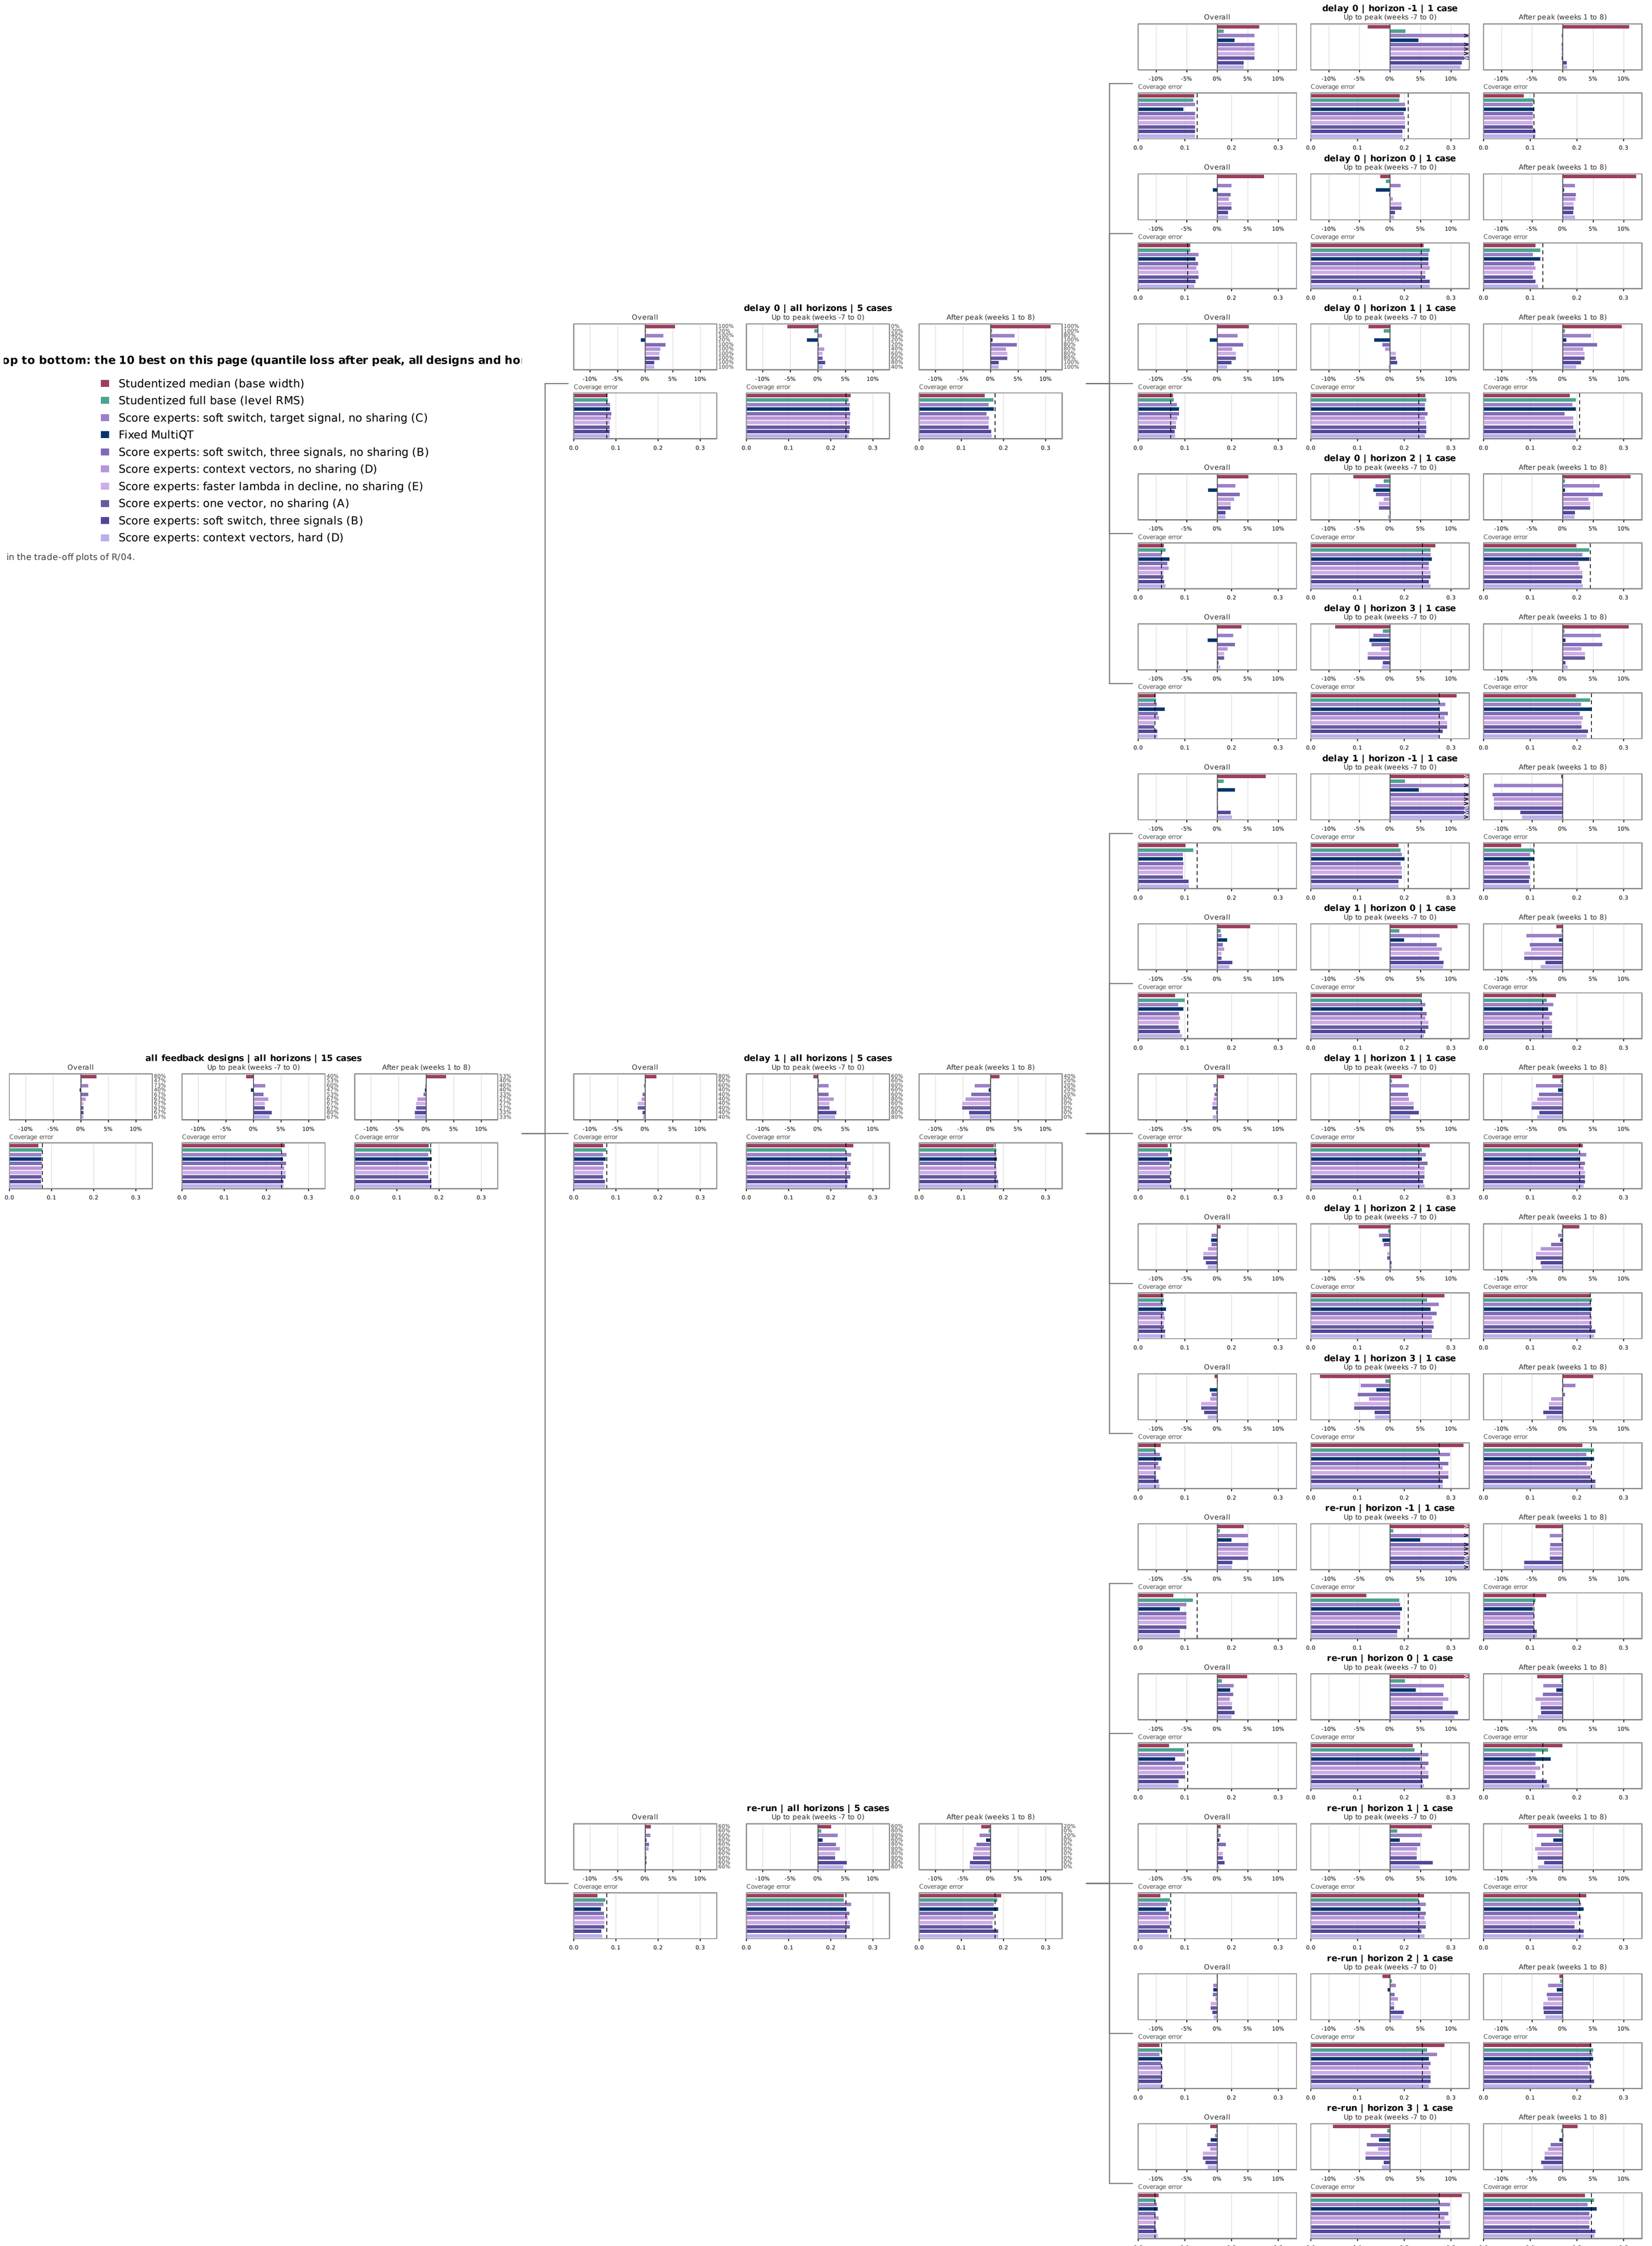

Loss bar: 100 * (1 - pooled loss / pooled loss of the original), pooled over the node's cases (location x horizon x feedback design), each case's mean loss weighted by its number of weeks; to the right: positive = smaller loss than the original.
Numbers right of each loss panel: share of the node's cases in which the method's loss is below the original's (nodes with at least 5 cases). Up to peak / after peak: the weeks around every local peak of the latest counts.
Below each loss panel: coverage error, the mean over the quantile levels of |coverage - alpha| over the weeks of the window, averaged over the cases of the node weighted by their weeks; dashed: the original forecasts.
Identical forecasts in every case of a design: Score experts: faster lambda in decline, no sharing (E) = Score experts: one vector, no sharing (A) (delay 0, delay 1, re-run)

covid | California (06) | evaluation: Jun 2025 to Sep 2026 | loss in counts per 100k residents

op to bottom: the 10 best on this page (quantile loss after peak, all designs and ho

- Studentized median (residual RMS)
- Studentized median (base width)
- Studentized full base (level RMS)
- Fixed MultiQT
- Weekly starts: most recent, equal
- Score experts: soft switch, three signals, no sharing (B)
- Score experts: context vectors, no sharing (D)
- Score experts: faster lambda in decline, no sharing (E)
- Score experts: one vector, no sharing (A)
- Score experts: soft switch, target signal, no sharing (C)

in the trade-off plots of R/04.


Loss bar: 100 * (1 - pooled loss / pooled loss of the original), pooled over the node's cases (location x horizon x feedback design), each case's mean loss weighted by its number of weeks; to the right: positive = smaller loss than the original.
Numbers right of each loss panel: share of the node's cases in which the method's loss is below the original's (nodes with at least 5 cases). Up to peak / after peak: the weeks around every local peak of the latest counts.
Below each loss panel: coverage error, the mean over the quantile levels of |coverage - alpha| over the weeks of the window, averaged over the cases of the node weighted by their weeks; dashed: the original forecasts.
Identical forecasts in every case of a design: Score experts: faster lambda in decline, no sharing (E) = Score experts: one vector, no sharing (A) (delay 0, delay 1, re-run)

covid | Texas (48) | evaluation: Jun 2025 to Sep 2026 | loss in counts per 100k residents

op to bottom: the 10 best on this page (quantile loss after peak, all designs and ho

- Studentized median (residual RMS)
- Studentized median (base width)
- Score experts: context vectors, no sharing (D)
- Weekly starts: most recent, equal
- Studentized full base (level RMS)
- Fixed MultiQT
- Score experts: context vectors, hard (D)
- Score experts: context vectors, blended (D)
- Score experts: soft switch, three signals, no sharing (B)
- Score experts: faster lambda in decline (E)

in the trade-off plots of R/04.

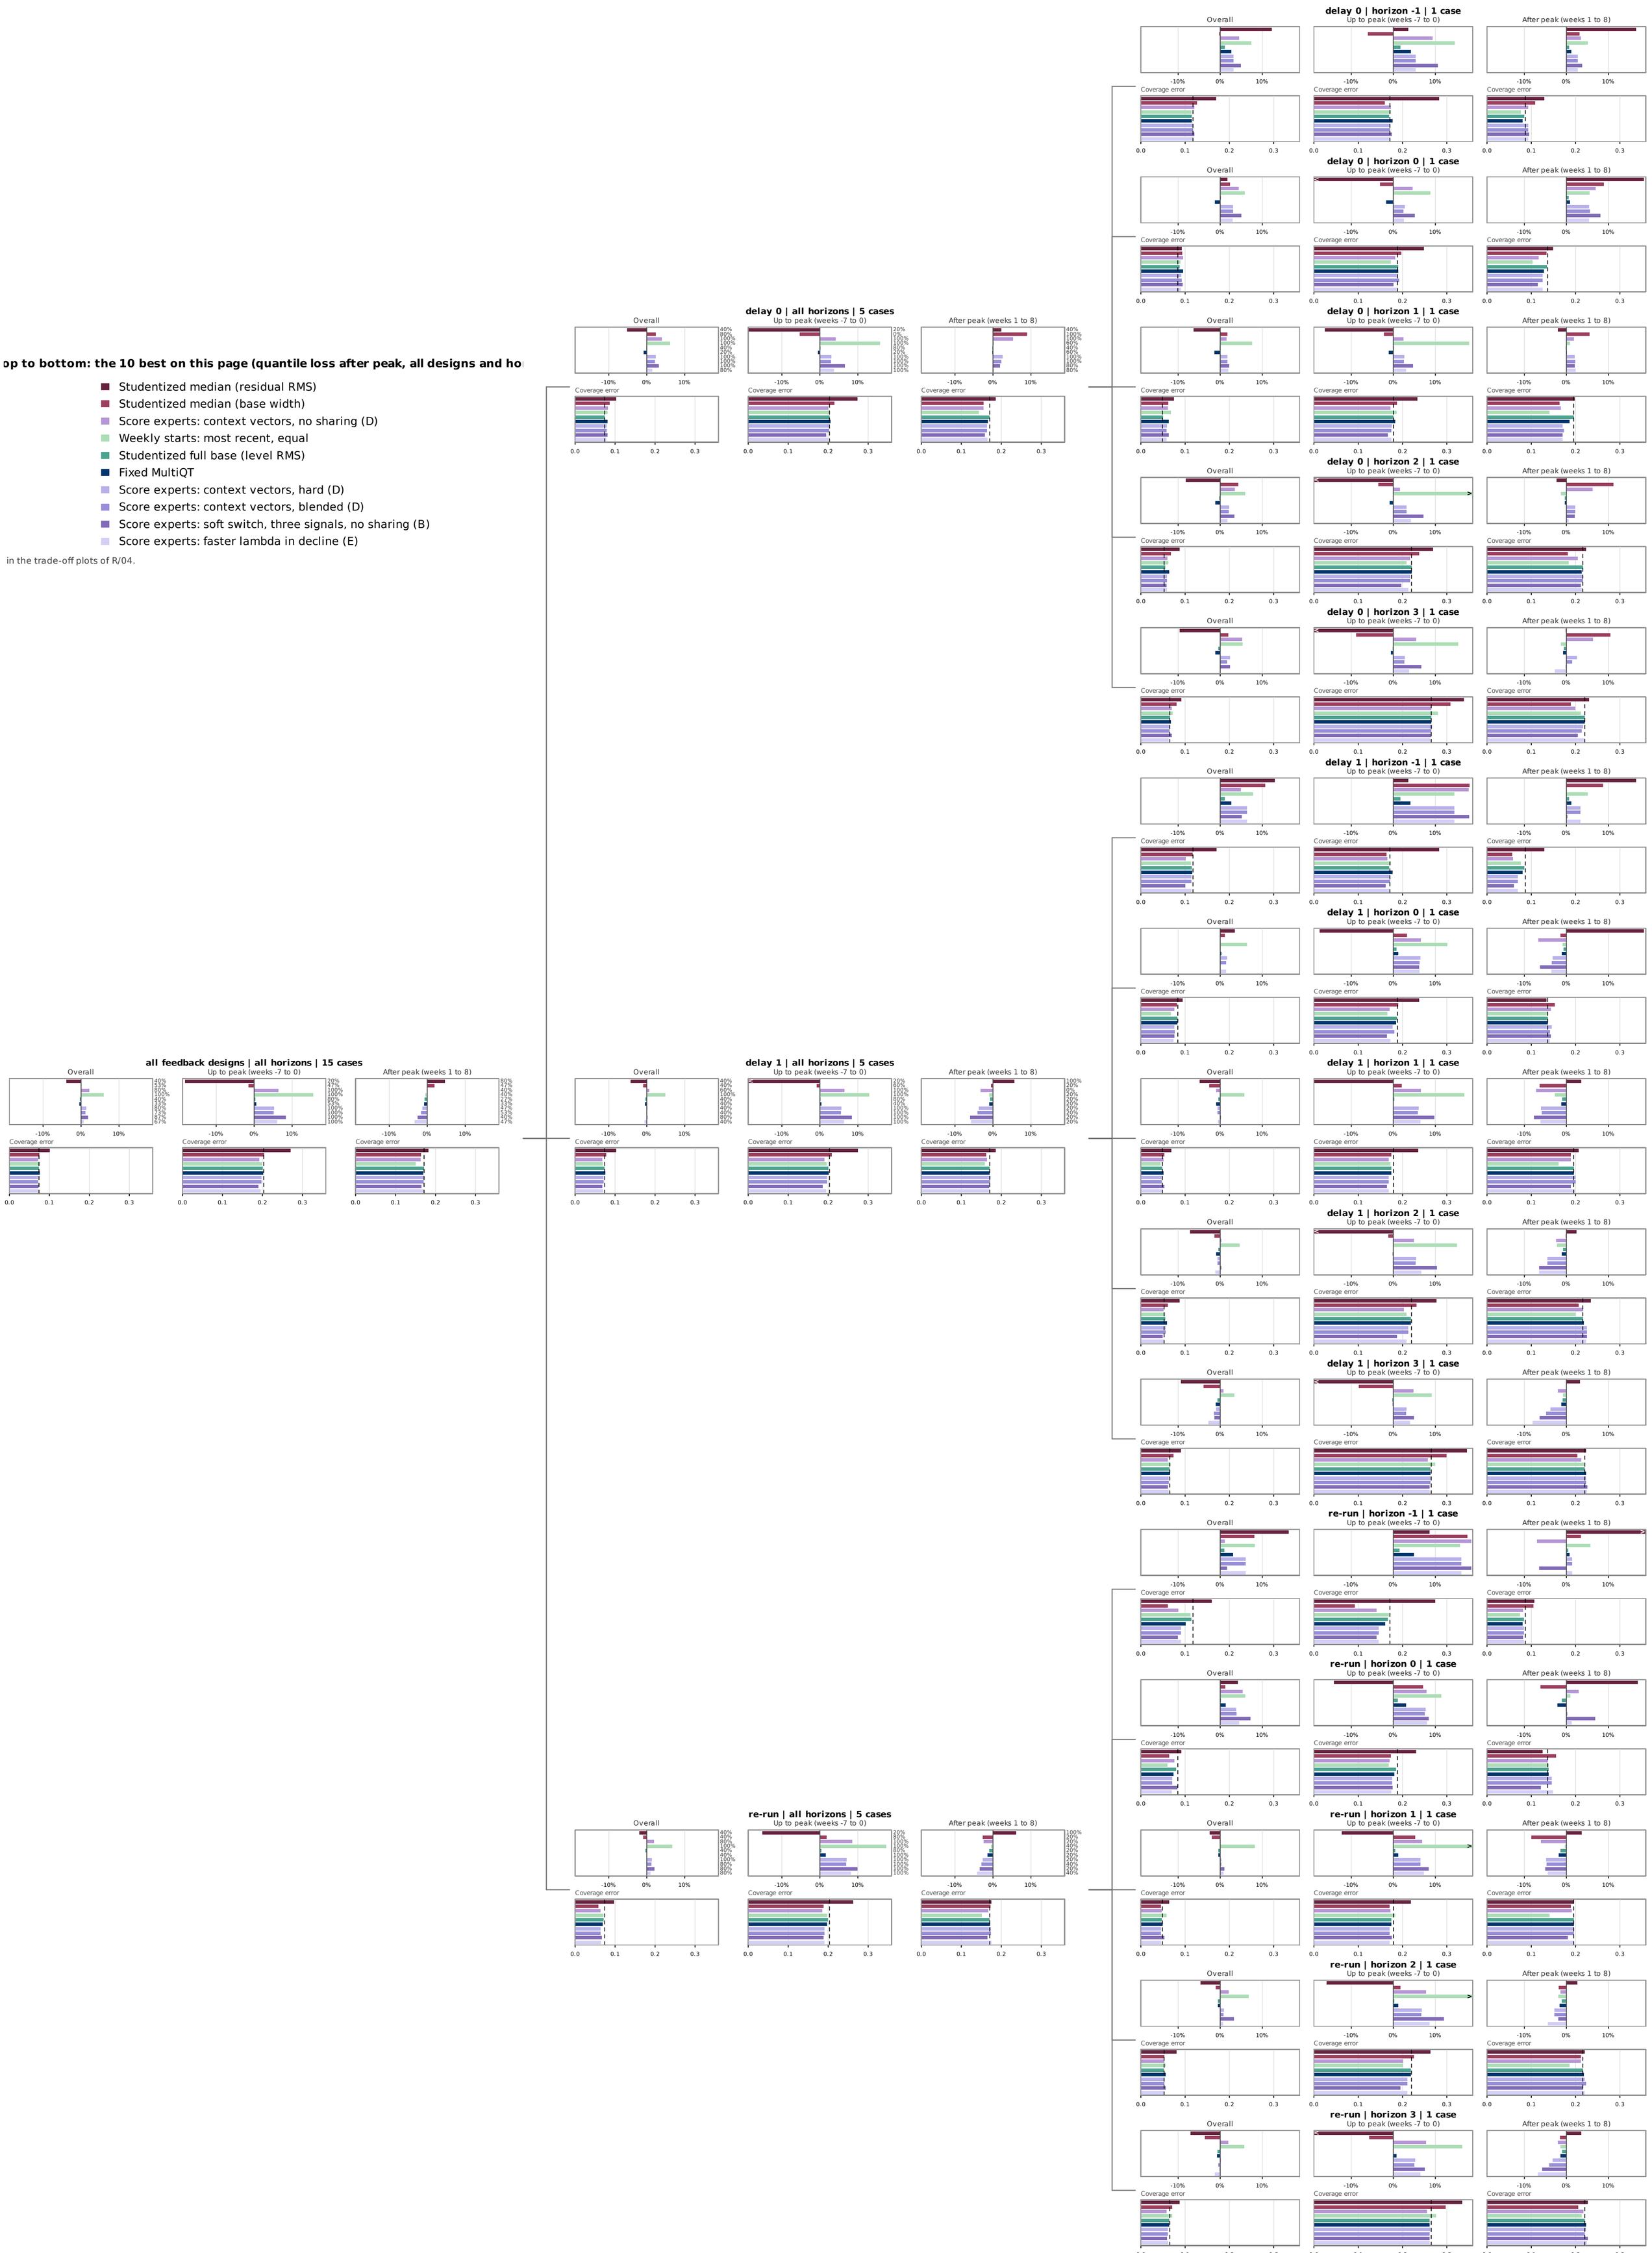


Loss bar: 100 * (1 - pooled loss / pooled loss of the original), pooled over the node's cases (location x horizon x feedback design), each case's mean loss weighted by its number of weeks; to the right: positive = smaller loss than the original.
Numbers right of each loss panel: share of the node's cases in which the method's loss is below the original's (nodes with at least 5 cases). Up to peak / after peak: the weeks around every local peak of the latest counts.
Below each loss panel: coverage error, the mean over the quantile levels of |coverage - alpha| over the weeks of the window, averaged over the cases of the node weighted by their weeks; dashed: the original forecasts.
At horizon -1 (no target signal) the score mixtures C, D and E give the forecast of A (one vector).

covid | New York (36) | evaluation: Jun 2025 to Sep 2026 | loss in counts per 100k residents

op to bottom: the 10 best on this page (quantile loss after peak, all designs and ho

- Studentized median (base width)
- Score experts: soft switch, target signal, no sharing (C)
- Score experts: soft switch, three signals, no sharing (B)
- Score experts: faster lambda in decline, no sharing (E)
- Score experts: one vector, no sharing (A)
- Score experts: context vectors, no sharing (D)
- Score experts: context vectors, hard (D)
- Score experts: context vectors, blended (D)
- Score experts: soft switch, three signals (B)
- Score experts: soft switch, target signal (C)

in the trade-off plots of R/04.

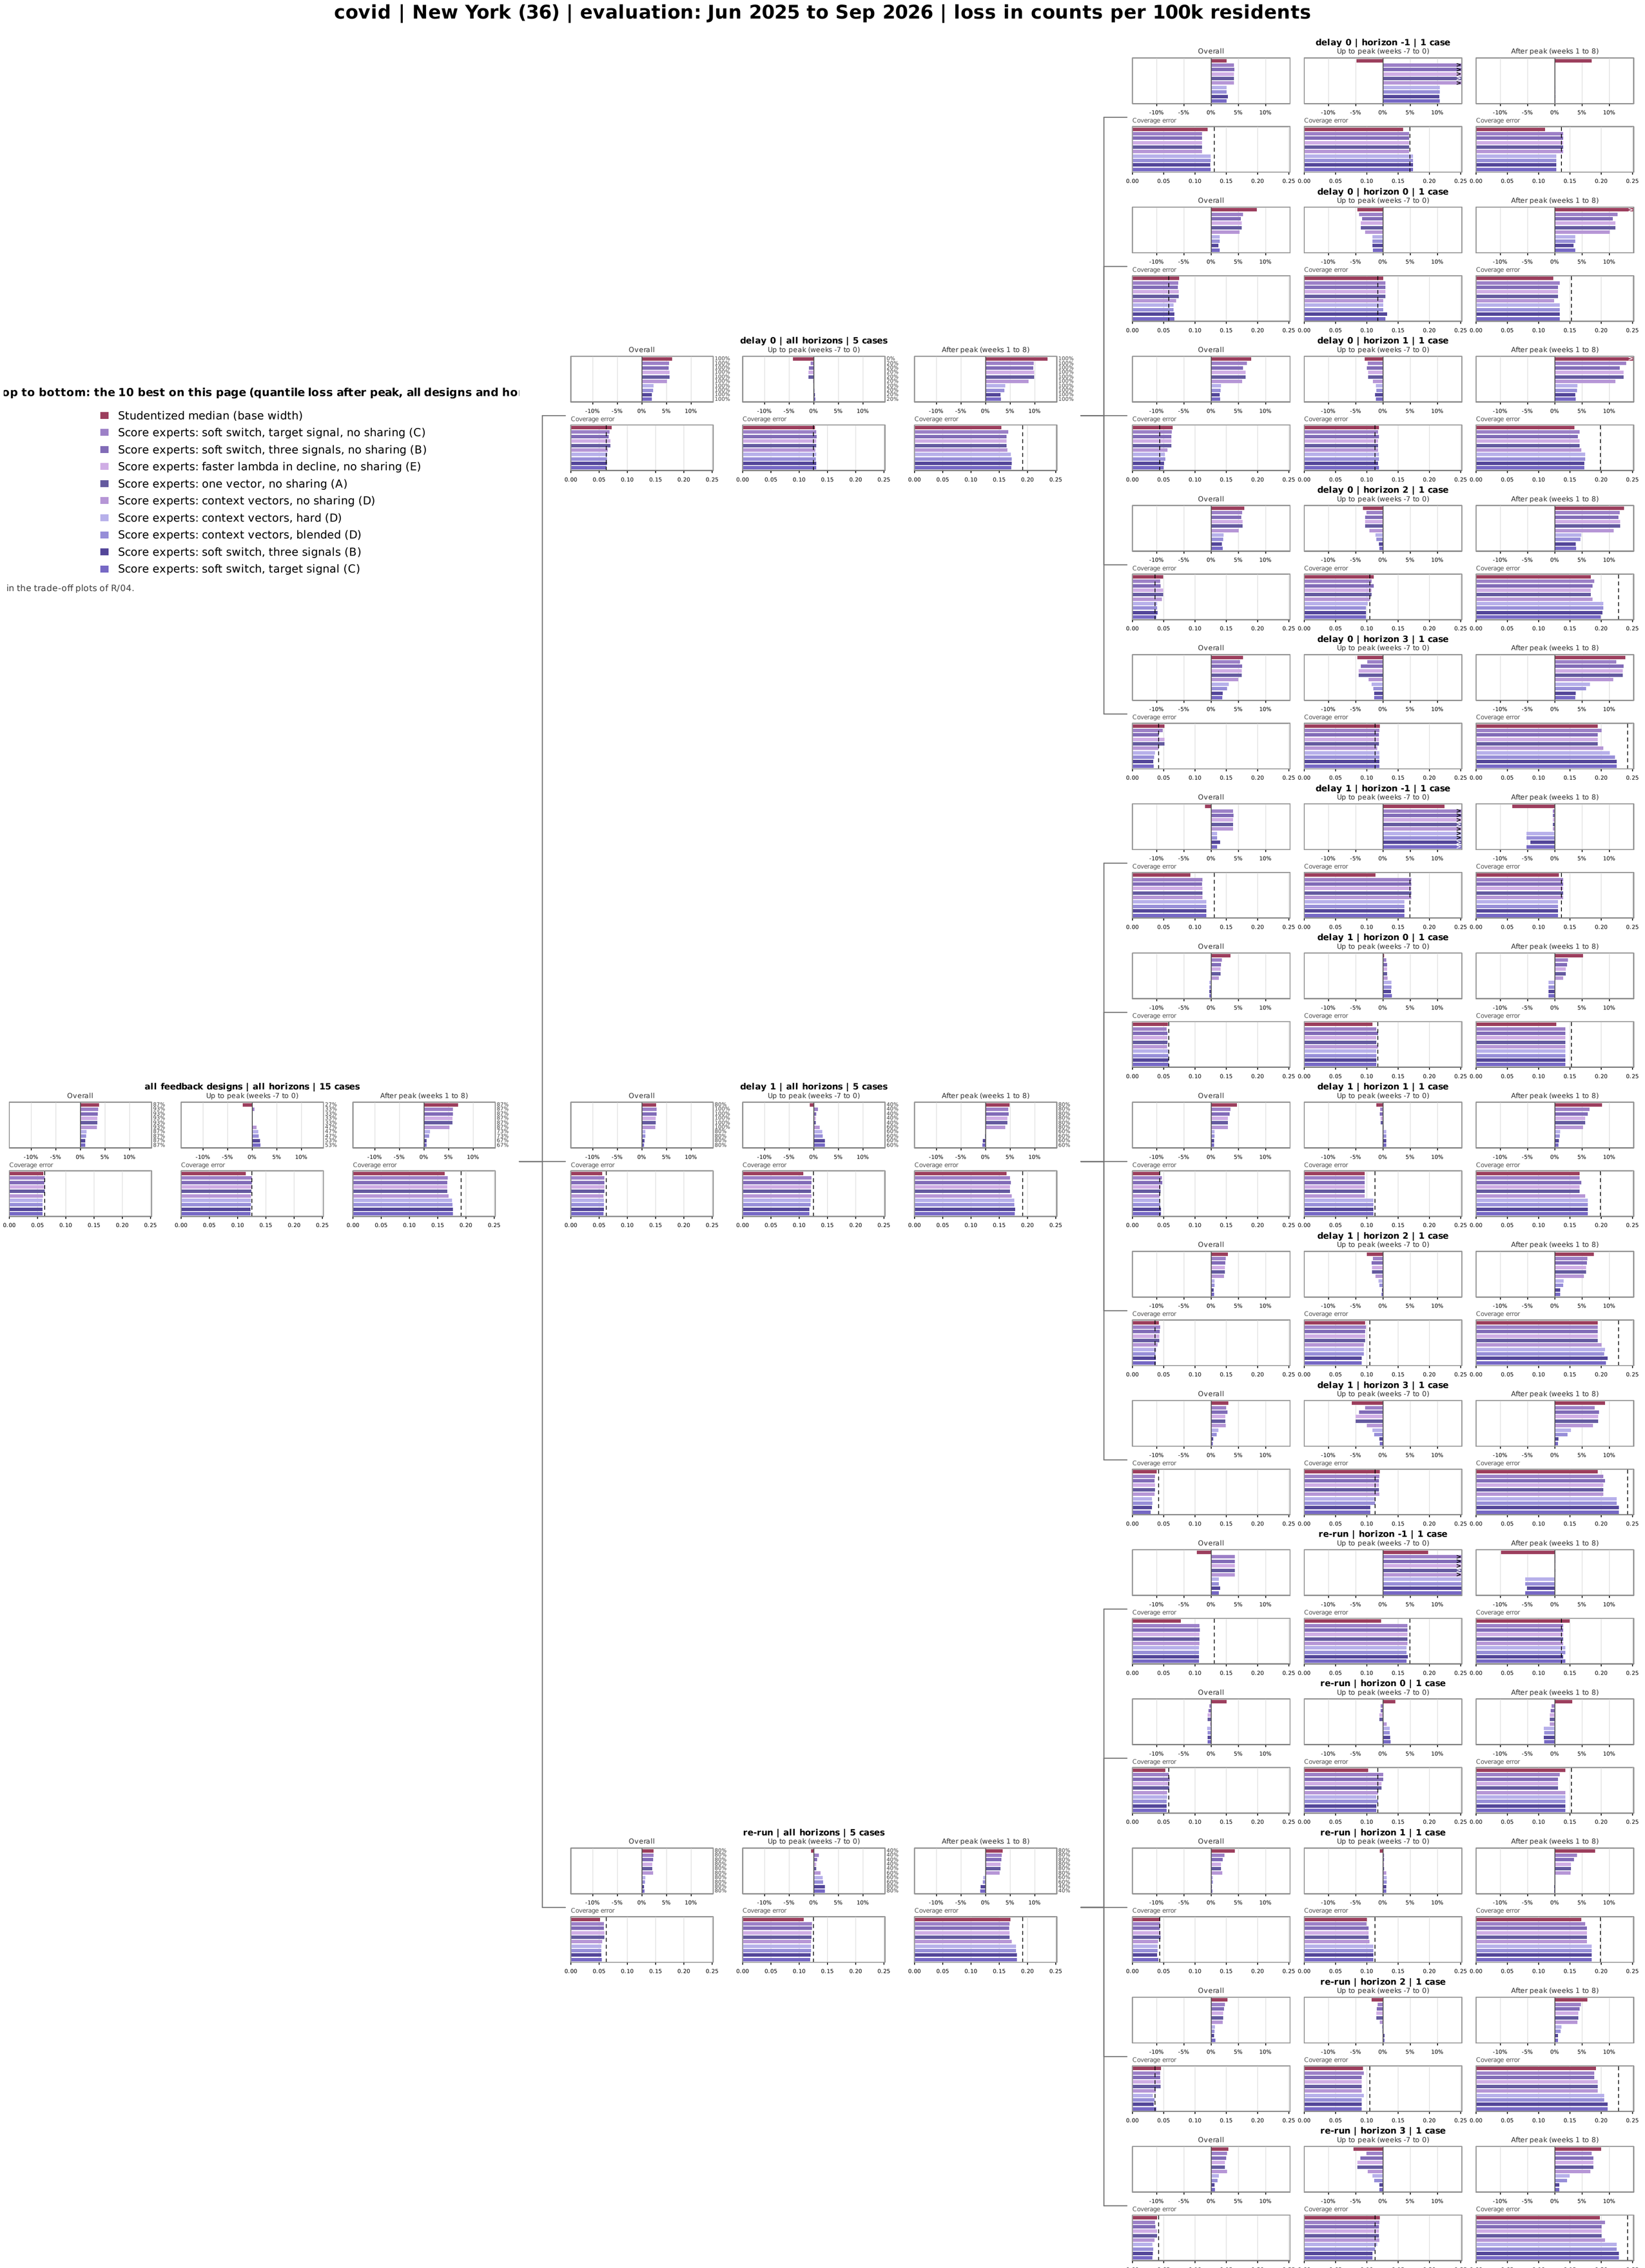

Loss bar: 100 * (1 - pooled loss / pooled loss of the original), pooled over the node's cases (location x horizon x feedback design), each case's mean loss weighted by its number of weeks; to the right: positive = smaller loss than the original.
Numbers right of each loss panel: share of the node's cases in which the method's loss is below the original's (nodes with at least 5 cases). Up to peak / after peak: the weeks around every local peak of the latest counts.
Below each loss panel: coverage error, the mean over the quantile levels of |coverage - alpha| over the weeks of the window, averaged over the cases of the node weighted by their weeks; dashed: the original forecasts.
Identical forecasts in every case of a design: Score experts: faster lambda in decline, no sharing (E) = Score experts: one vector, no sharing (A) (delay 0, delay 1, re-run)

covid | Pennsylvania (42) | evaluation: Jun 2025 to Sep 2026 | loss in counts per 100k residents

op to bottom: the 10 best on this page (quantile loss after peak, all designs and ho

- Studentized full base (level RMS)
- Fixed MultiQT
- Studentized median (base width)
- Score experts: soft switch, three signals, no sharing (B)
- Score experts: soft switch, three signals (B)
- Score experts: faster lambda in decline (E)
- Score experts: one vector (A)
- Score experts: context vectors, hard (D)
- Score experts: context vectors, blended (D)
- Score experts: context vectors, no sharing (D)

in the trade-off plots of R/04.

Loss bar: 100 * (1 - pooled loss / pooled loss of the original), pooled over the node's cases (location x horizon x feedback design), each case's mean loss weighted by its number of weeks; to the right: positive = smaller loss than the original.
Numbers right of each loss panel: share of the node's cases in which the method's loss is below the original's (nodes with at least 5 cases). Up to peak / after peak: the weeks around every local peak of the latest counts.
Below each loss panel: coverage error, the mean over the quantile levels of |coverage - alpha| over the weeks of the window, averaged over the cases of the node weighted by their weeks; dashed: the original forecasts.
Identical forecasts in every case of a design: Score experts: faster lambda in decline (E) = Score experts: one vector (A) (delay 0, delay 1, re-run)


flu | all 52 locations pooled | evaluation: Jun 2025 to Sep 2026 | loss in counts per 100k residents

op to bottom: the 10 best on this page (quantile loss after peak, all designs and ho


- Fixed MultiQT
- Studentized full base (level RMS)
- Rate grid: learned, common weights
- Delphi sqrt 0.018 (flu prod)
- Weekly starts: most recent, equal
- Rate grid: learned, no sharing
- Delphi REF-op (covid prod)
- Weekly starts: equal
- Weekly starts: learned
- Starts equal + outer

in the trade-off plots of R/04.
non weights for all levels.
ne: + outer MultiQT.


delay 0 | horizon -1 | 52 cases

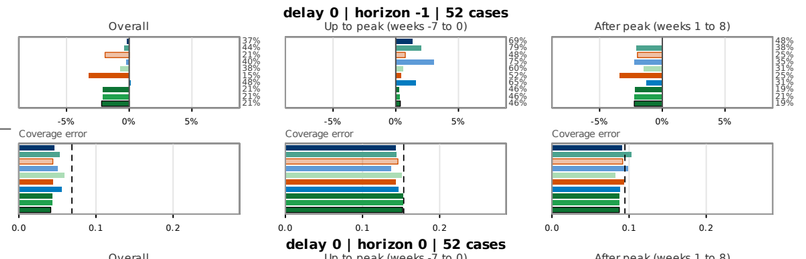


delay 0 | horizon 0 | 52 cases

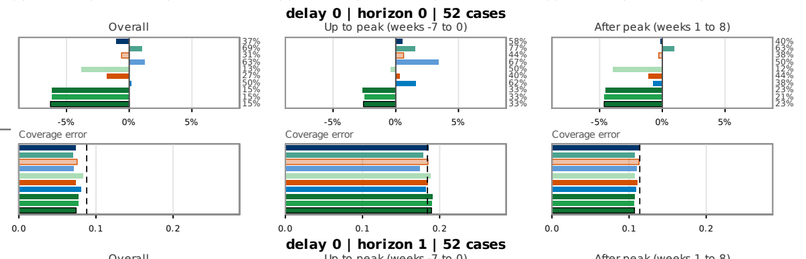


delay 0 | all horizons | 260 cases

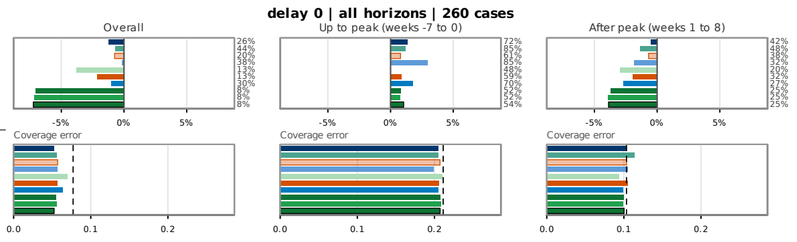


delay 0 | horizon 1 | 52 cases

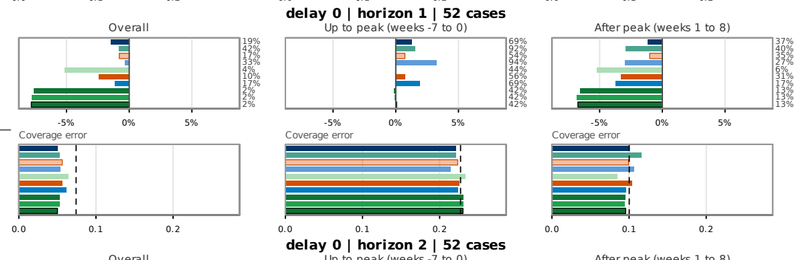


delay 0 | horizon 2 | 52 cases

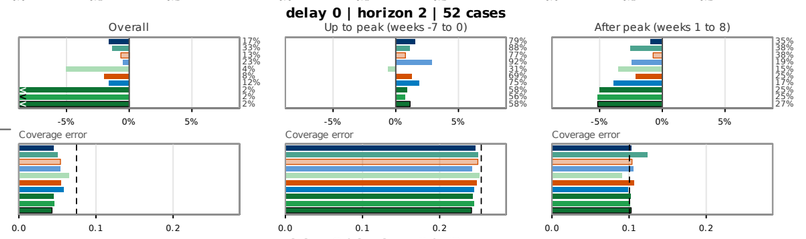


delay 0 | horizon 3 | 52 cases

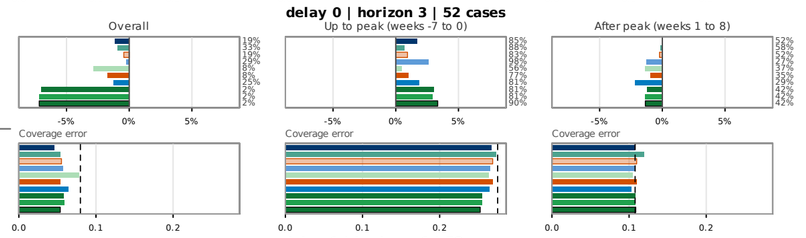


delay 1 | horizon -1 | 52 cases

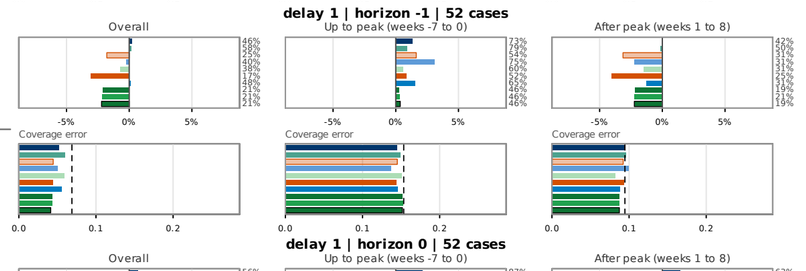


delay 1 | horizon 0 | 52 cases

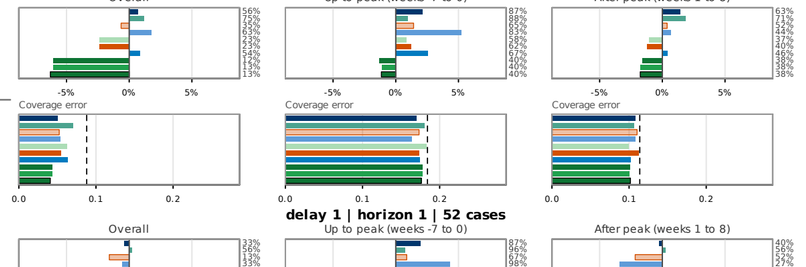


all feedback designs | all horizons | 780 cases

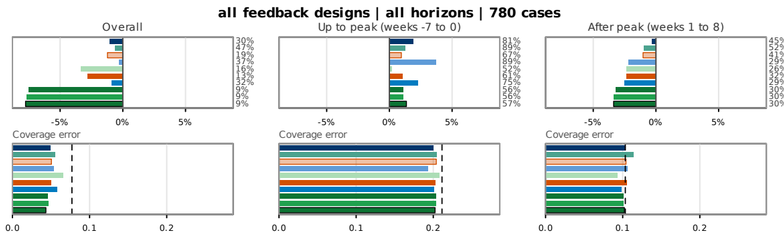


delay 1 | all horizons | 260 cases

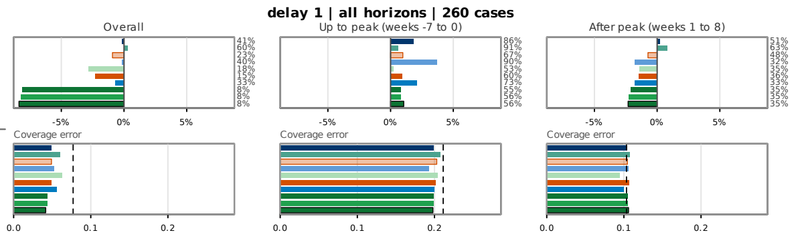


delay 1 | horizon 1 | 52 cases

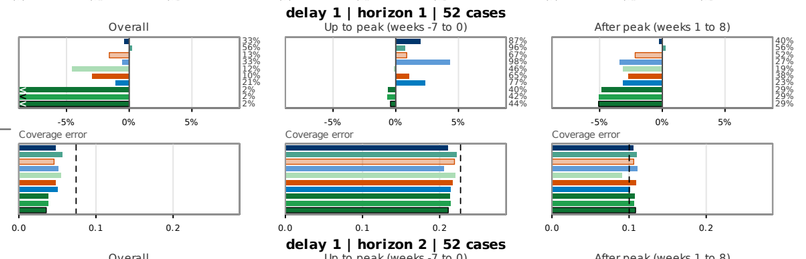


delay 1 | horizon 2 | 52 cases

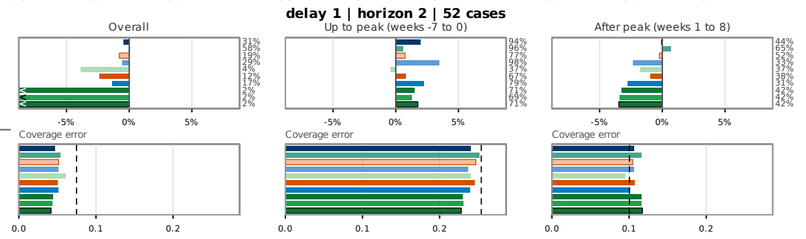


delay 1 | horizon 3 | 52 cases

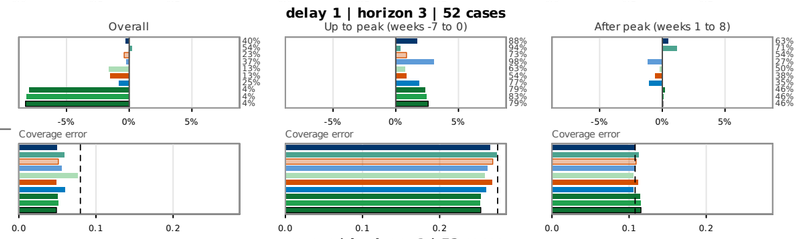


re-run | horizon -1 | 52 cases

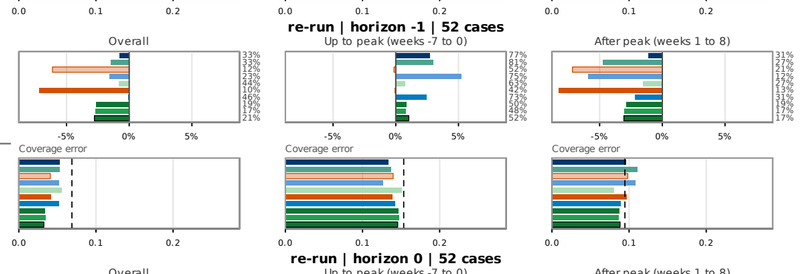


re-run | horizon 0 | 52 cases

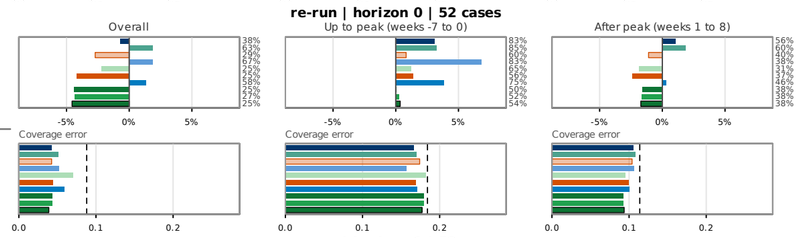


re-run | all horizons | 260 cases

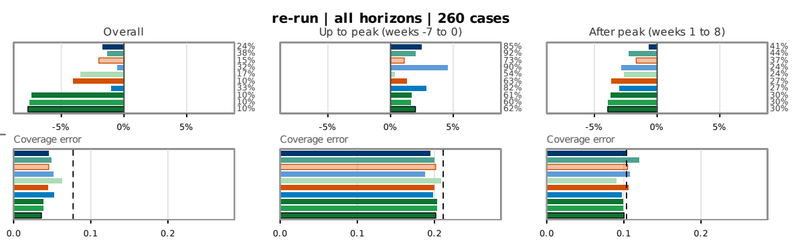


re-run | horizon 1 | 52 cases

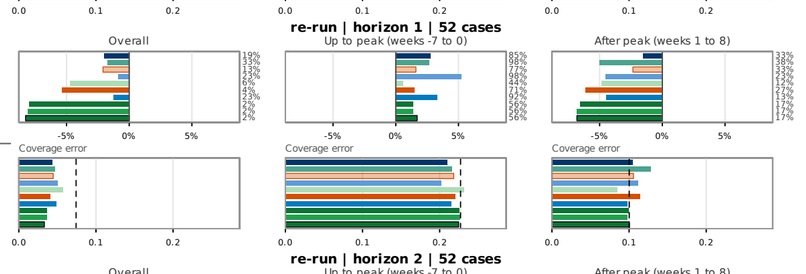

re-run | horizon 2 | 52 cases

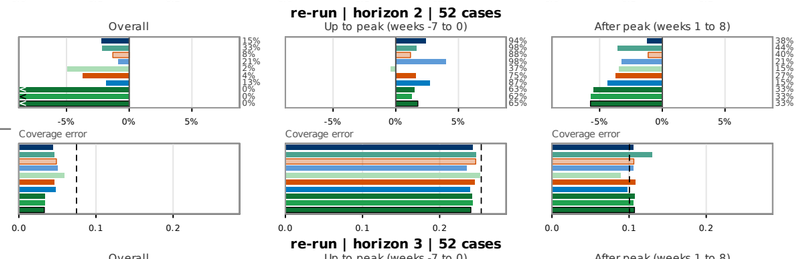

re-run | horizon 3 | 52 cases

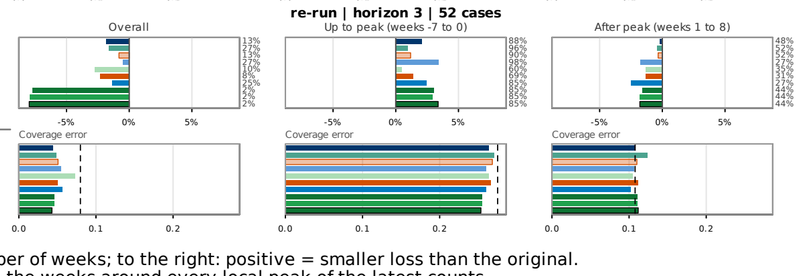

Loss bar: 100 * (1 - pooled loss / pooled loss of the original), pooled over the node's cases (location x horizon x feedback design), each case's mean loss weighted by its number of weeks; to the right: positive = smaller loss than the original.
Numbers right of each loss panel: share of the node's cases in which the method's loss is below the original's (nodes with at least 5 cases). Up to peak / after peak: the weeks around every local peak of the latest counts.
Below each loss panel: coverage error, the mean over the quantile levels of |coverage - alpha| over the weeks of the window, averaged over the cases of the node weighted by their weeks; dashed: the original forecasts.

flu | United States (US) | evaluation: Jun 2025 to Sep 2026 | loss in counts per 100k residents

op to bottom: the 10 best on this page (quantile loss after peak, all designs and ho

- Studentized full base (level RMS)
- Fixed MultiQT
- Rate grid: learned, common weights
- Starts equal + outer
- Weekly starts: equal
- Weekly starts: learned
- Starts learned + outer
- Rate grid: learned, no sharing
- Delphi sqrt 0.018 (flu prod)
- Starts x rate grid: learned

in the trade-off plots of R/04.
non weights for all levels.
ne: + outer MultiQT.

Loss bar: 100 * (1 - pooled loss / pooled loss of the original), pooled over the node's cases (location x horizon x feedback design), each case's mean loss weighted by its number of weeks; to the right: positive = smaller loss than the original.
Numbers right of each loss panel: share of the node's cases in which the method's loss is below the original's (nodes with at least 5 cases). Up to peak / after peak: the weeks around every local peak of the latest counts.
Below each loss panel: coverage error, the mean over the quantile levels of |coverage - alpha| over the weeks of the window, averaged over the cases of the node weighted by their weeks; dashed: the original forecasts.

flu | California (06) | evaluation: Jun 2025 to Sep 2026 | loss in counts per 100k residents


op to bottom: the 10 best on this page (quantile loss after peak, all designs and ho


- Weekly starts: most recent, equal
- Delphi REF-op (covid prod)
- Score experts: faster lambda in decline (E)
- Score experts: one vector (A)
- Score experts: soft switch, three signals (B)
- Score experts: soft switch, target signal (C)
- Score experts: faster lambda in decline, no sharing (E)
- Score experts: one vector, no sharing (A)
- Score experts: soft switch, three signals, no sharing (B)
- Fixed MultiQT

in the trade-off plots of R/04.





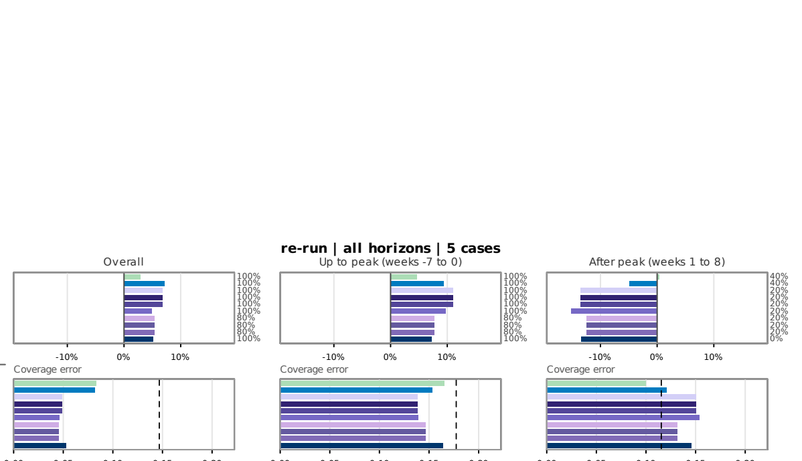

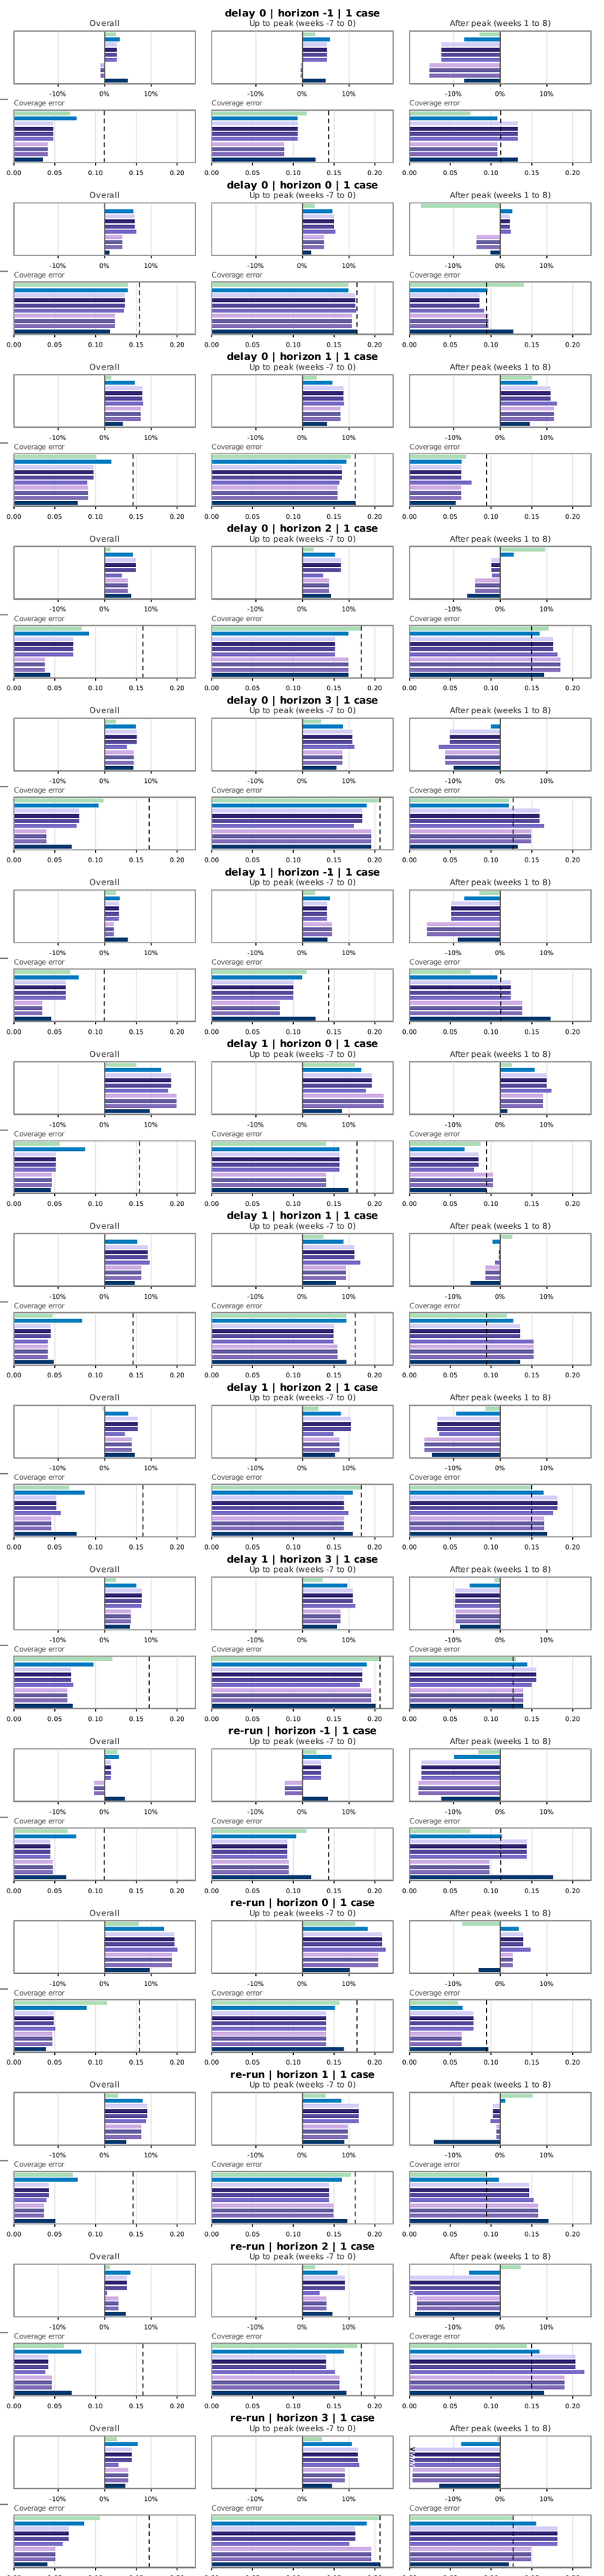

Loss bar: 100 * (1 - pooled loss / pooled loss of the original), pooled over the node's cases (location x horizon x feedback design), each case's mean loss weighted by its number of weeks; to the right: positive = smaller loss than the original.
Numbers right of each loss panel: share of the node's cases in which the method's loss is below the original's (nodes with at least 5 cases). Up to peak / after peak: the weeks around every local peak of the latest counts.
Below each loss panel: coverage error, the mean over the quantile levels of |coverage - alpha| over the weeks of the window, averaged over the cases of the node weighted by their weeks; dashed: the original forecasts.
nals (B) (delay 0, delay 1, re-run); Score experts: faster lambda in decline, no sharing (E) = Score experts: one vector, no sharing (A) (delay 0, delay 1, re-run); Score experts: faster lambda in decline, no sharing (E) = Score experts: soft switch, three signals, no sharing (B) (delay 0, delay 1, re-run);

flu | Texas (48) | evaluation: Jun 2025 to Sep 2026 | loss in counts per 100k residents

op to bottom: the 10 best on this page (quantile loss after peak, all designs and ho

- Rate grid: equal
- Rate grid: learned + sharing, common weights
- Rate grid: sharing, common weights + outer
- Starts x rate grid + outer
- Starts x rate grid: learned
- Studentized full base (level RMS)
- Slope rate
- Rate grid: learned + sharing
- Rate grid: sharing + outer
- Starts learned + outer

in the trade-off plots of R/04.
non weights for all levels.
ne: + outer MultiQT.

all feedback designs | all horizons | 15 cases

delay 0 | all horizons | 5 cases

delay 1 | all horizons | 5 cases

re-run | all horizons | 5 cases

delay 0 | horizon -1 | 1 case

delay 0 | horizon 0 | 1 case

delay 0 | horizon 1 | 1 case

delay 0 | horizon 2 | 1 case

delay 0 | horizon 3 | 1 case

delay 1 | horizon -1 | 1 case

delay 1 | horizon 0 | 1 case

delay 1 | horizon 1 | 1 case

delay 1 | horizon 2 | 1 case

delay 1 | horizon 3 | 1 case

re-run | horizon -1 | 1 case

re-run | horizon 0 | 1 case

re-run | horizon 1 | 1 case

re-run | horizon 2 | 1 case

re-run | horizon 3 | 1 case

Overall | Up to peak (weeks -7 to 0) | After peak (weeks 1 to 8)

Coverage error


Loss bar: 100 * (1 - pooled loss / pooled loss of the original), pooled over the node's cases (location x horizon x feedback design), each case's mean loss weighted by its number of weeks; to the right: positive = smaller loss than the original.
Numbers right of each loss panel: share of the node's cases in which the method's loss is below the original's (nodes with at least 5 cases). Up to peak / after peak: the weeks around every local peak of the latest counts.
Below each loss panel: coverage error, the mean over the quantile levels of |coverage - alpha| over the weeks of the window, averaged over the cases of the node weighted by their weeks; dashed: the original forecasts.


flu | New York (36) | evaluation: Jun 2025 to Sep 2026 | loss in counts per 100k residents


op to bottom: the 10 best on this page (quantile loss after peak, all designs and ho


- Fixed MultiQT
- Delphi sqrt 0.018 (flu prod)
- Weekly starts: most recent, equal
- Delphi REF-op (covid prod)
- Rate grid: learned, common weights
- Score experts: context vectors, hard (D)
- Score experts: context vectors, blended (D)
- Score experts: soft switch, target signal (C)
- Score experts: context vectors, no sharing (D)
- Rate grid: learned, no sharing

in the trade-off plots of R/04.
non weights for all levels.

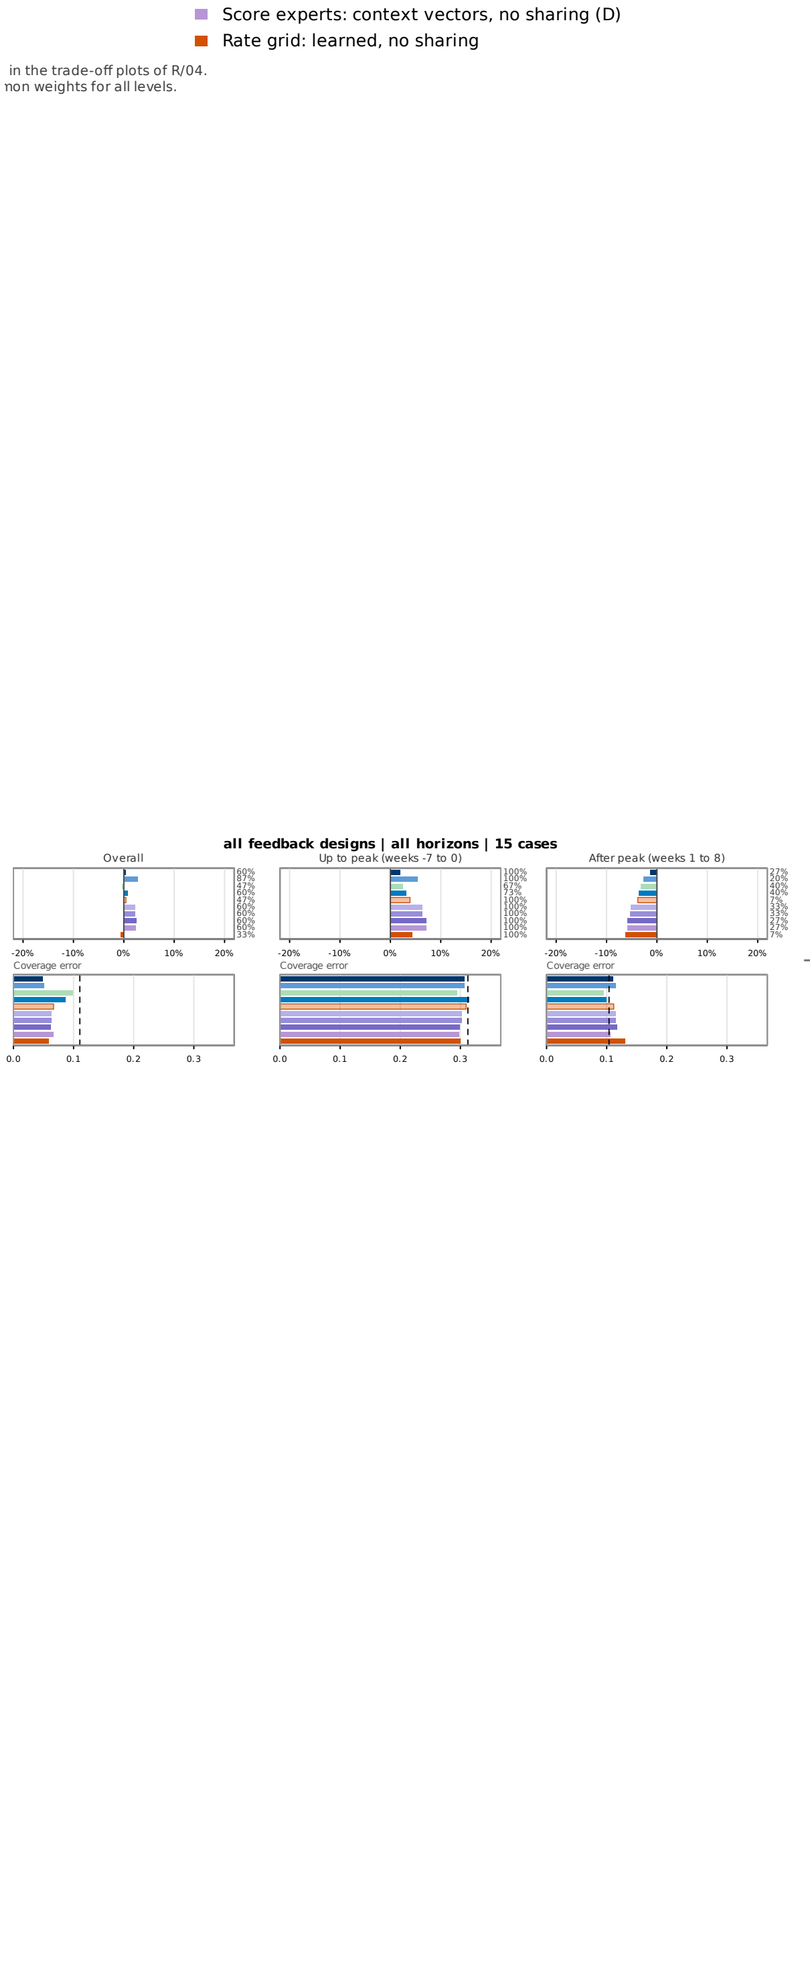

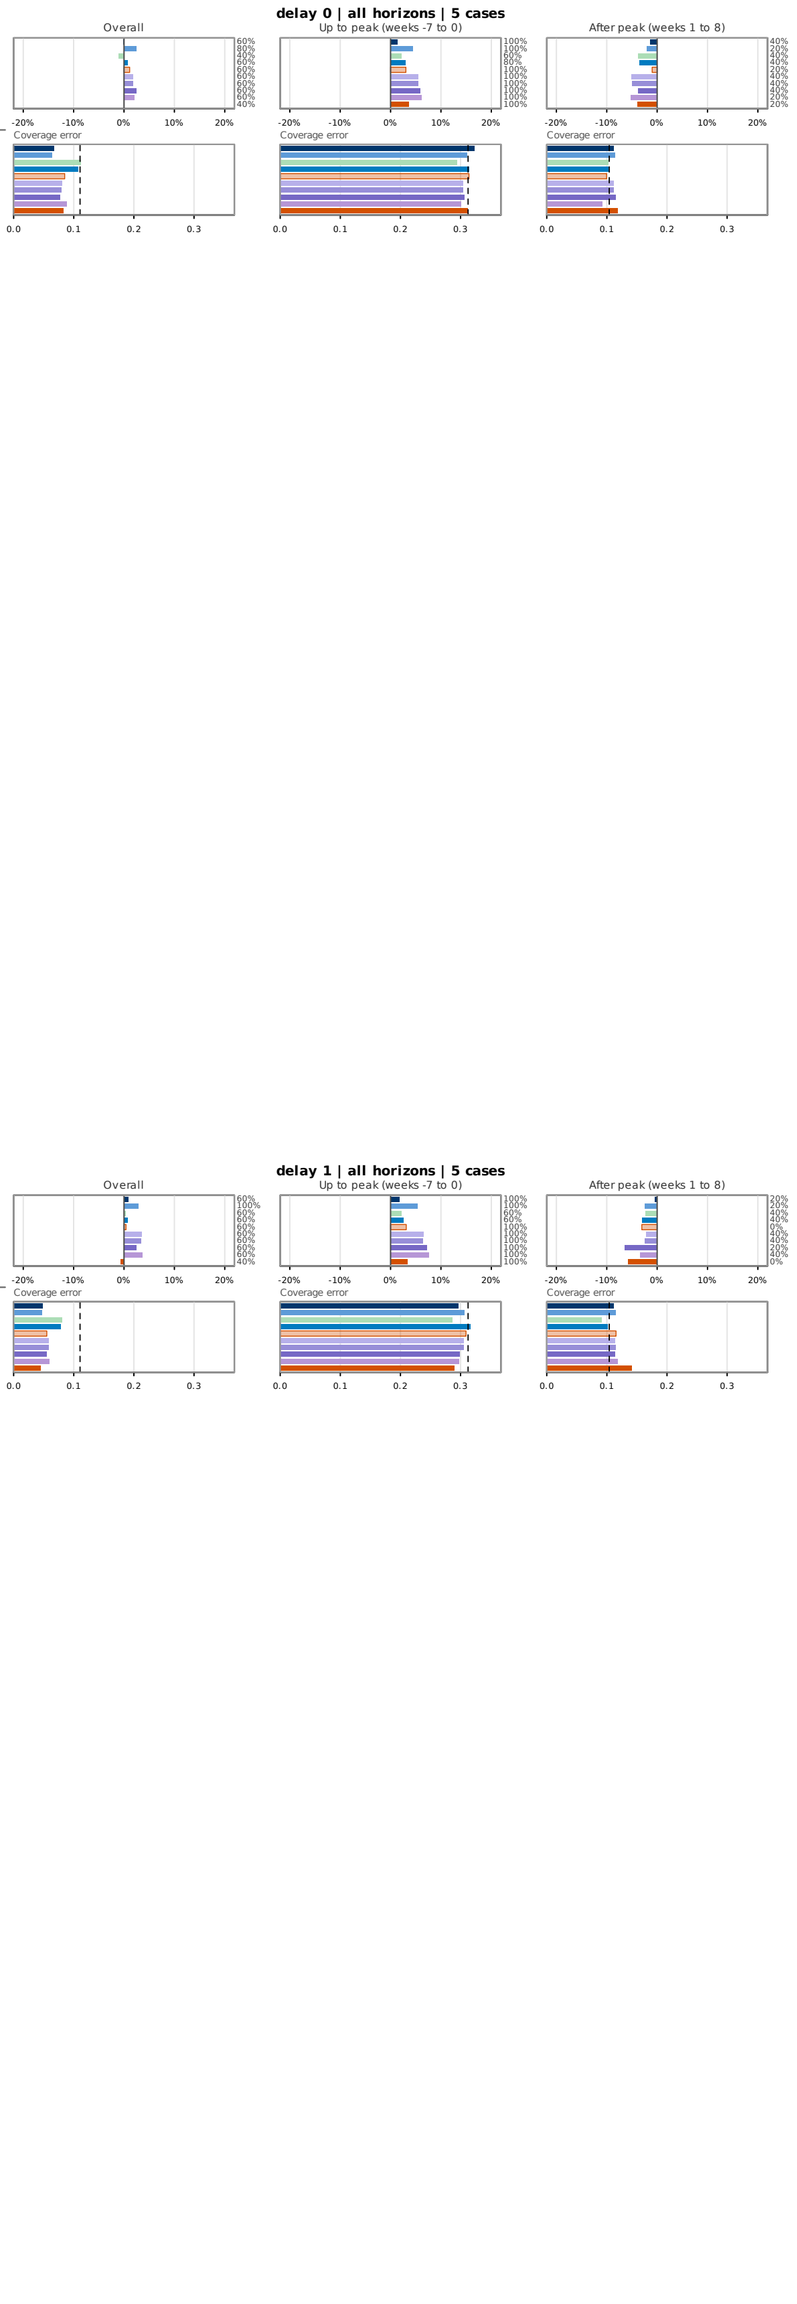

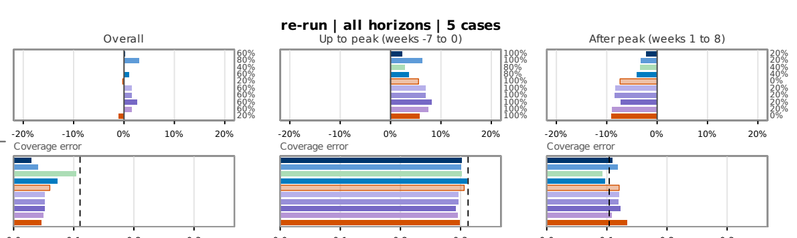

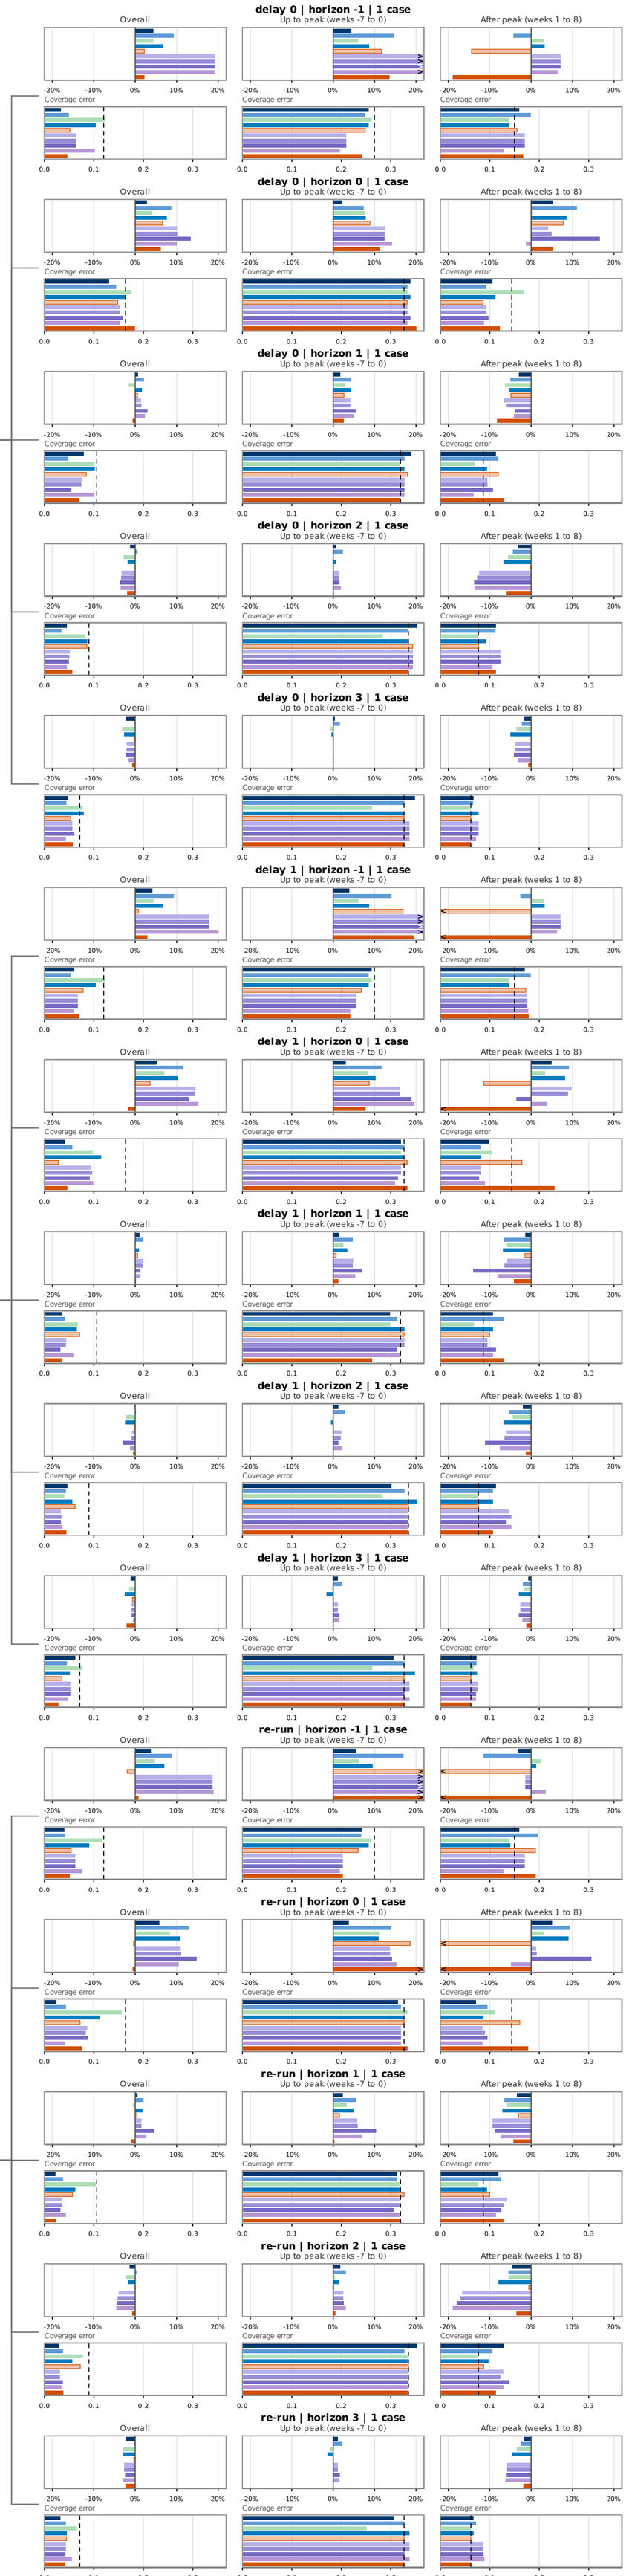


Loss bar: 100 * (1 - pooled loss / pooled loss of the original), pooled over the node's cases (location x horizon x feedback design), each case's mean loss weighted by its number of weeks; to the right: positive = smaller loss than the original.
Numbers right of each loss panel: share of the node's cases in which the method's loss is below the original's (nodes with at least 5 cases). Up to peak / after peak: the weeks around every local peak of the latest counts.
Below each loss panel: coverage error, the mean over the quantile levels of |coverage - alpha| over the weeks of the window, averaged over the cases of the node weighted by their weeks; dashed: the original forecasts.
At horizon -1 (no target signal) the score mixtures C, D and E give the forecast of A (one vector).


flu | Pennsylvania (42) | evaluation: Jun 2025 to Sep 2026 | loss in counts per 100k residents


op to bottom: the 10 best on this page (quantile loss after peak, all designs and ho


- Fixed MultiQT
- Rate grid: learned, common weights
- Rate grid: learned, no sharing
- Delphi sqrt 0.018 (flu prod)
- Weekly starts: most recent, equal
- Studentized full base (level RMS)
- Delphi REF-op (covid prod)
- Weekly starts: equal
- Starts equal + outer
- Weekly starts: learned

in the trade-off plots of R/04.
non weights for all levels.
ne: + outer MultiQT.

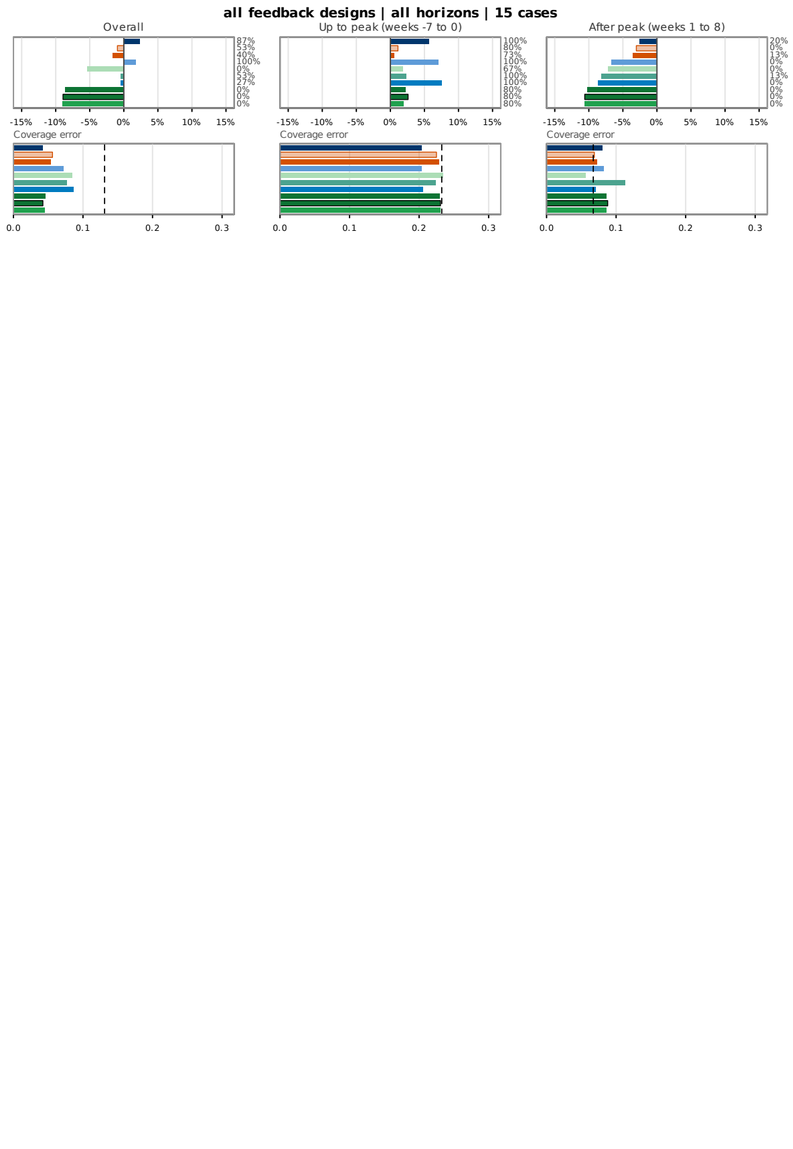

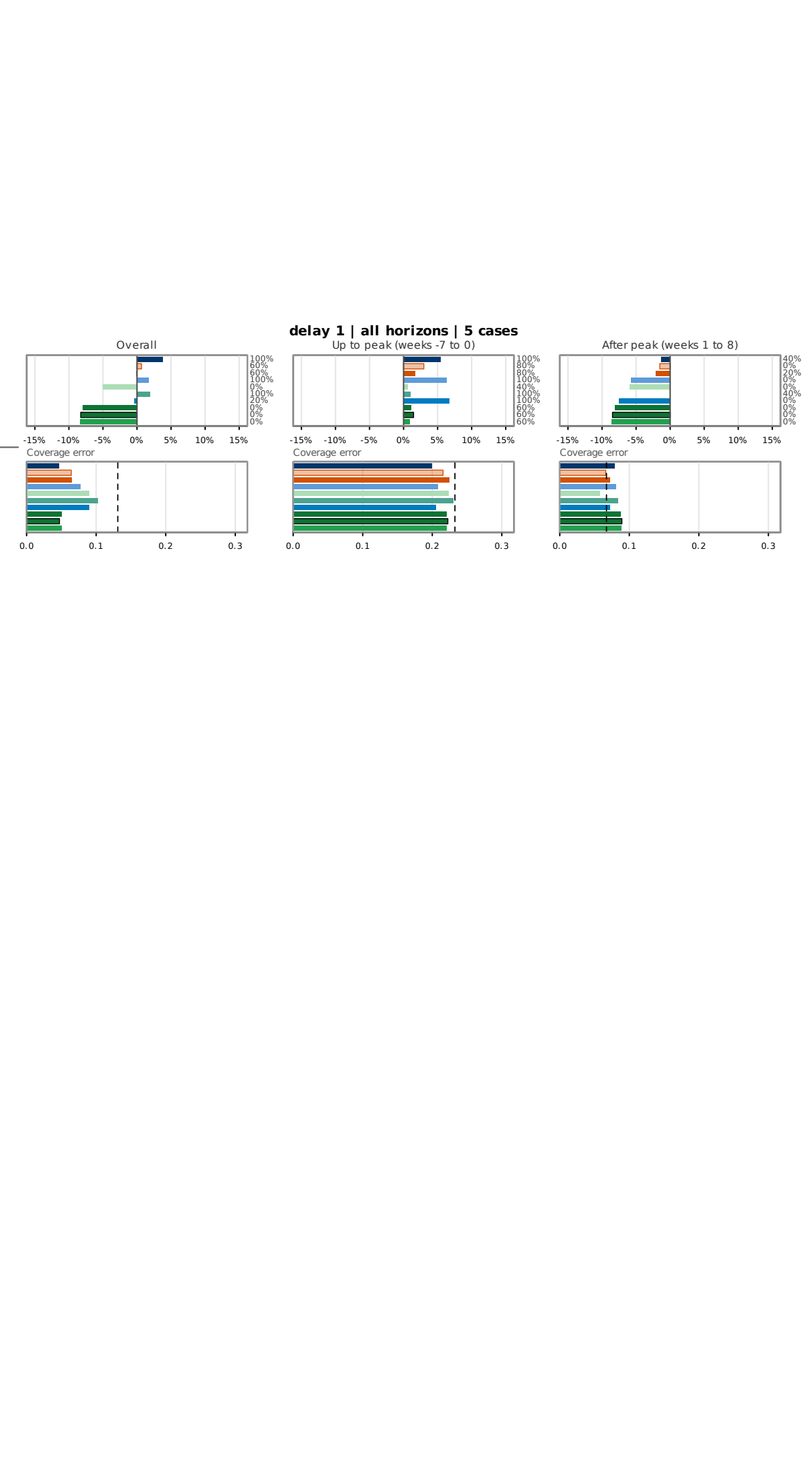

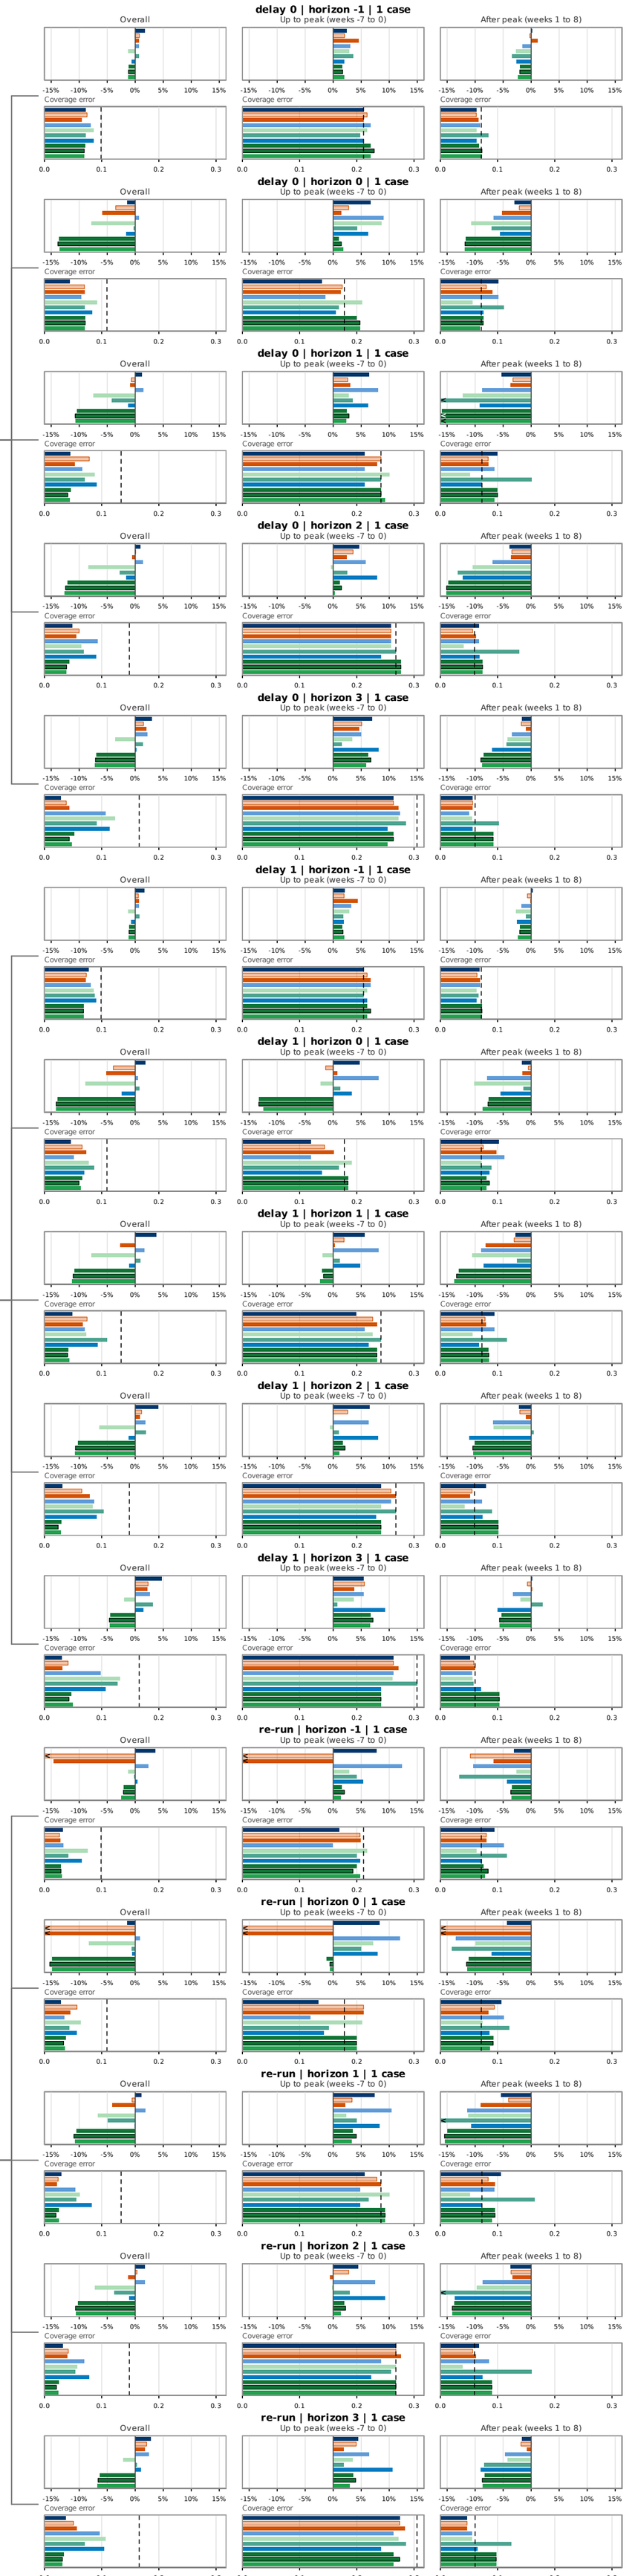

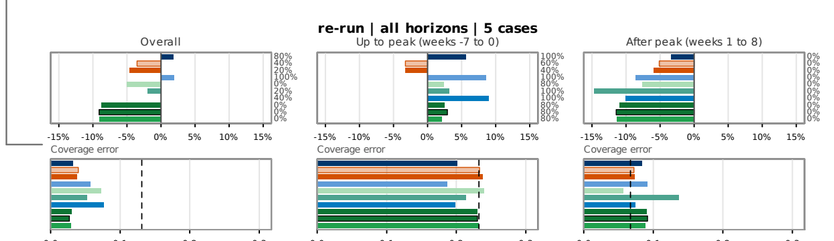

Loss bar: 100 * (1 - pooled loss / pooled loss of the original), pooled over the node's cases (location x horizon x feedback design), each case's mean loss weighted by its number of weeks; to the right: positive = smaller loss than the original.
Numbers right of each loss panel: share of the node's cases in which the method's loss is below the original's (nodes with at least 5 cases). Up to peak / after peak: the weeks around every local peak of the latest counts.
Below each loss panel: coverage error, the mean over the quantile levels of |coverage - alpha| over the weeks of the window, averaged over the cases of the node weighted by their weeks; dashed: the original forecasts.