

Score experts: context vectors, blended (D, delta=0, H=4, sharing 1/8)

covid | horizon 2 | United States (US) | evaluation: Jun 2025 to Sep 2026 | raw-count updates | feedback delay 0 (latest-at-use-v2)

Declining context at issuance

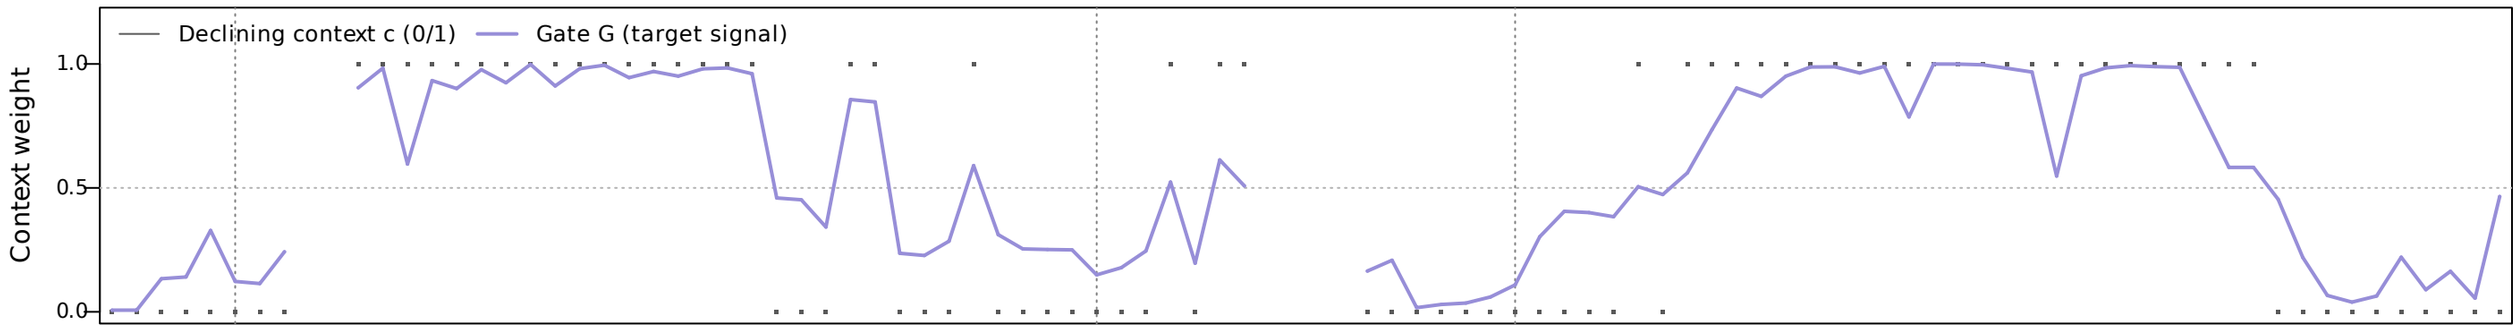


Baseline vector (forecasts made in baseline context)

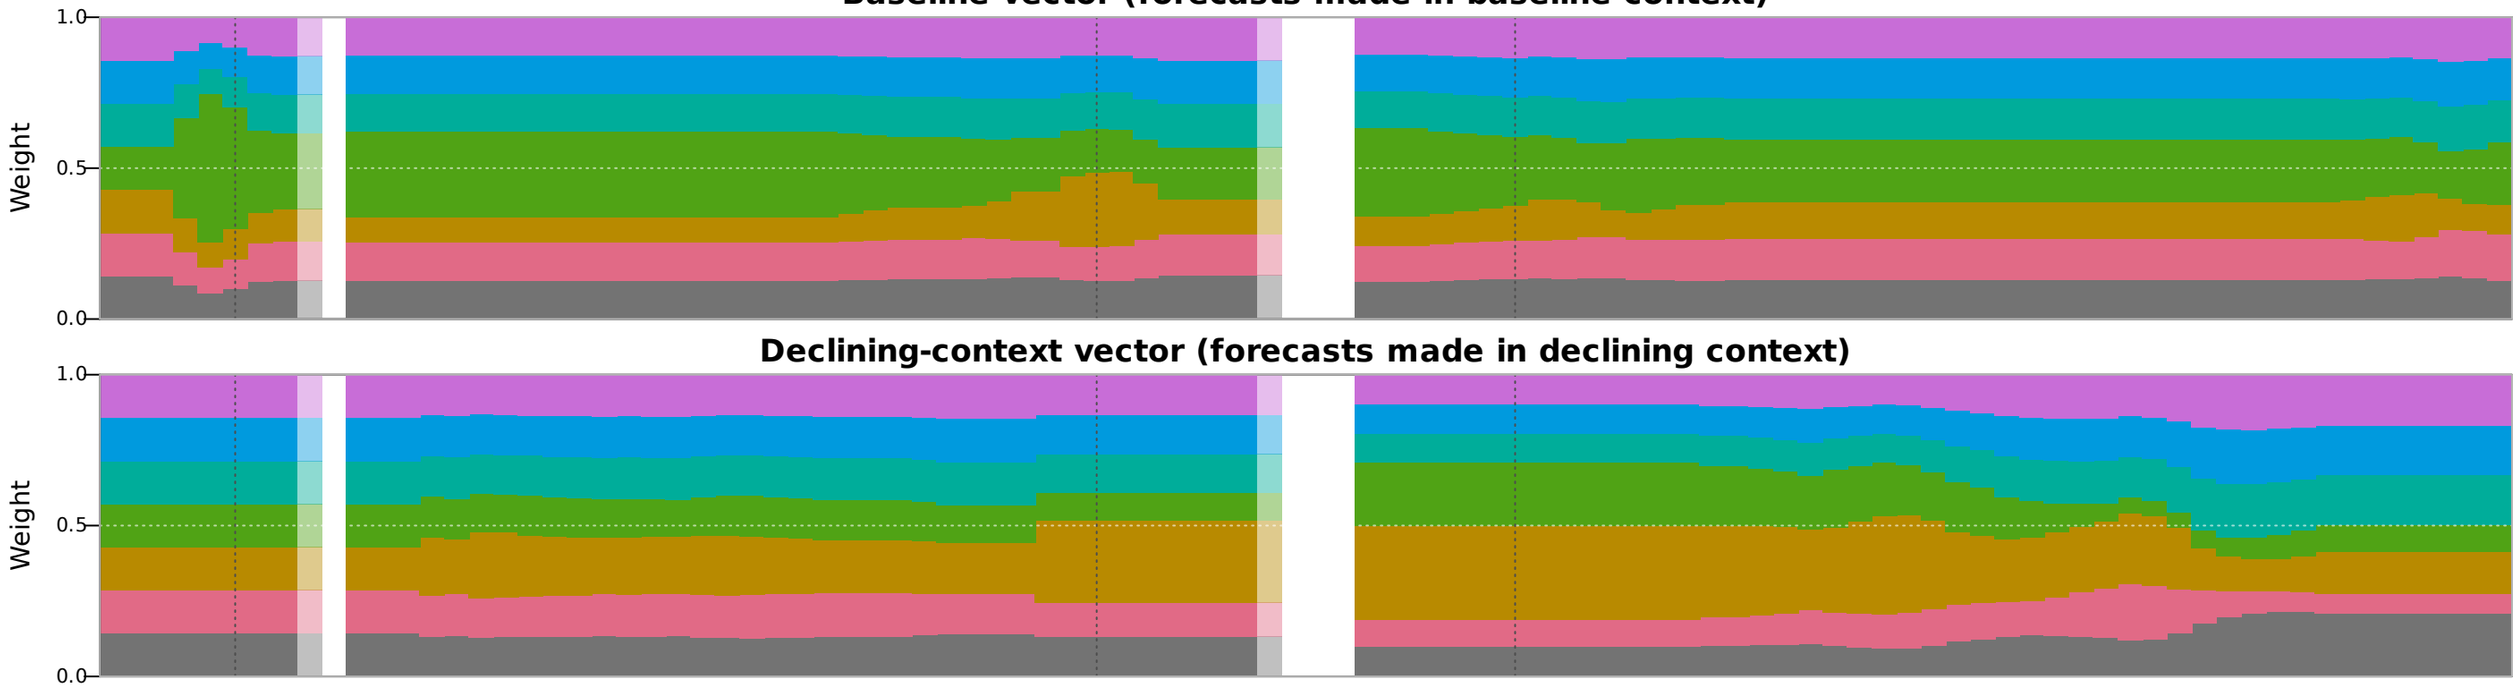

Declining-context vector (forecasts made in declining context)

Issued mixture: (1 - gate) x baseline + gate x declining

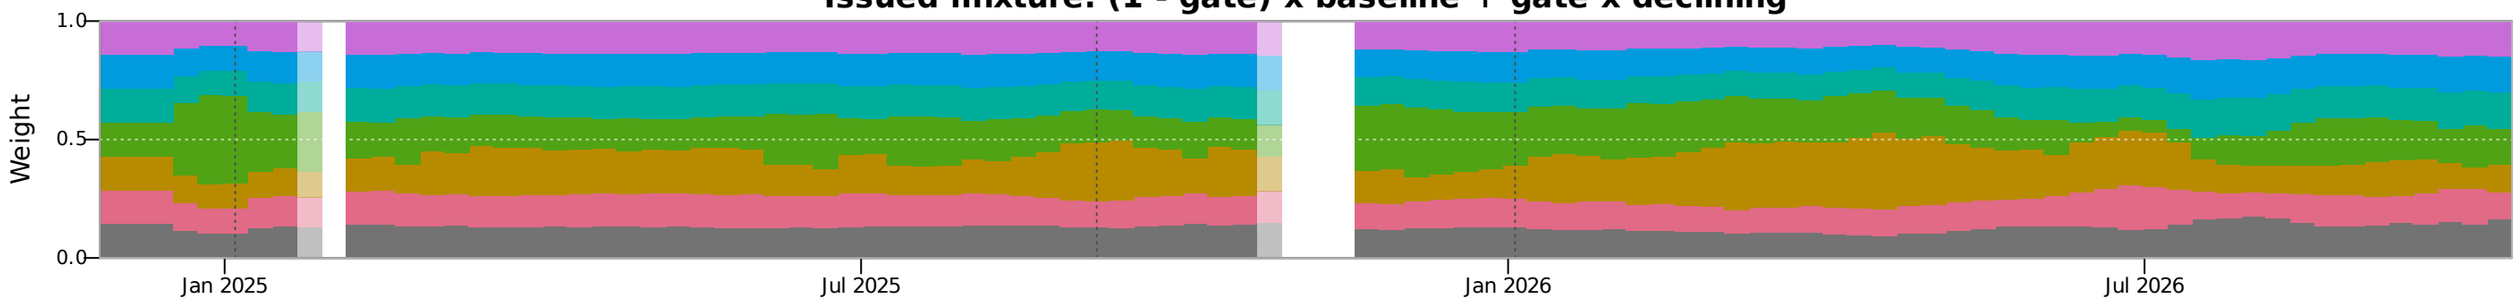

Original
Fixed MultiQT
Leaky MultiQT
Studentized median (base width)
Studentized full base (base width)
Studentized full base (level scales)
Studentized full base (level RMS)


Issue date | Common expert weights across quantile levels | Dotted lines: hindsight peaks

D: each vector learns only from the losses of forecasts made in its context (c saved when the forecast was made).
Forecast: (1 - G) x baseline + G x declining; weeks without a signal use the forecast of A.
Lighter bars: filled forecast rounds.


Score experts: soft switch, three signals (B, strength=1, H=4, sharing 1/8)

covid | horizon 2 | United States (US) | evaluation: Jun 2025 to Sep 2026 | raw-count updates | feedback delay 0 (latest-at-use-v2)

Declining context at issuance

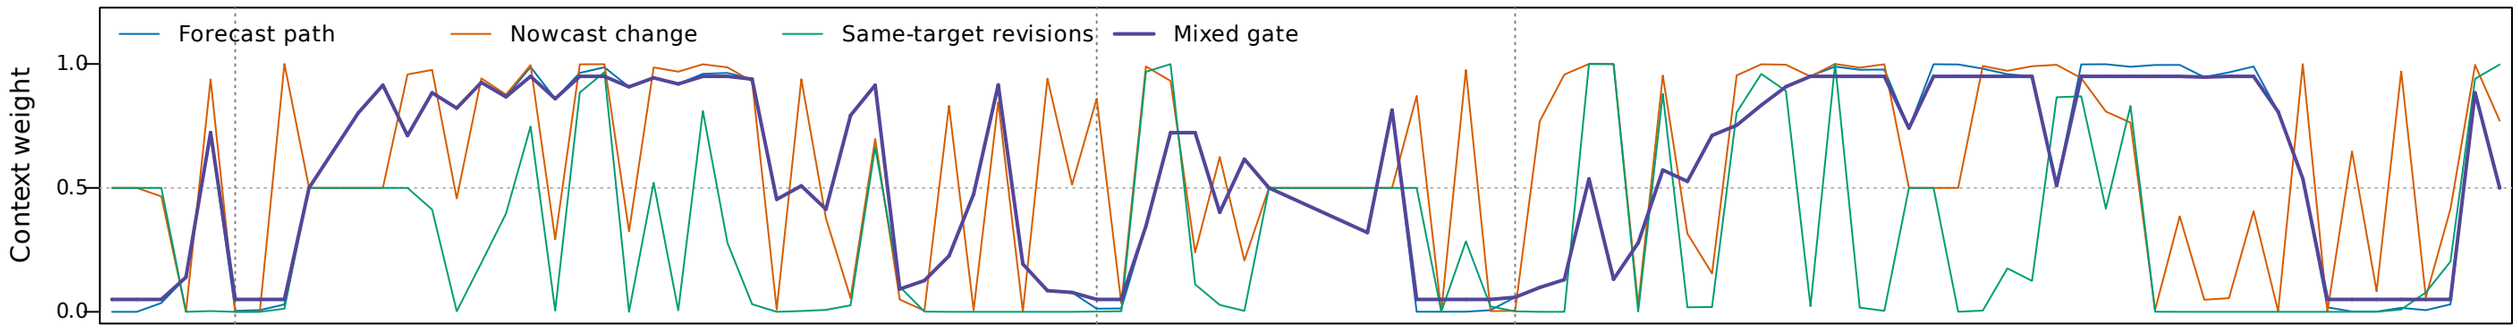


Baseline-context expert weights

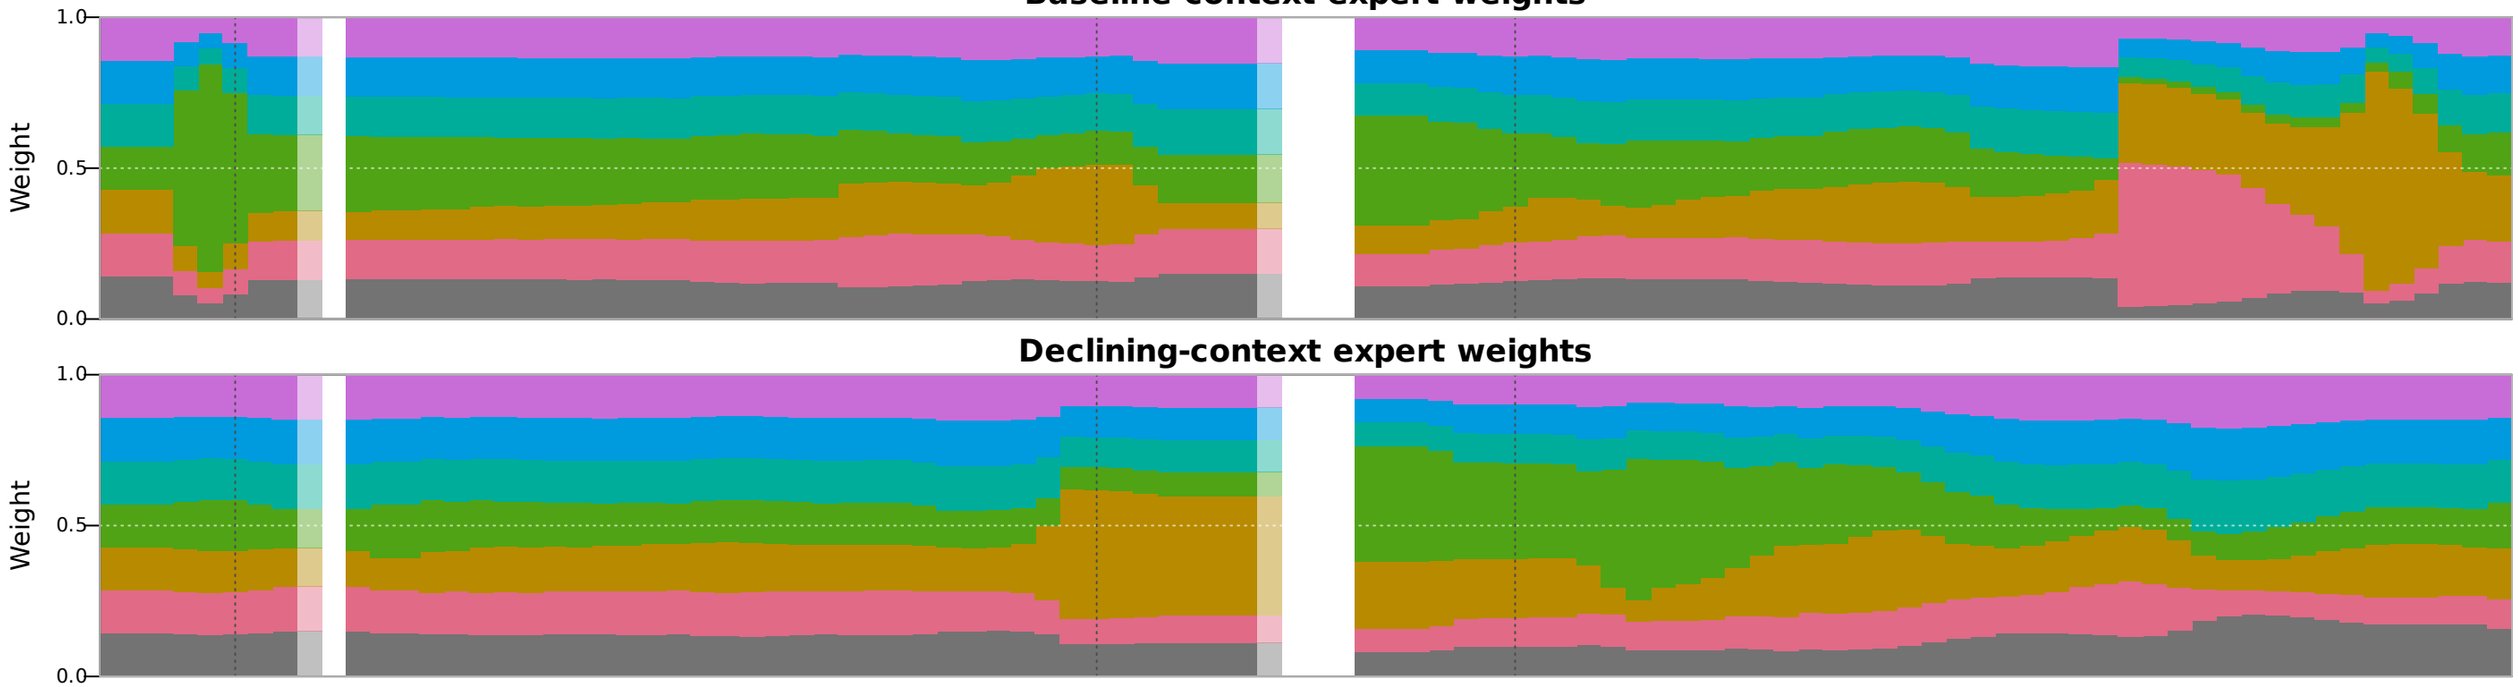

Declining-context expert weights

Issued mixture: (1 - gate) x baseline + gate x declining

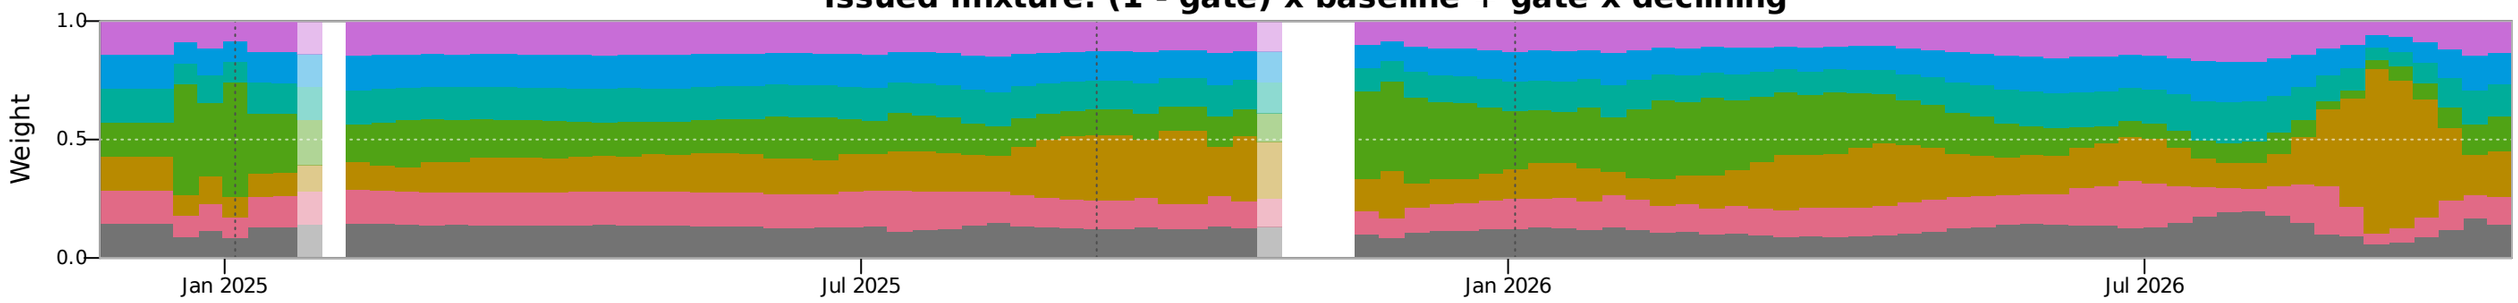

Original
Fixed MultiQT
Leaky MultiQT
Studentized median (base width)
Studentized full base (base width)
Studentized full base (level scales)
Studentized full base (level RMS)


Issue date | Common expert weights across quantile levels | Dotted lines: hindsight peaks

B: the gate is a context weight, not a peak probability; missing signals contribute a neutral score of 0.5.
Both vectors learn from every loss, scaled by 2 x (1 - gate) and 2 x gate saved when the forecast was made.
Lighter bars: filled forecast rounds.


Score experts: soft switch, target signal (C, delta=0, H=4, sharing 1/8)

covid | horizon 2 | United States (US) | evaluation: Jun 2025 to Sep 2026 | raw-count updates | feedback delay 0 (latest-at-use-v2)


Declining context at issuance

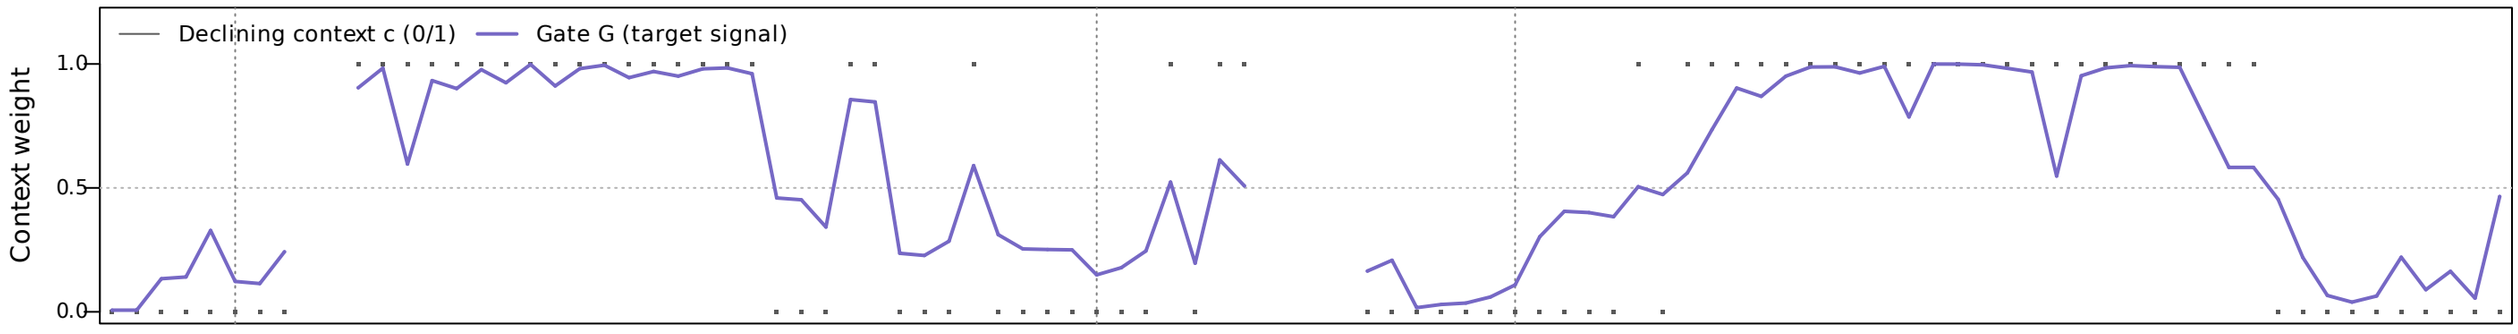


Baseline-context expert weights

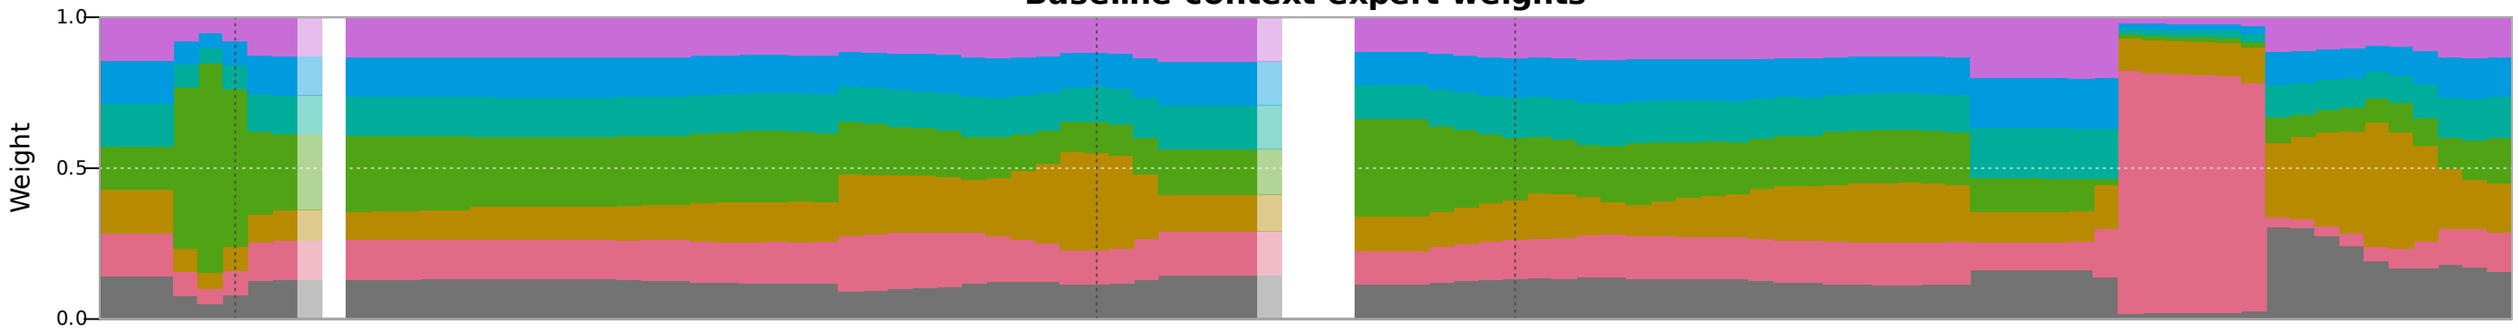

Declining-context expert weights

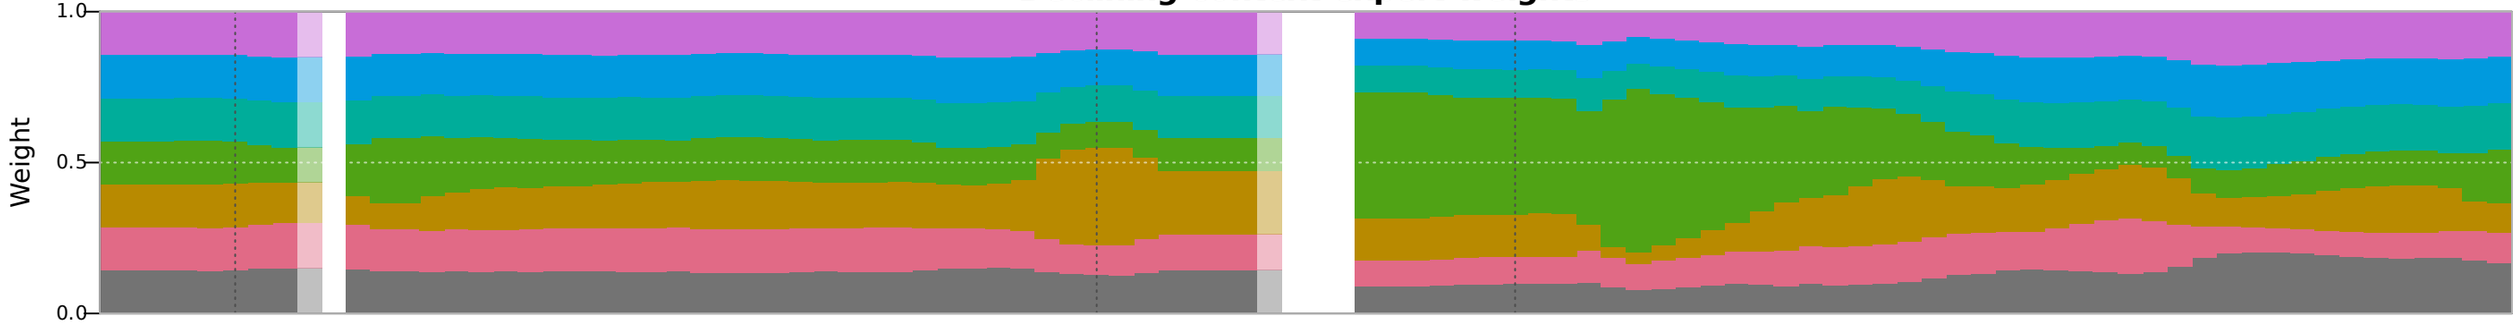

Issued mixture: (1 - gate) x baseline + gate x declining

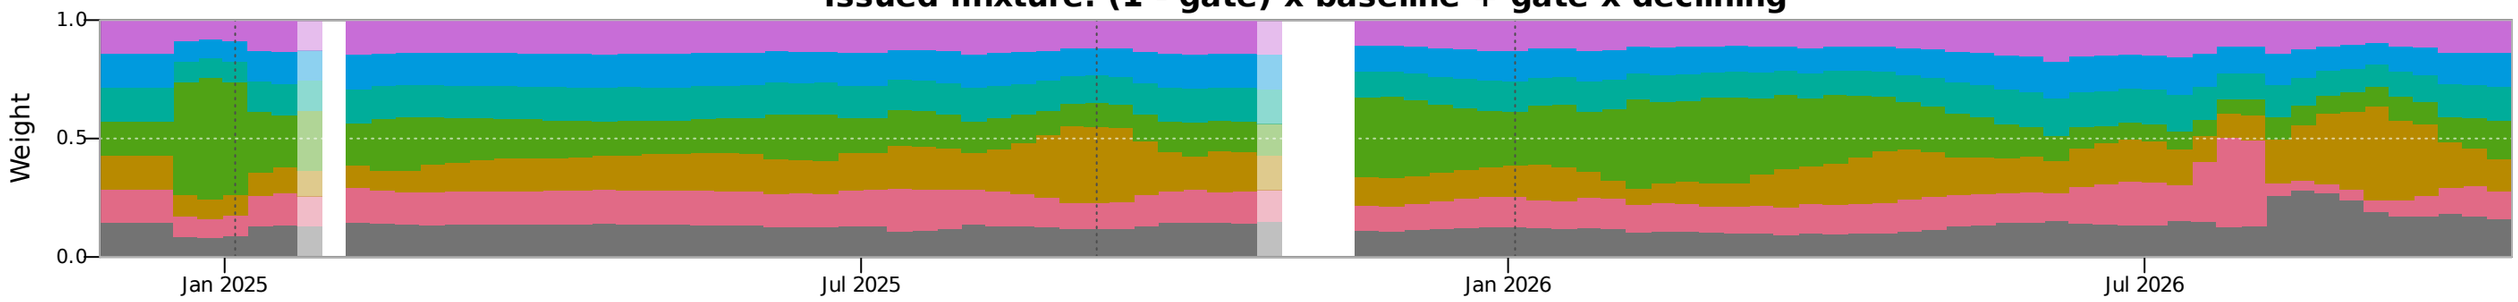

Original
Fixed MultiQT
Leaky MultiQT
Studentized median (base width)
Studentized full base (base width)
Studentized full base (level scales)
Studentized full base (level RMS)


Issue date | Common expert weights across quantile levels | Dotted lines: hindsight peaks

C: gate G = logistic of the target signal (the target median below an earlier point of the base curve).
Both vectors learn from every loss, scaled by 2 x (1 - G) and 2 x G saved when the forecast was made; weeks without a signal use the forecast of A.
Lighter bars: filled forecast rounds.


Score experts: context vectors, blended (D, delta=0, H=4, sharing 1/8)

covid | horizon 2 | California (06) | evaluation: Jun 2025 to Sep 2026 | raw-count updates | feedback delay 0 (latest-at-use-v2)

Declining context at issuance

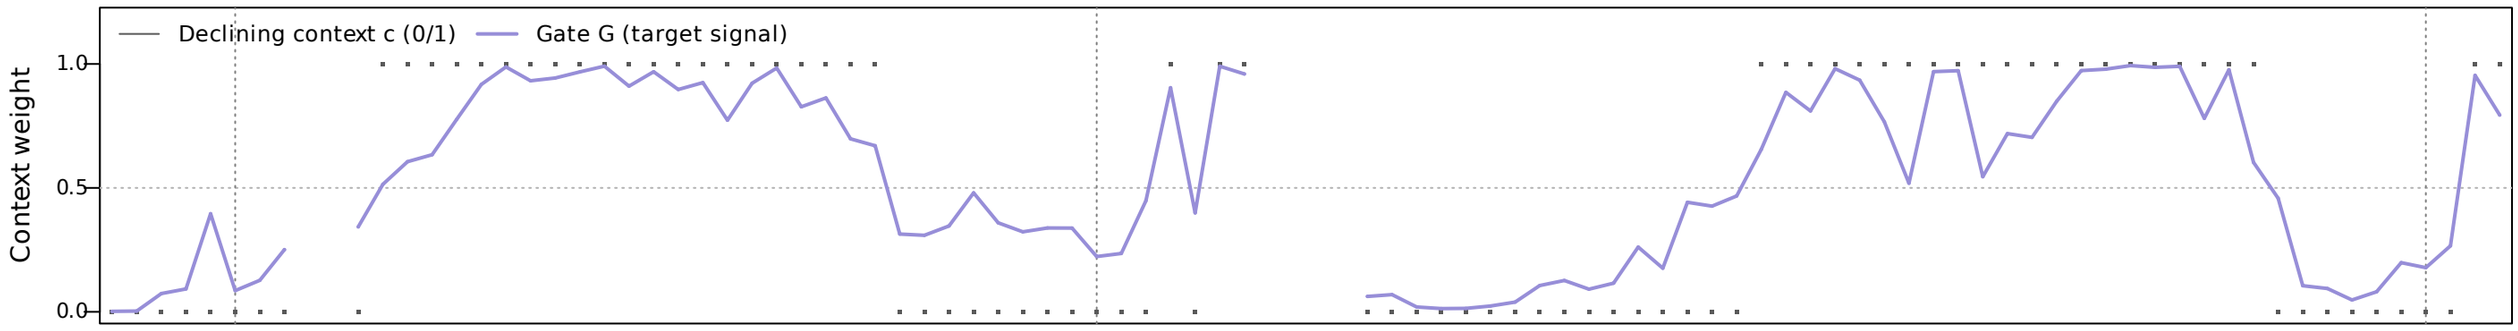


Baseline vector (forecasts made in baseline context)

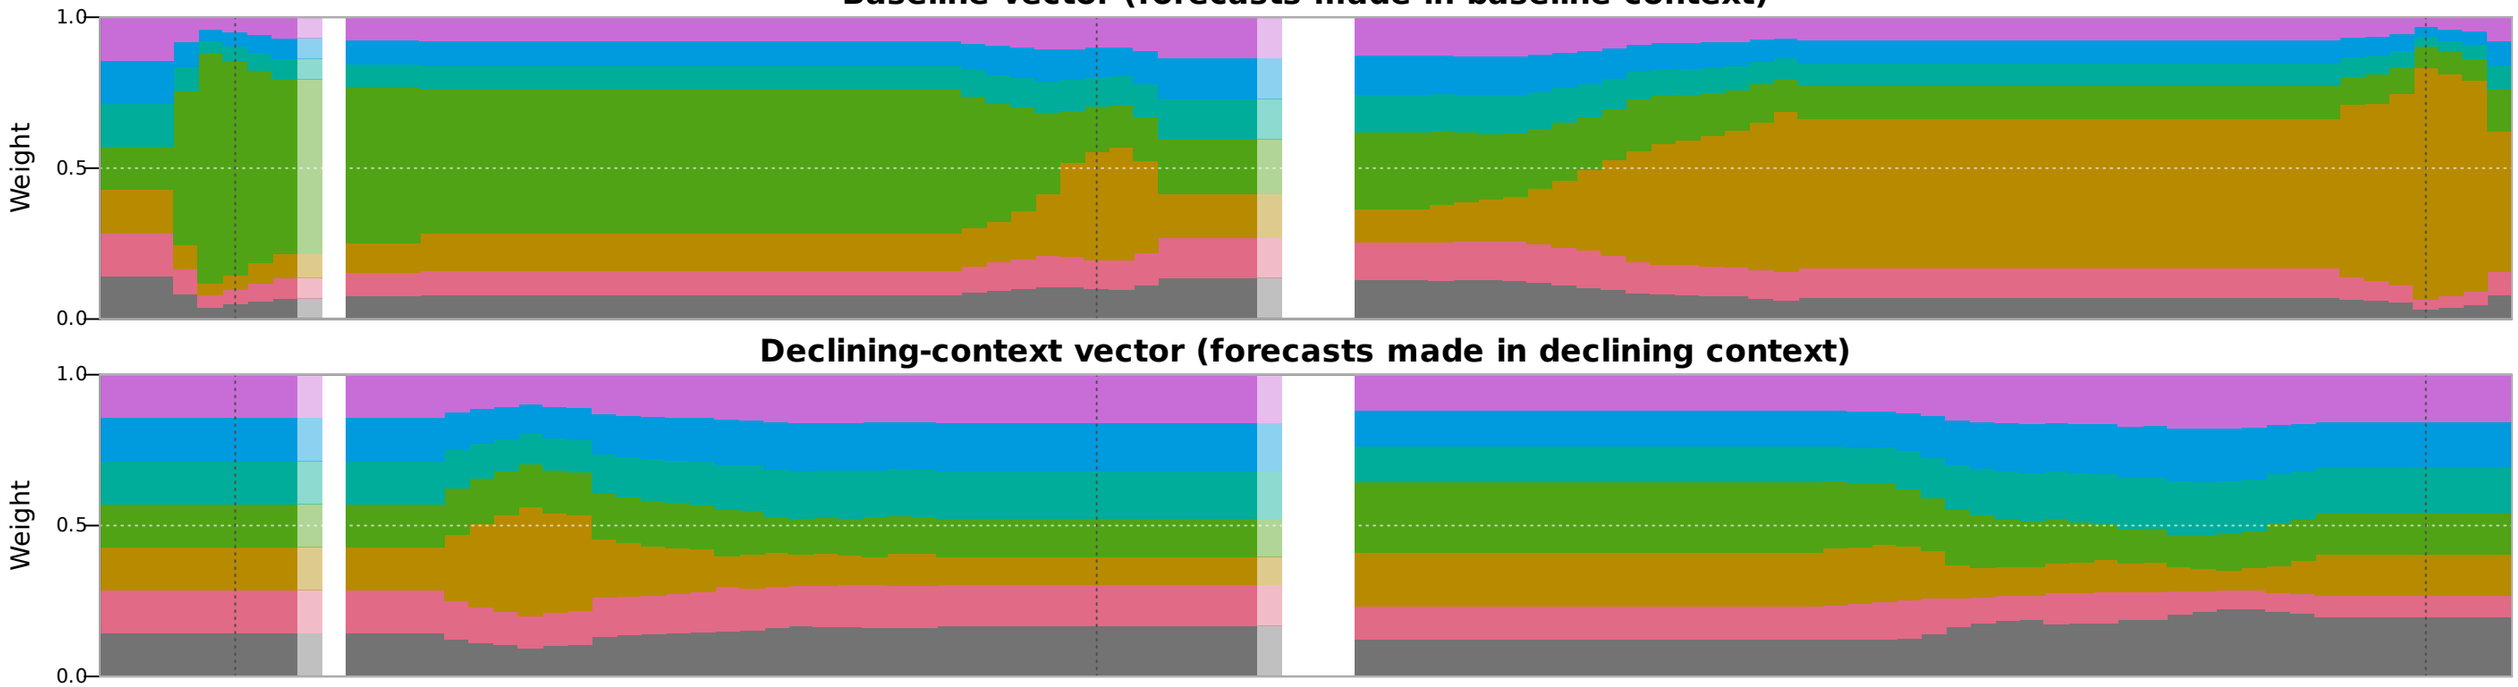

Declining-context vector (forecasts made in declining context)

Issued mixture: (1 - gate) x baseline + gate x declining

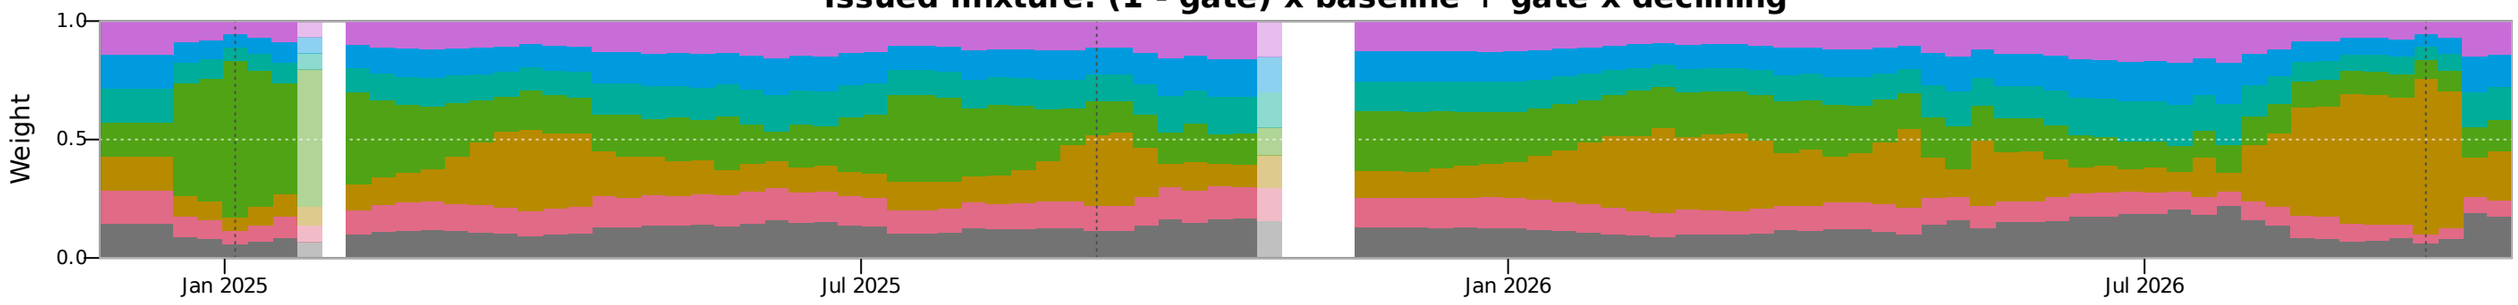

Original
Fixed MultiQT
Leaky MultiQT
Studentized median (base width)
Studentized full base (base width)
Studentized full base (level scales)
Studentized full base (level RMS)


Issue date | Common expert weights across quantile levels | Dotted lines: hindsight peaks

D: each vector learns only from the losses of forecasts made in its context (c saved when the forecast was made).
Forecast: (1 - G) x baseline + G x declining; weeks without a signal use the forecast of A.
Lighter bars: filled forecast rounds.


Score experts: soft switch, three signals (B, strength=1, H=4, sharing 1/8)

covid | horizon 2 | California (06) | evaluation: Jun 2025 to Sep 2026 | raw-count updates | feedback delay 0 (latest-at-use-v2)


Declining context at issuance

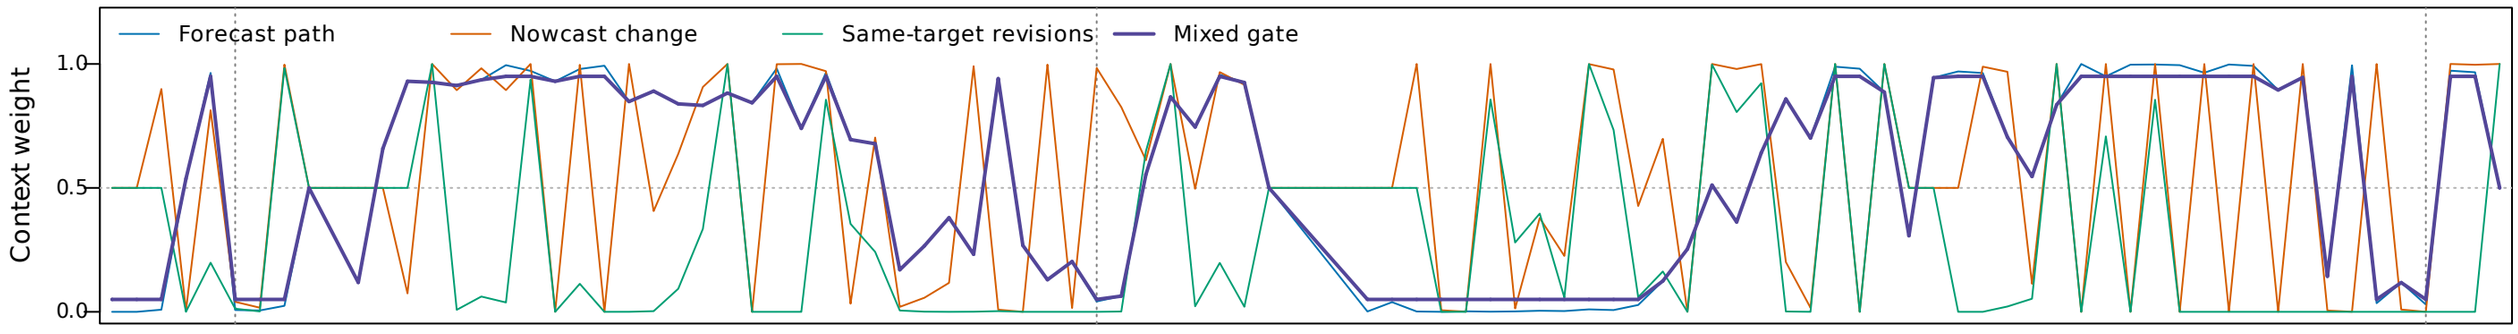


Baseline-context expert weights

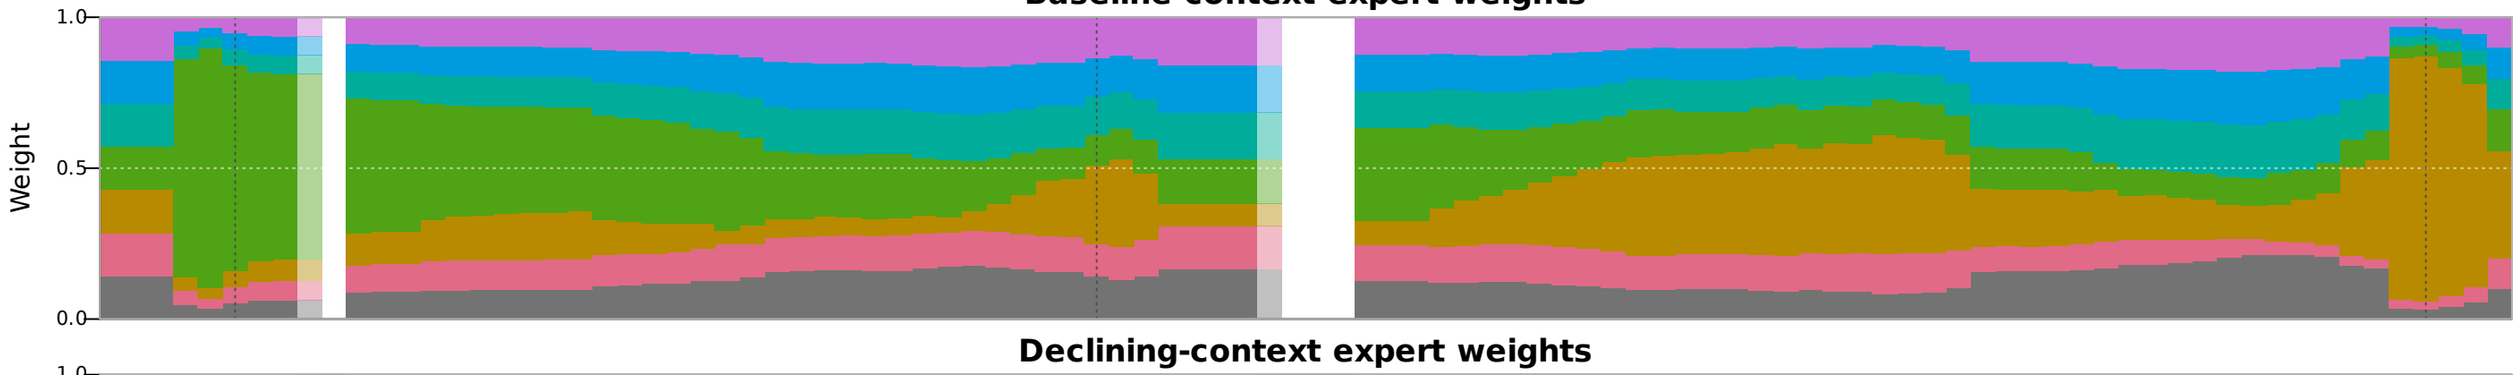

Declining-context expert weights

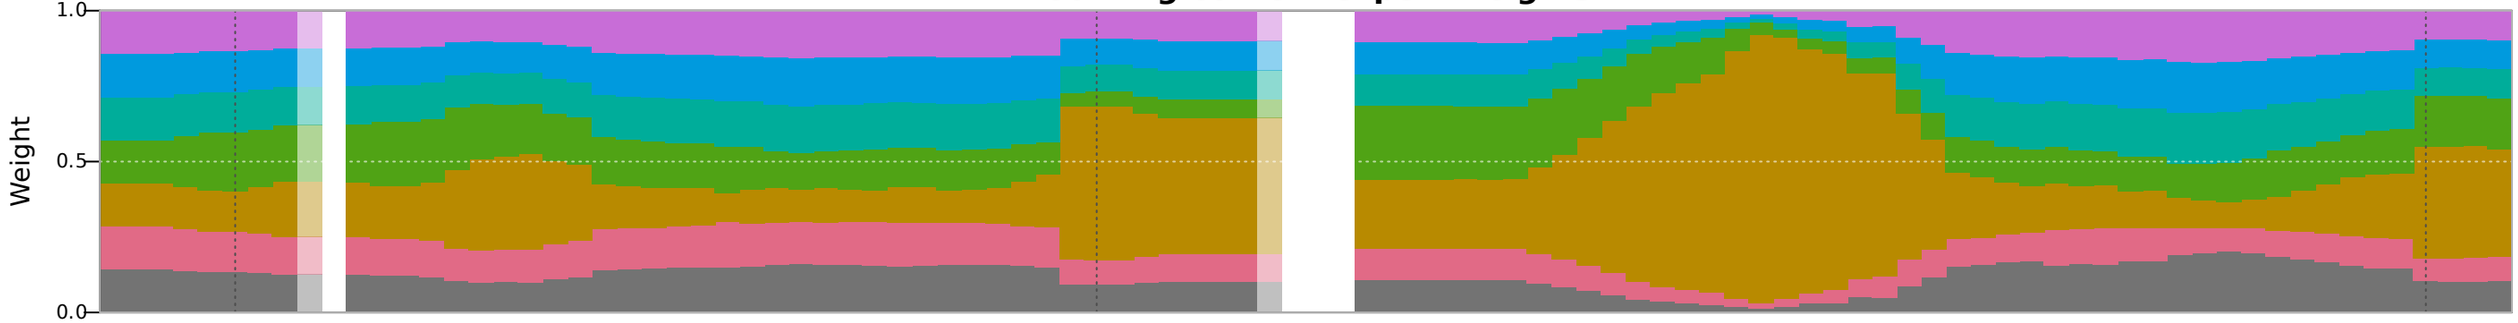

Issued mixture: (1 - gate) x baseline + gate x declining

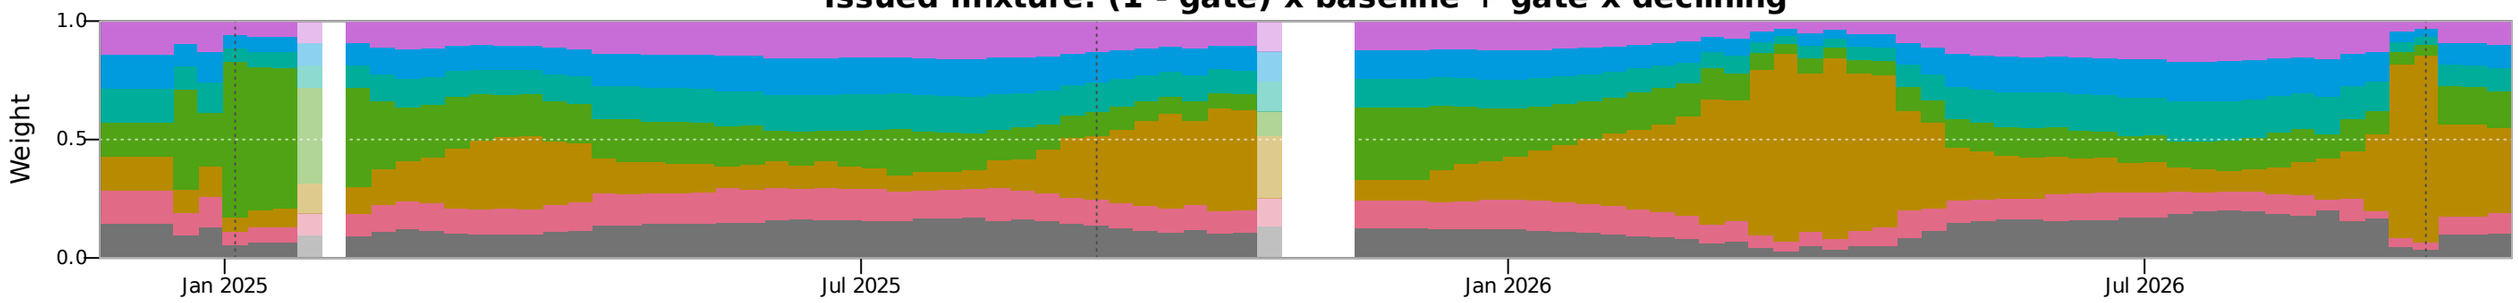

Original
Fixed MultiQT
Leaky MultiQT
Studentized median (base width)
Studentized full base (base width)
Studentized full base (level scales)
Studentized full base (level RMS)


Issue date | Common expert weights across quantile levels | Dotted lines: hindsight peaks

B: the gate is a context weight, not a peak probability; missing signals contribute a neutral score of 0.5.
Both vectors learn from every loss, scaled by 2 x (1 - gate) and 2 x gate saved when the forecast was made.
Lighter bars: filled forecast rounds.


Score experts: soft switch, target signal (C, delta=0, H=4, sharing 1/8)

covid | horizon 2 | California (06) | evaluation: Jun 2025 to Sep 2026 | raw-count updates | feedback delay 0 (latest-at-use-v2)


Declining context at issuance

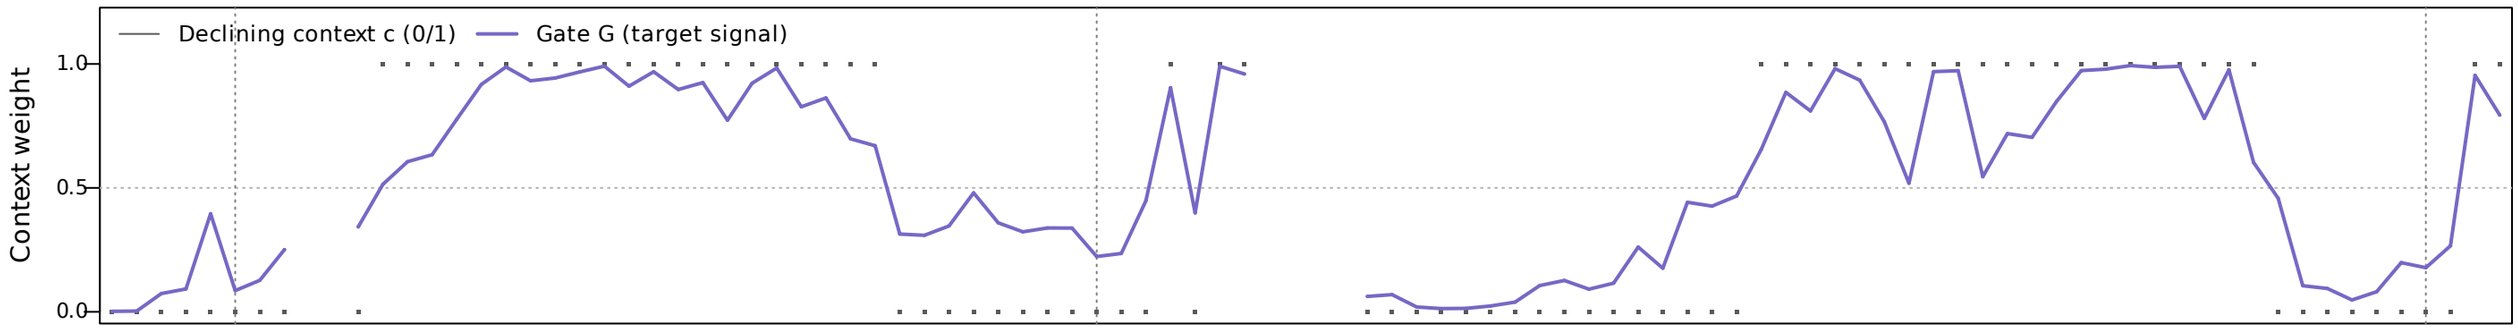


Baseline-context expert weights

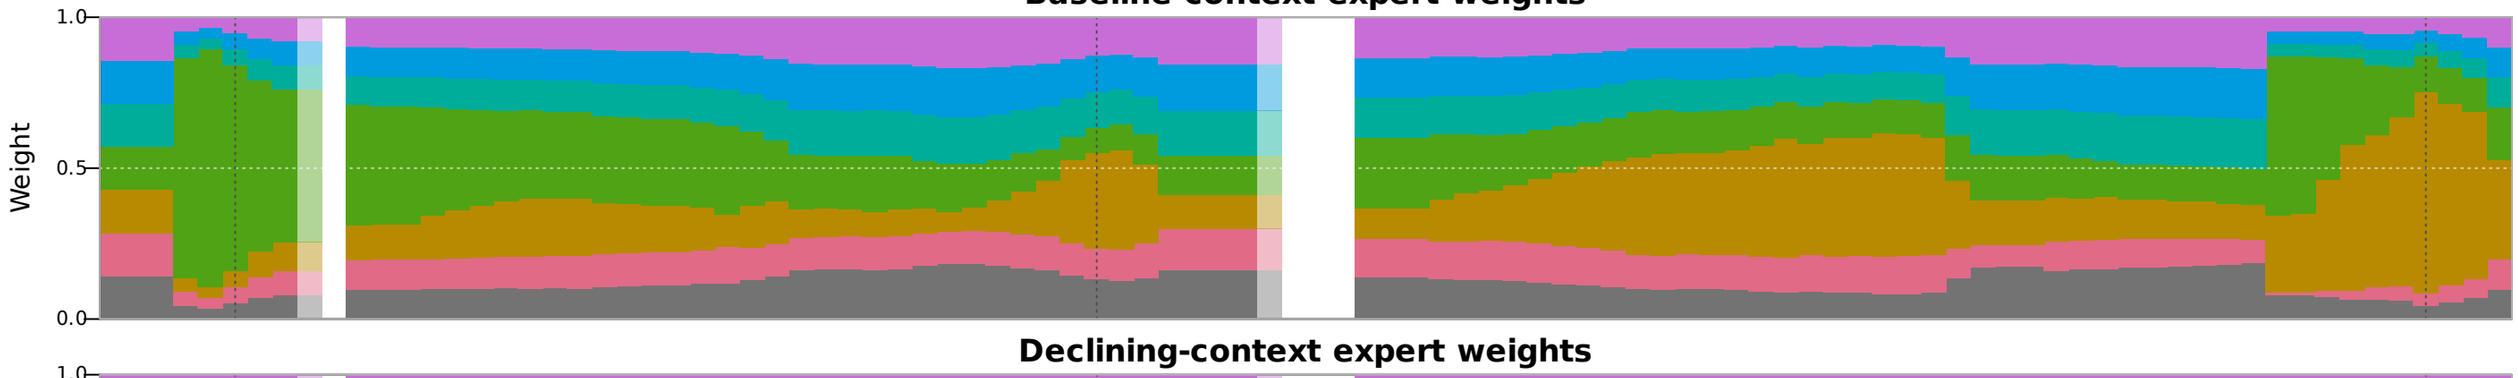

Declining-context expert weights

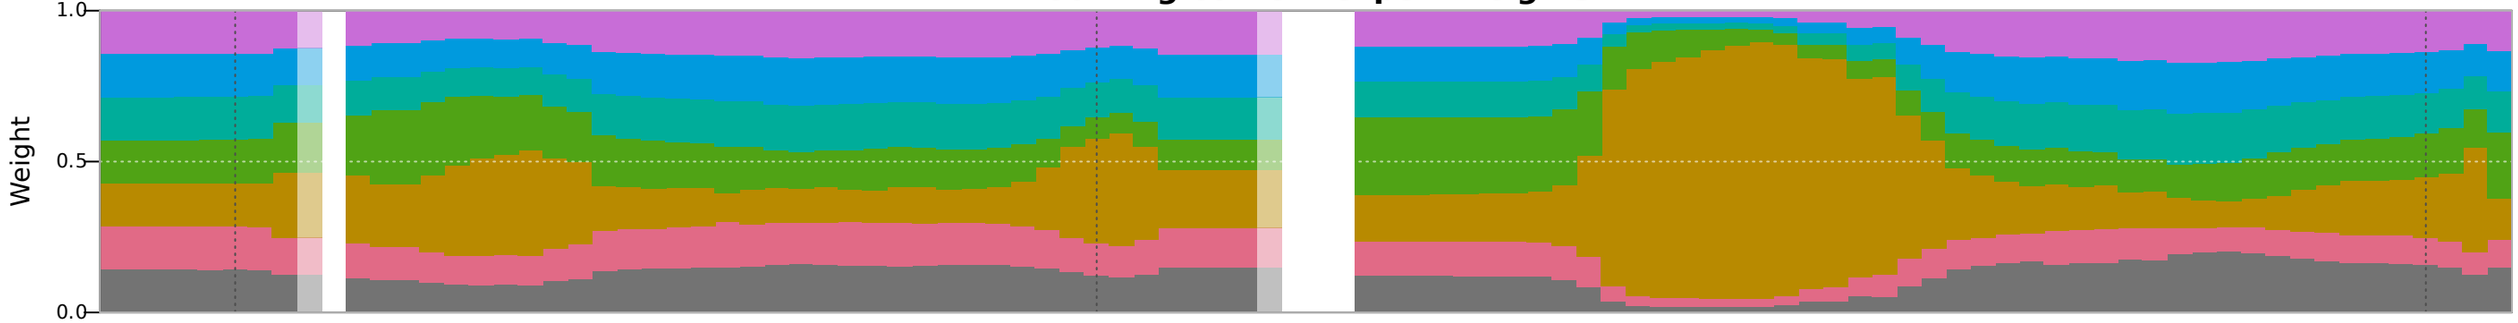

Issued mixture: (1 - gate) x baseline + gate x declining

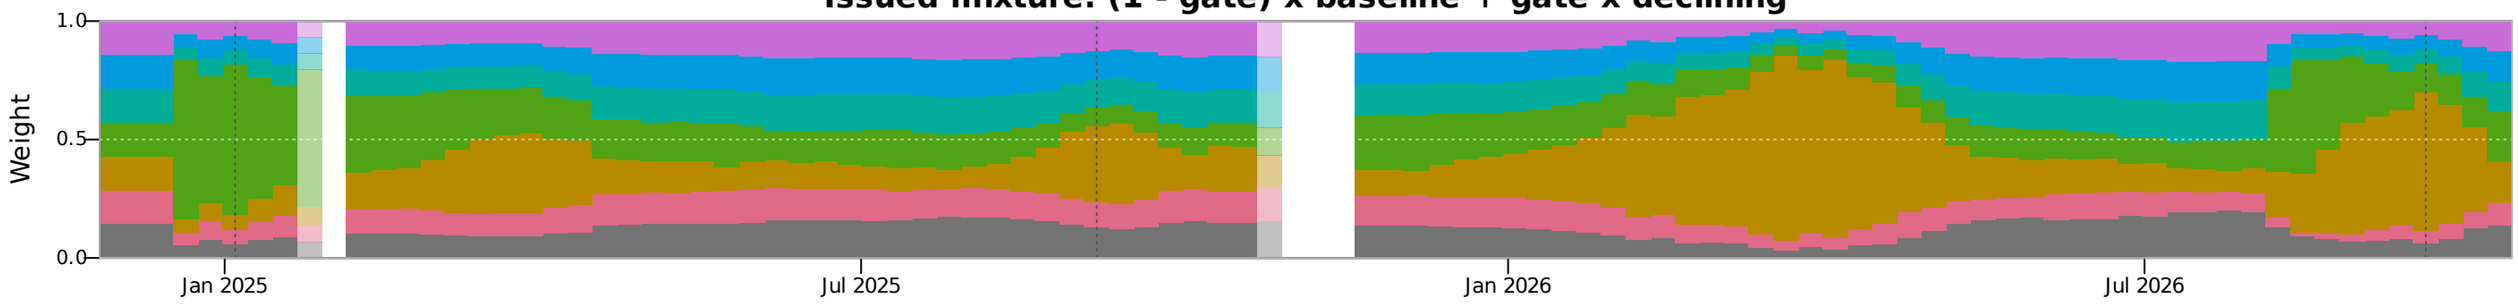

Original
Fixed MultiQT
Leaky MultiQT
Studentized median (base width)
Studentized full base (base width)
Studentized full base (level scales)
Studentized full base (level RMS)


Issue date | Common expert weights across quantile levels | Dotted lines: hindsight peaks

C: gate G = logistic of the target signal (the target median below an earlier point of the base curve).
Both vectors learn from every loss, scaled by 2 x (1 - G) and 2 x G saved when the forecast was made; weeks without a signal use the forecast of A.
Lighter bars: filled forecast rounds.


Score experts: context vectors, blended (D, delta=0, H=4, sharing 1/8)

covid | horizon 2 | Texas (48) | evaluation: Jun 2025 to Sep 2026 | raw-count updates | feedback delay 0 (latest-at-use-v2)


Declining context at issuance

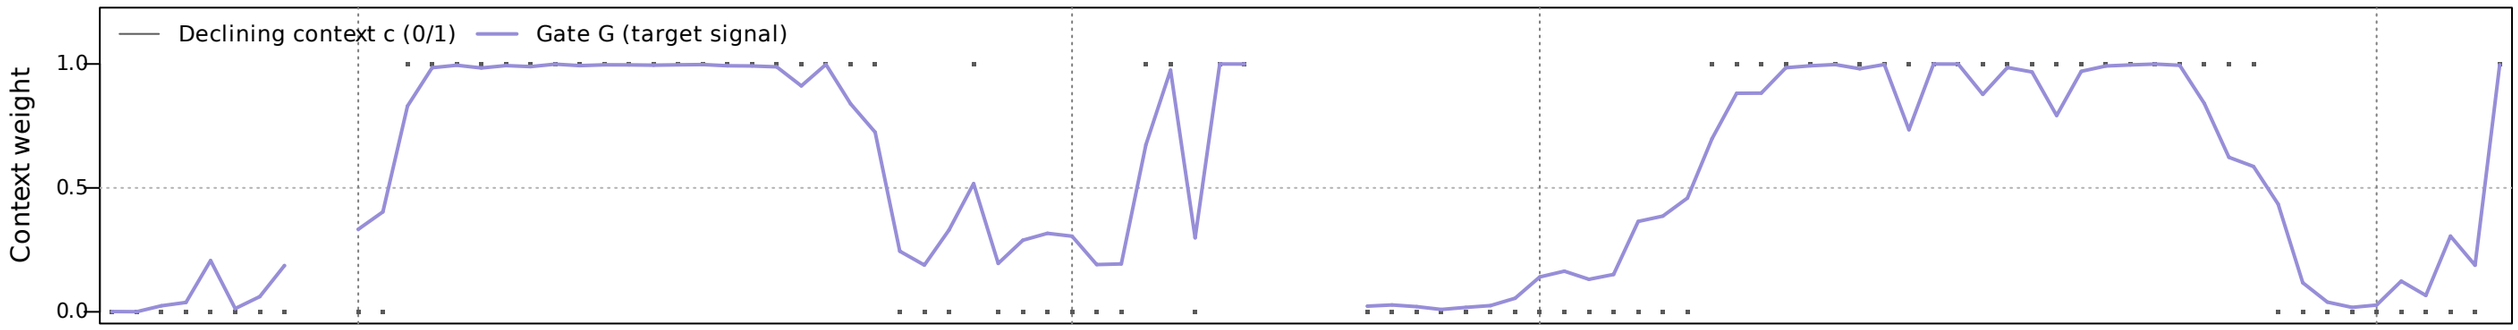


Baseline vector (forecasts made in baseline context)

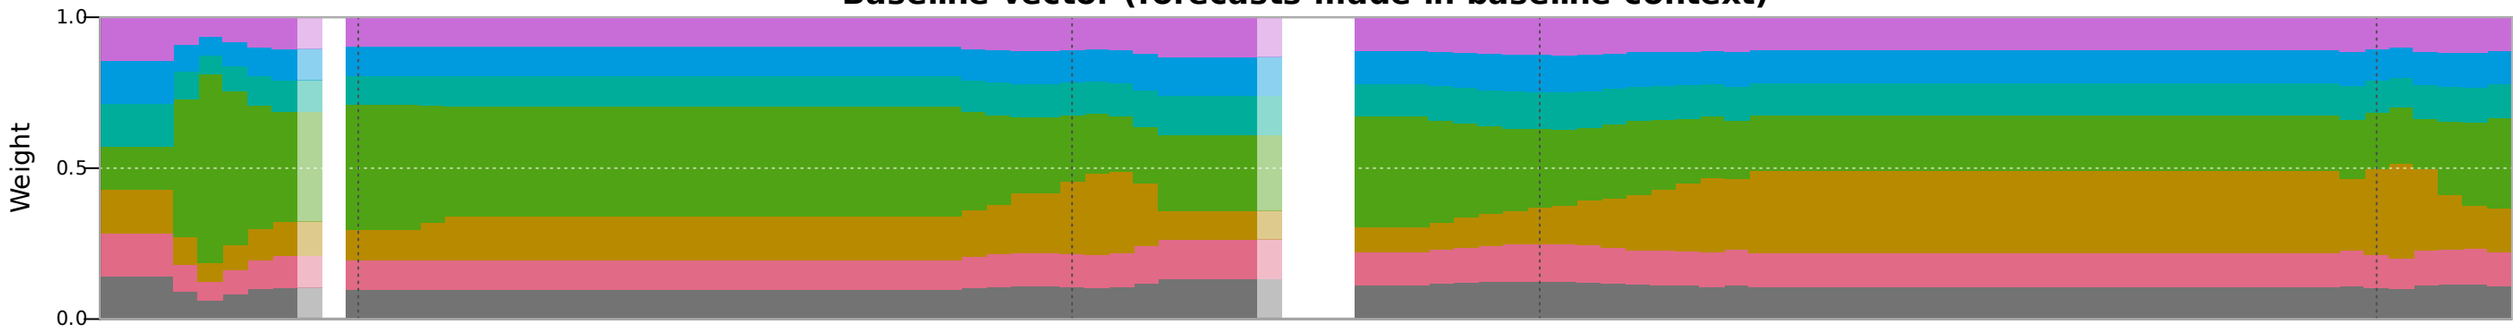

Declining-context vector (forecasts made in declining context)

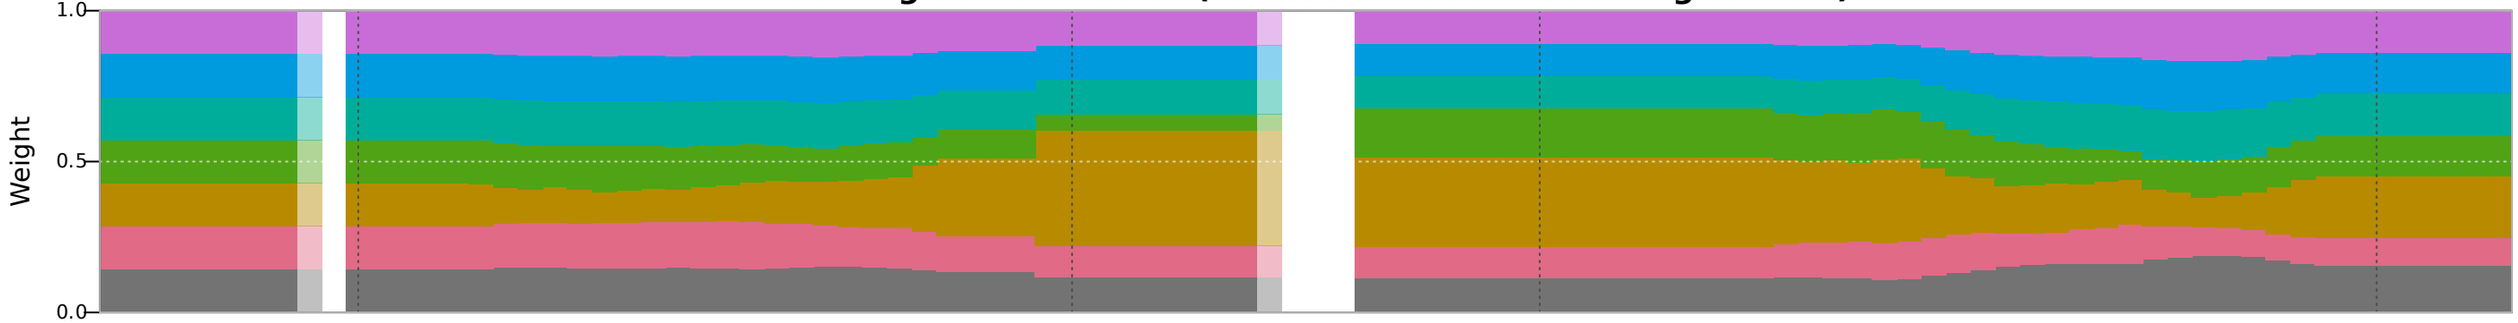

Issued mixture: (1 - gate) x baseline + gate x declining

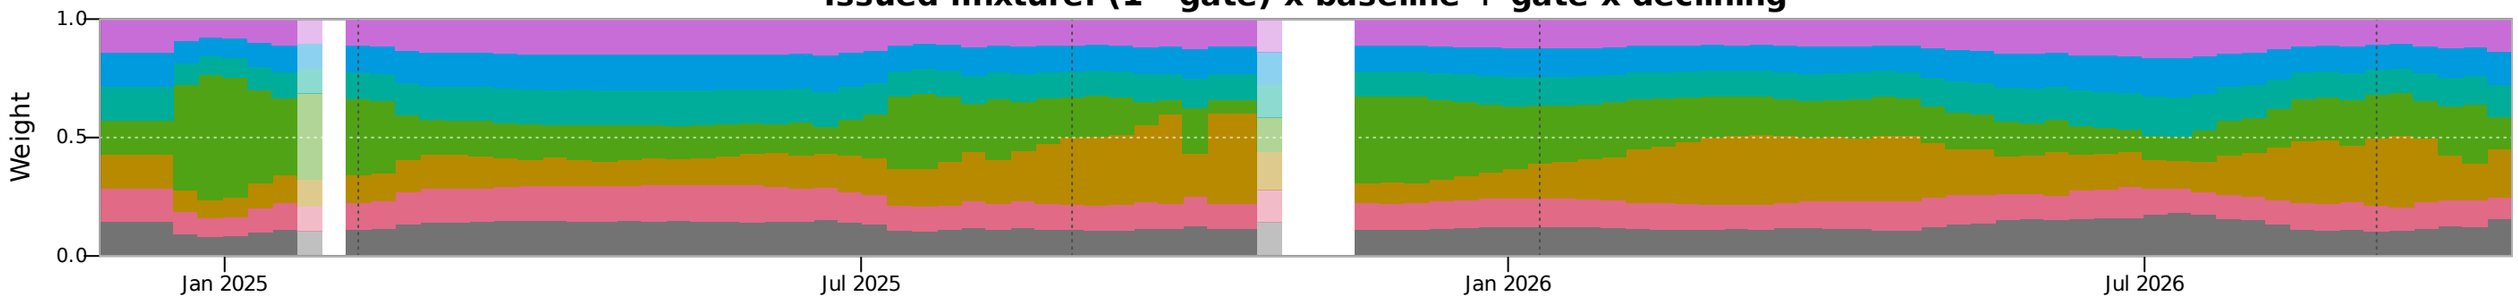

Original
Fixed MultiQT
Leaky MultiQT
Studentized median (base width)
Studentized full base (base width)
Studentized full base (level scales)
Studentized full base (level RMS)


Issue date | Common expert weights across quantile levels | Dotted lines: hindsight peaks

D: each vector learns only from the losses of forecasts made in its context (c saved when the forecast was made).
Forecast: (1 - G) x baseline + G x declining; weeks without a signal use the forecast of A.
Lighter bars: filled forecast rounds.


Score experts: soft switch, three signals (B, strength=1, H=4, sharing 1/8)

covid | horizon 2 | Texas (48) | evaluation: Jun 2025 to Sep 2026 | raw-count updates | feedback delay 0 (latest-at-use-v2)


Declining context at issuance

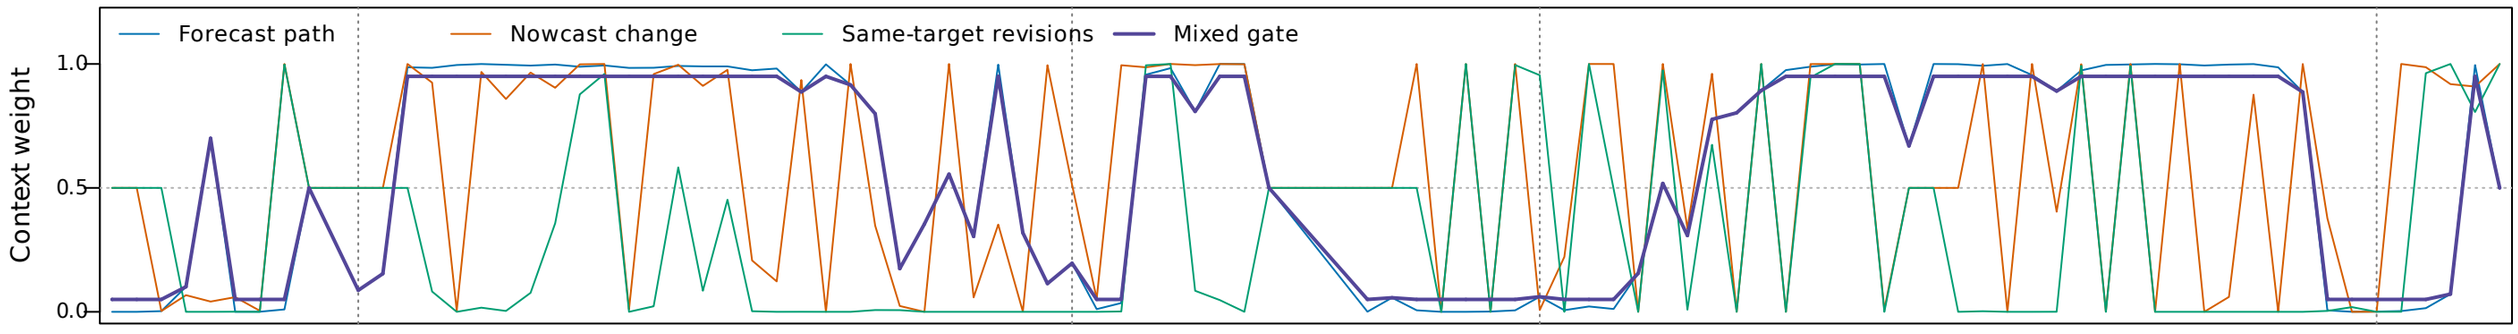


Baseline-context expert weights

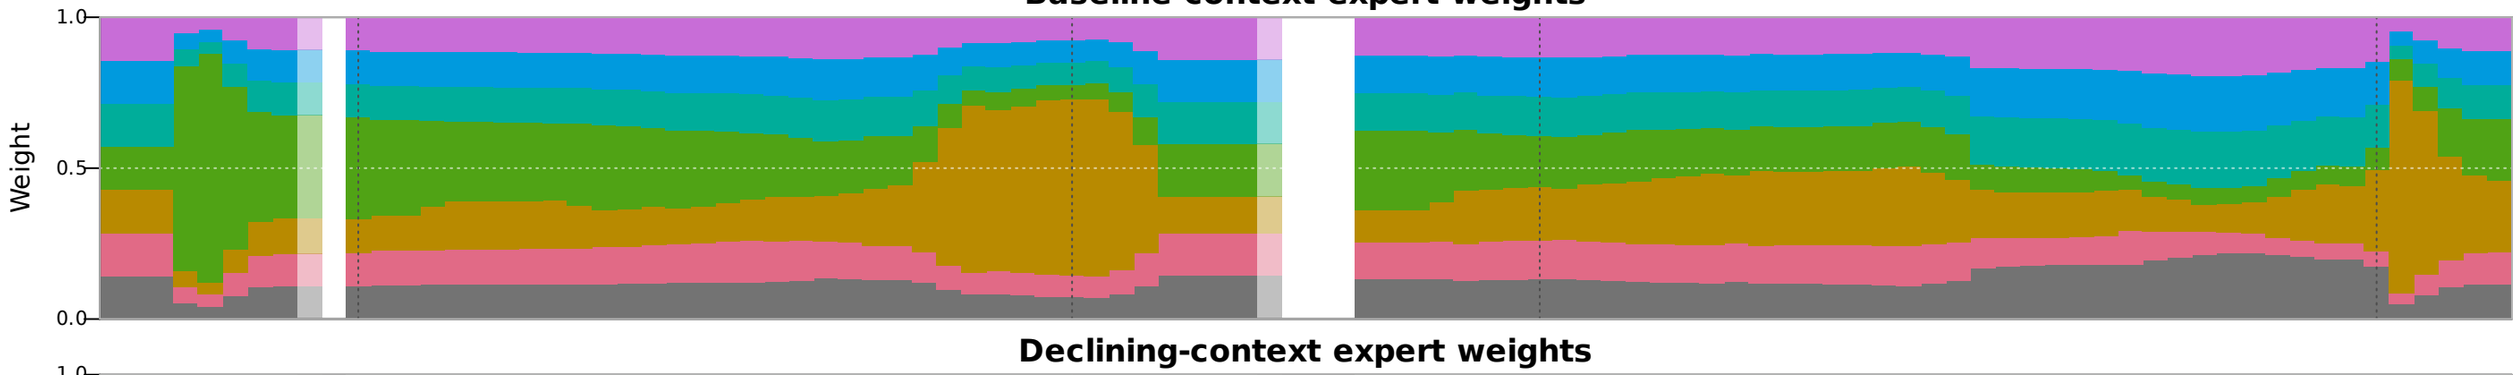

Declining-context expert weights

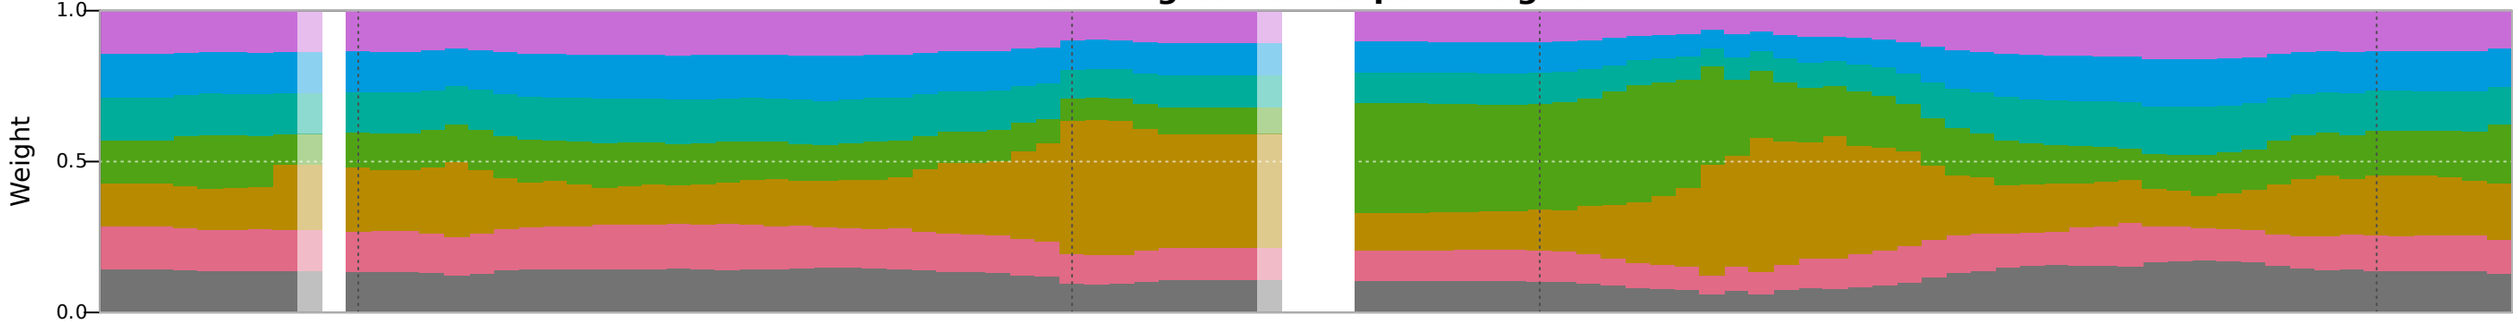

Issued mixture: (1 - gate) x baseline + gate x declining

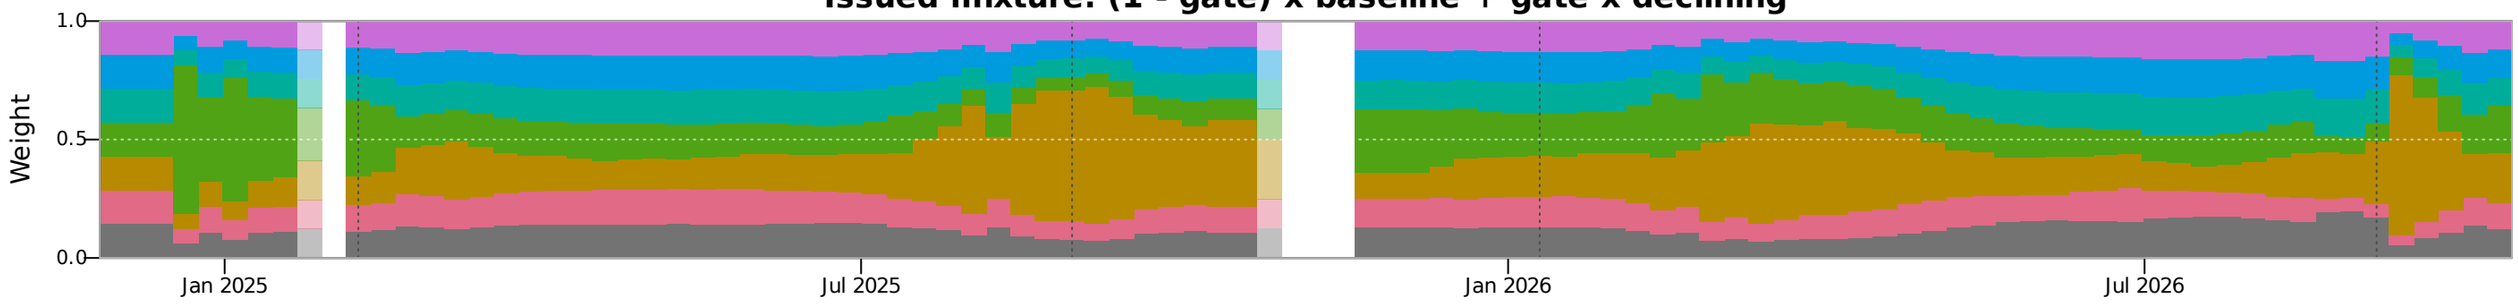

Original
Fixed MultiQT
Leaky MultiQT
Studentized median (base width)
Studentized full base (base width)
Studentized full base (level scales)
Studentized full base (level RMS)


Issue date | Common expert weights across quantile levels | Dotted lines: hindsight peaks

B: the gate is a context weight, not a peak probability; missing signals contribute a neutral score of 0.5.
Both vectors learn from every loss, scaled by 2 x (1 - gate) and 2 x gate saved when the forecast was made.
Lighter bars: filled forecast rounds.


Score experts: soft switch, target signal (C, delta=0, H=4, sharing 1/8)

covid | horizon 2 | Texas (48) | evaluation: Jun 2025 to Sep 2026 | raw-count updates | feedback delay 0 (latest-at-use-v2)


Declining context at issuance

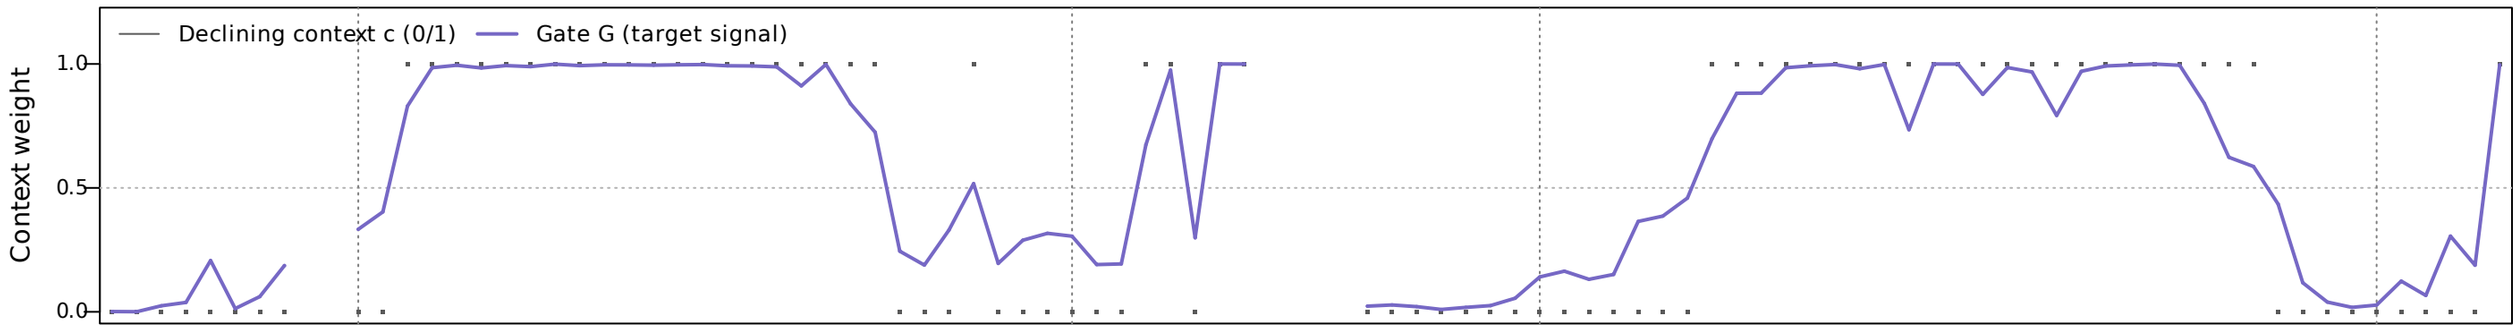


Baseline-context expert weights

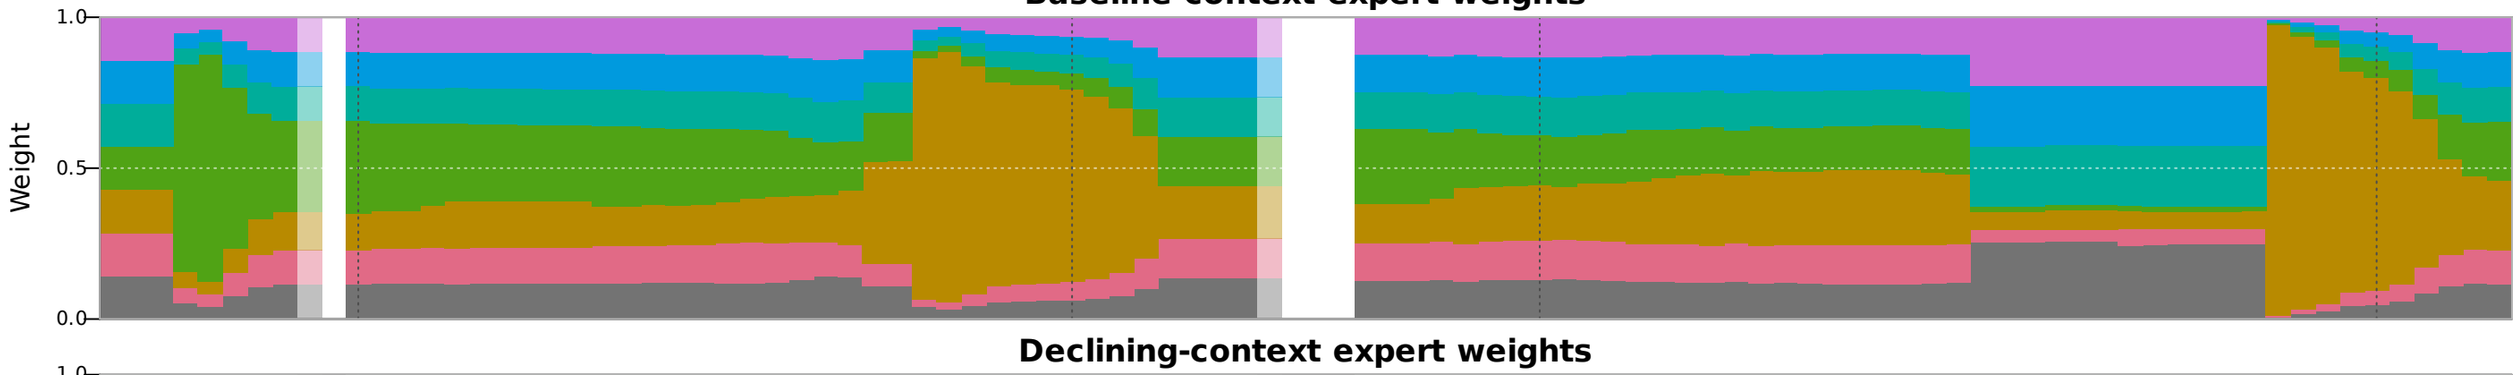

Declining-context expert weights

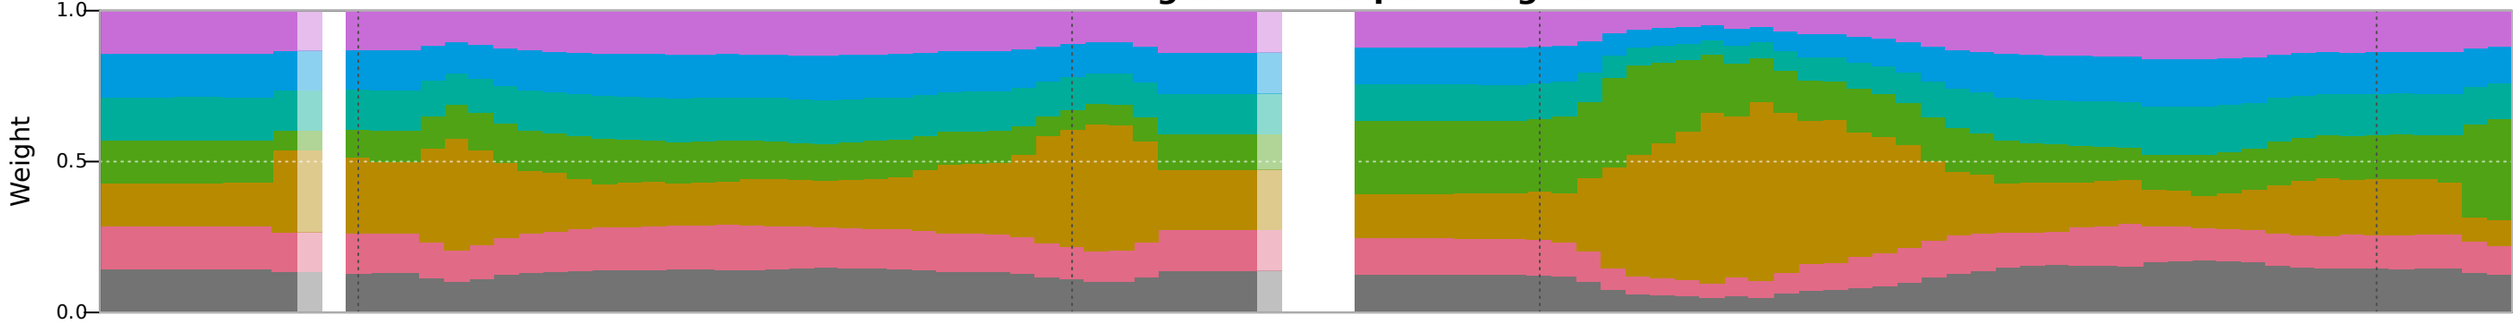

Issued mixture: (1 - gate) x baseline + gate x declining

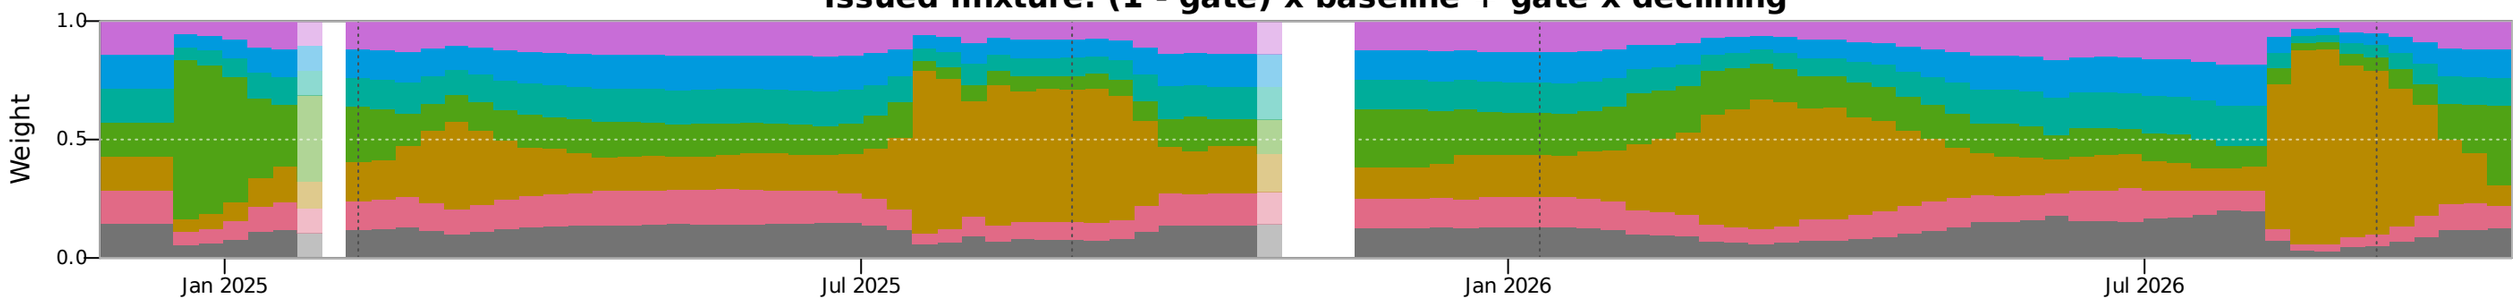

Original
Fixed MultiQT
Leaky MultiQT
Studentized median (base width)
Studentized full base (base width)
Studentized full base (level scales)
Studentized full base (level RMS)


Issue date | Common expert weights across quantile levels | Dotted lines: hindsight peaks

C: gate G = logistic of the target signal (the target median below an earlier point of the base curve).
Both vectors learn from every loss, scaled by 2 x (1 - G) and 2 x G saved when the forecast was made; weeks without a signal use the forecast of A.
Lighter bars: filled forecast rounds.


Score experts: context vectors, blended (D, delta=0, H=4, sharing 1/8)

covid | horizon 2 | New York (36) | evaluation: Jun 2025 to Sep 2026 | raw-count updates | feedback delay 0 (latest-at-use-v2)

Declining context at issuance

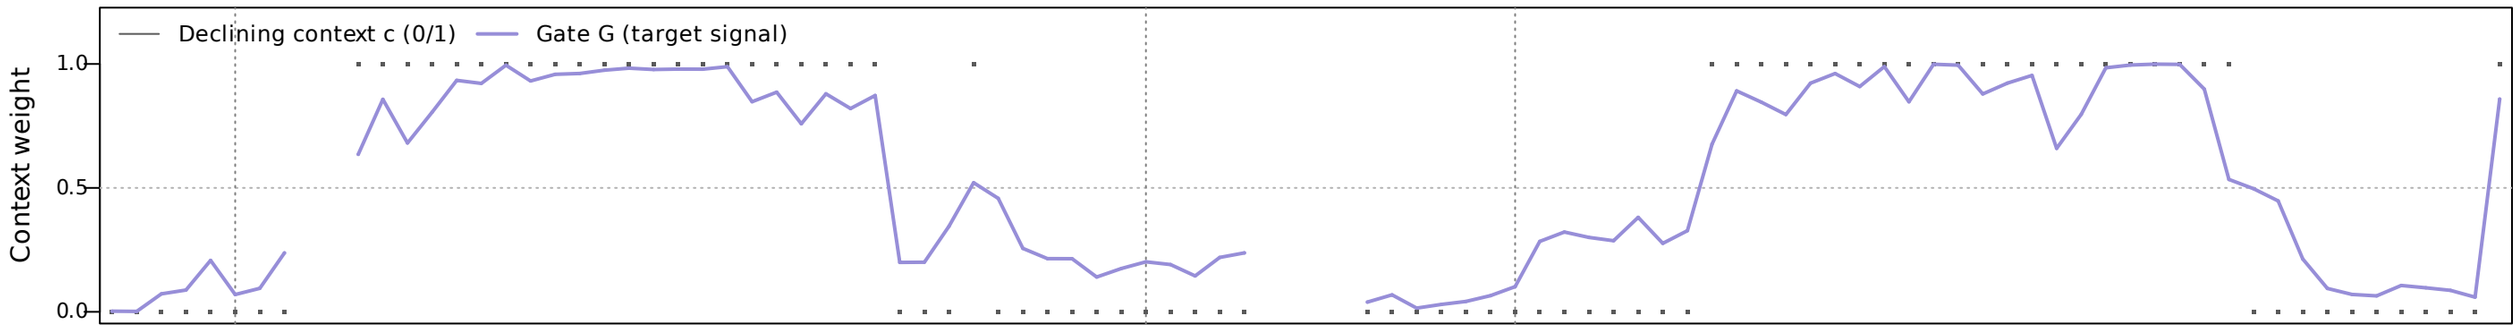


Baseline vector (forecasts made in baseline context)

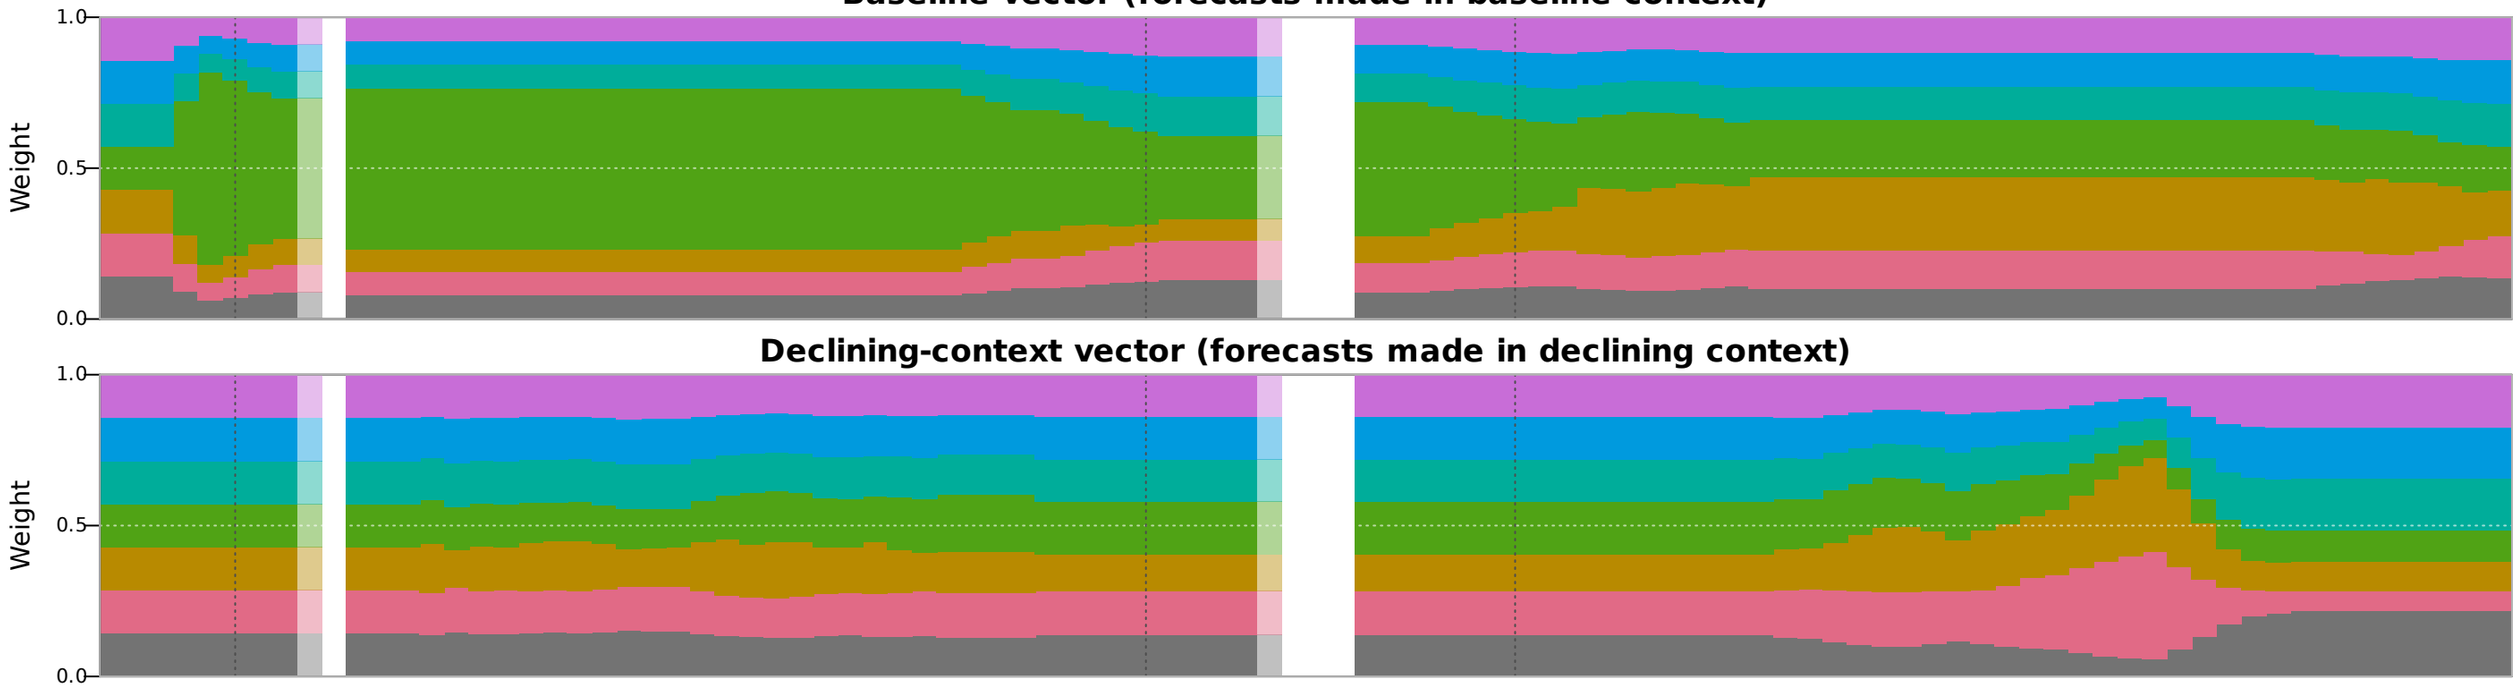

Declining-context vector (forecasts made in declining context)

Issued mixture: (1 - gate) x baseline + gate x declining

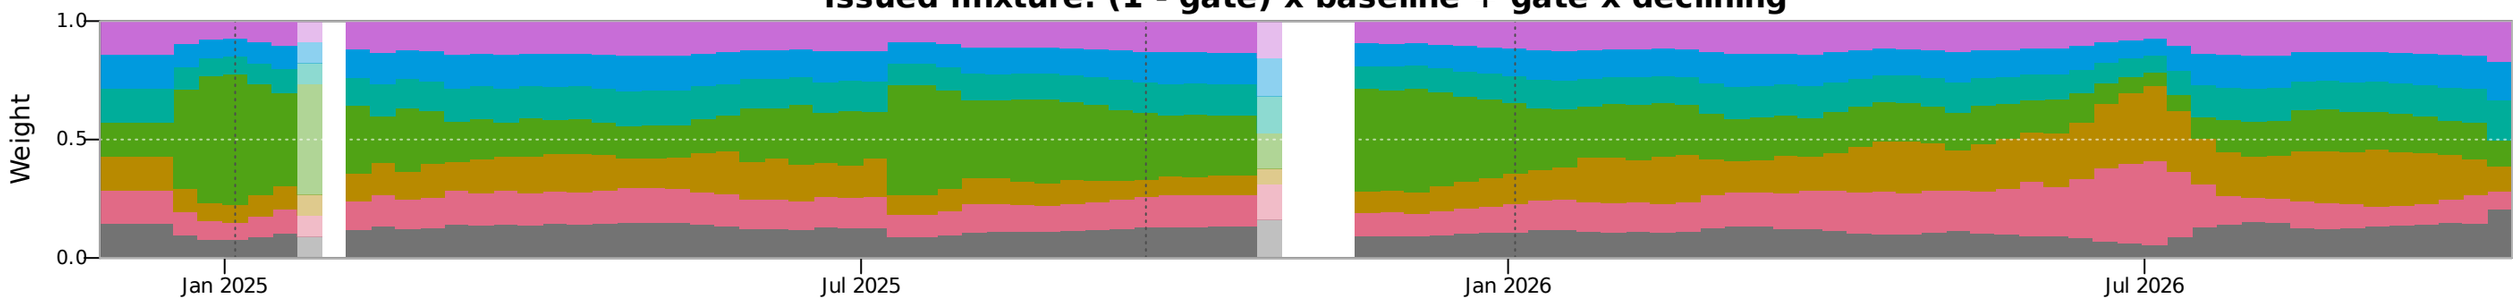

Original
Fixed MultiQT
Leaky MultiQT
Studentized median (base width)
Studentized full base (base width)
Studentized full base (level scales)
Studentized full base (level RMS)


Issue date | Common expert weights across quantile levels | Dotted lines: hindsight peaks

D: each vector learns only from the losses of forecasts made in its context (c saved when the forecast was made).
Forecast: (1 - G) x baseline + G x declining; weeks without a signal use the forecast of A.
Lighter bars: filled forecast rounds.


Score experts: soft switch, three signals (B, strength=1, H=4, sharing 1/8)

covid | horizon 2 | New York (36) | evaluation: Jun 2025 to Sep 2026 | raw-count updates | feedback delay 0 (latest-at-use-v2)


Declining context at issuance

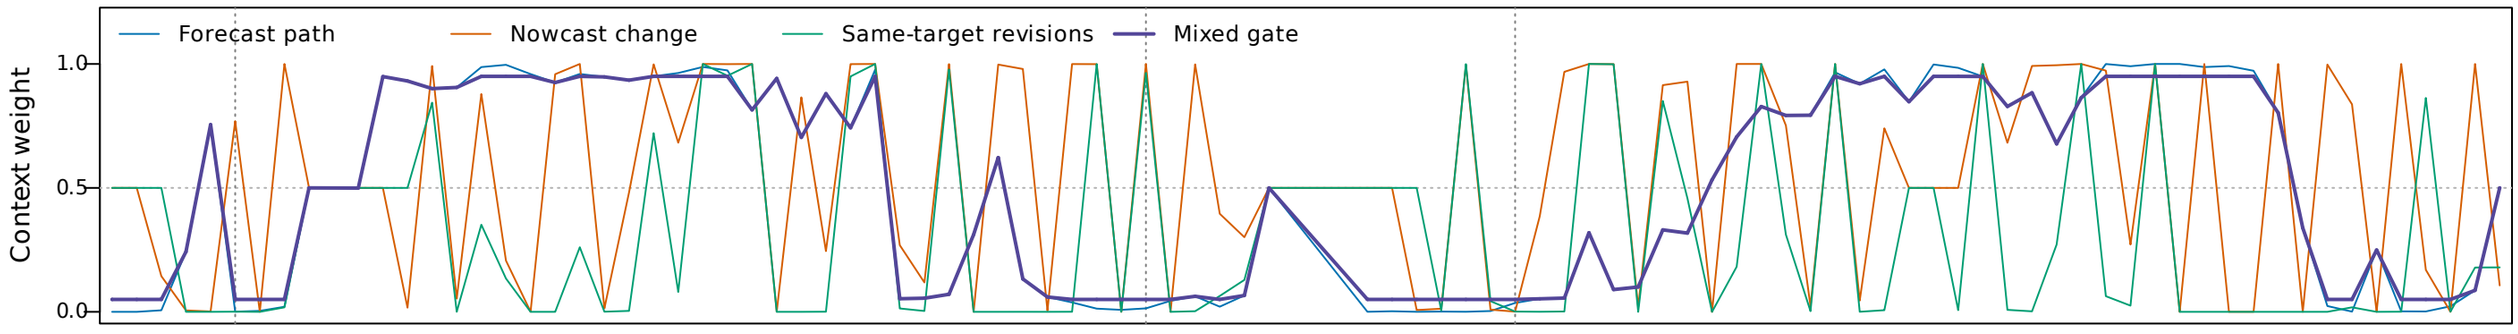


Baseline-context expert weights

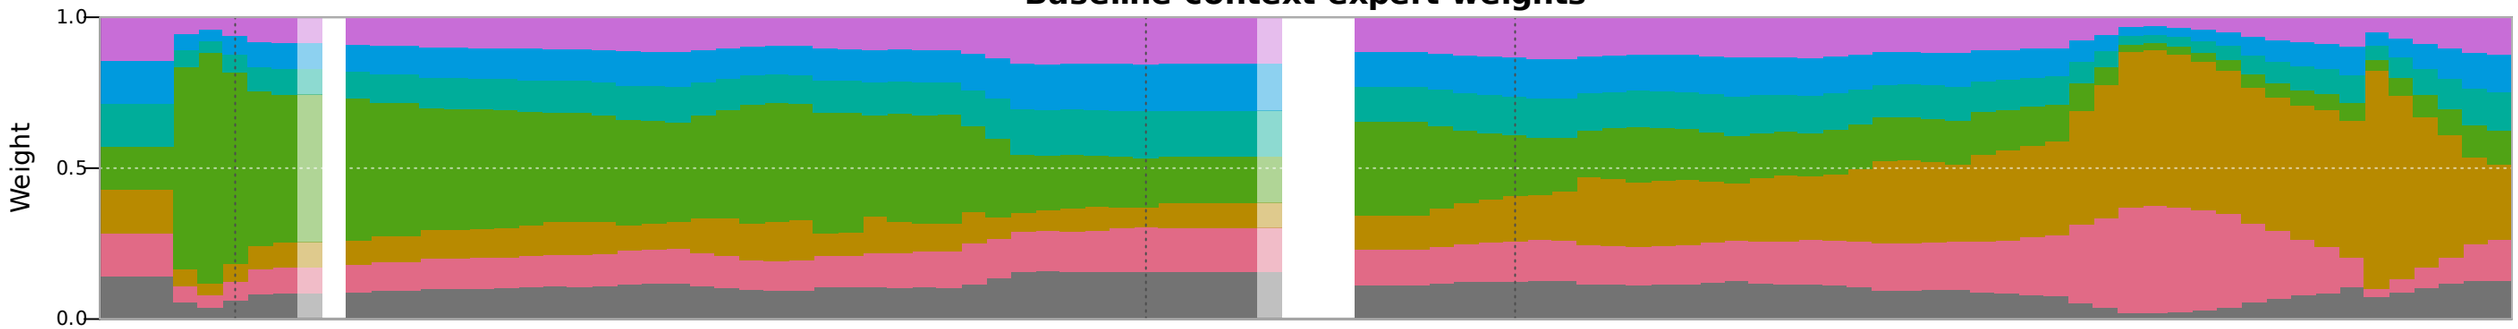

Declining-context expert weights

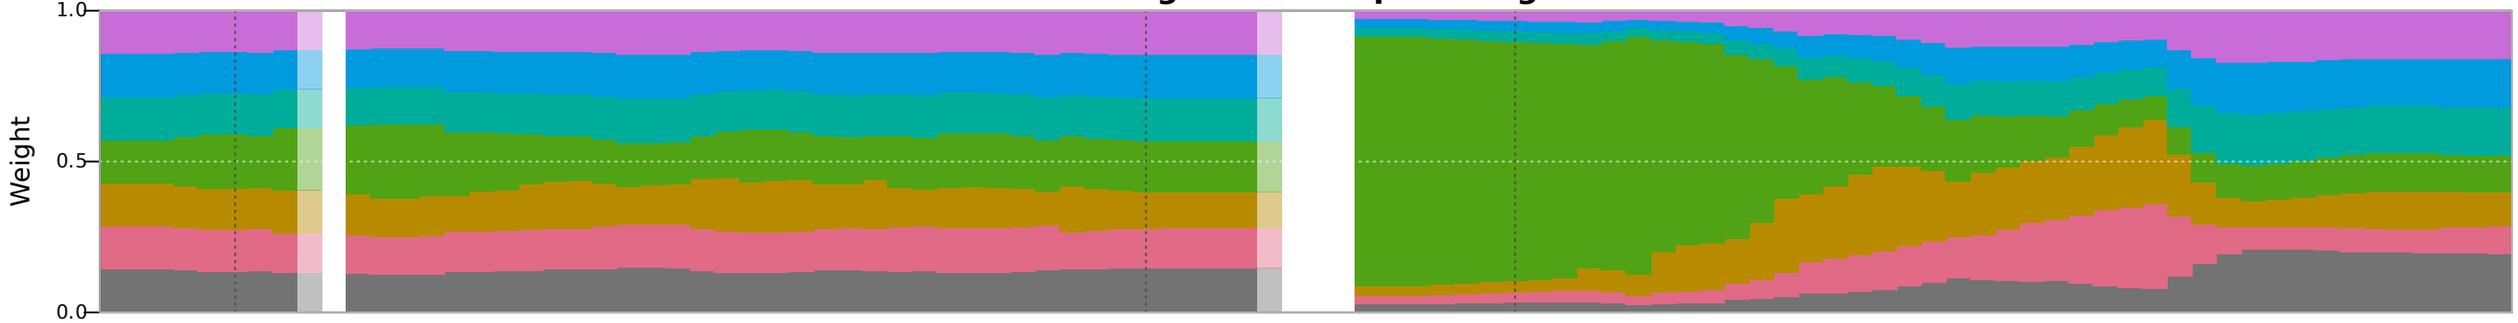

Issued mixture: (1 - gate) x baseline + gate x declining

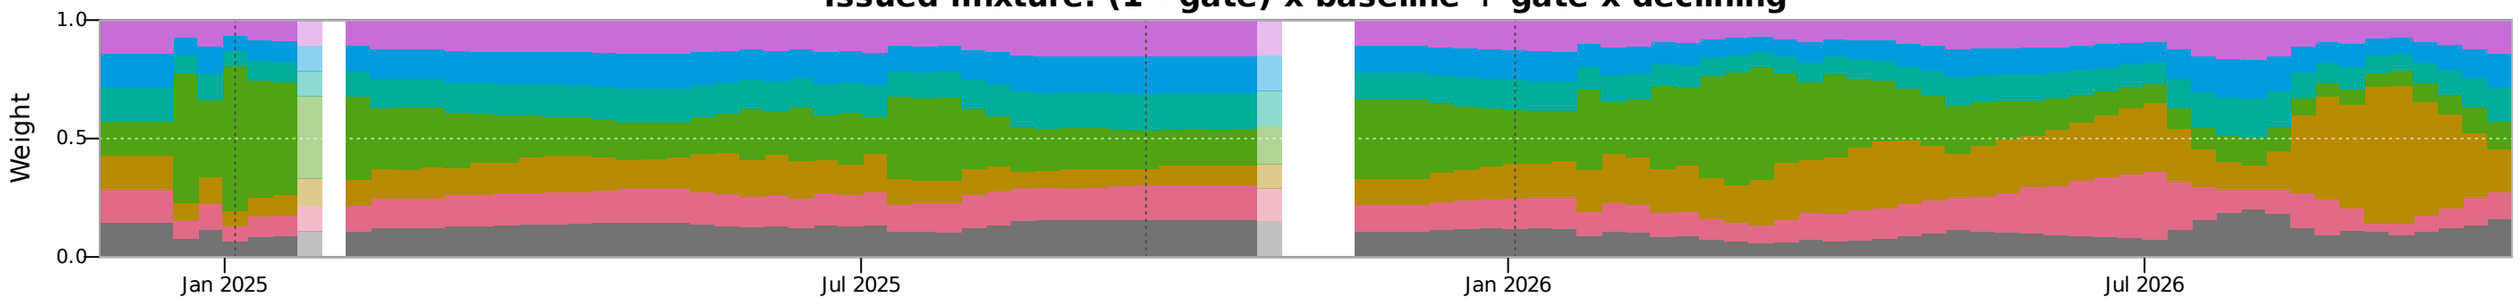

Original
Fixed MultiQT
Leaky MultiQT
Studentized median (base width)
Studentized full base (base width)
Studentized full base (level scales)
Studentized full base (level RMS)


Issue date | Common expert weights across quantile levels | Dotted lines: hindsight peaks

B: the gate is a context weight, not a peak probability; missing signals contribute a neutral score of 0.5.
Both vectors learn from every loss, scaled by 2 x (1 - gate) and 2 x gate saved when the forecast was made.
Lighter bars: filled forecast rounds.


Score experts: soft switch, target signal (C, delta=0, H=4, sharing 1/8)

covid | horizon 2 | New York (36) | evaluation: Jun 2025 to Sep 2026 | raw-count updates | feedback delay 0 (latest-at-use-v2)

Declining context at issuance

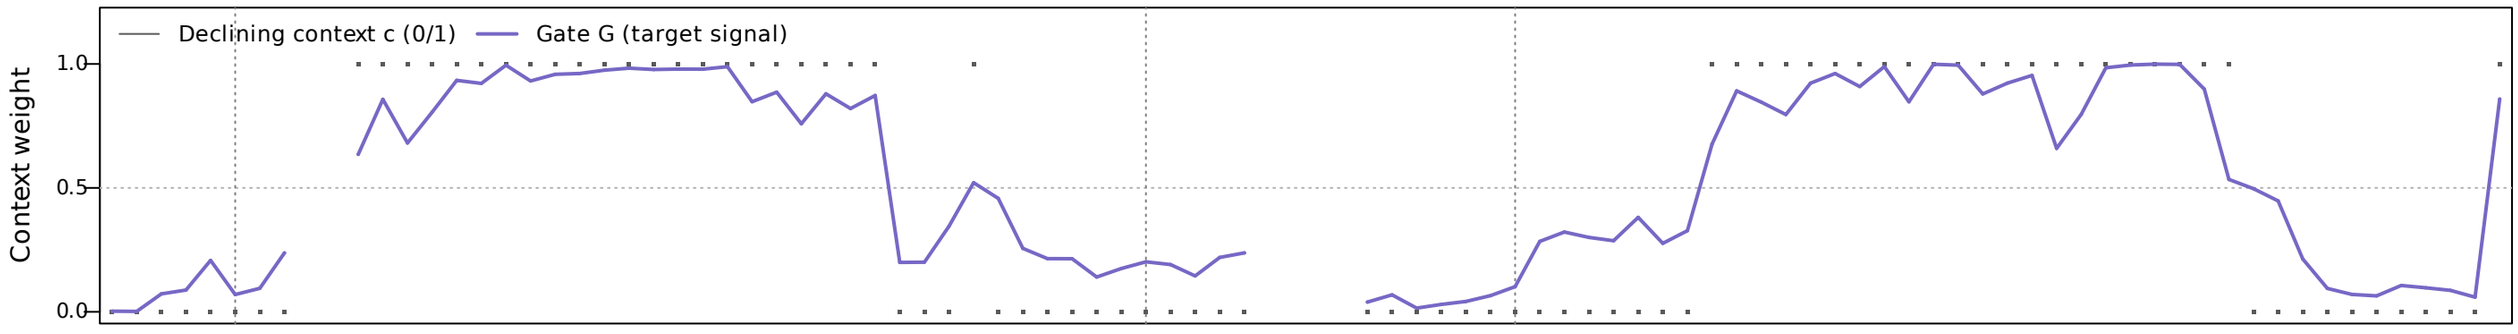


Baseline-context expert weights

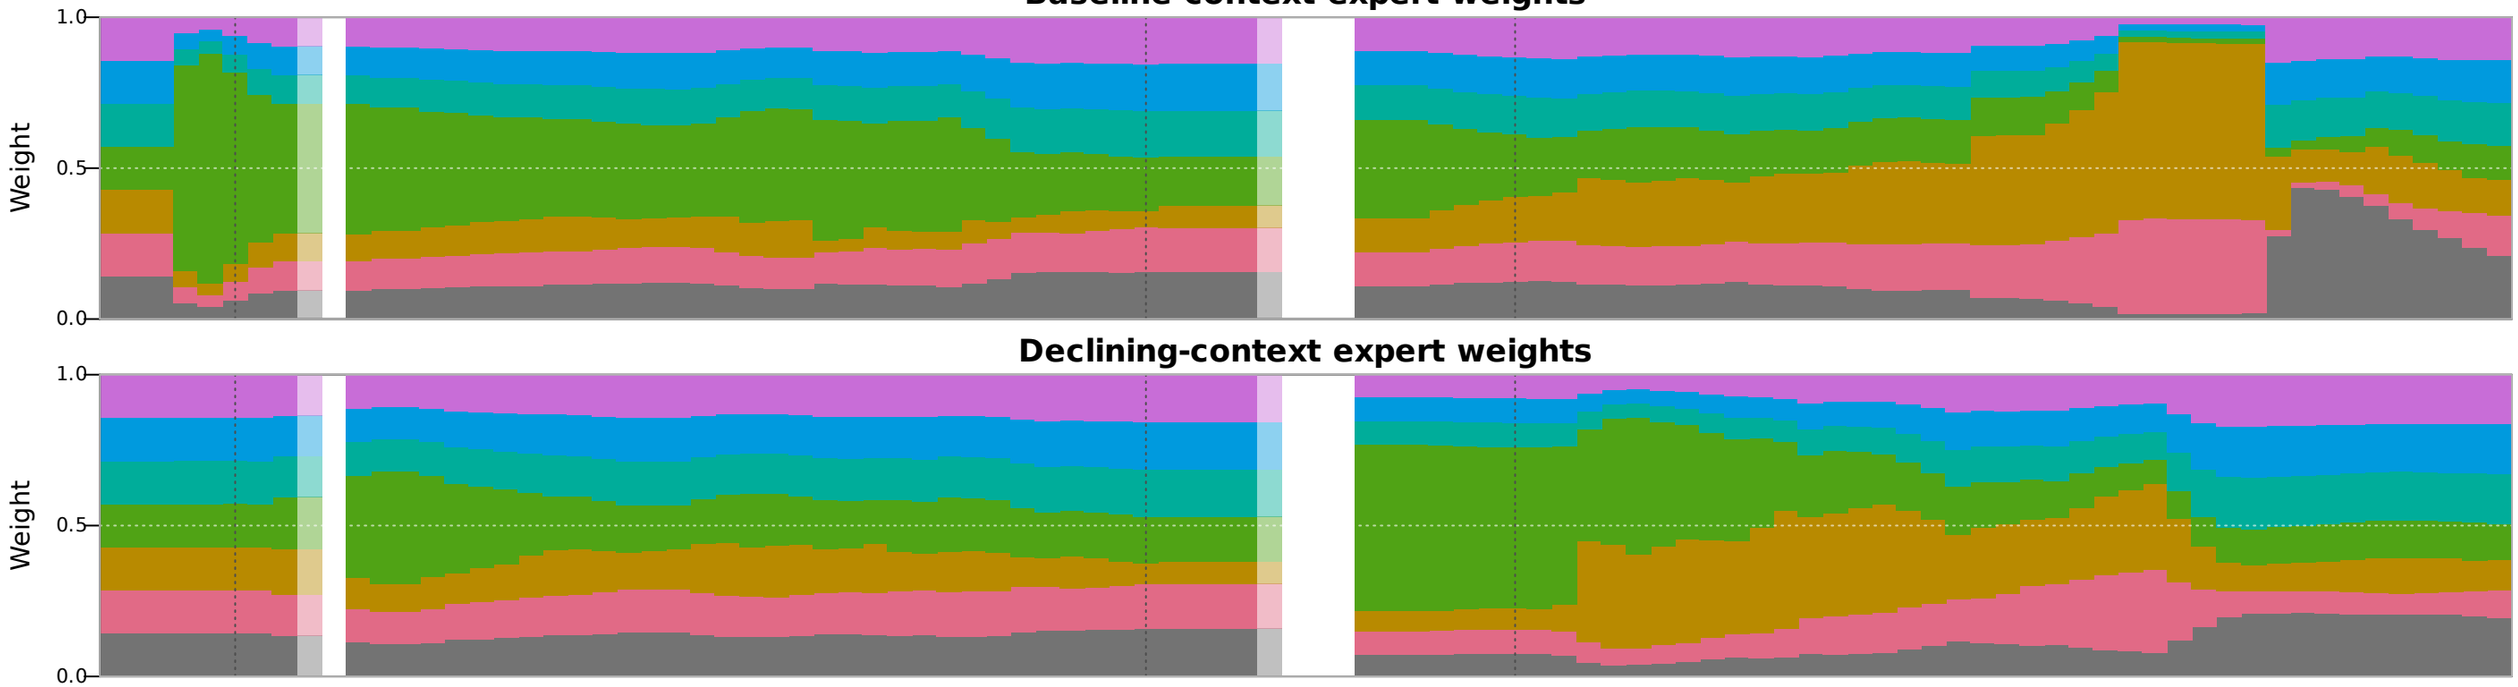

Declining-context expert weights

Issued mixture: (1 - gate) x baseline + gate x declining

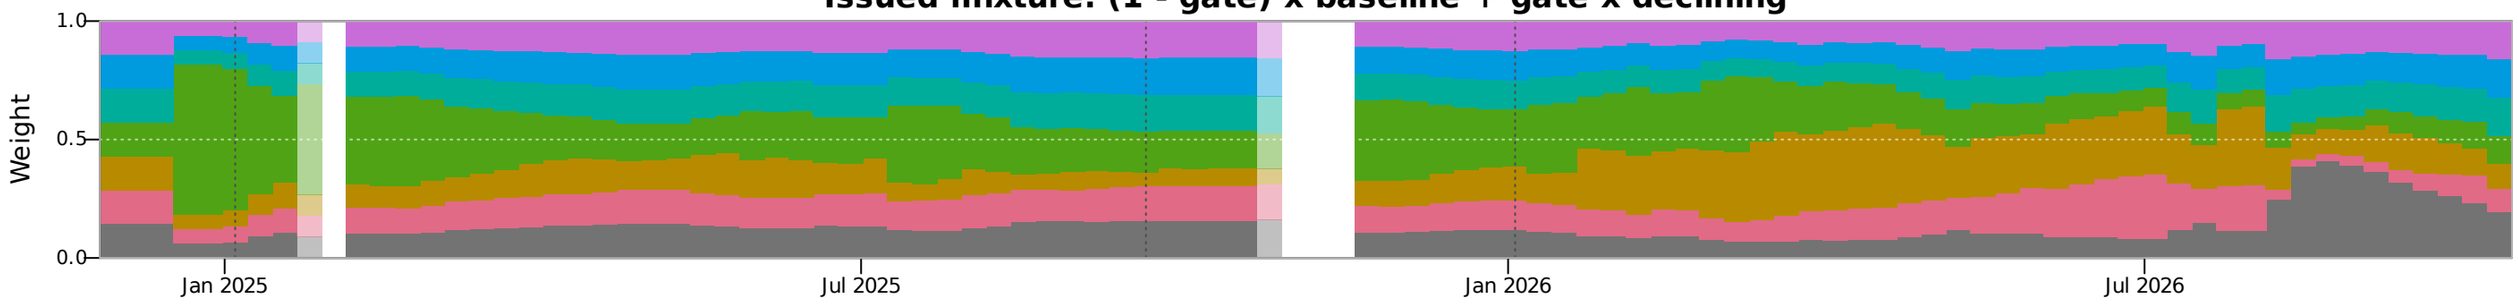

Original
Fixed MultiQT
Leaky MultiQT
Studentized median (base width)
Studentized full base (base width)
Studentized full base (level scales)
Studentized full base (level RMS)


Issue date | Common expert weights across quantile levels | Dotted lines: hindsight peaks

C: gate G = logistic of the target signal (the target median below an earlier point of the base curve).
Both vectors learn from every loss, scaled by 2 x (1 - G) and 2 x G saved when the forecast was made; weeks without a signal use the forecast of A.
Lighter bars: filled forecast rounds.


Score experts: context vectors, blended (D, delta=0, H=4, sharing 1/8)

covid | horizon 2 | Pennsylvania (42) | evaluation: Jun 2025 to Sep 2026 | raw-count updates | feedback delay 0 (latest-at-use-v2)

Declining context at issuance

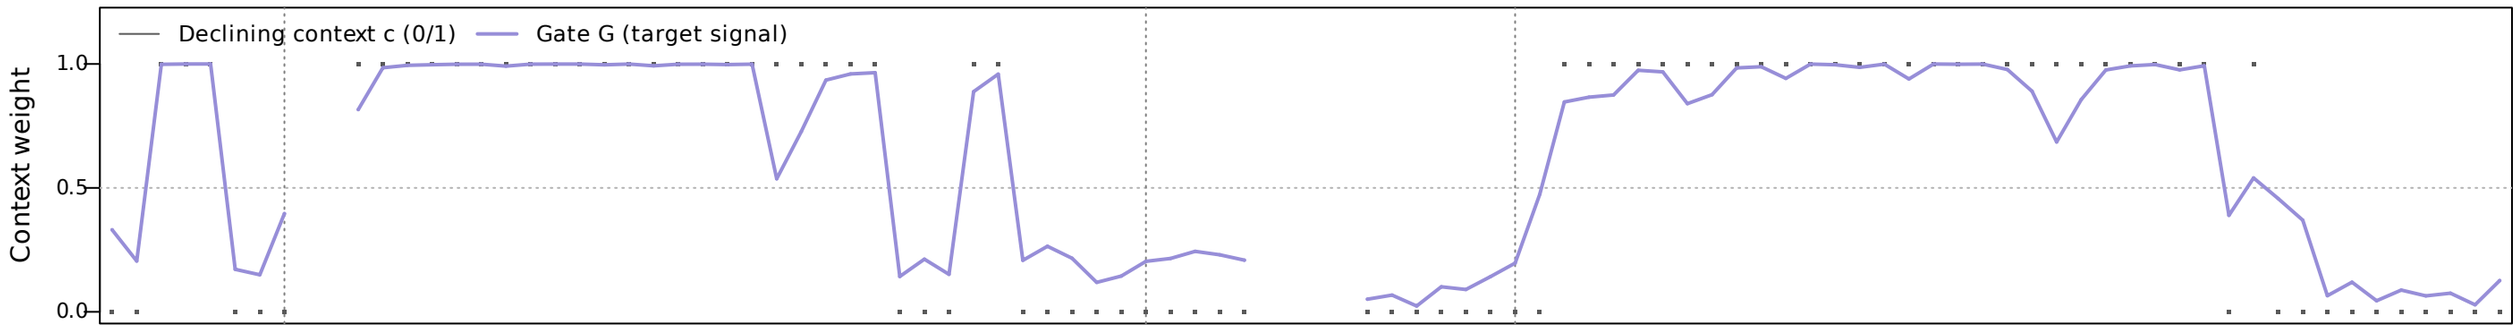


Baseline vector (forecasts made in baseline context)

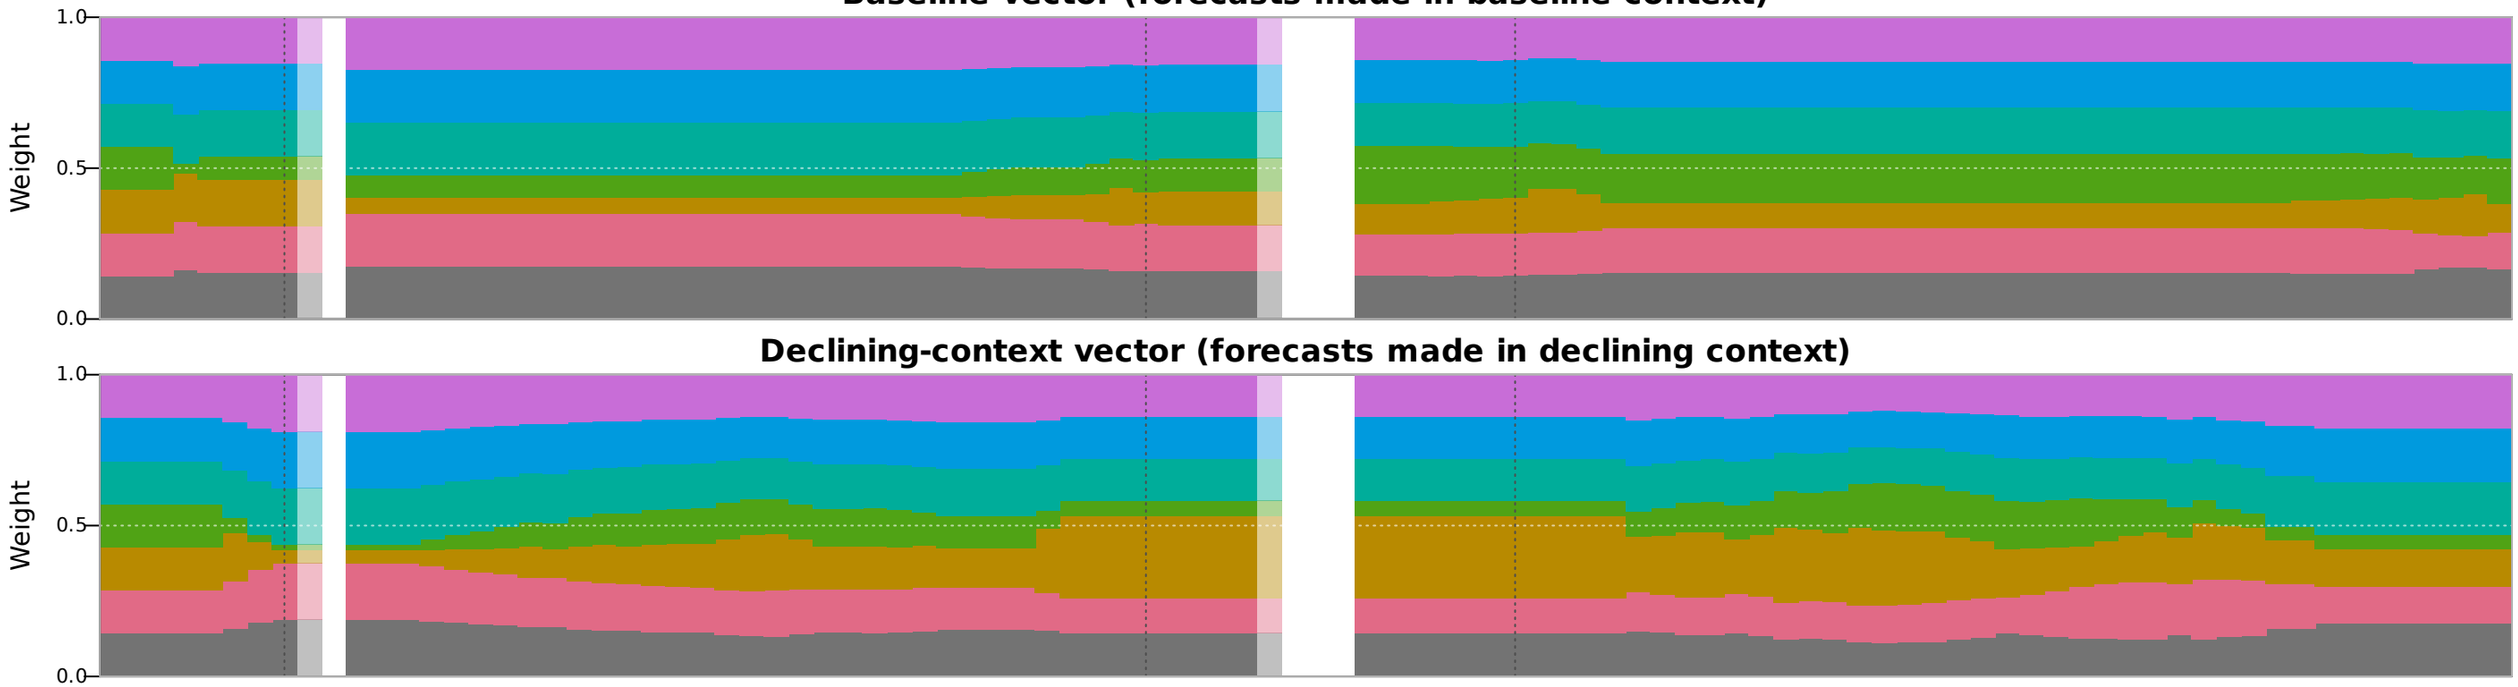

Declining-context vector (forecasts made in declining context)

Issued mixture: (1 - gate) x baseline + gate x declining

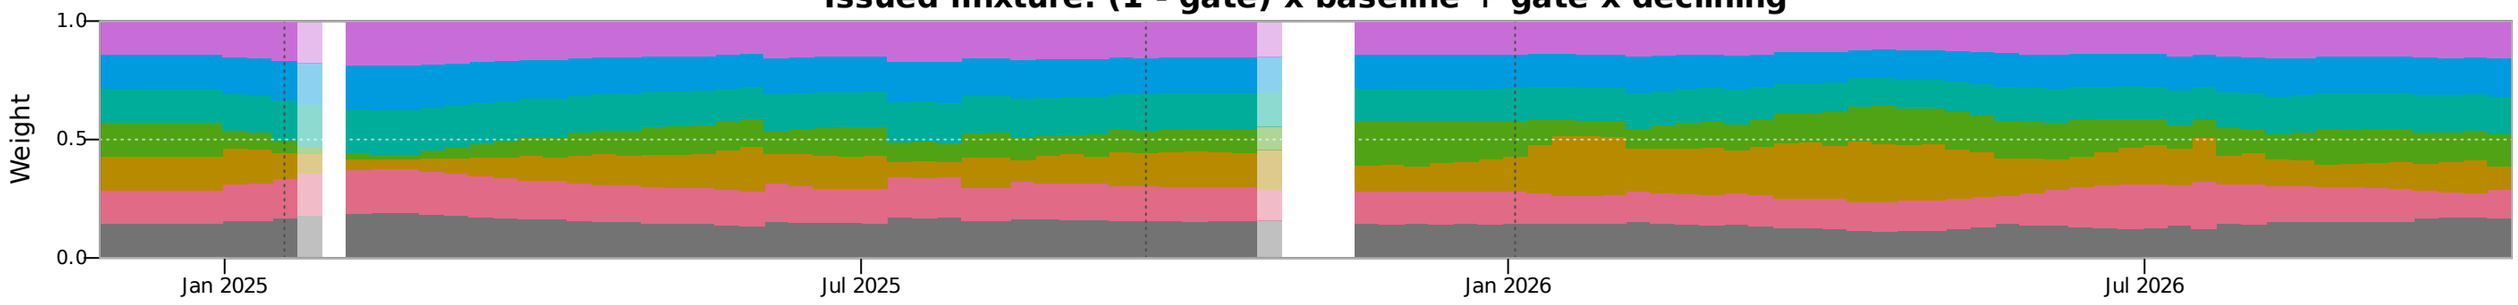

Original
Fixed MultiQT
Leaky MultiQT
Studentized median (base width)
Studentized full base (base width)
Studentized full base (level scales)
Studentized full base (level RMS)


Issue date | Common expert weights across quantile levels | Dotted lines: hindsight peaks

D: each vector learns only from the losses of forecasts made in its context (c saved when the forecast was made).
Forecast: (1 - G) x baseline + G x declining; weeks without a signal use the forecast of A.
Lighter bars: filled forecast rounds.


Score experts: soft switch, three signals (B, strength=1, H=4, sharing 1/8)

covid | horizon 2 | Pennsylvania (42) | evaluation: Jun 2025 to Sep 2026 | raw-count updates | feedback delay 0 (latest-at-use-v2)

Declining context at issuance

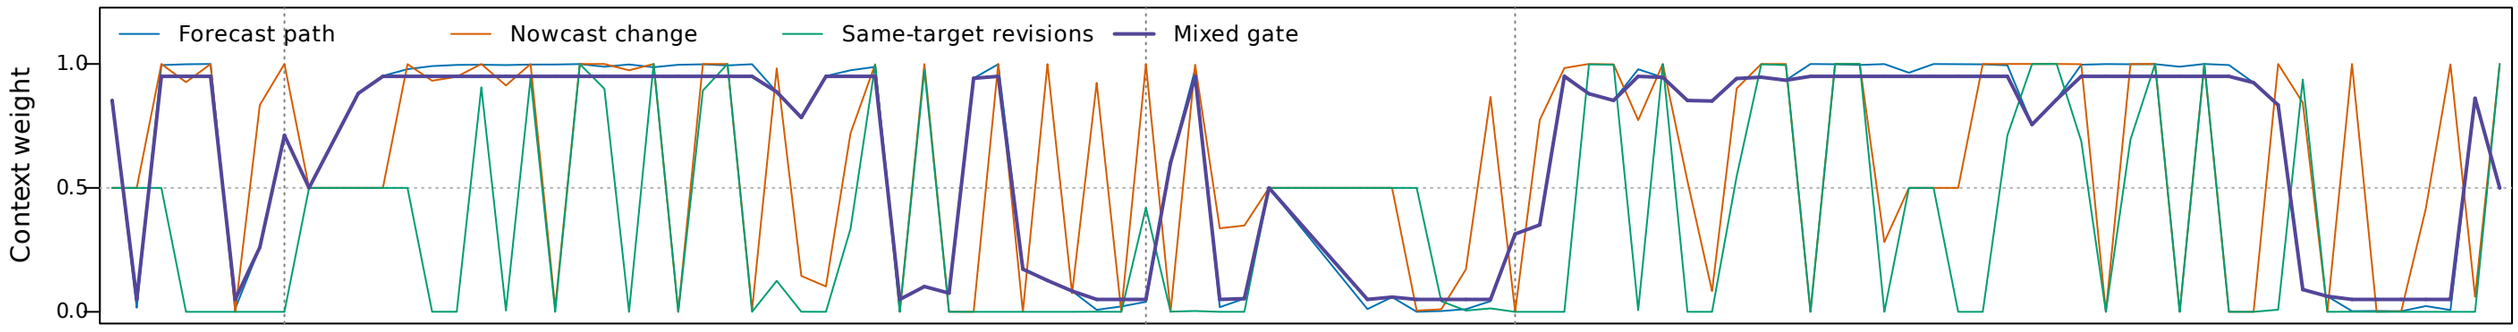


Baseline-context expert weights

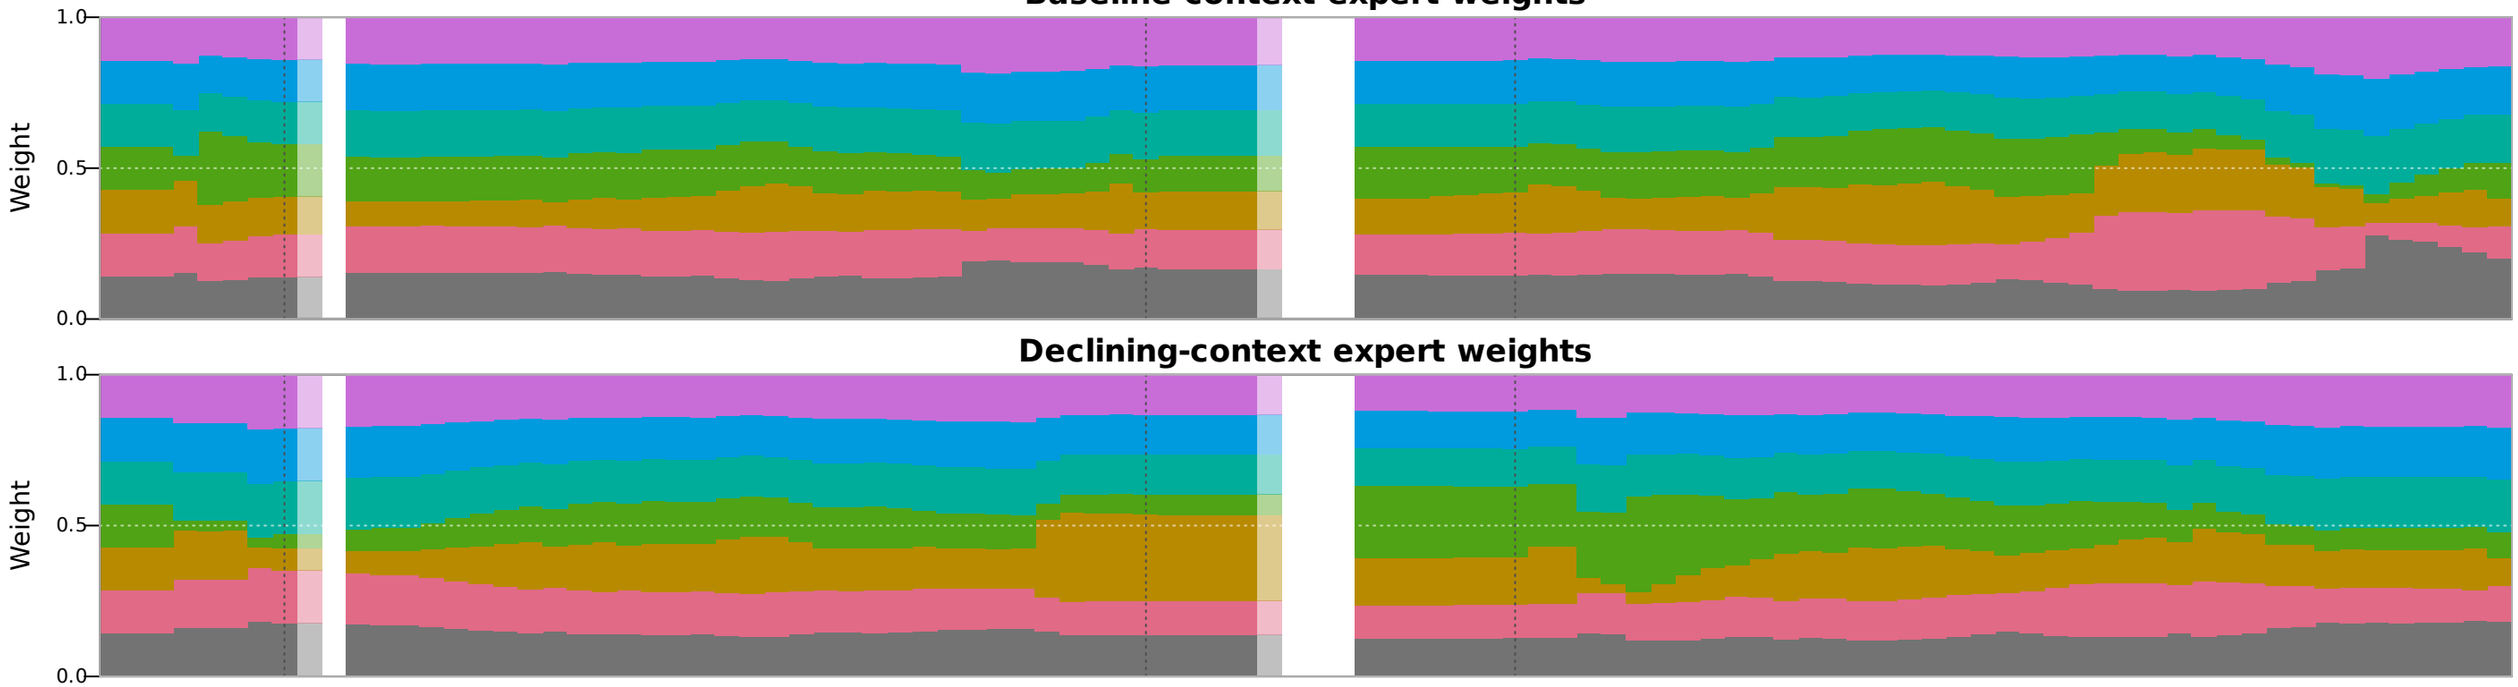

Declining-context expert weights

Issued mixture: (1 - gate) x baseline + gate x declining

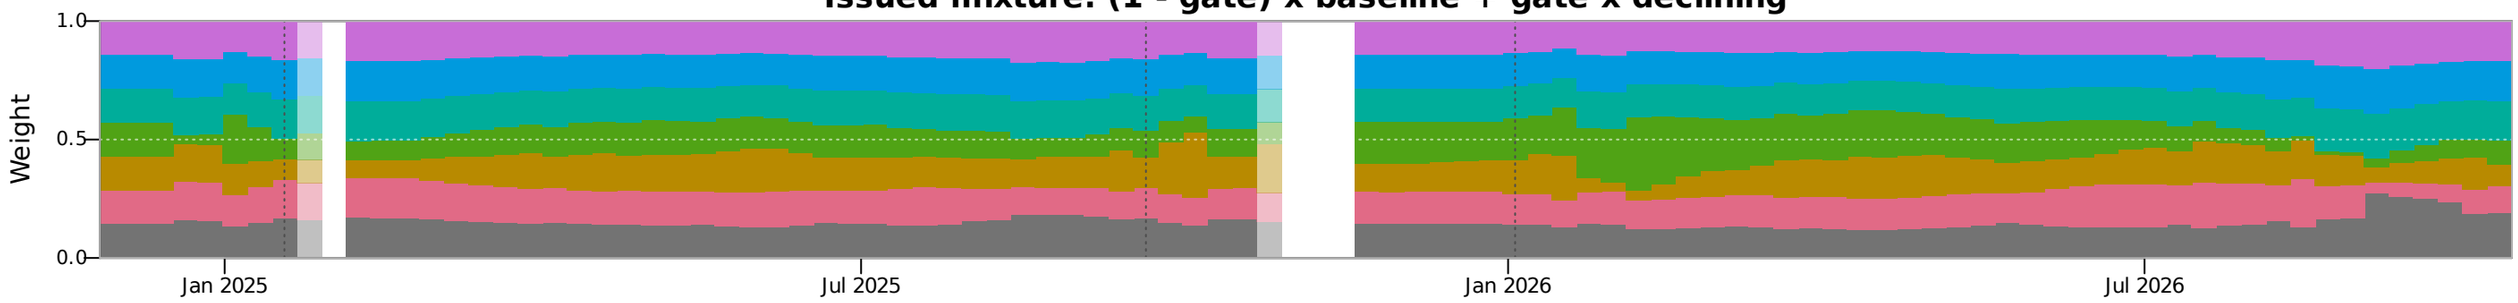

Original
Fixed MultiQT
Leaky MultiQT
Studentized median (base width)
Studentized full base (base width)
Studentized full base (level scales)
Studentized full base (level RMS)


Issue date | Common expert weights across quantile levels | Dotted lines: hindsight peaks

B: the gate is a context weight, not a peak probability; missing signals contribute a neutral score of 0.5.
Both vectors learn from every loss, scaled by 2 x (1 - gate) and 2 x gate saved when the forecast was made.
Lighter bars: filled forecast rounds.


Score experts: soft switch, target signal (C, delta=0, H=4, sharing 1/8)

covid | horizon 2 | Pennsylvania (42) | evaluation: Jun 2025 to Sep 2026 | raw-count updates | feedback delay 0 (latest-at-use-v2)

Declining context at issuance

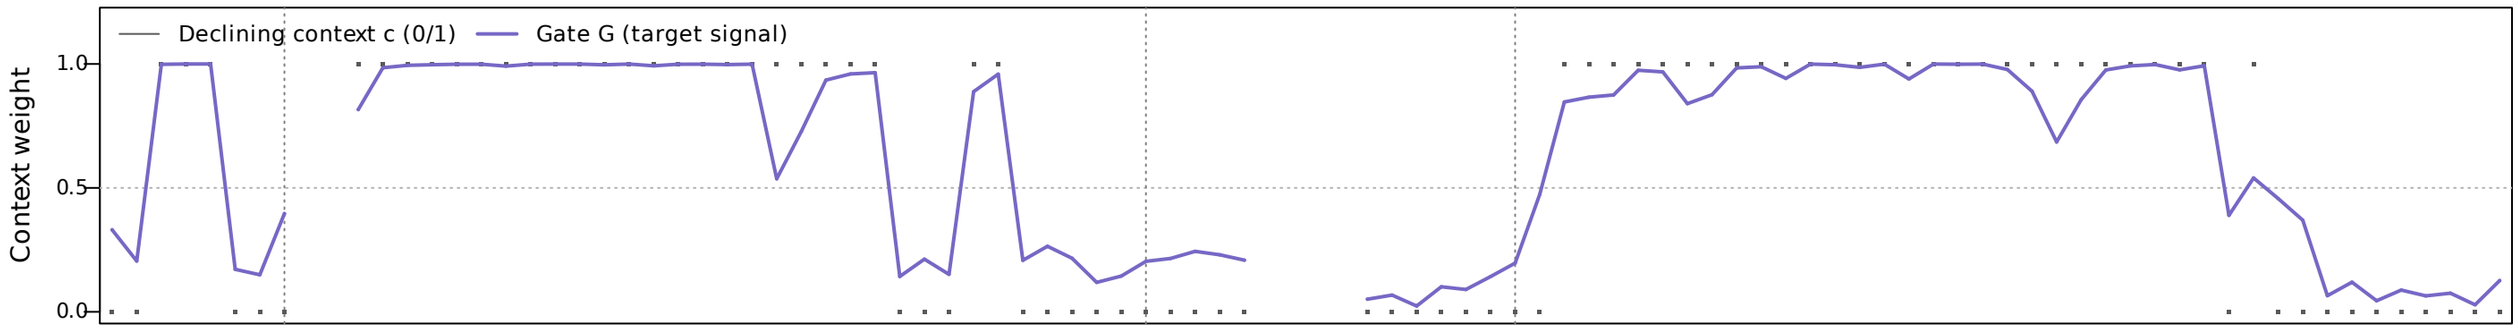


Baseline-context expert weights

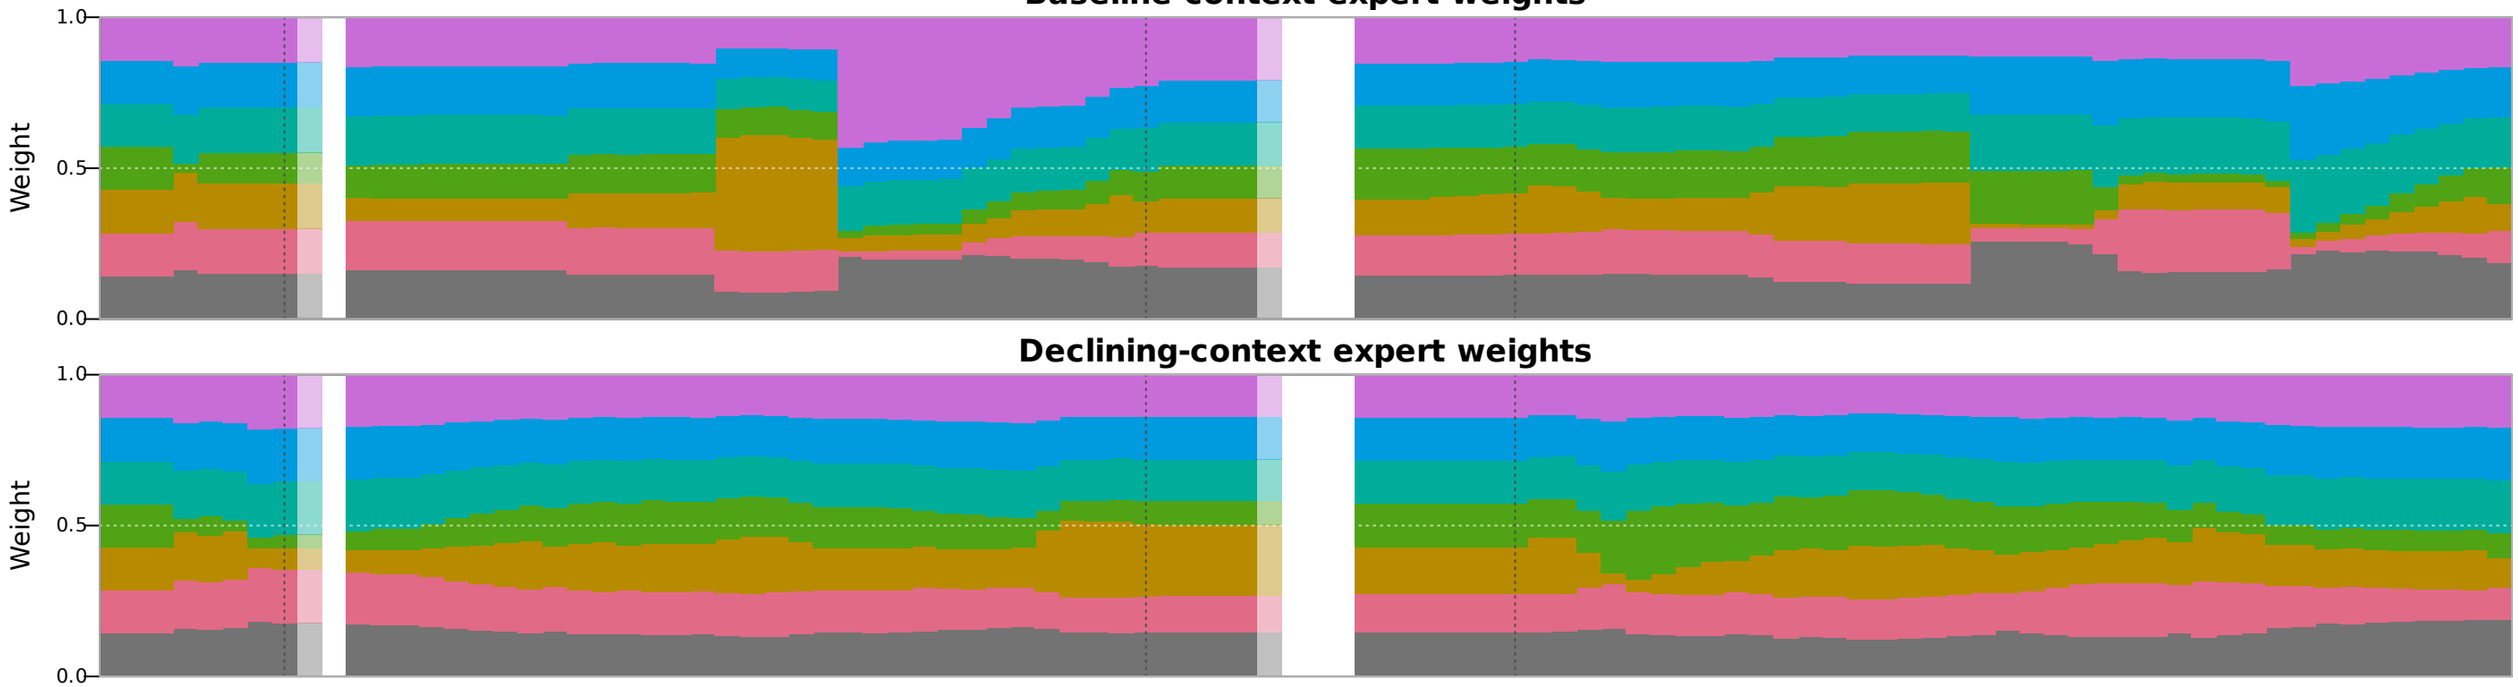

Declining-context expert weights

Issued mixture: (1 - gate) x baseline + gate x declining

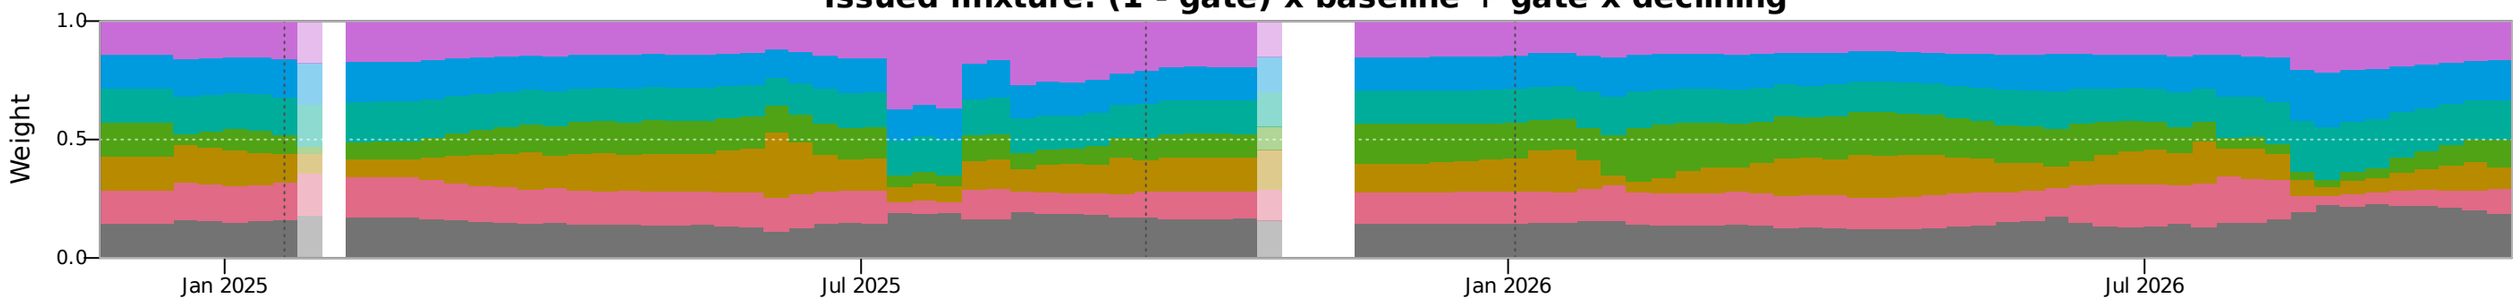

Original
Fixed MultiQT
Leaky MultiQT
Studentized median (base width)
Studentized full base (base width)
Studentized full base (level scales)
Studentized full base (level RMS)

Issue date | Common expert weights across quantile levels | Dotted lines: hindsight peaks

C: gate G = logistic of the target signal (the target median below an earlier point of the base curve).
Both vectors learn from every loss, scaled by 2 x (1 - G) and 2 x G saved when the forecast was made; weeks without a signal use the forecast of A.
Lighter bars: filled forecast rounds.