
United States | Fixed-rate MultiQT: loss and calibration before and after the peak


Log1p-count tracking | eta = m * S0, S0 frozen after 20 released rows (warmup replayed) | Feedback delay 2 week(s) | Scored against latest reported counts in counts per 100k residents

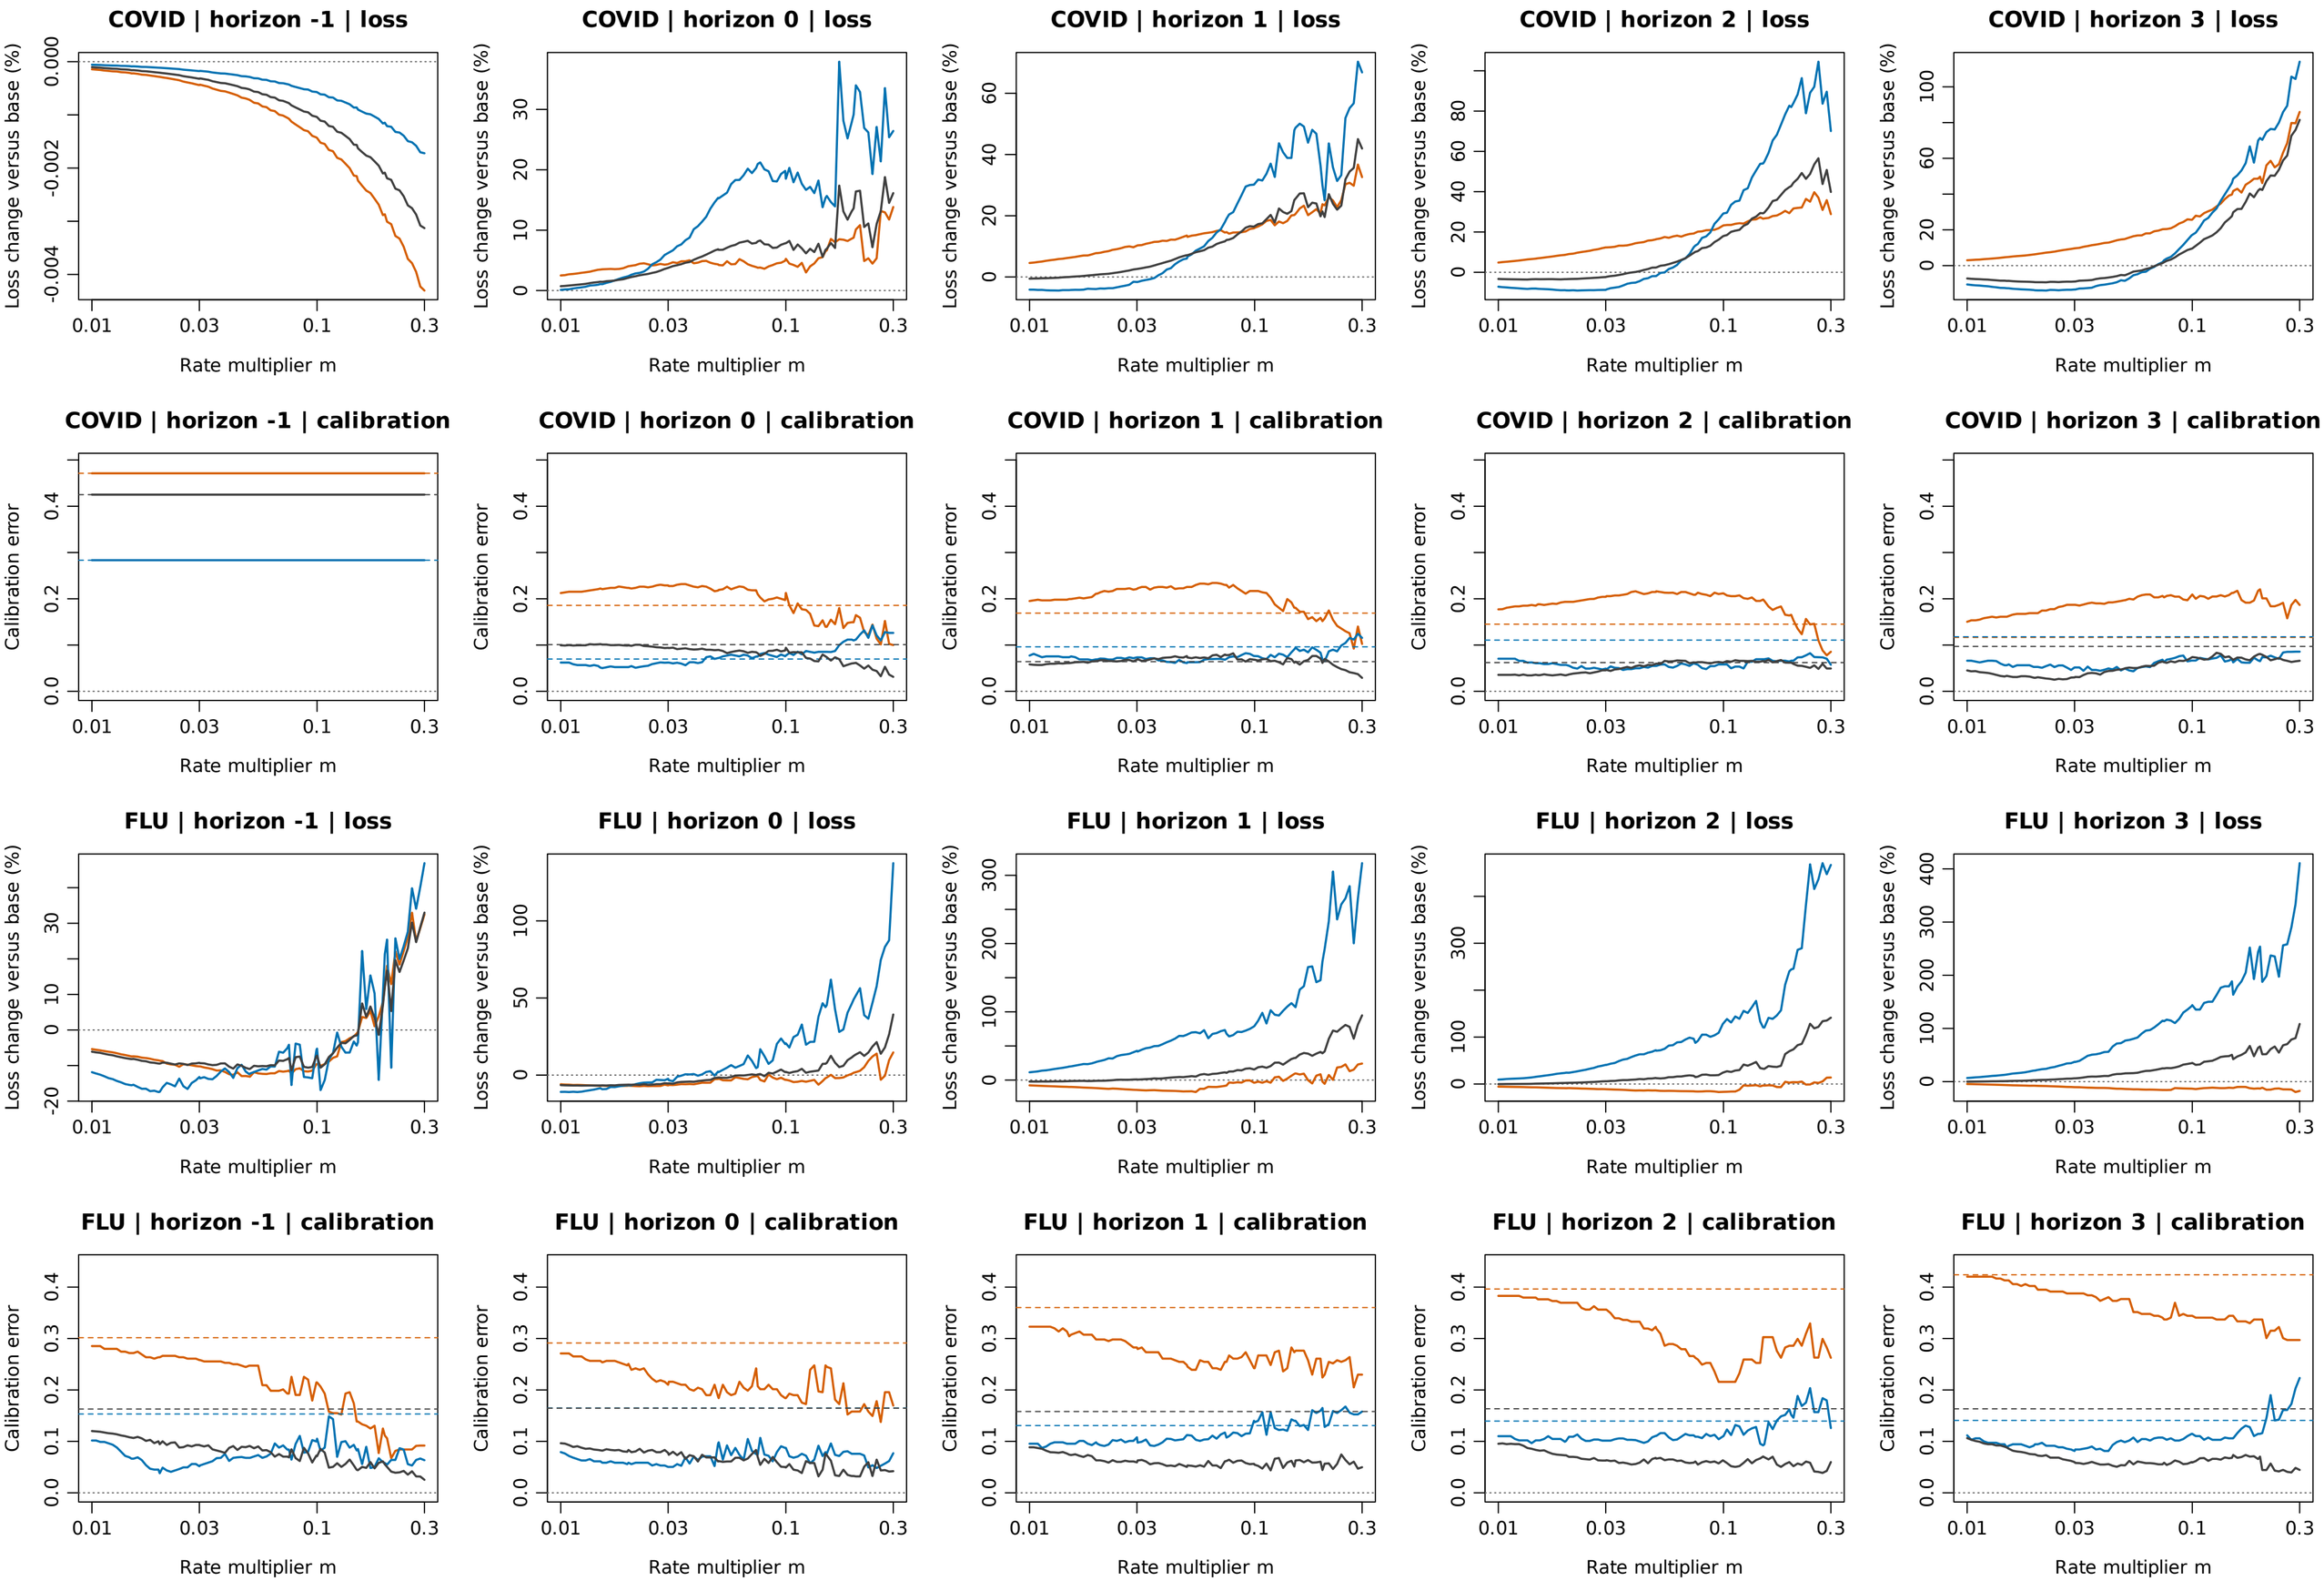



Loss: % change from m = 0 in the same phase (negative is better). Calibration: mean |coverage - alpha| over levels (lower is better); dashed: m = 0.


California | Fixed-rate MultiQT: loss and calibration before and after the peak


Log1p-count tracking | eta = m * S0, S0 frozen after 20 released rows (warmup replayed) | Feedback delay 2 week(s) | Scored against latest reported counts in counts per 100k residents

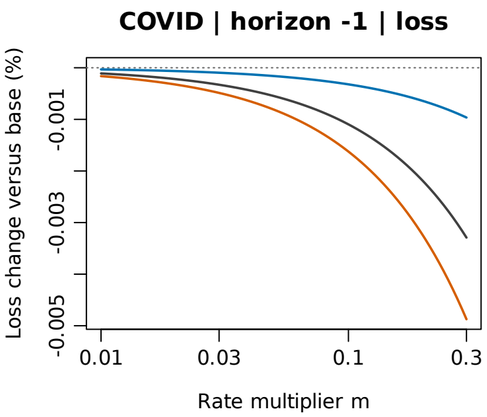


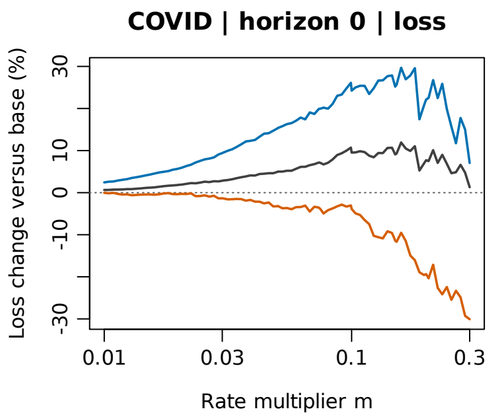


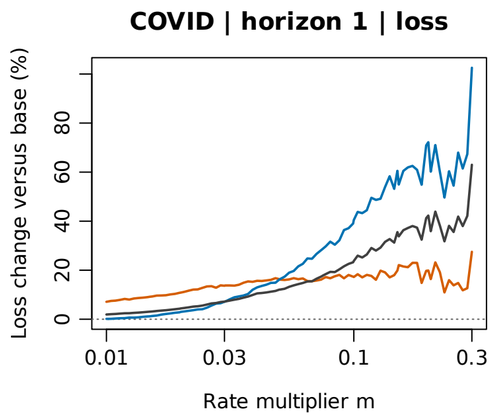


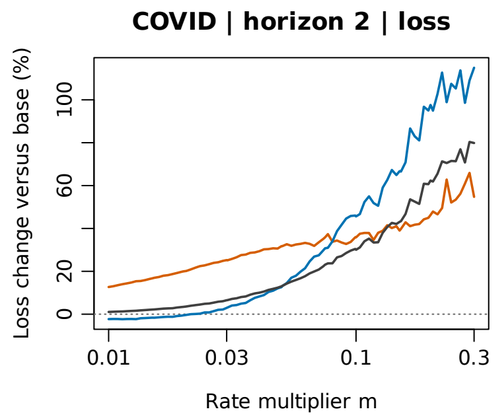


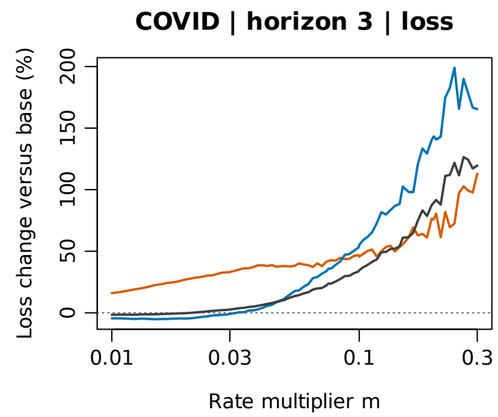


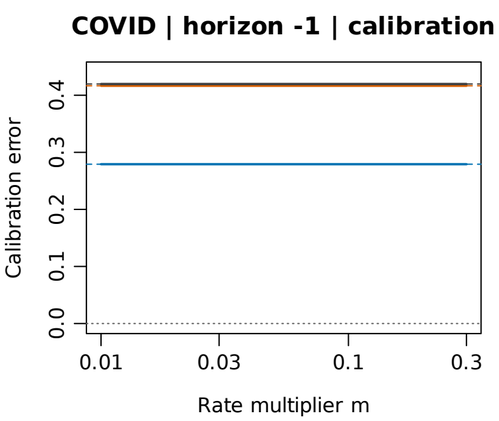


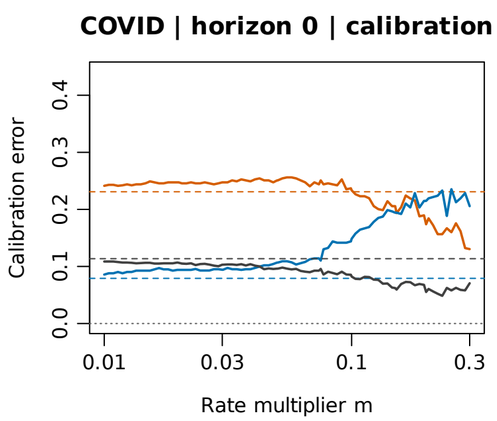


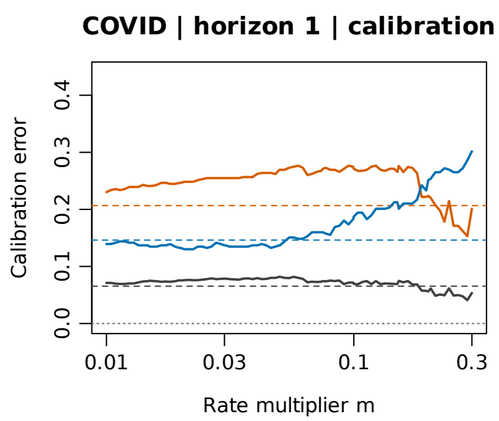


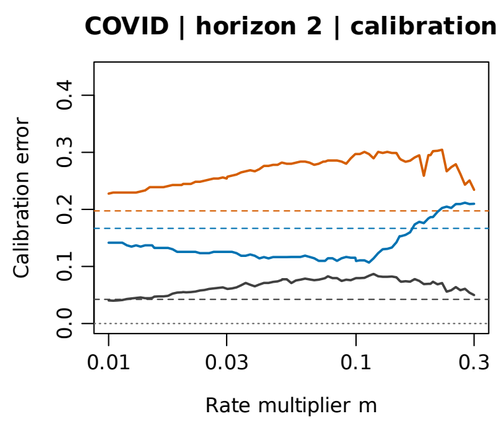


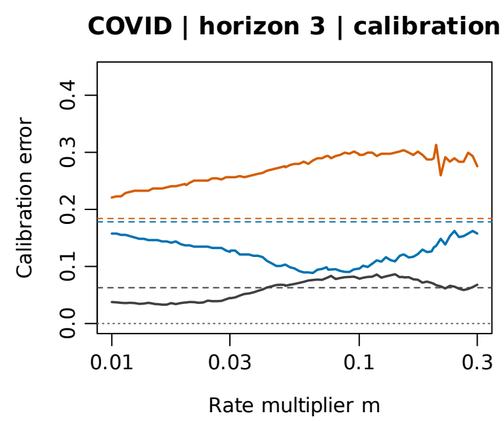


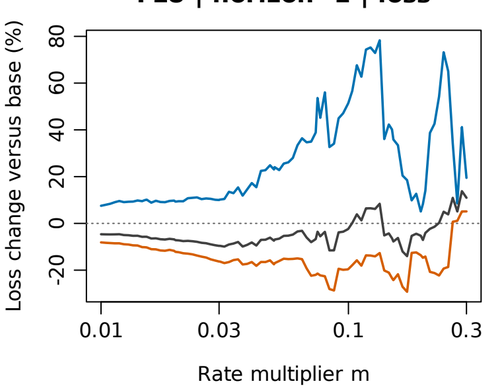


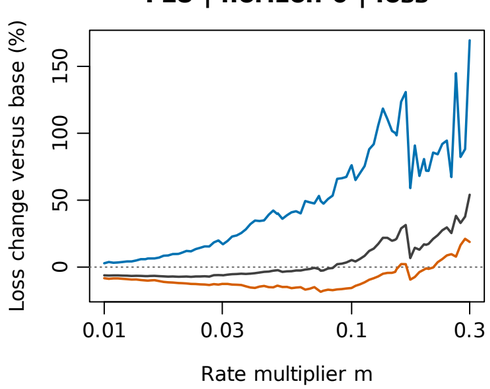


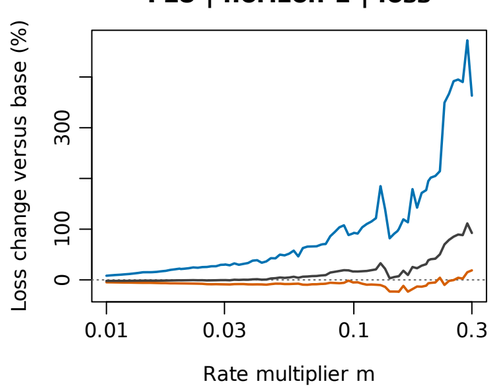


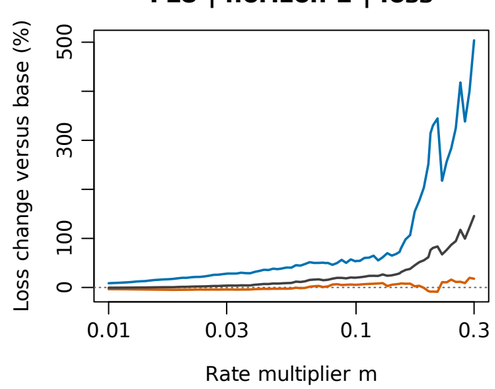


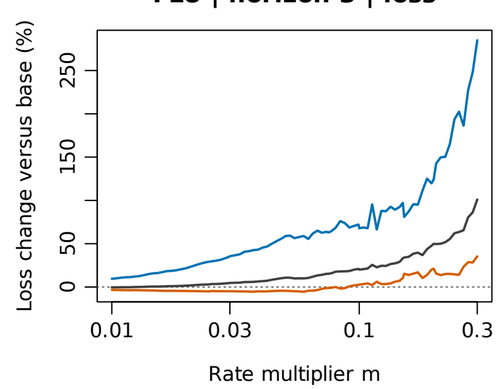


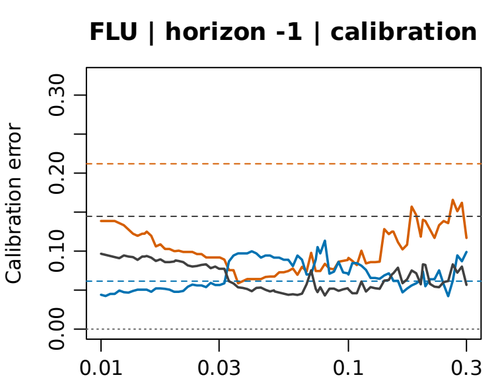

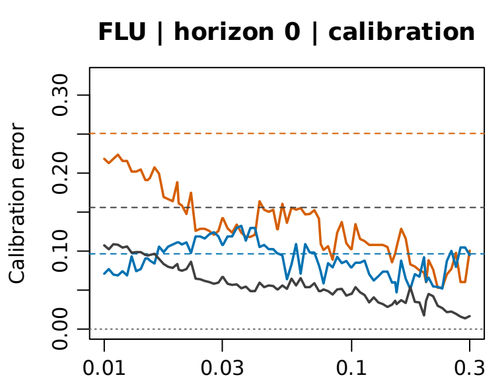

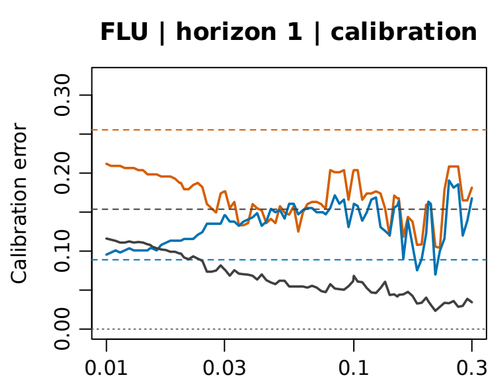

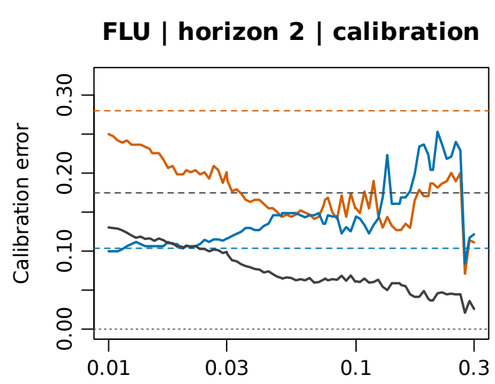

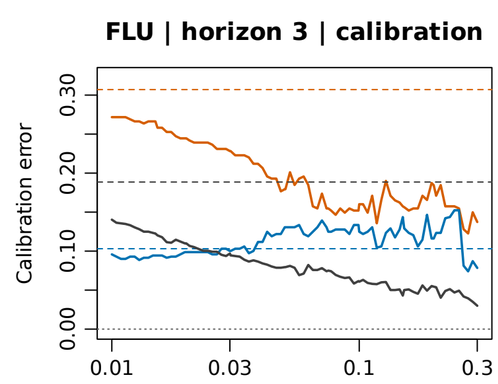



Before peak (weeks -7 to 0) | After peak (weeks 1 to 8) | Overall (seasons 2024/25 and 2025/26)


Loss: % change from m = 0 in the same phase (negative is better). Calibration: mean |coverage - alpha| over levels (lower is better); dashed: m = 0.


Texas | Fixed-rate MultiQT: loss and calibration before and after the peak


Log1p-count tracking | eta = m * S0, S0 frozen after 20 released rows (warmup replayed) | Feedback delay 2 week(s) | Scored against latest reported counts in counts per 100k residents

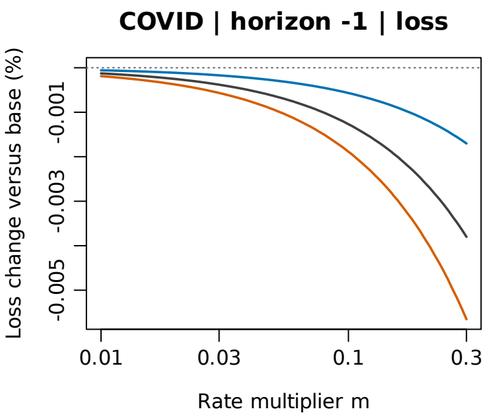


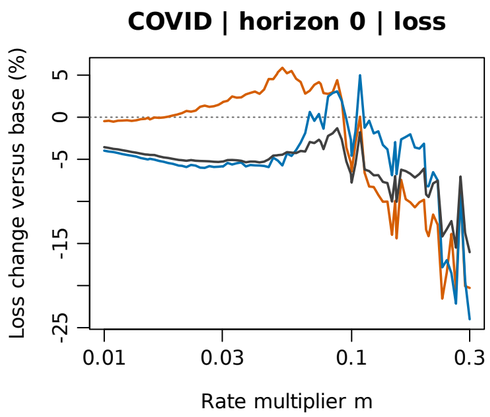


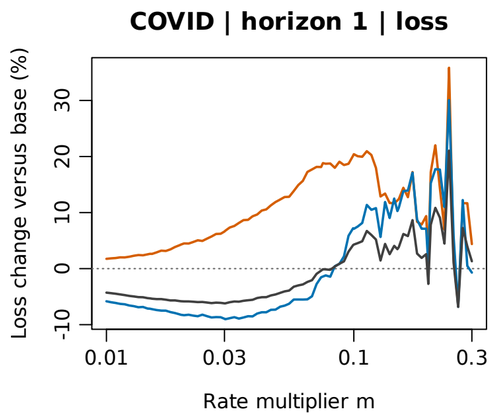


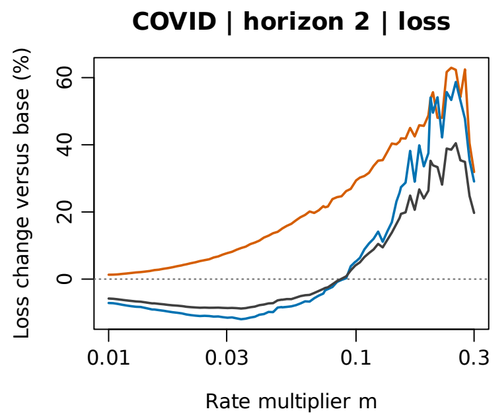


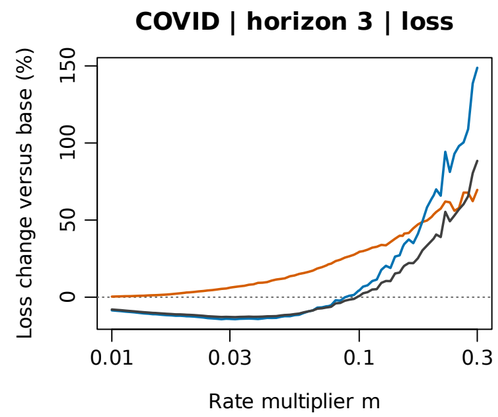


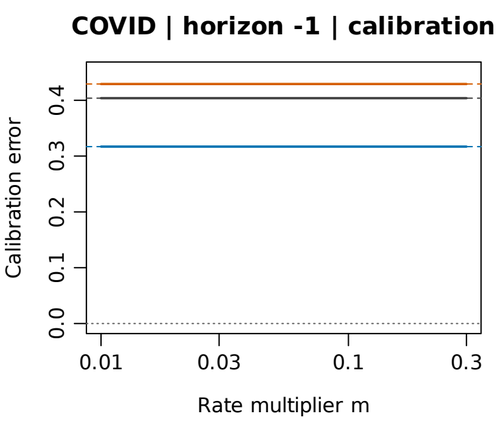


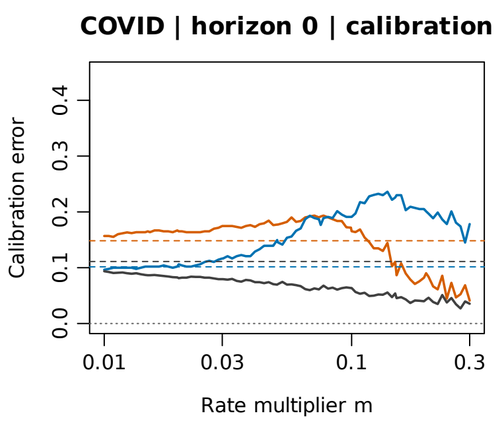


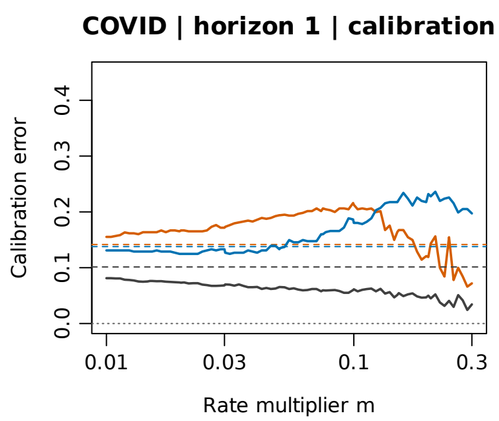


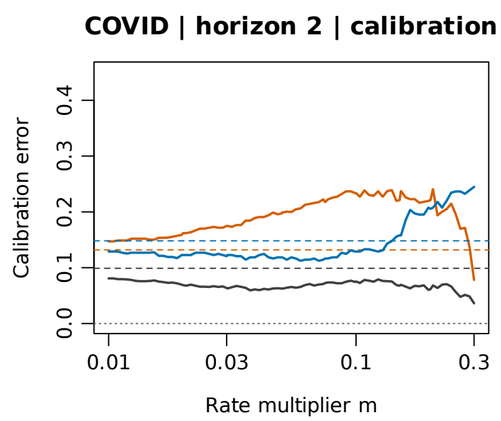


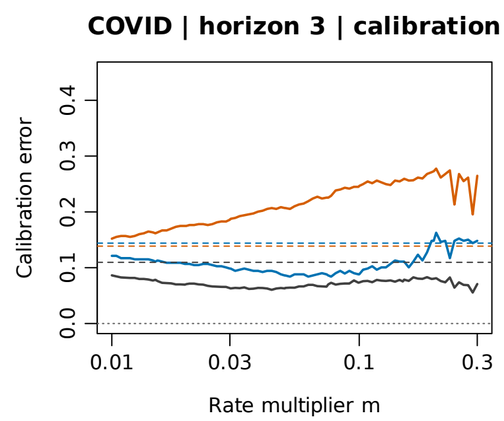


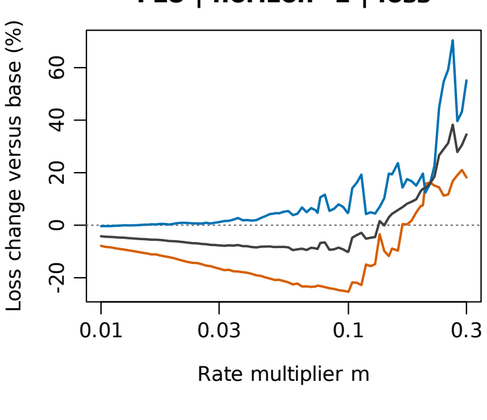


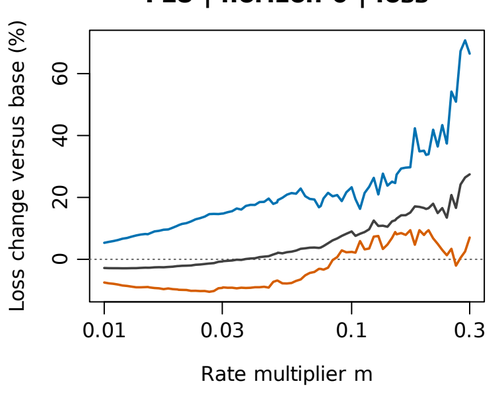


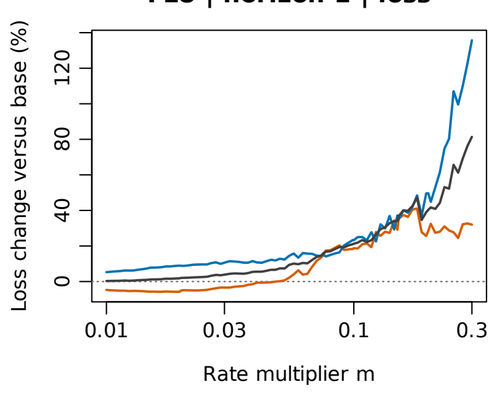


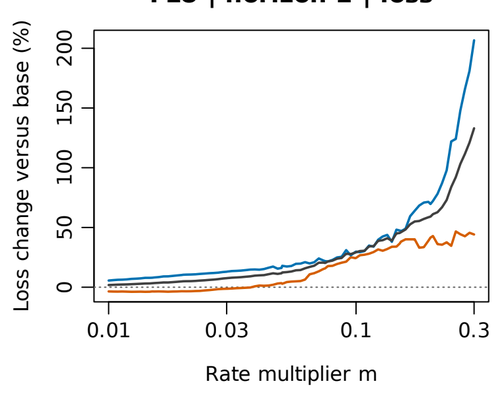


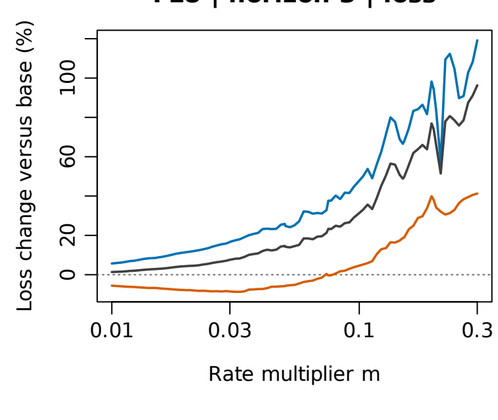


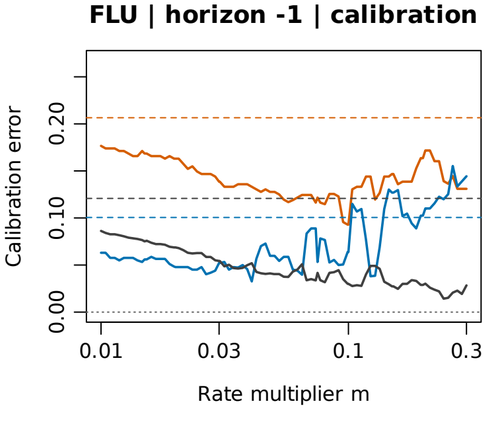

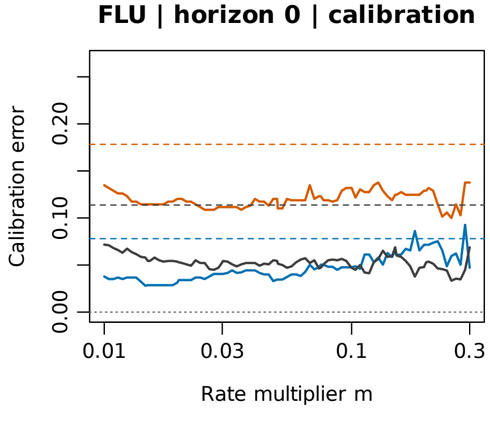

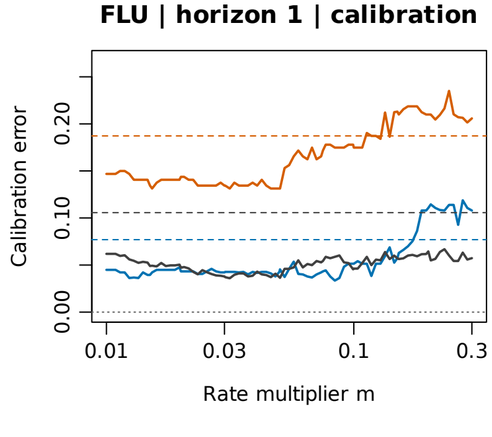

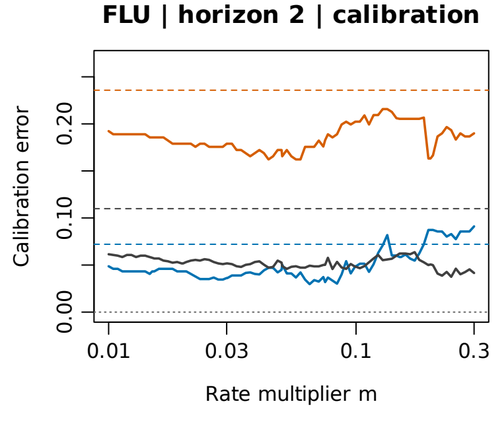

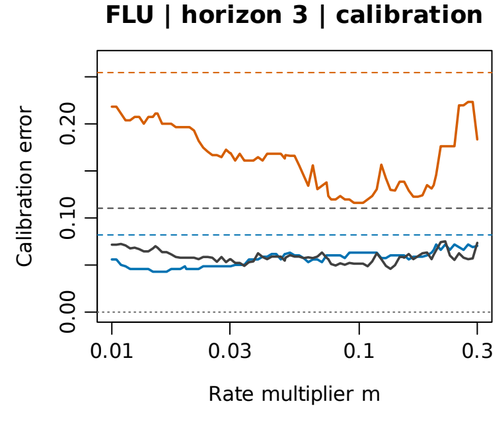



Before peak (weeks -7 to 0) | After peak (weeks 1 to 8) | Overall (seasons 2024/25 and 2025/26)


Loss: % change from m = 0 in the same phase (negative is better). Calibration: mean |coverage - alpha| over levels (lower is better); dashed: m = 0.


New York | Fixed-rate MultiQT: loss and calibration before and after the peak


Log1p-count tracking | eta = m * S0, S0 frozen after 20 released rows (warmup replayed) | Feedback delay 2 week(s) | Scored against latest reported counts in counts per 100k residents

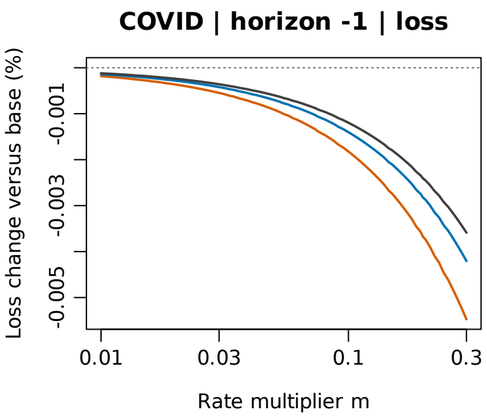


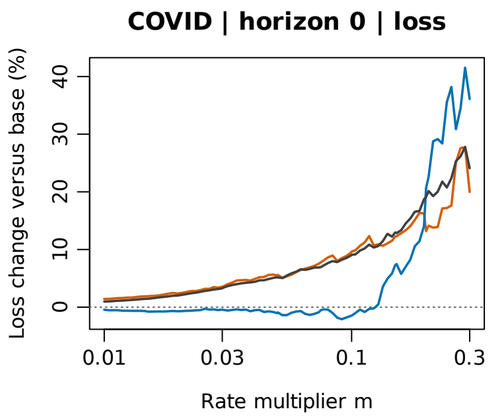


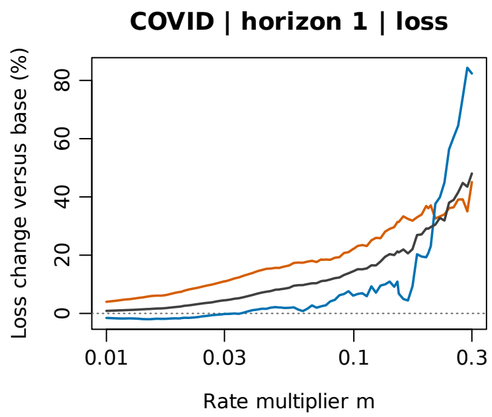


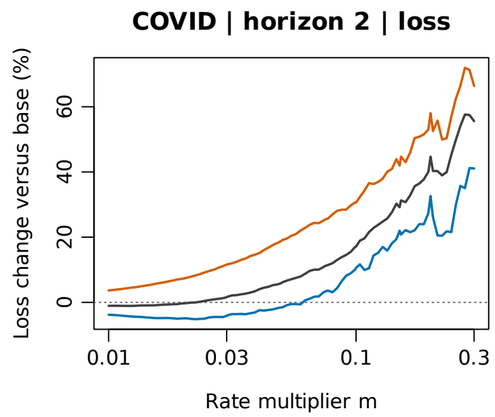


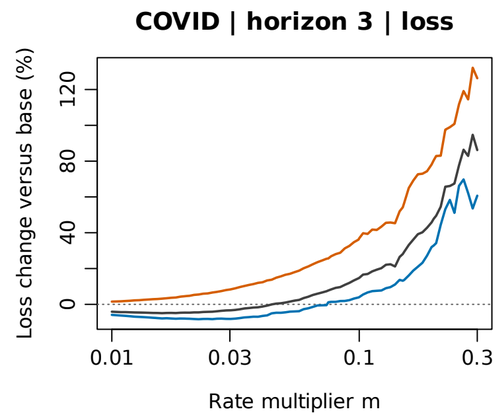


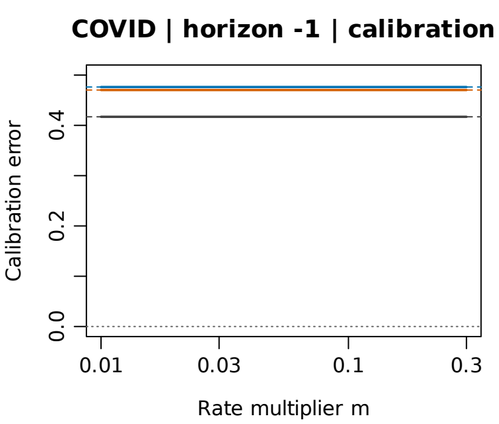


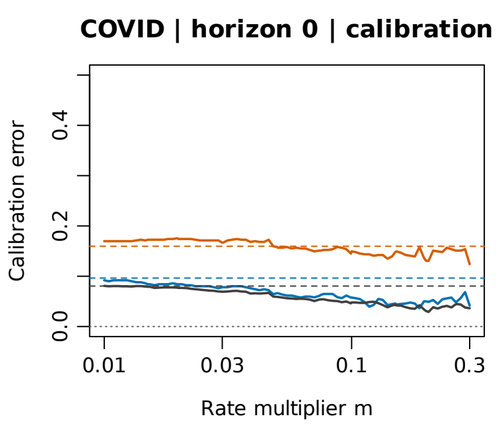


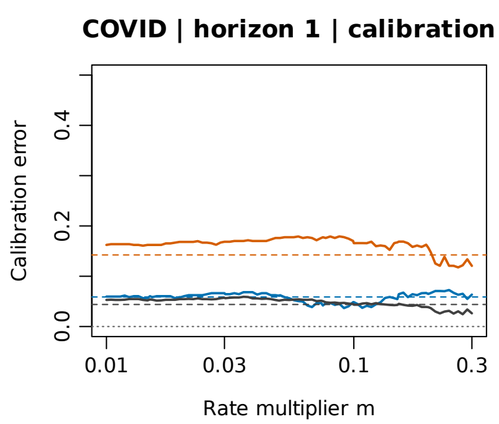


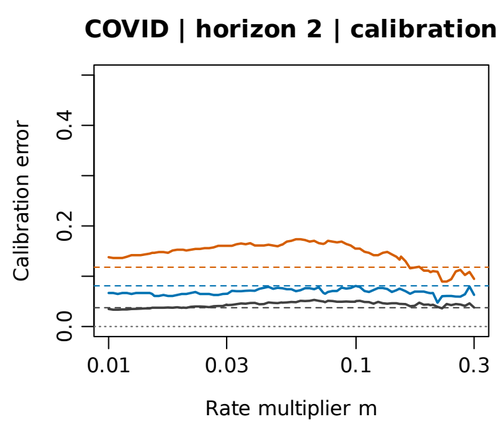


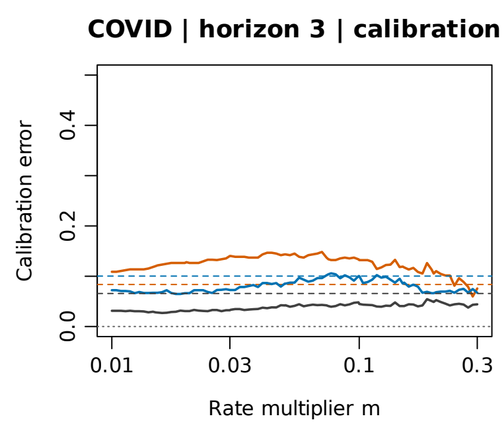


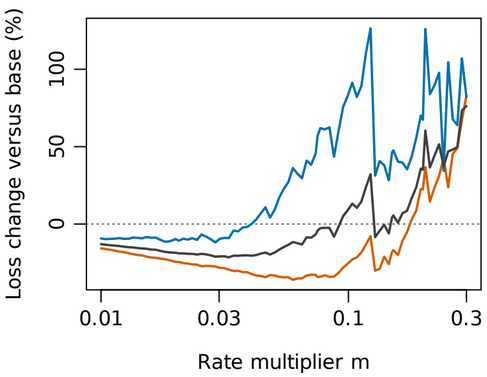


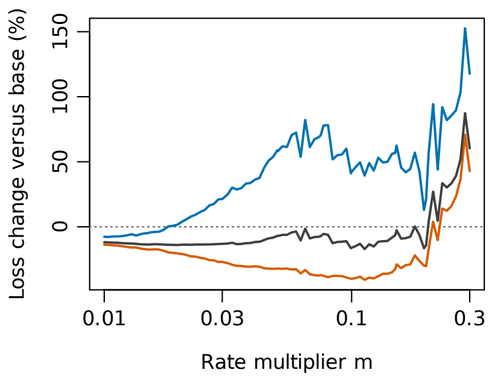


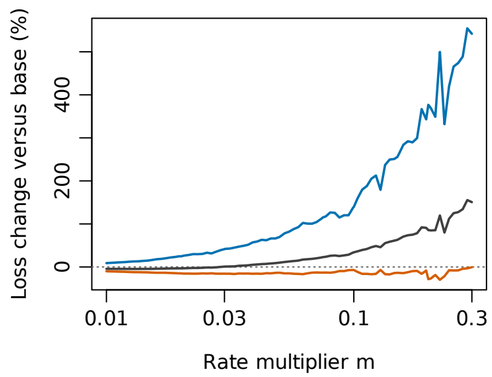


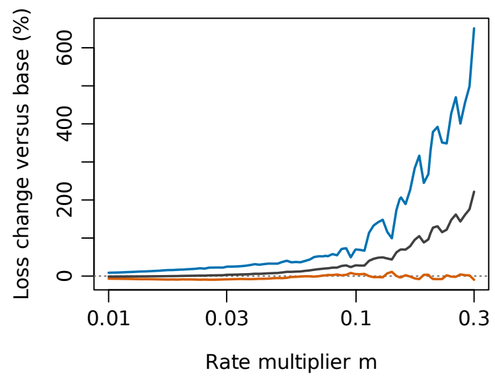


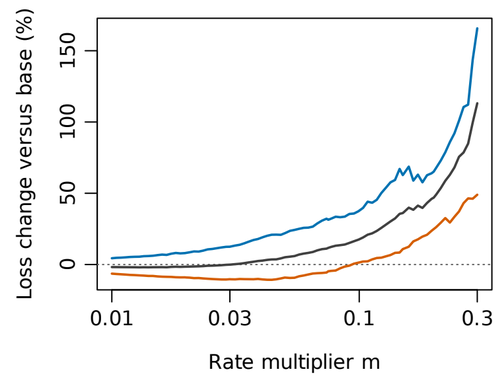


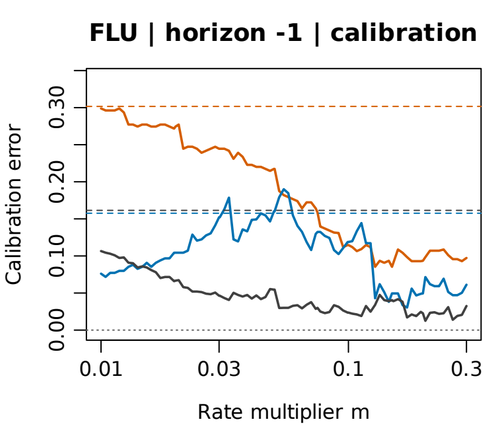

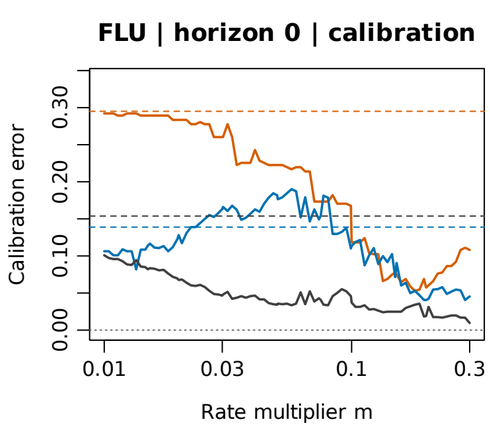

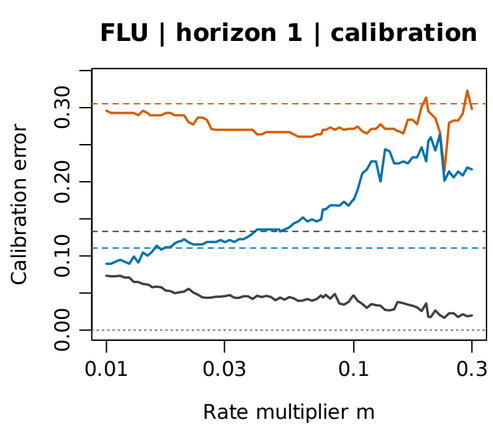

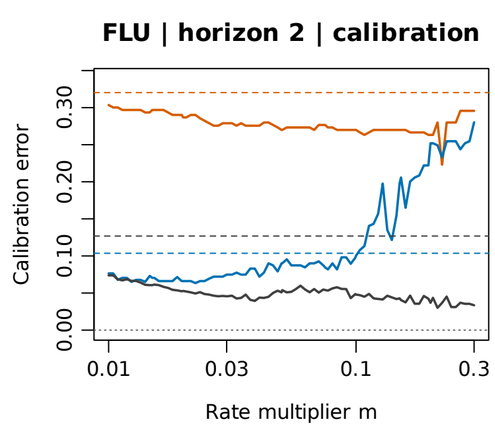

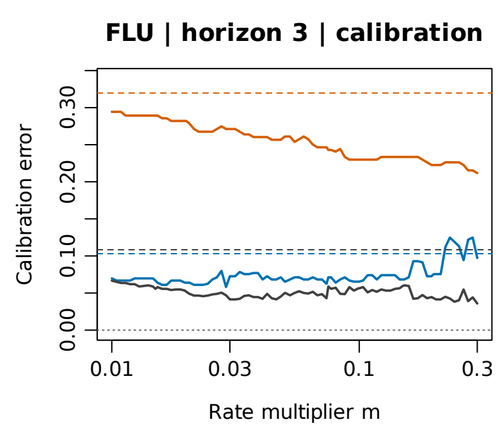



Before peak (weeks -7 to 0) After peak (weeks 1 to 8) Overall (seasons 2024/25 and 2025/26)


Loss: % change from m = 0 in the same phase (negative is better). Calibration: mean |coverage - alpha| over levels (lower is better); dashed: m = 0.


Pennsylvania | Fixed-rate MultiQT: loss and calibration before and after the peak

Log1p-count tracking | eta = m * S0, S0 frozen after 20 released rows (warmup replayed) | Feedback delay 2 week(s) | Scored against latest reported counts in counts per 100k residents

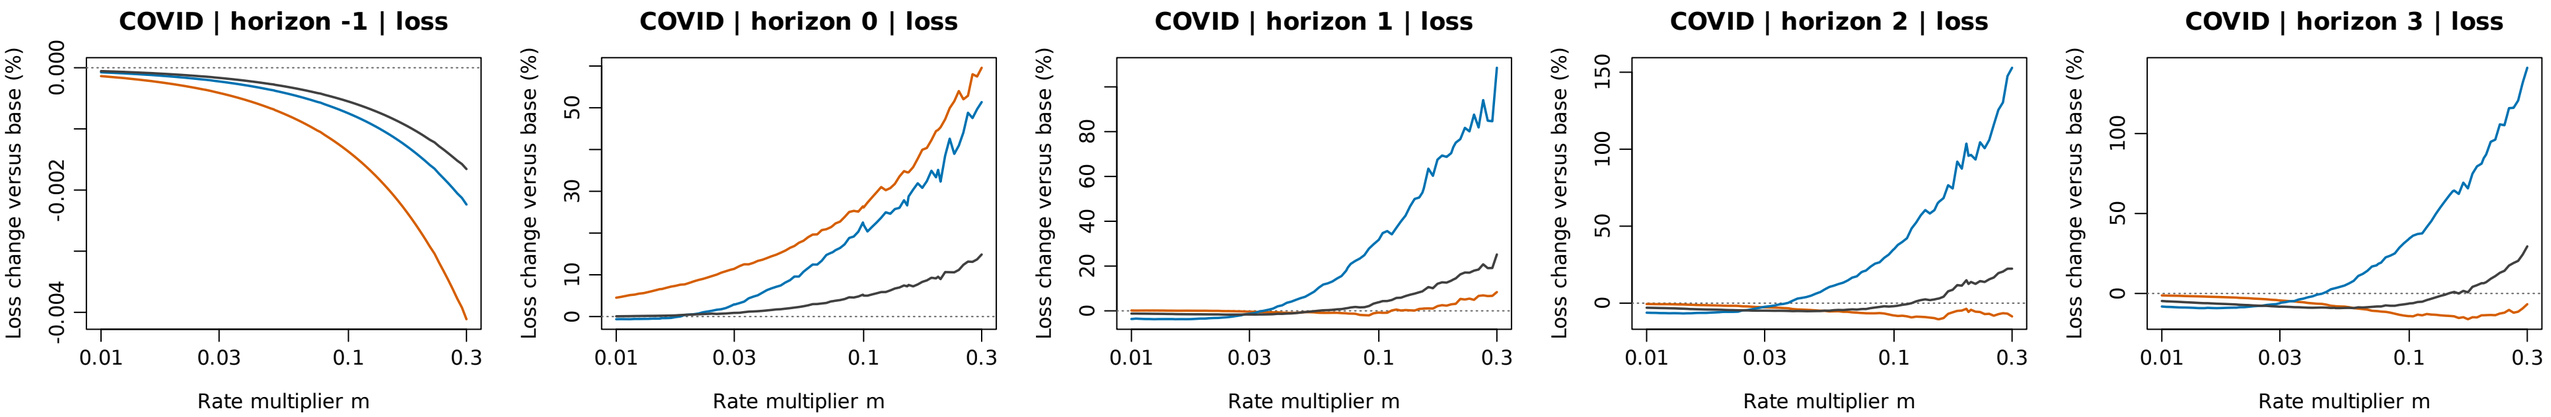

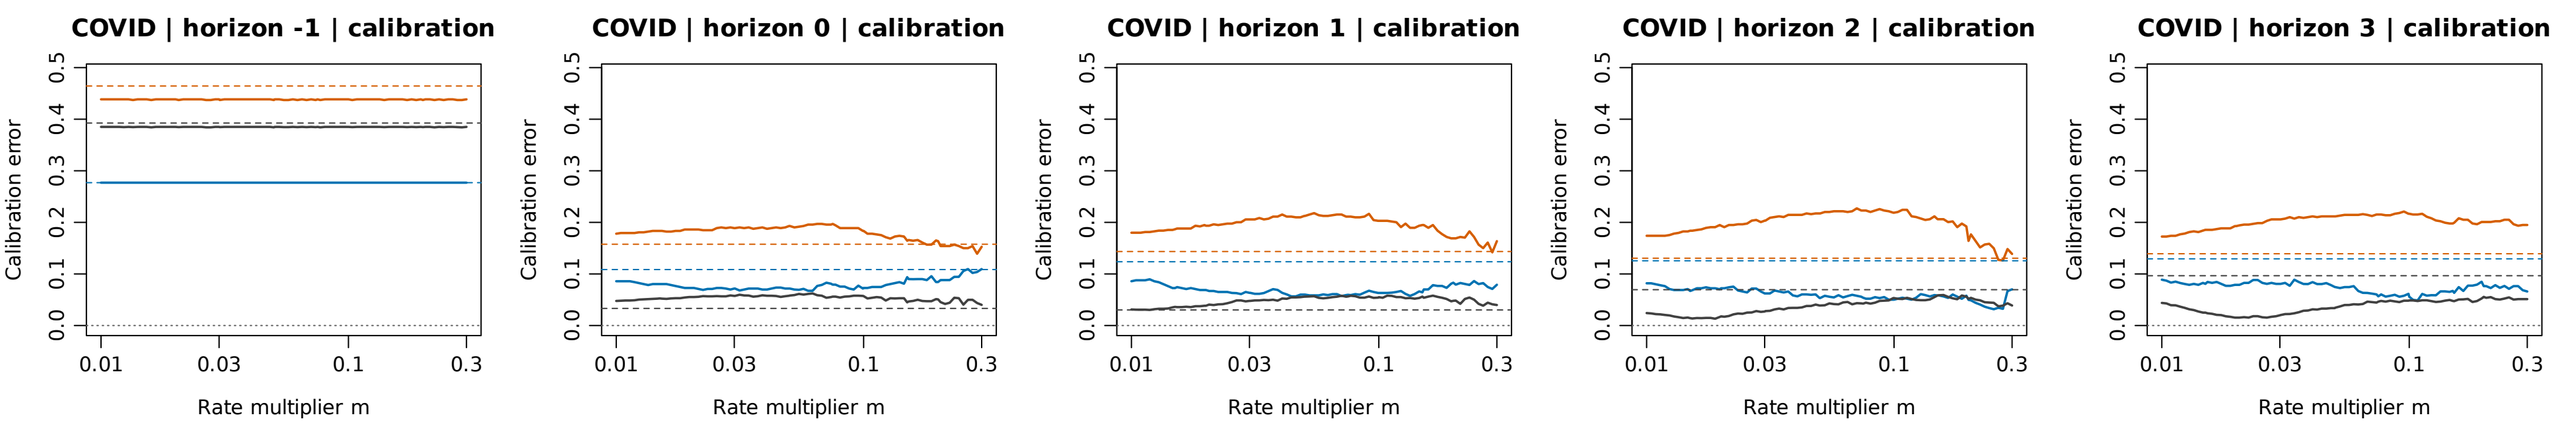

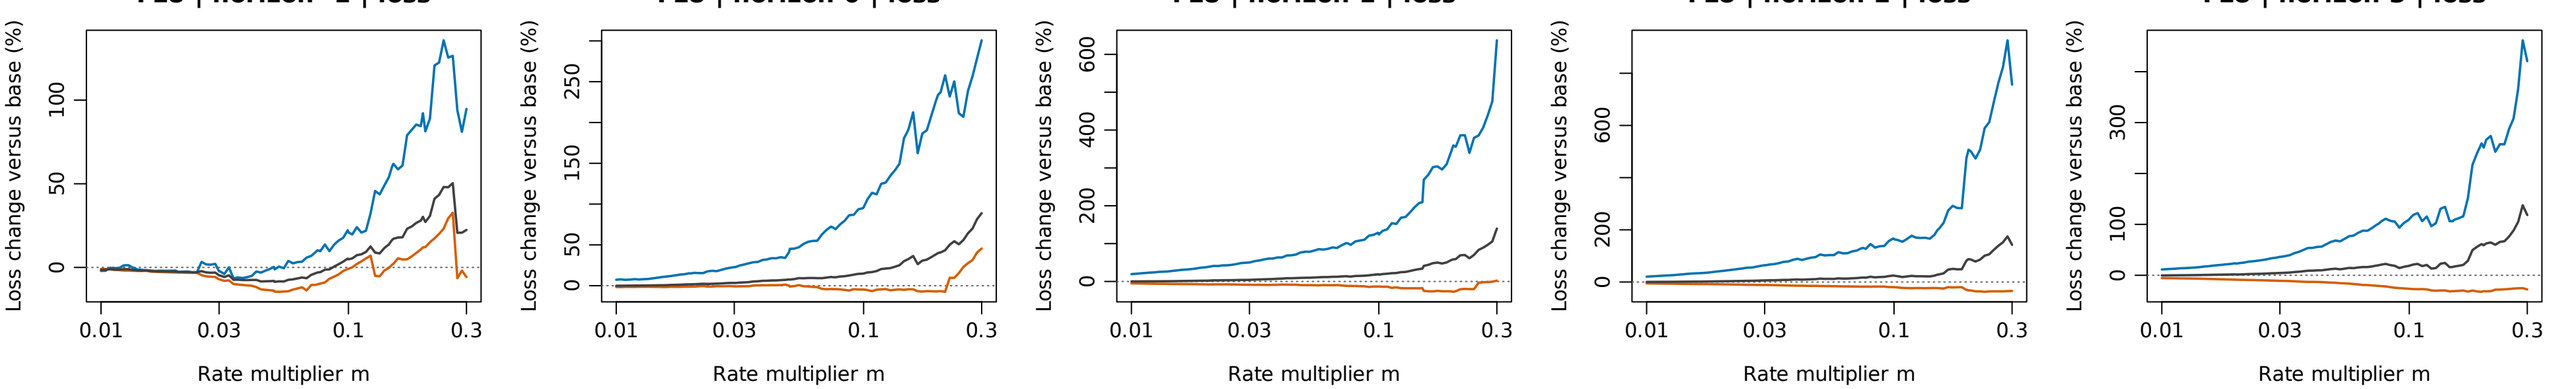

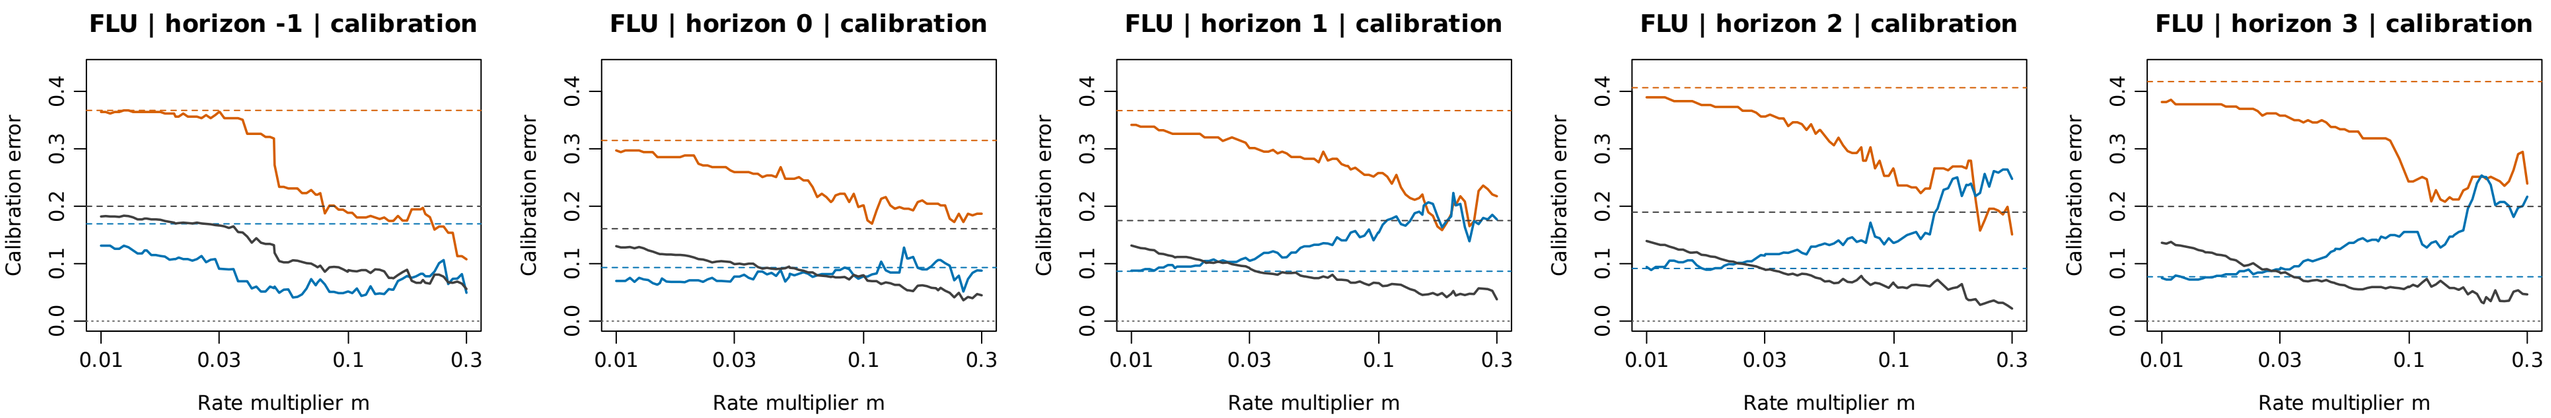



Before peak (weeks -7 to 0) | After peak (weeks 1 to 8) | Overall (seasons 2024/25 and 2025/26)


Loss: % change from m = 0 in the same phase (negative is better). Calibration: mean |coverage - alpha| over levels (lower is better); dashed: m = 0.


Illinois | Fixed-rate MultiQT: loss and calibration before and after the peak

Log1p-count tracking | eta = m * S0, S0 frozen after 20 released rows (warmup replayed) | Feedback delay 2 week(s) | Scored against latest reported counts in counts per 100k residents

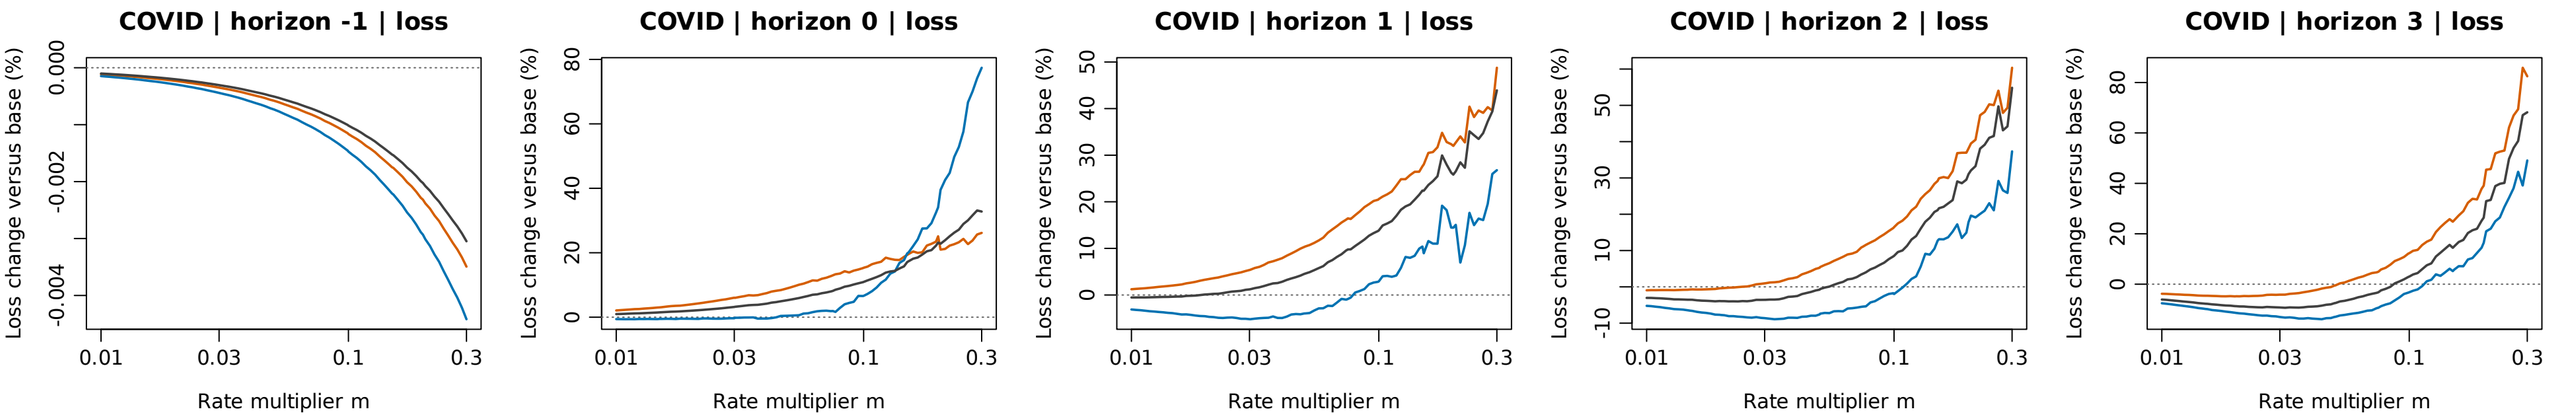

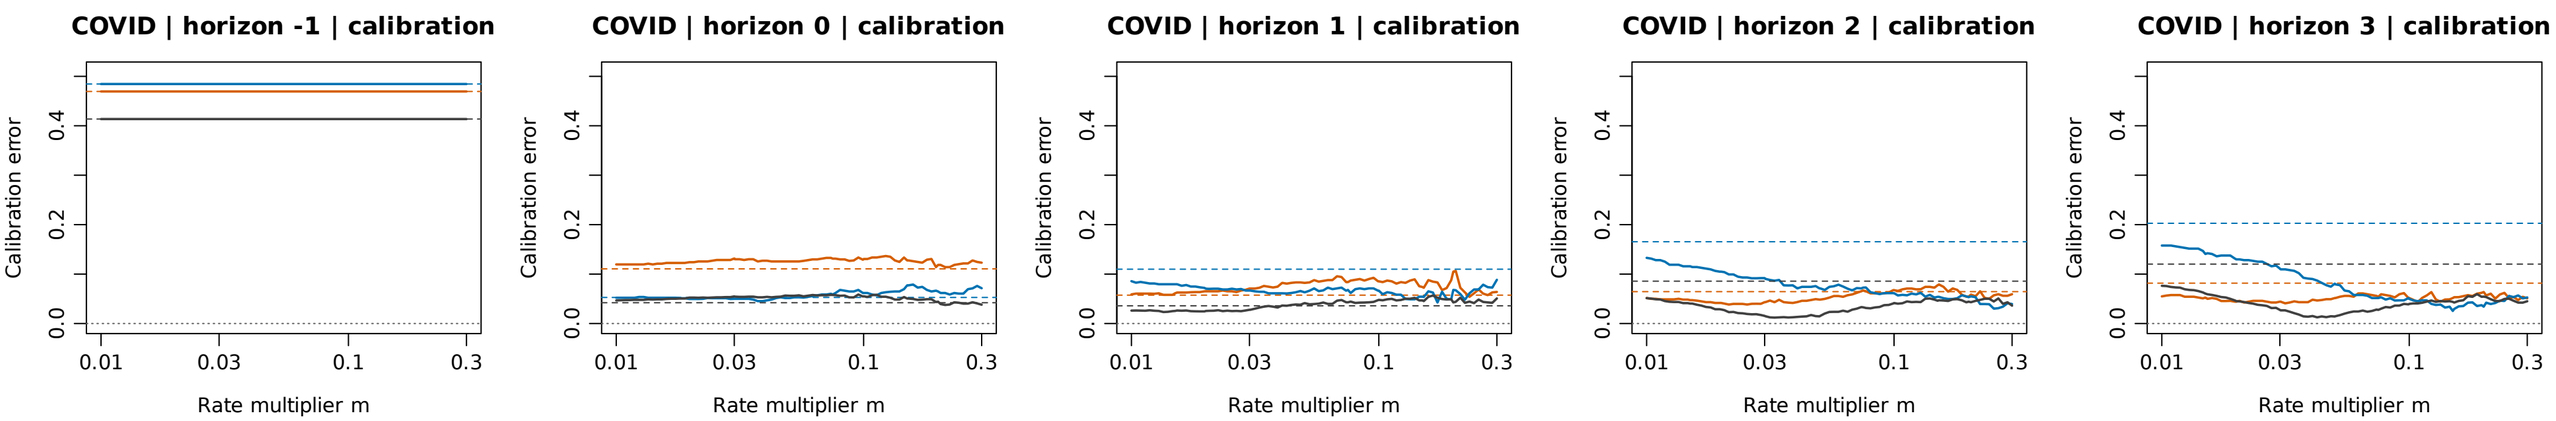

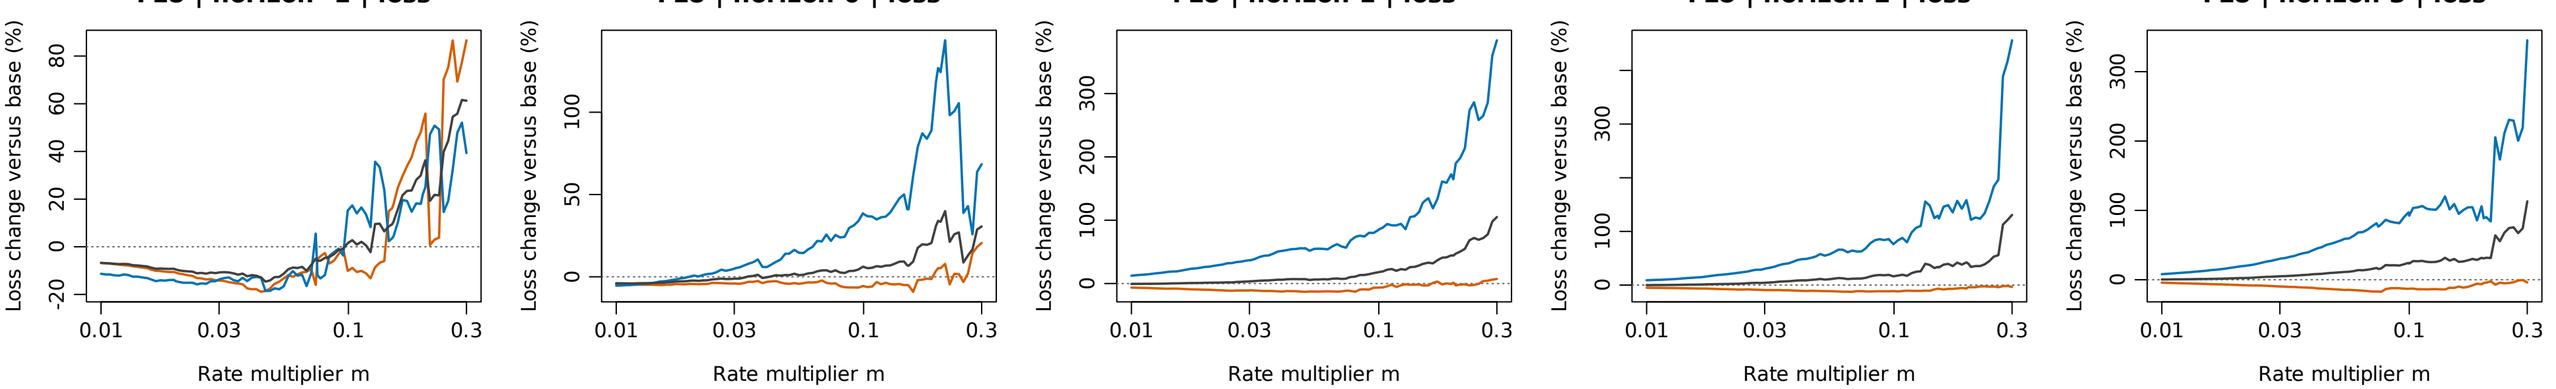

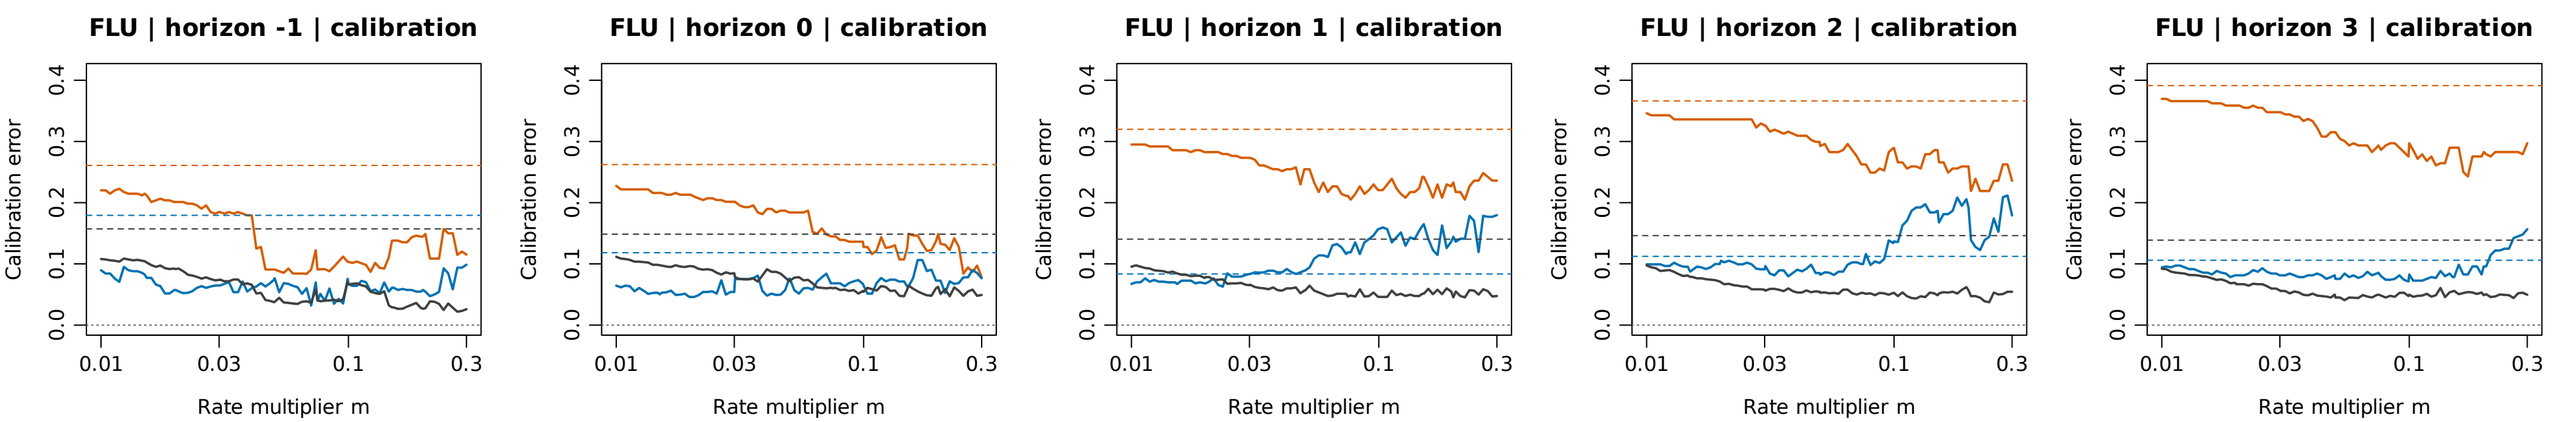

Before peak (weeks -7 to 0) | After peak (weeks 1 to 8) | Overall (seasons 2024/25 and 2025/26)

Loss: % change from m = 0 in the same phase (negative is better). Calibration: mean |coverage - alpha| over levels (lower is better); dashed: m = 0.