
COVID | Base forecast paths and three indicators


cmu_submission | counts per 100k residents | All peaks from script 01 | Indicators: score > log(1.05)

Blue curves: one reference week, horizons -1 to 3; darker = later within each peak window. Open point: h = -1.


United States | 3 detected peaks

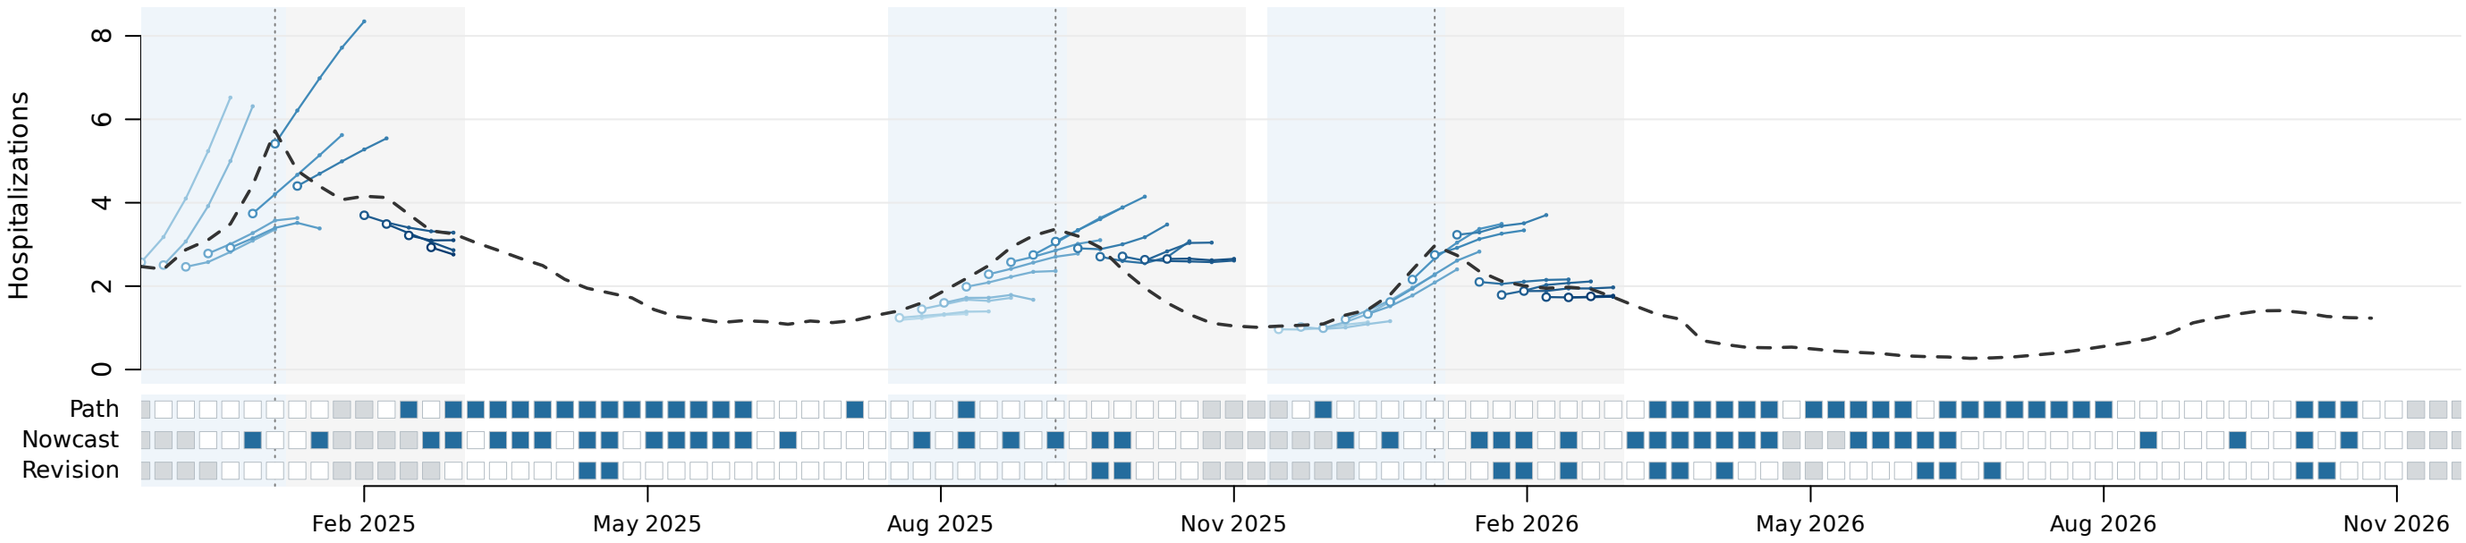


California | 3 detected peaks

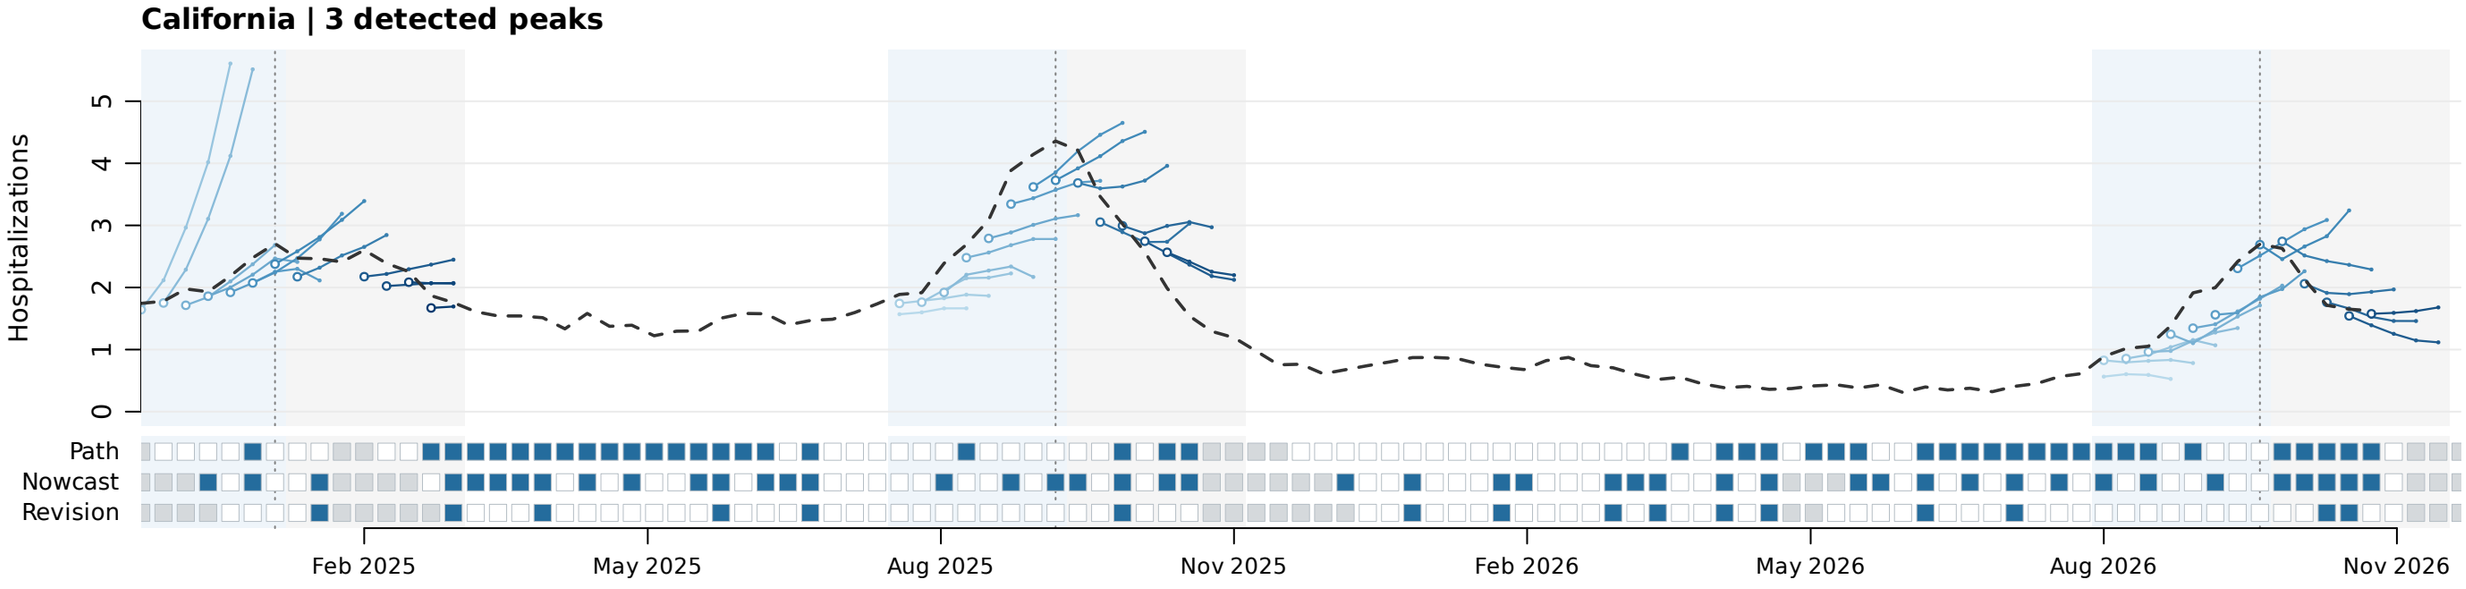


Texas | 4 detected peaks

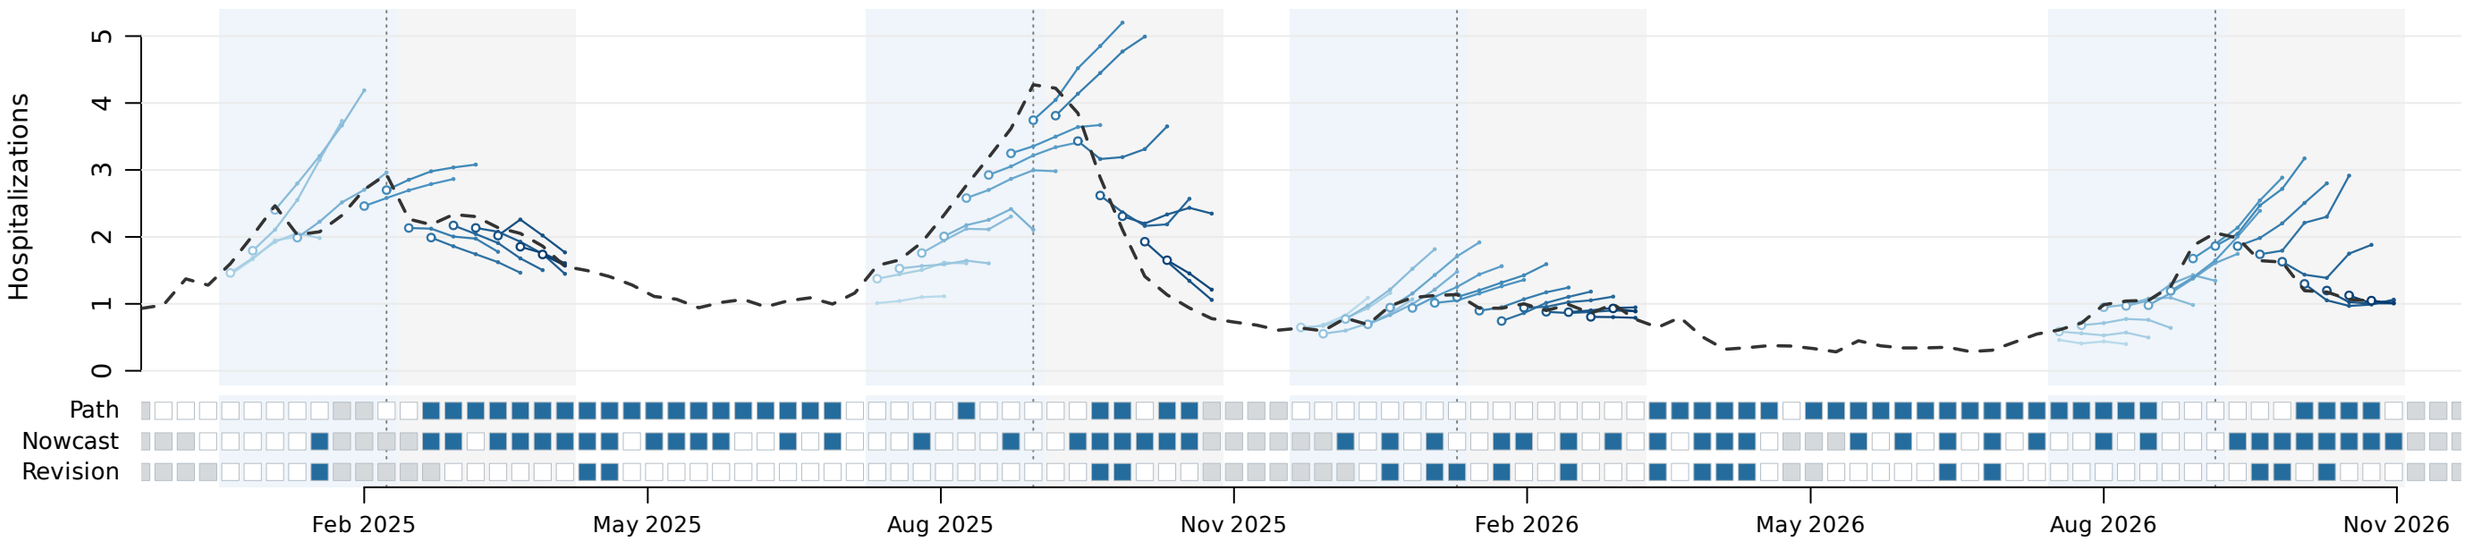

New York | 3 detected peaks

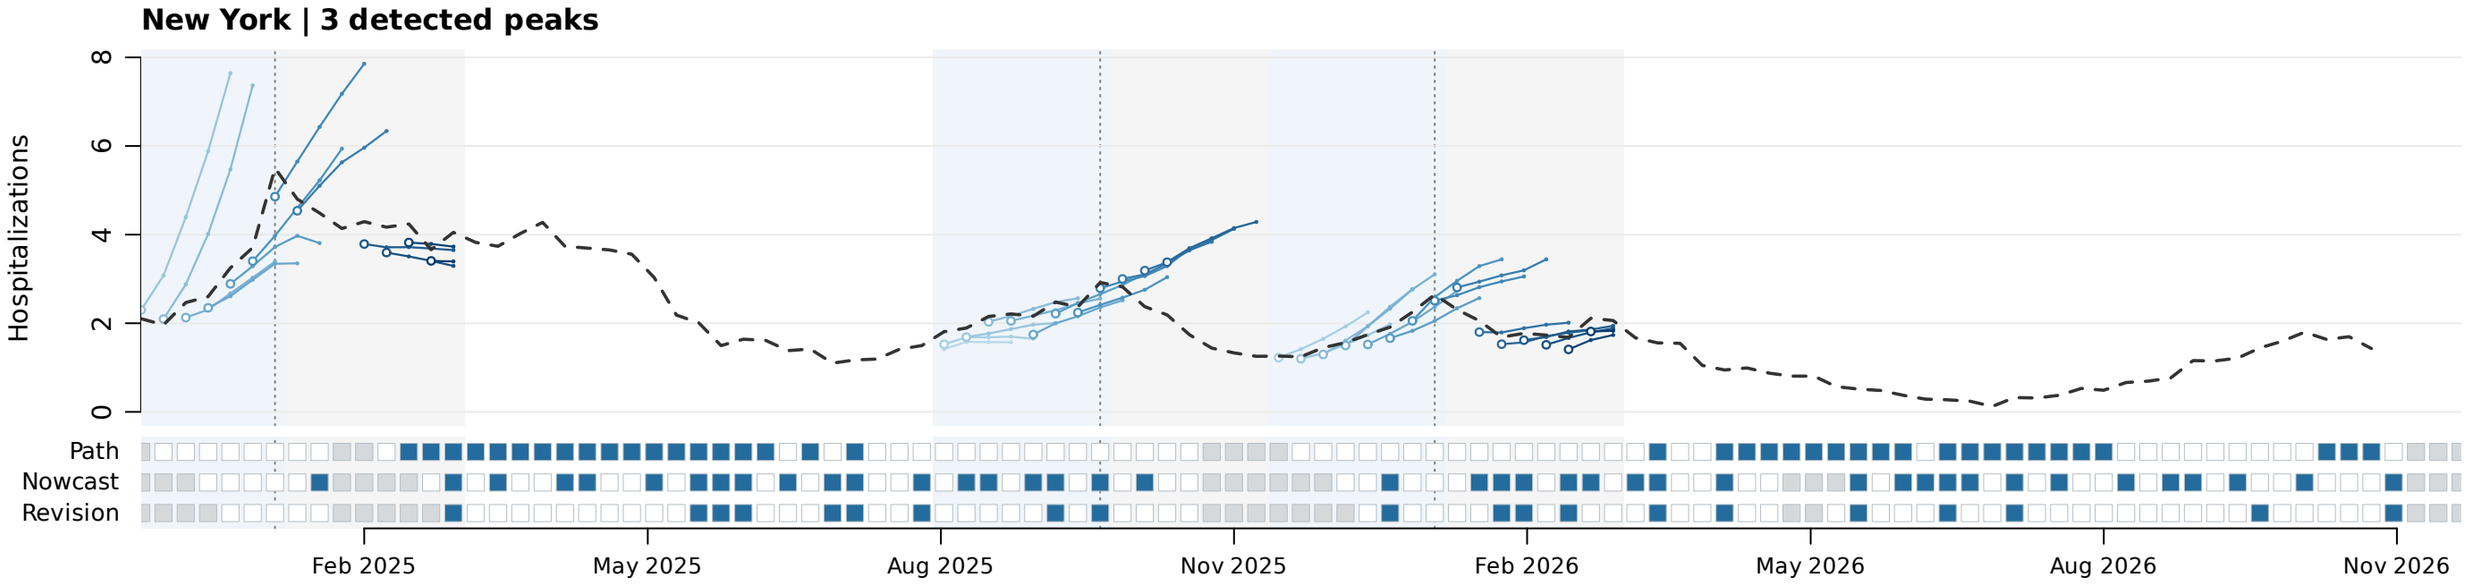

Pennsylvania | 3 detected peaks

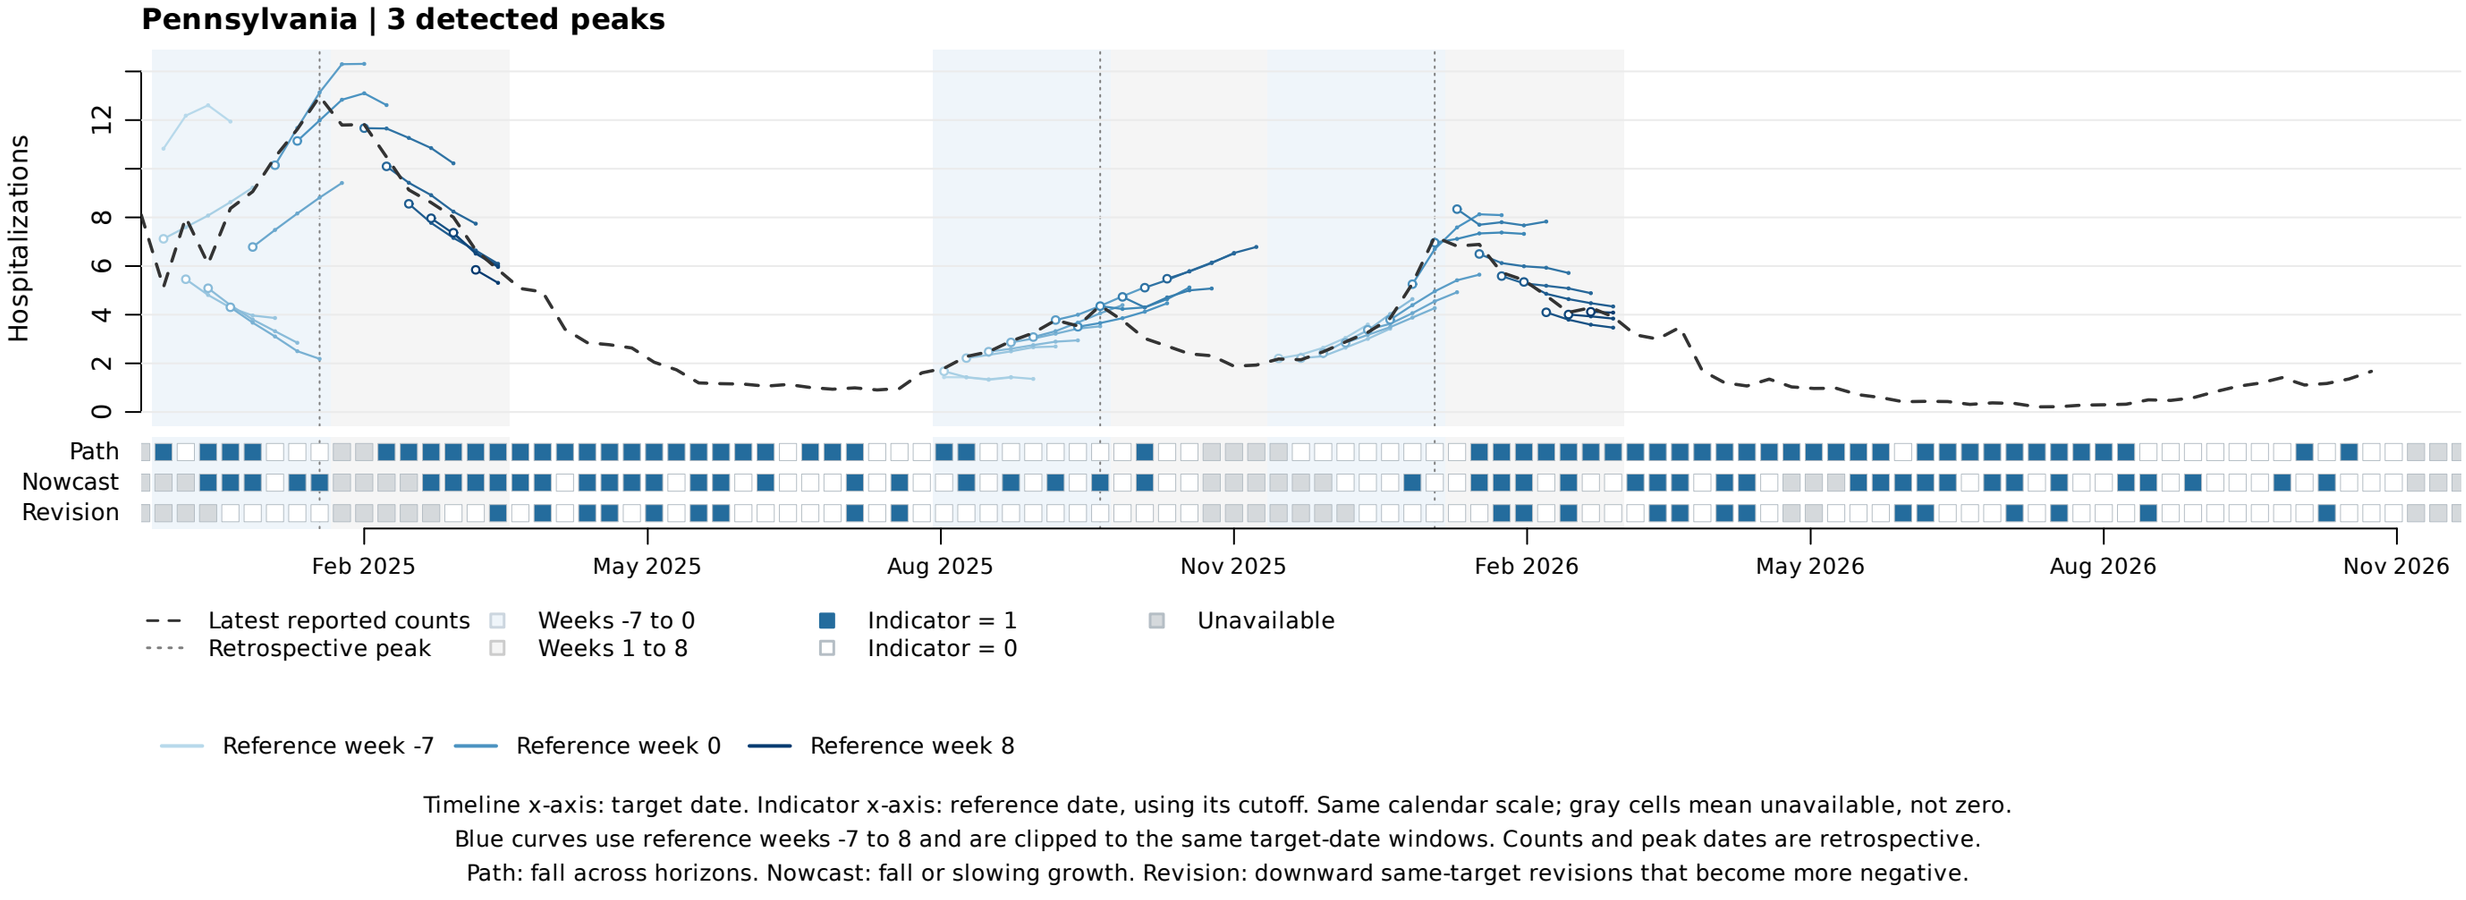

Timeline x-axis: target date. Indicator x-axis: reference date, using its cutoff. Same calendar scale; gray cells mean unavailable, not zero.

Blue curves use reference weeks -7 to 8 and are clipped to the same target-date windows. Counts and peak dates are retrospective.


Path: fall across horizons. Nowcast: fall or slowing growth. Revision: downward same-target revisions that become more negative.

FLU | Base forecast paths and three indicators


cmu_submission | counts per 100k residents | All peaks from script 01 | Indicators: score > log(1.05)

Blue curves: one reference week, horizons -1 to 3; darker = later within each peak window. Open point: h = -1.


United States | 2 detected peaks

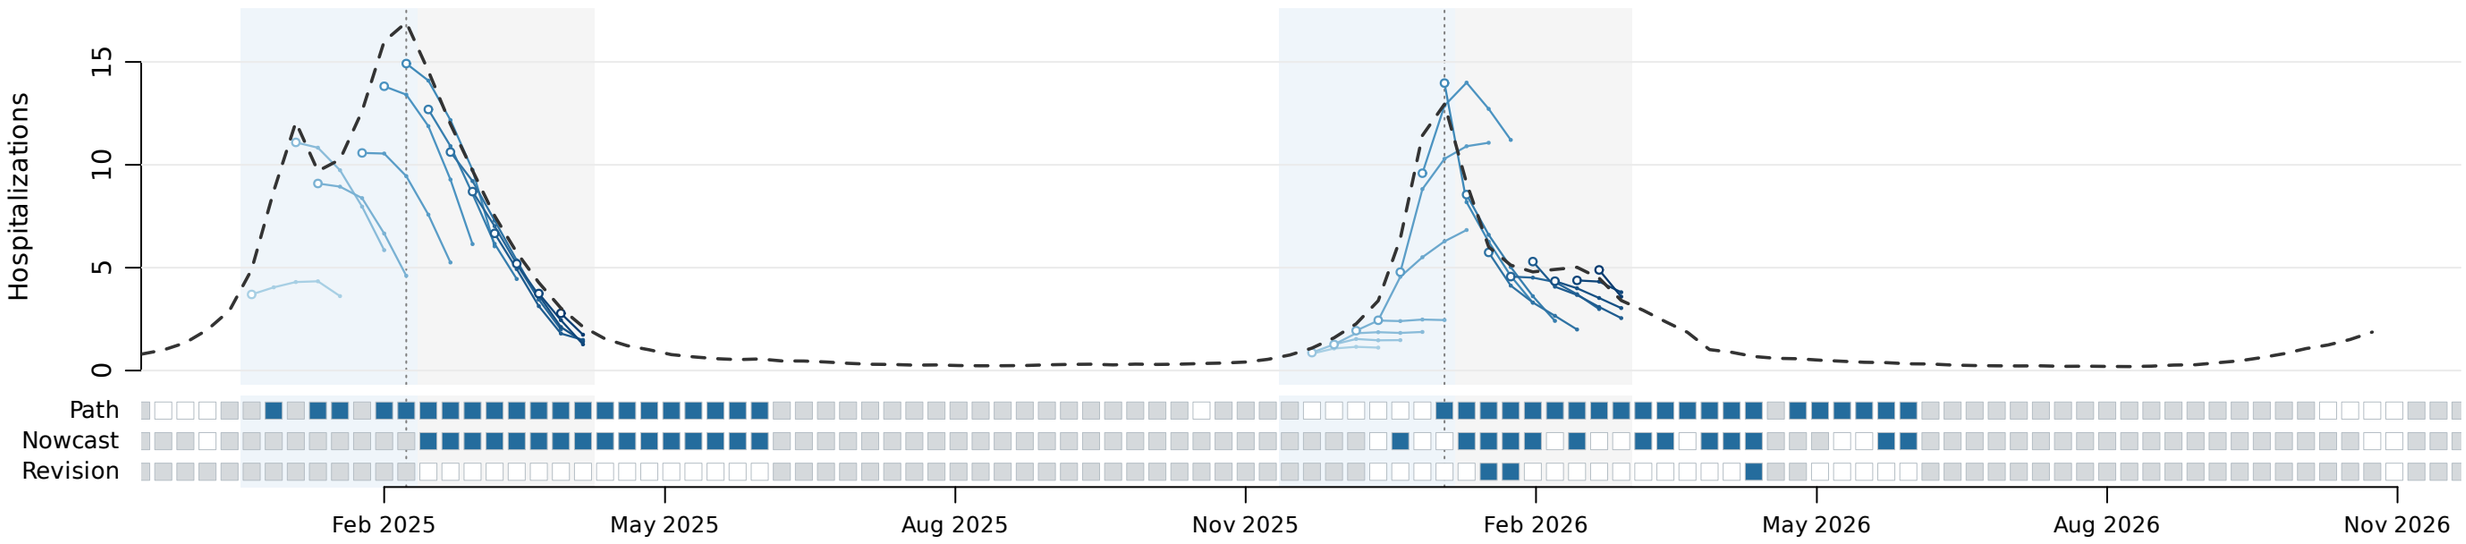


California | 2 detected peaks

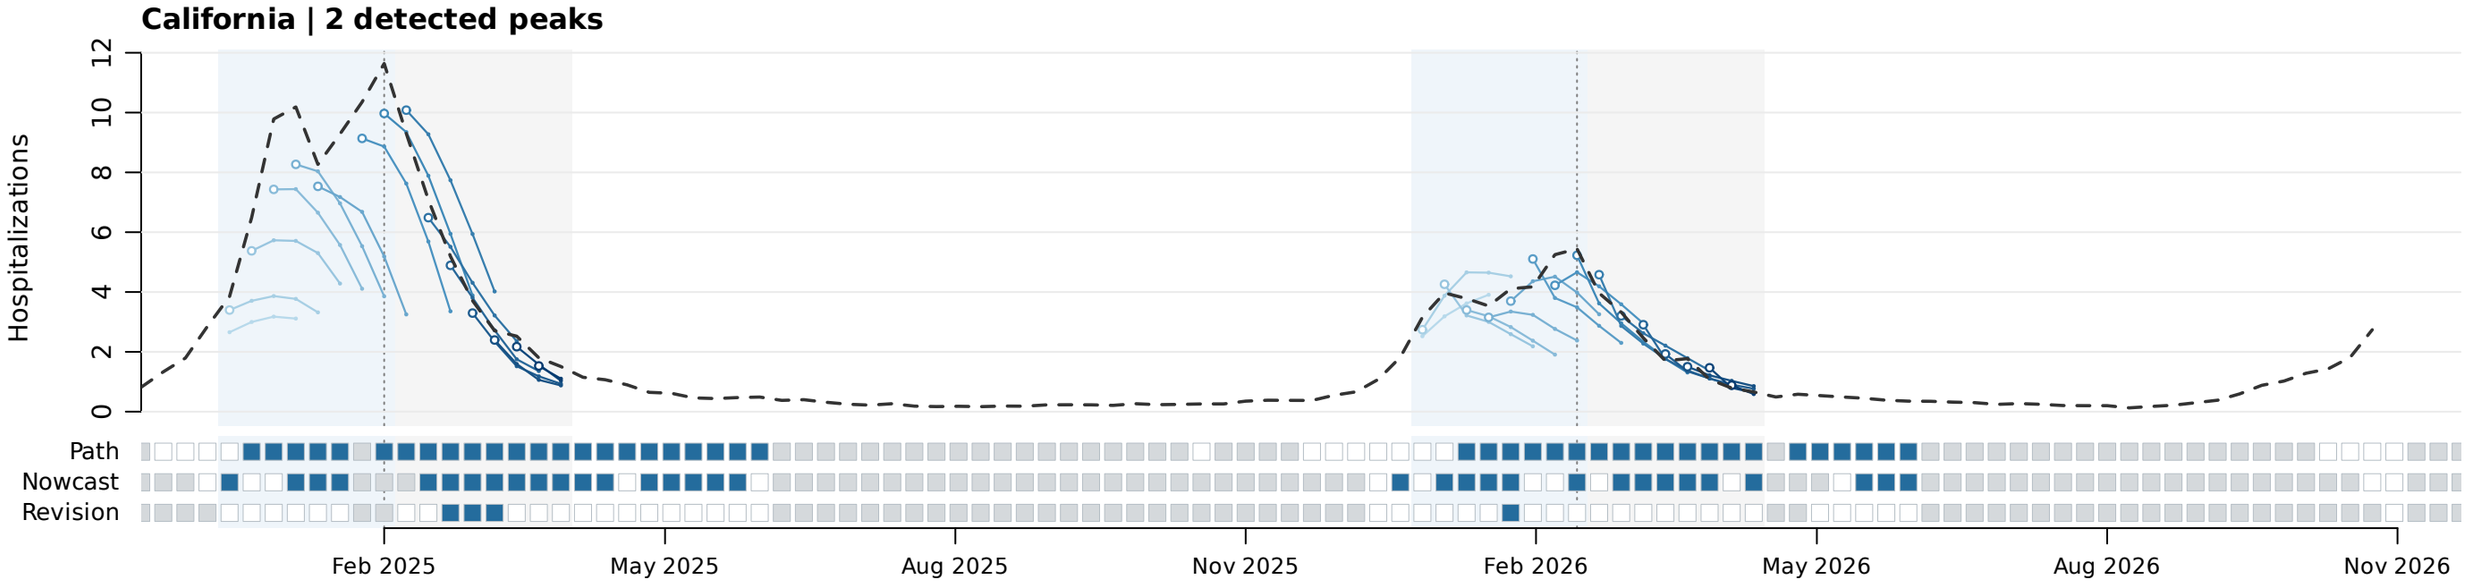

Texas | 2 detected peaks

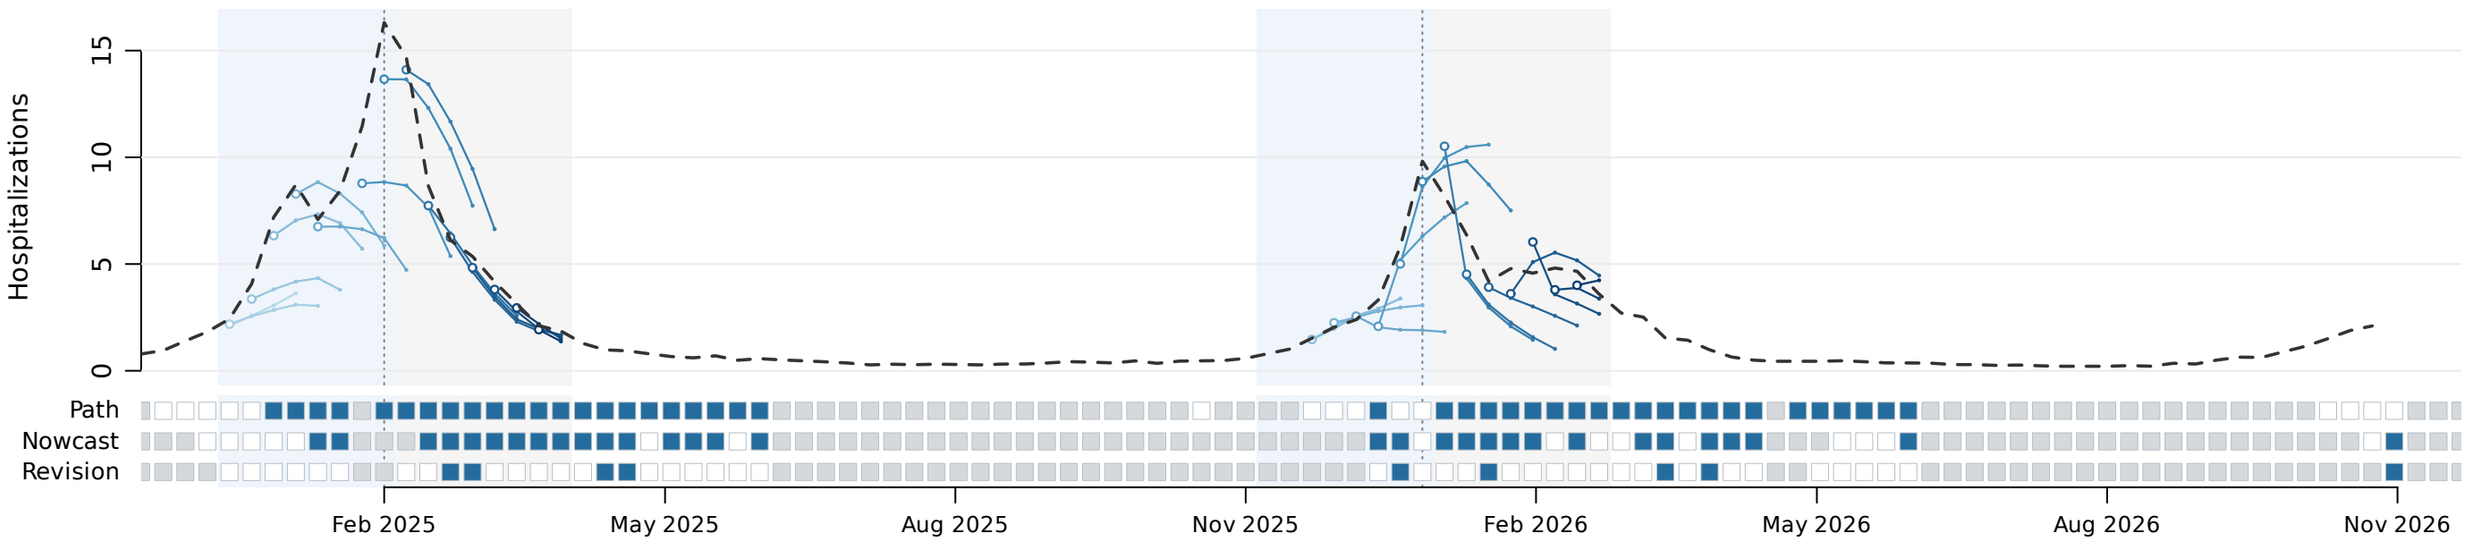

New York | 2 detected peaks

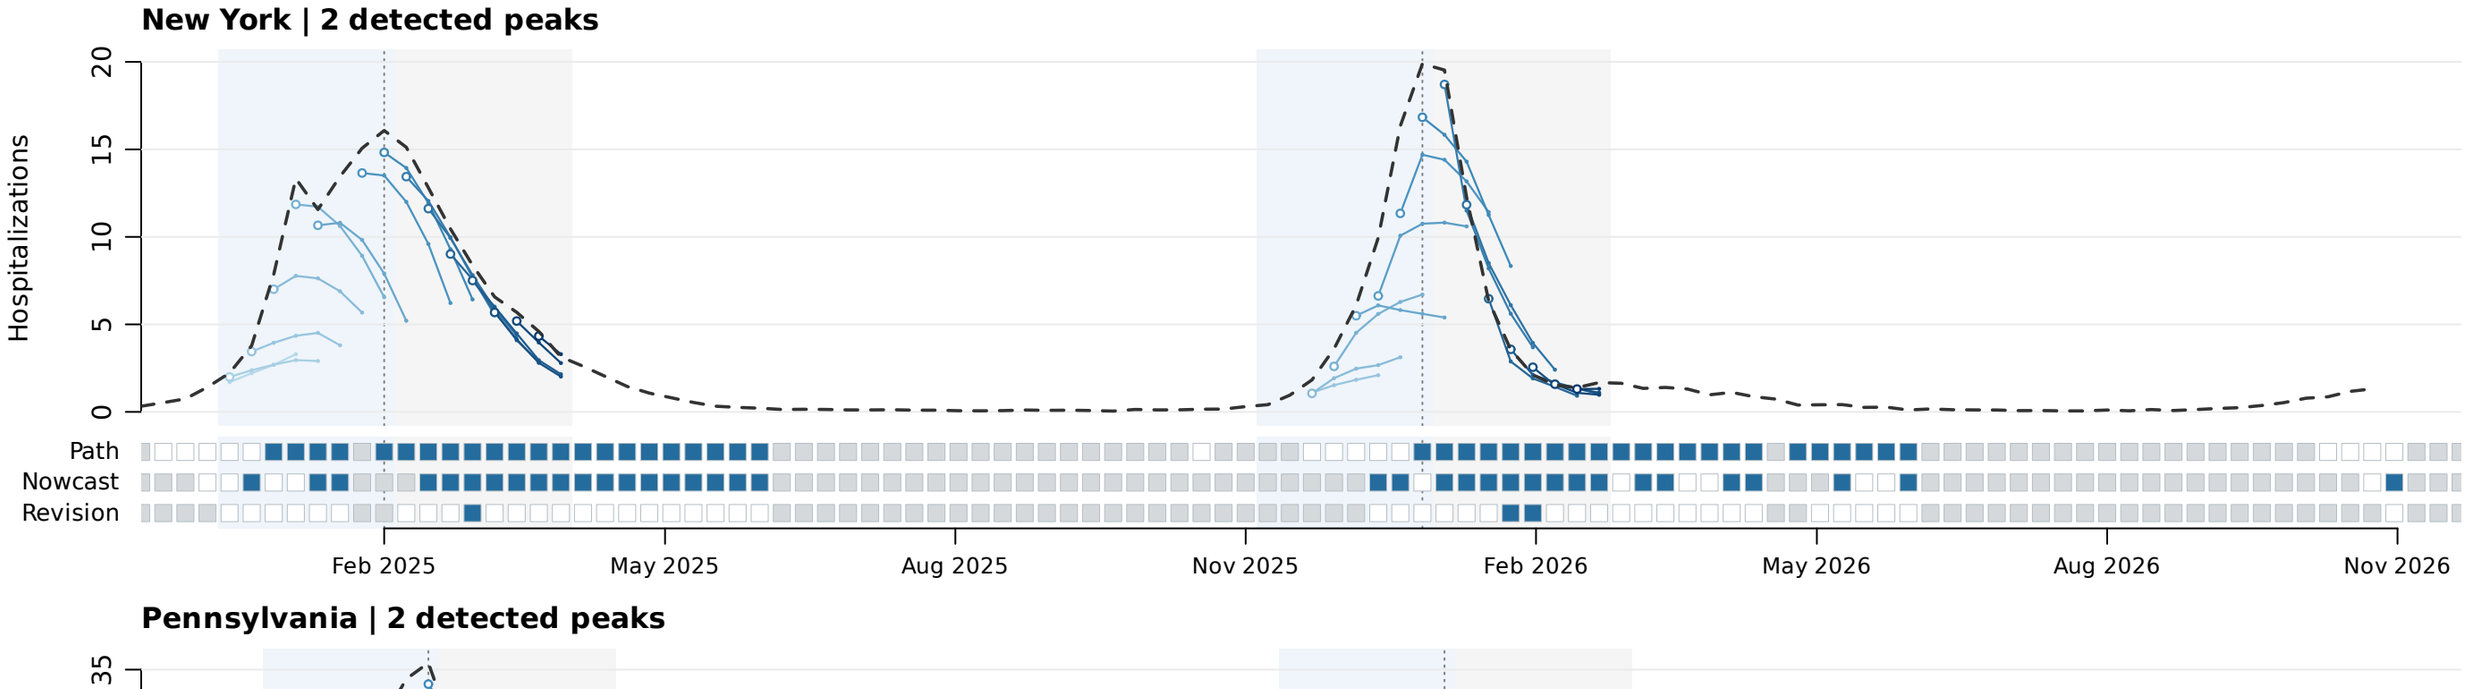

Pennsylvania | 2 detected peaks

Timeline x-axis: target date. Indicator x-axis: reference date, using its cutoff. Same calendar scale; gray cells mean unavailable, not zero.
Blue curves use reference weeks -7 to 8 and are clipped to the same target-date windows. Counts and peak dates are retrospective.
Path: fall across horizons. Nowcast: fall or slowing growth. Revision: downward same-target revisions that become more negative.