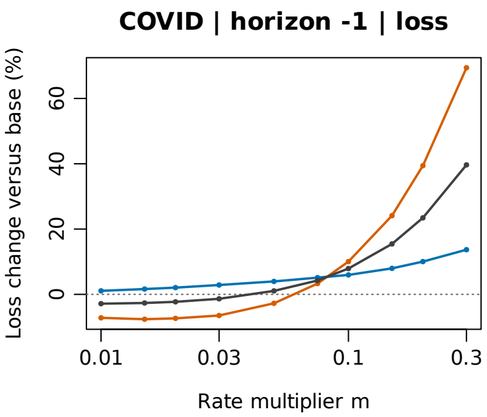
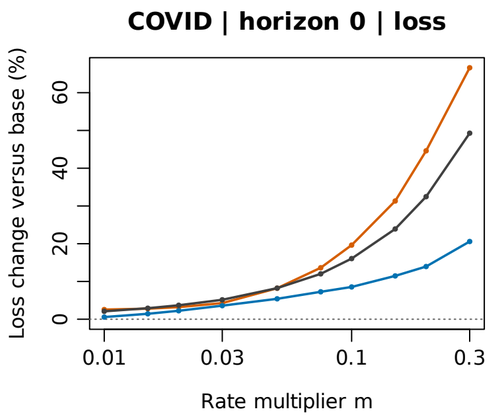
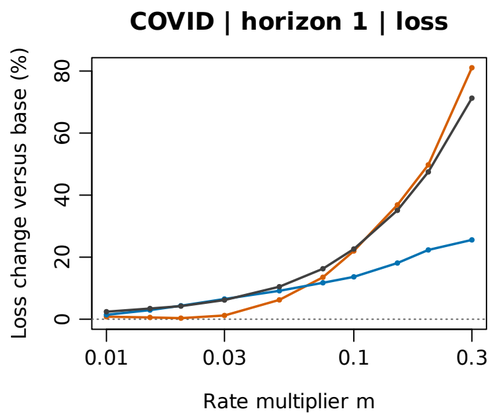
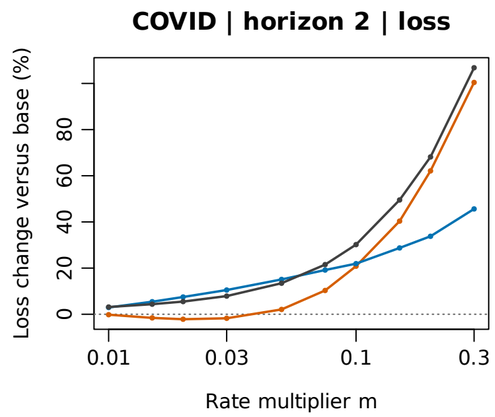
All 52 locations pooled (multipliers of the dots) | delay 0 | Fixed-rate MultiQT: loss and calibration before and after the peak

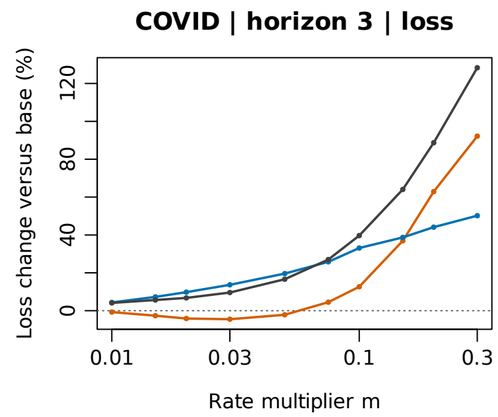
Count tracking | eta = m * S0, S0 frozen after 20 released rows (in hindsight: warmup replayed) | Feedback delay 0 | Scored against latest reported counts in counts per 100k residents

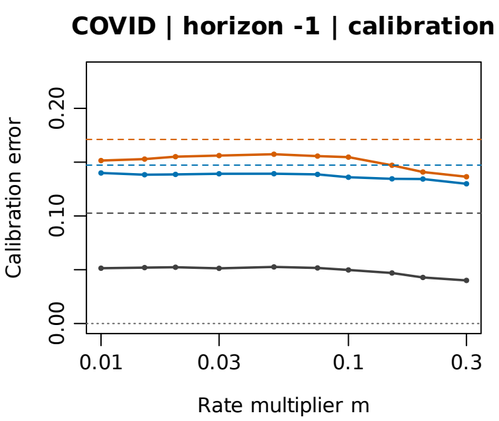


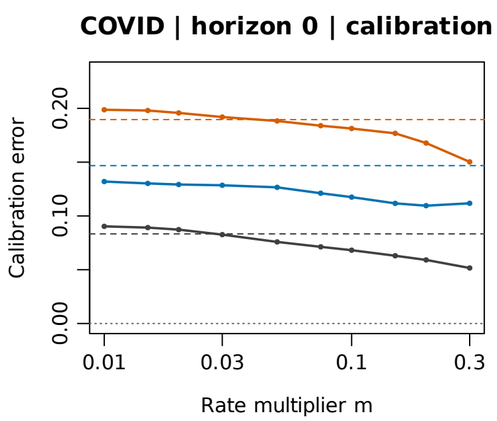



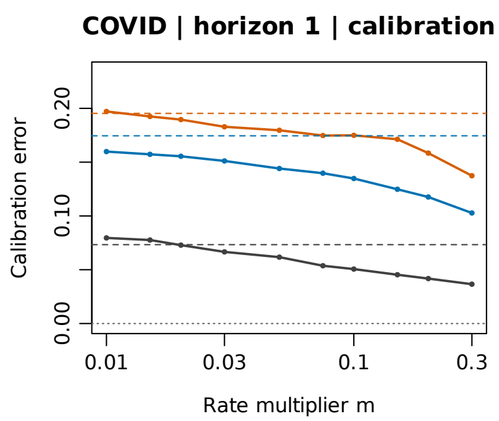



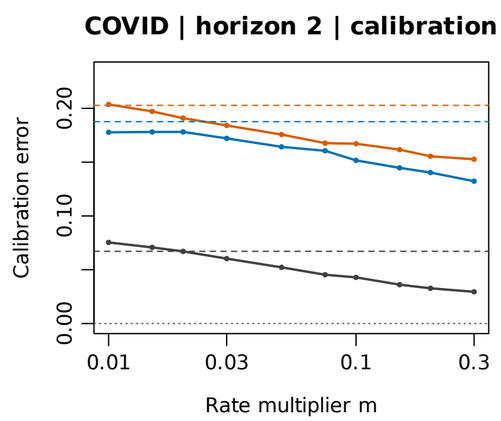



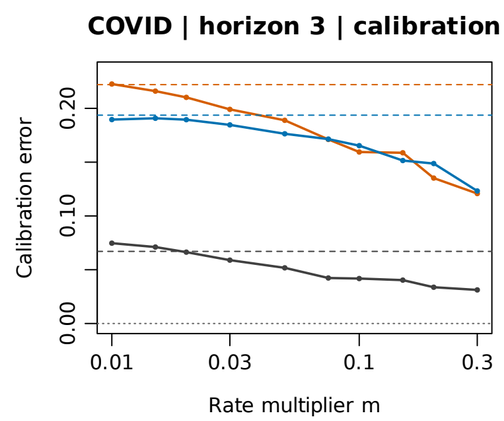



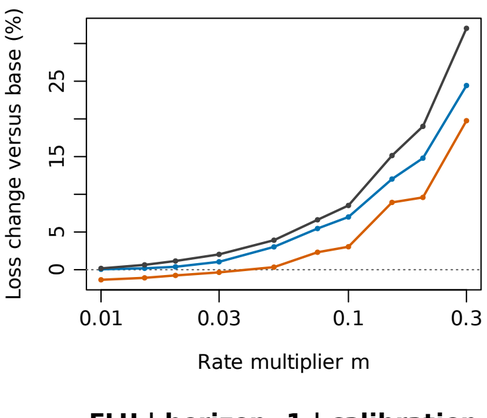



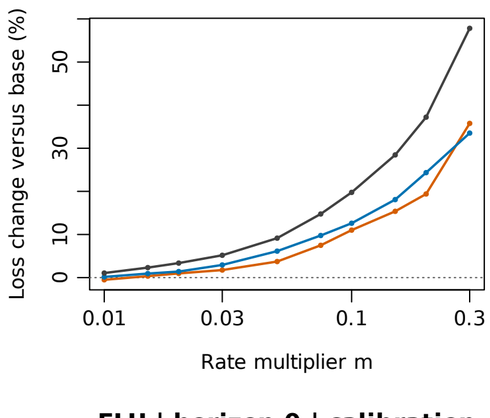



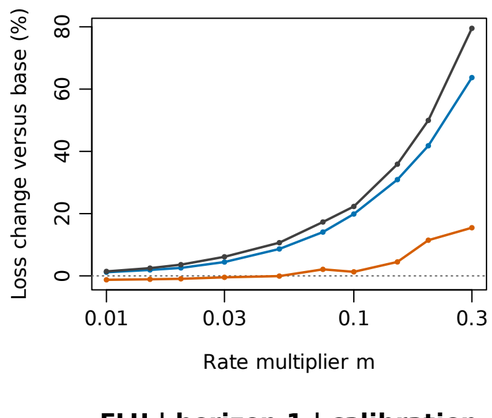



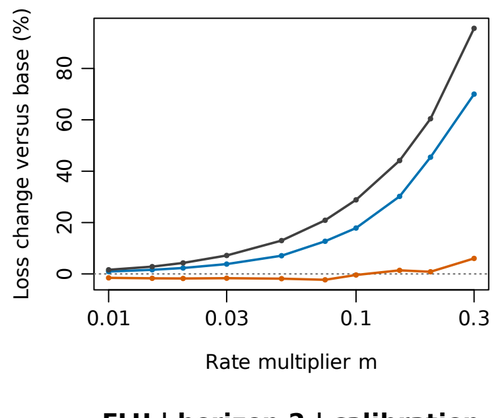



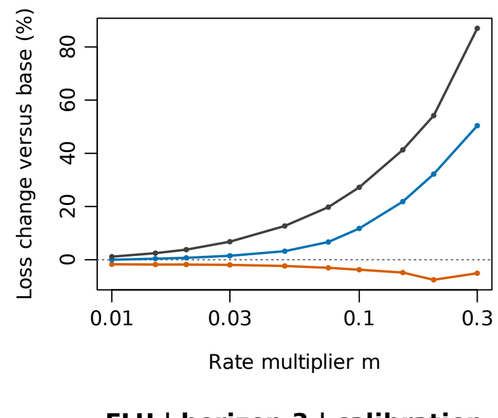



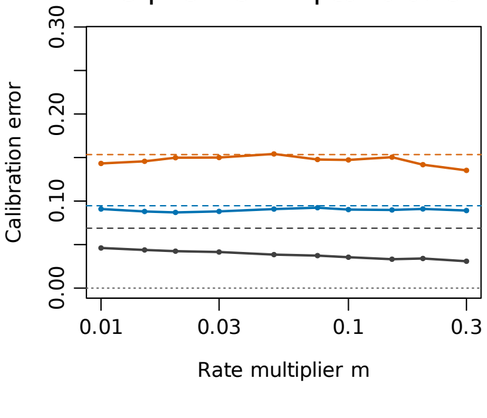



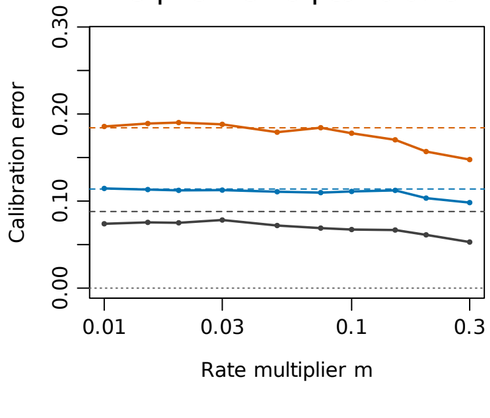



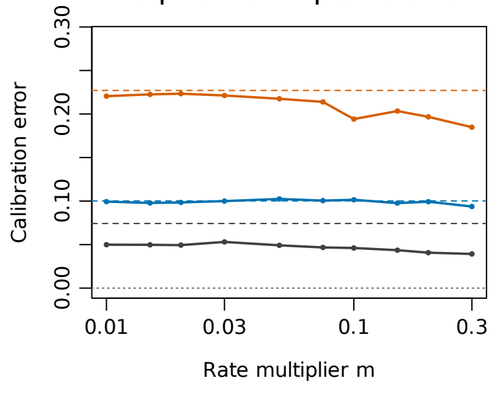



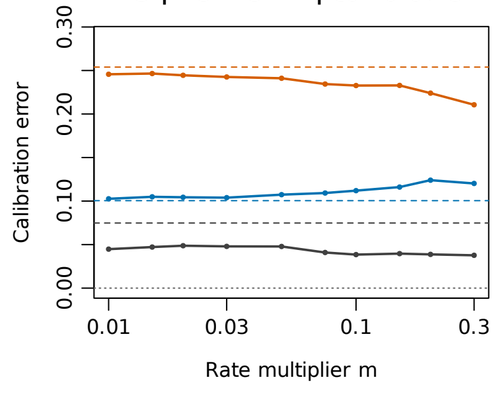



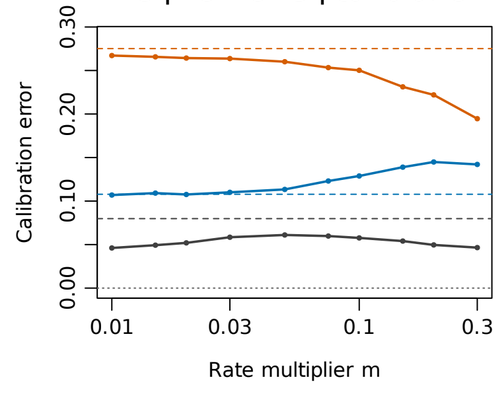



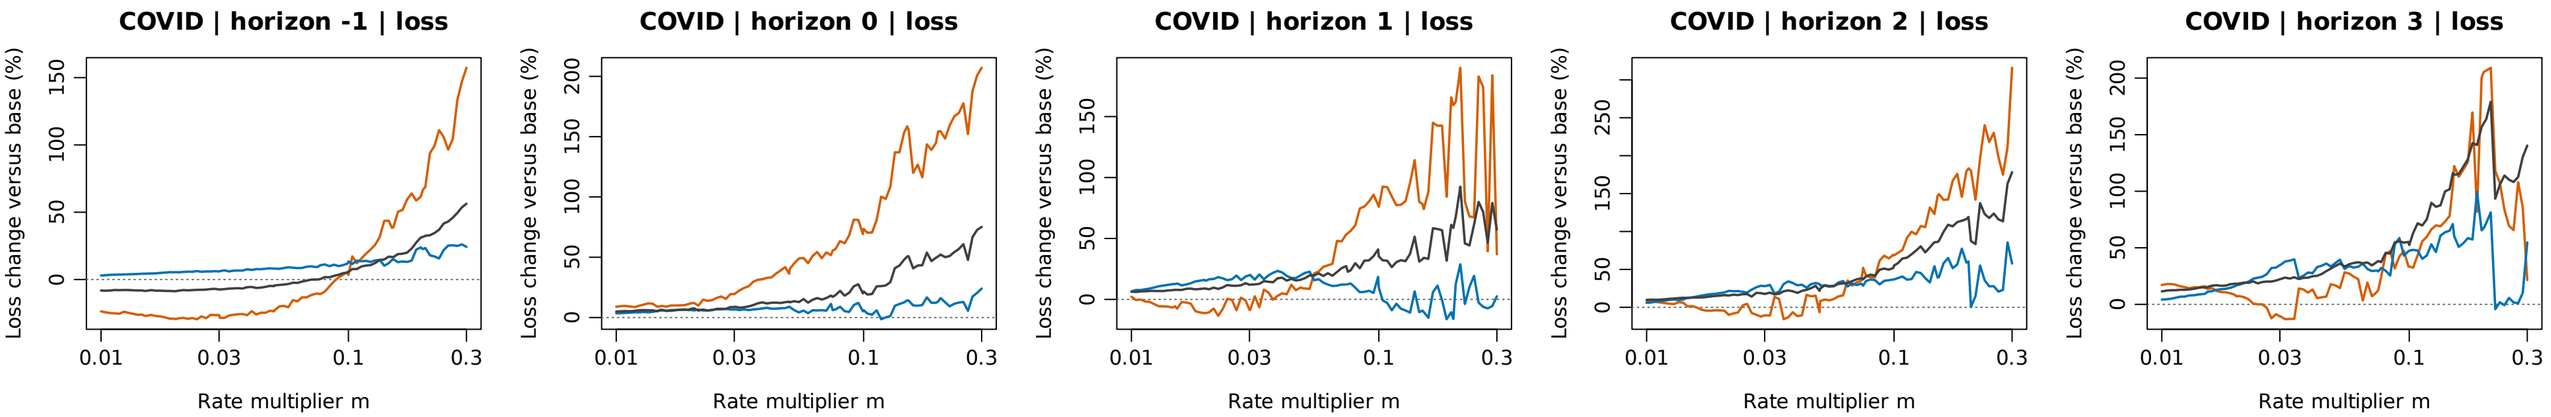



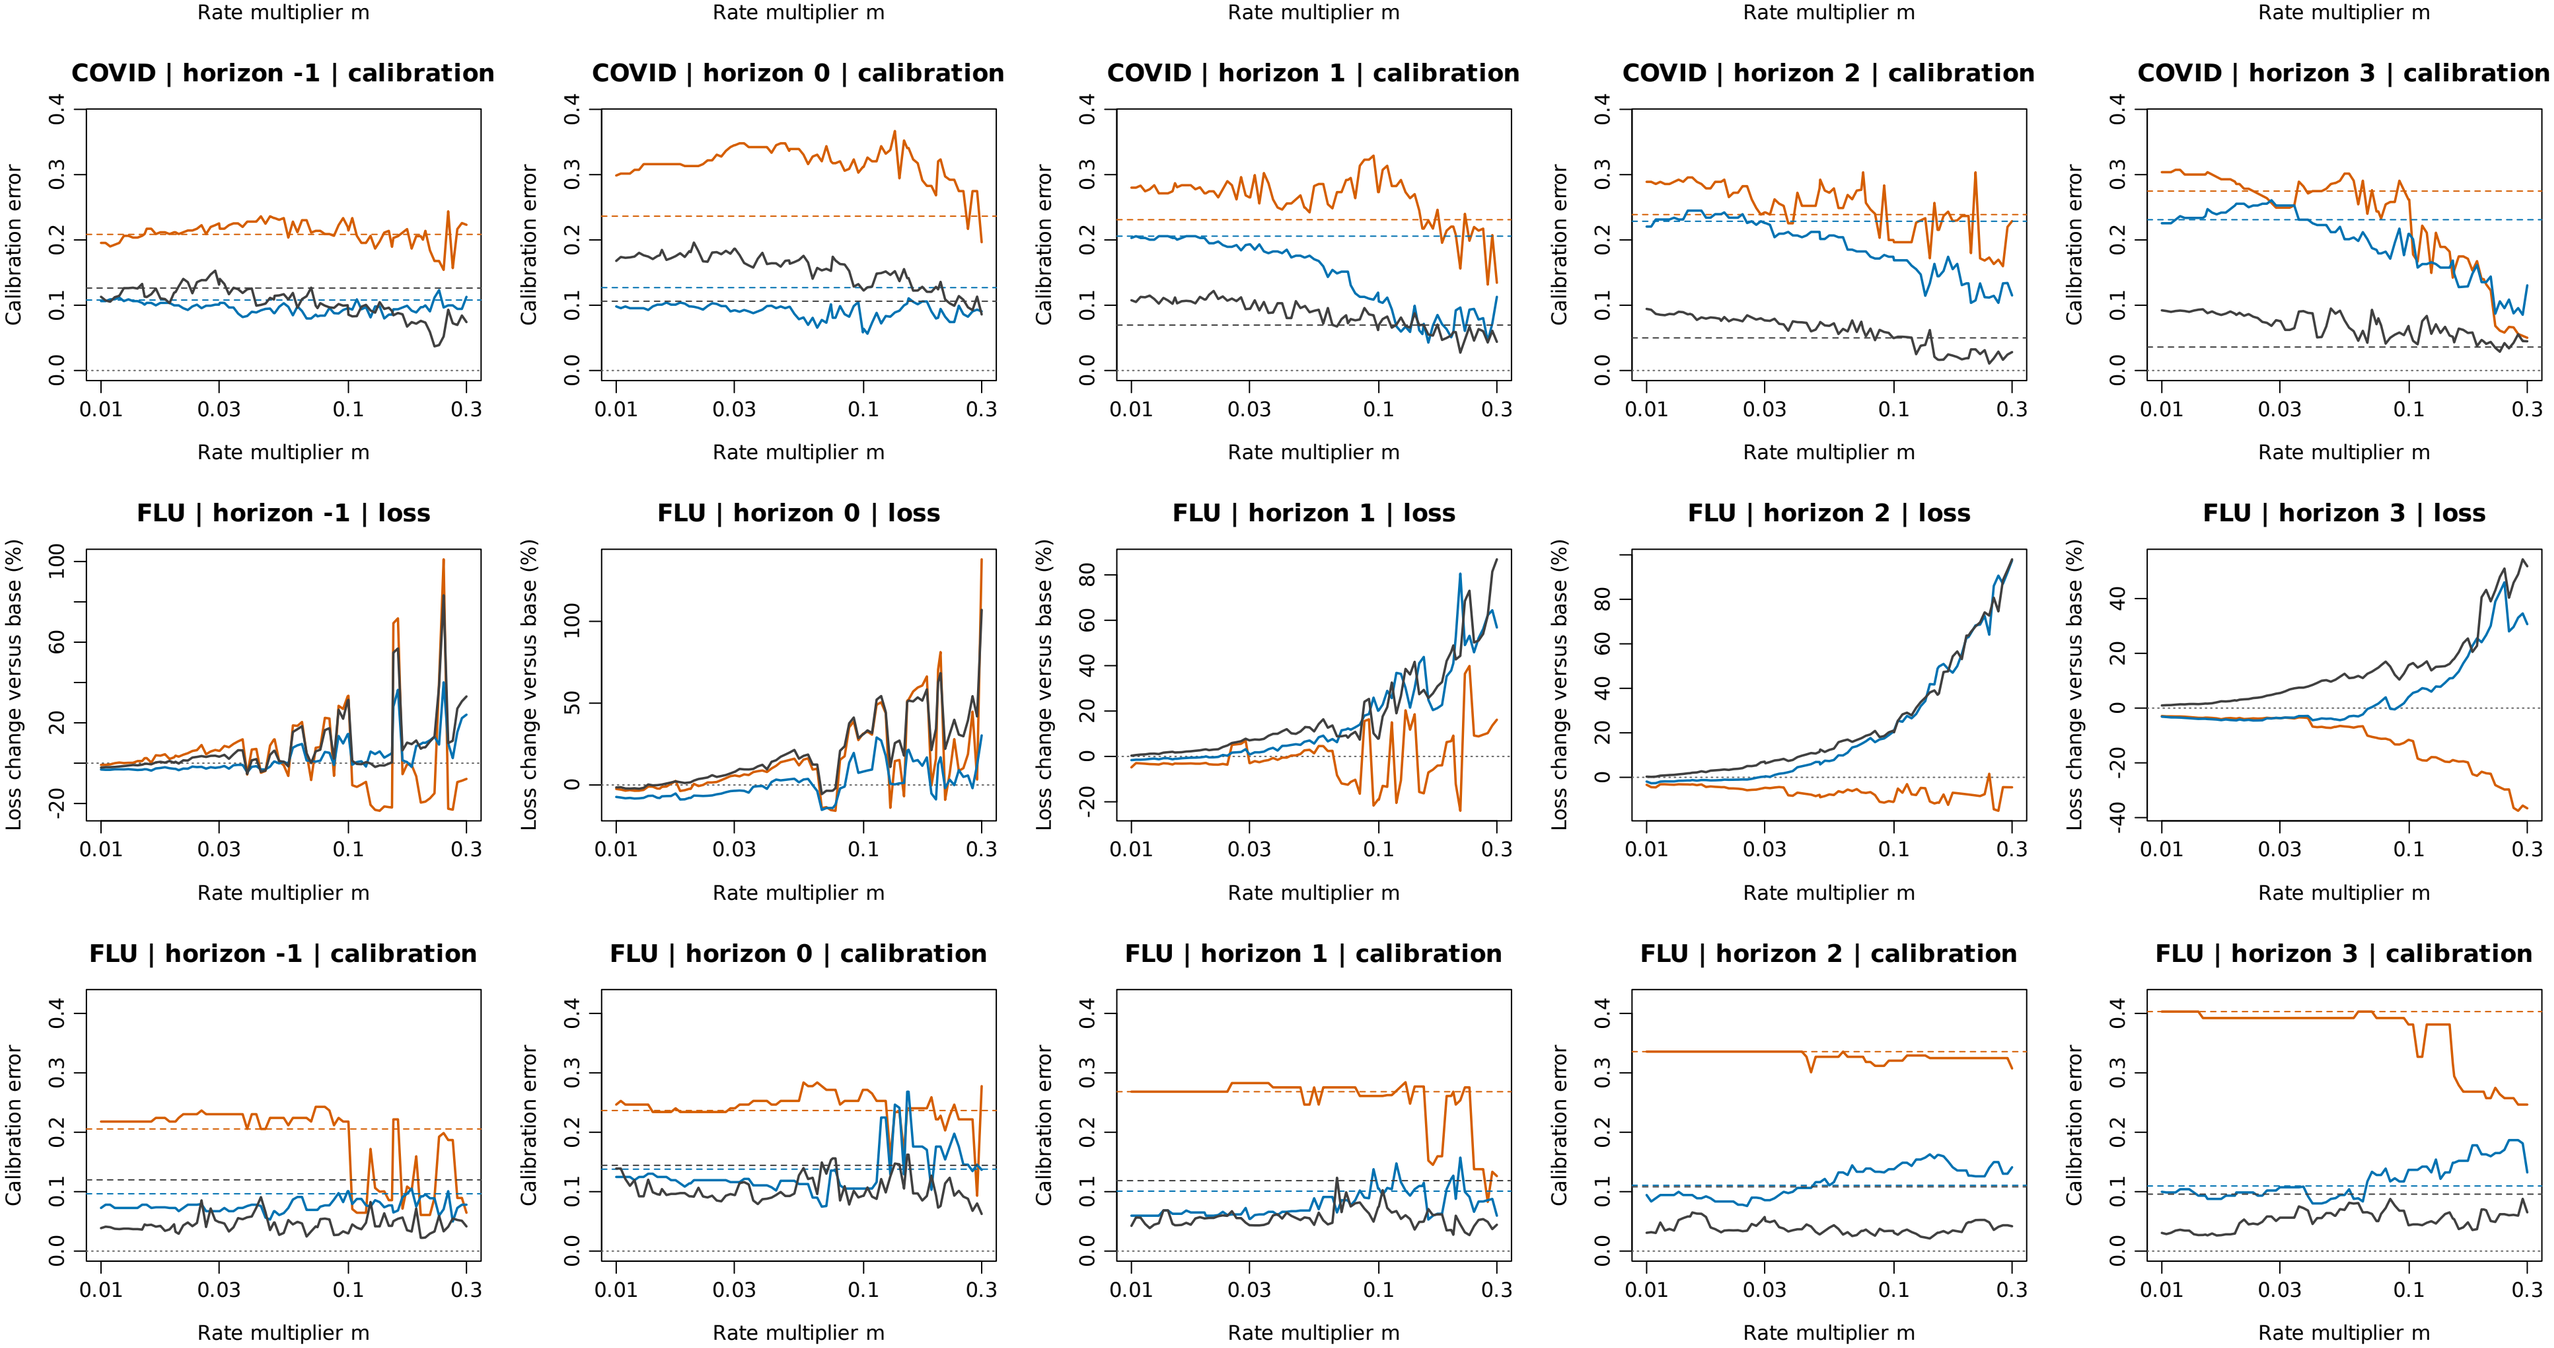

Before peak (weeks -7 to 0)  After peak (weeks 1 to 8)  Overall (Jun 2025 to Sep 2026)

Loss: % change from m = 0 in the same phase (negative is better). Calibration: mean |coverage - alpha| over levels (lower is better); dashed: m = 0. Pooled: each location weighted by its weeks.

# United States | delay 0 | Fixed-rate MultiQT: loss and calibration before and after the peak

Count tracking | eta = m * S0, S0 frozen after 20 released rows (in hindsight: warmup replayed) | Feedback delay 0 | Scored against latest reported counts in counts per 100k residents



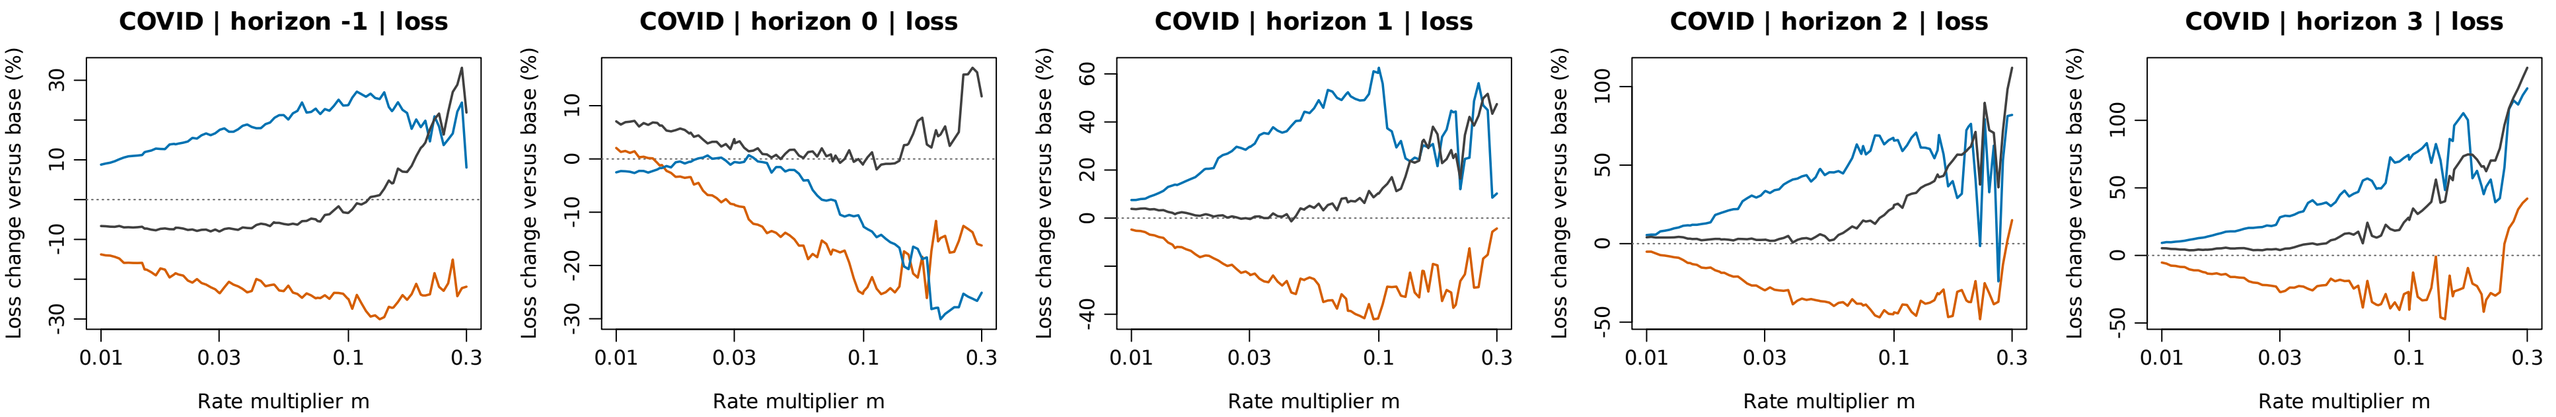



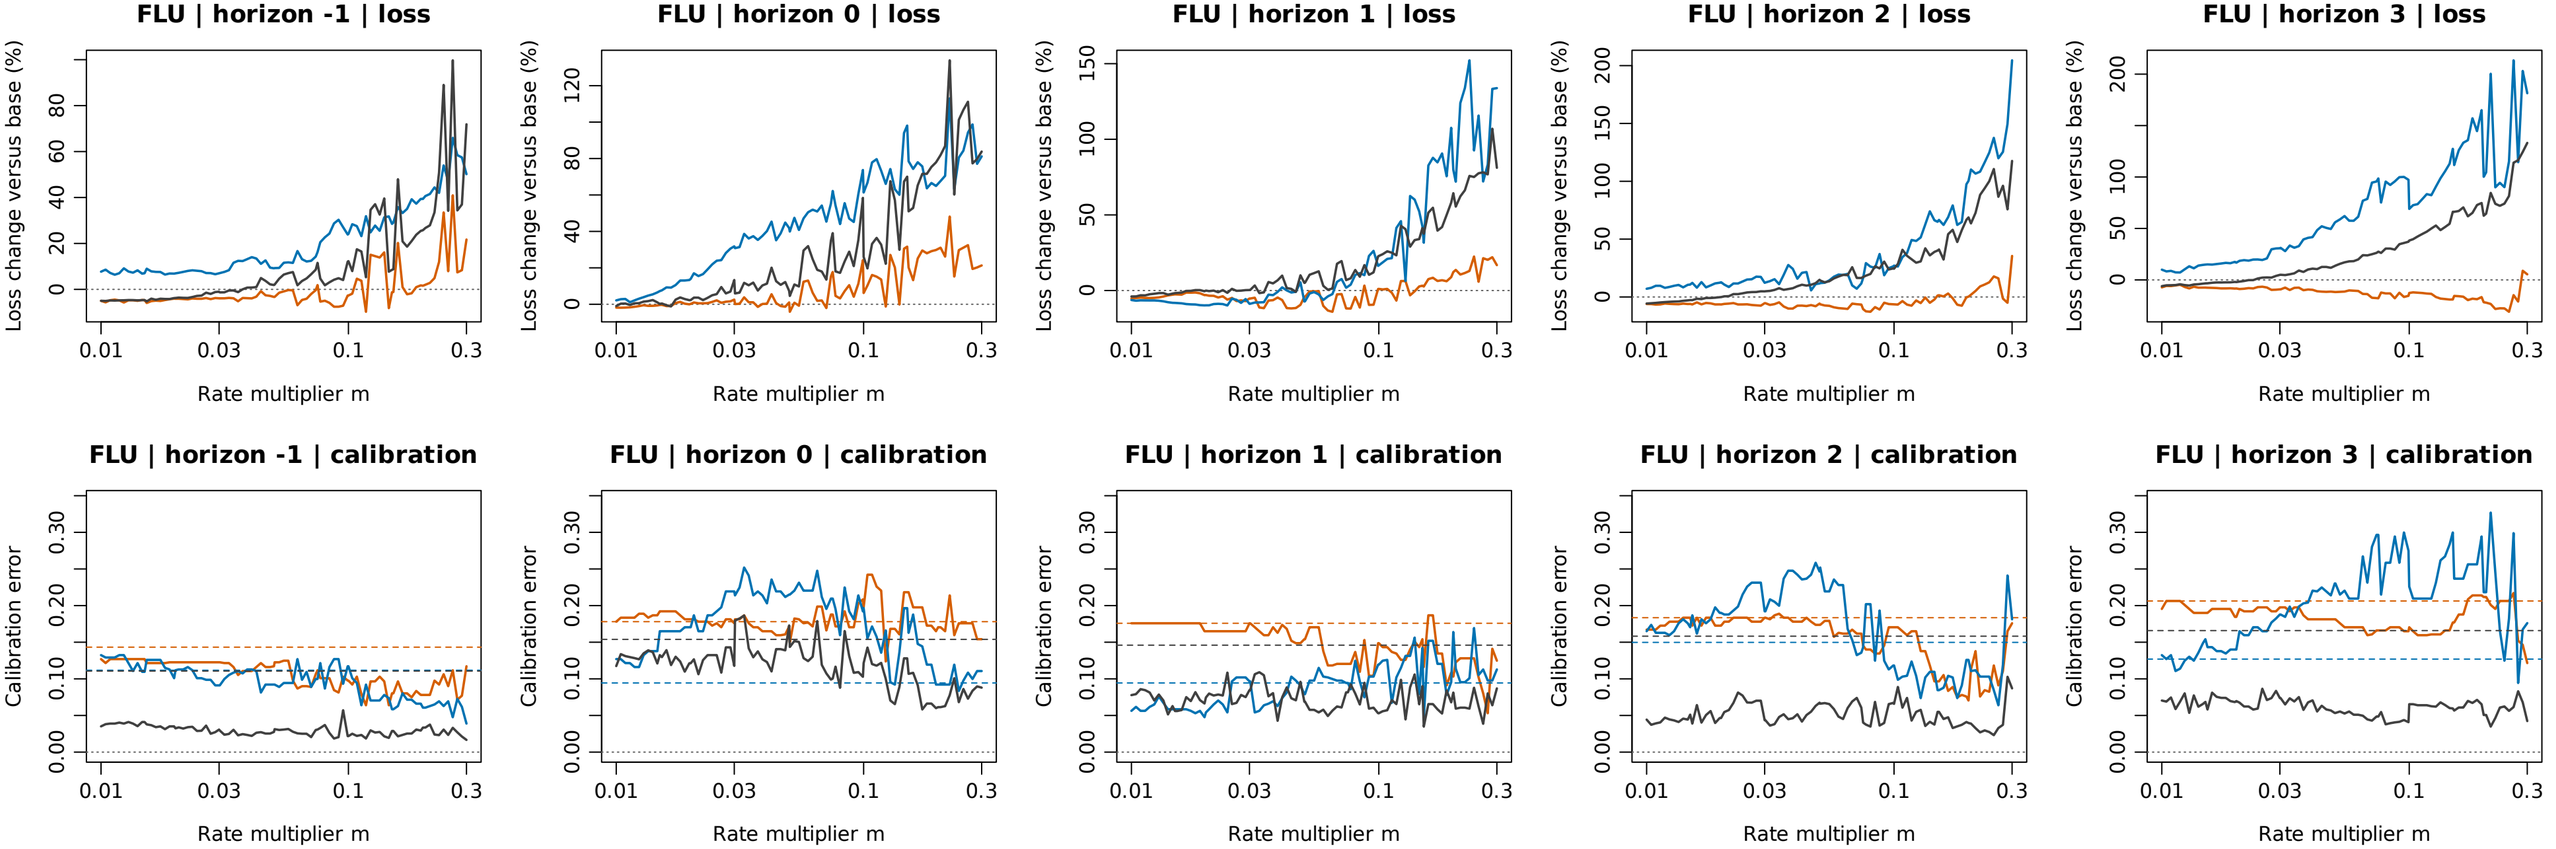

Before peak (weeks -7 to 0) | After peak (weeks 1 to 8) | Overall (Jun 2025 to Sep 2026)

Loss: % change from m = 0 in the same phase (negative is better). Calibration: mean |coverage - alpha| over levels (lower is better); dashed: m = 0.

# California | delay 0 | Fixed-rate MultiQT: loss and calibration before and after the peak

Count tracking | eta = m * S0, S0 frozen after 20 released rows (in hindsight: warmup replayed) | Feedback delay 0 | Scored against latest reported counts in counts per 100k residents



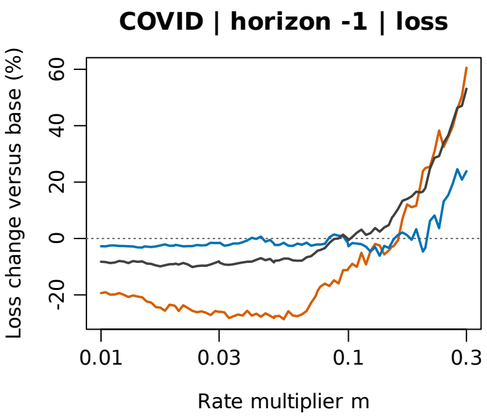



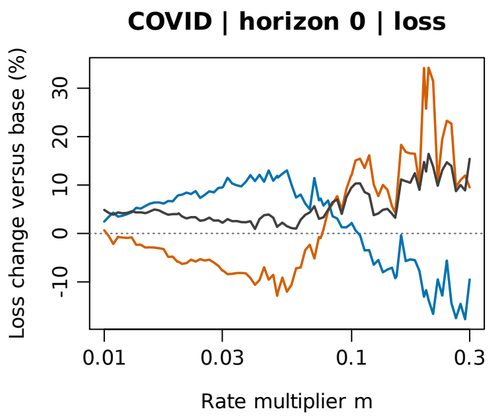

Before peak (weeks -7 to 0) | After peak (weeks 1 to 8) | Overall (Jun 2025 to Sep 2026)

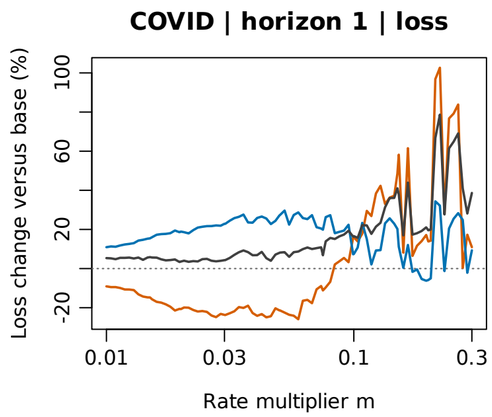
Loss: % change from m = 0 in the same phase (negative is better). Calibration: mean |coverage - alpha| over levels (lower is better); dashed: m = 0.

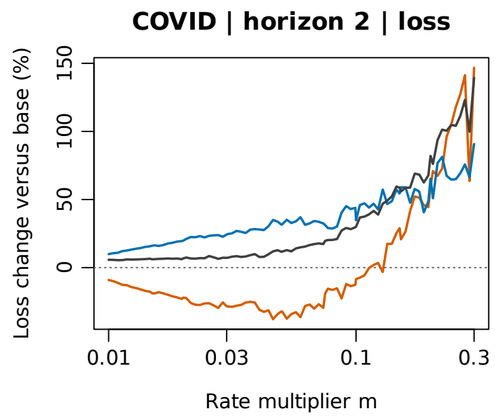
# Texas | delay 0 | Fixed-rate MultiQT: loss and calibration before and after the peak

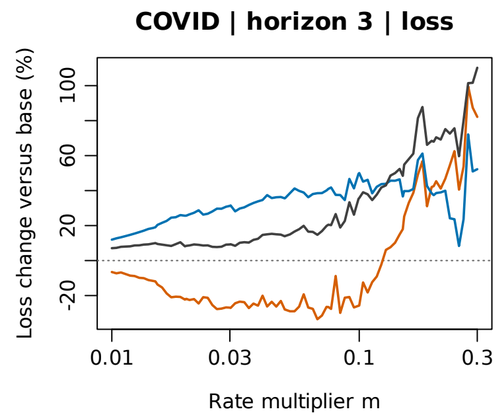
Count tracking | eta = m * S0, S0 frozen after 20 released rows (in hindsight: warmup replayed) | Feedback delay 0 | Scored against latest reported counts in counts per 100k residents

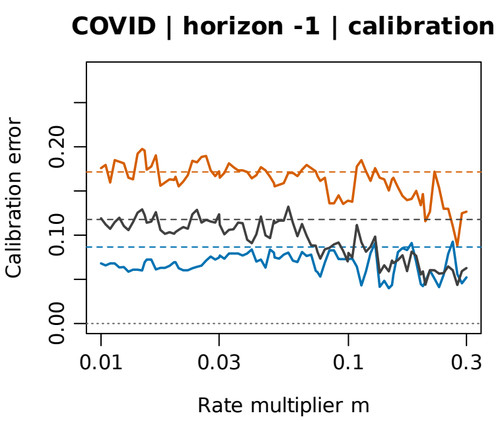


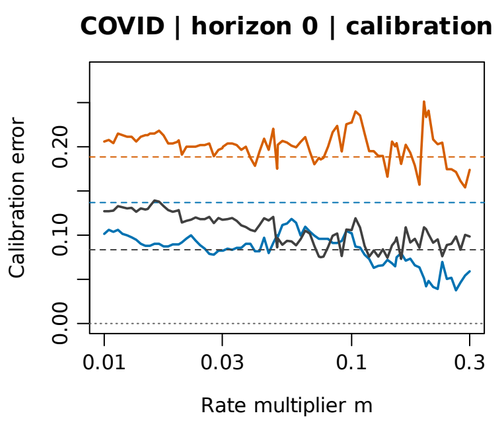



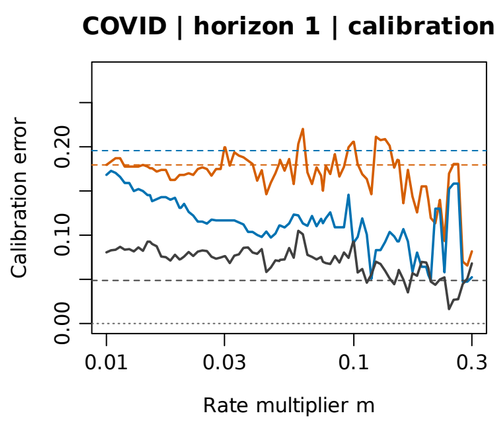



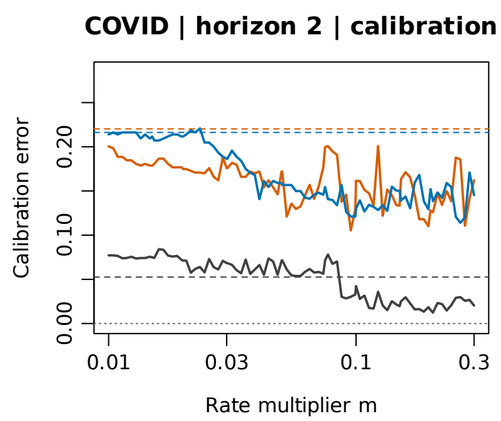



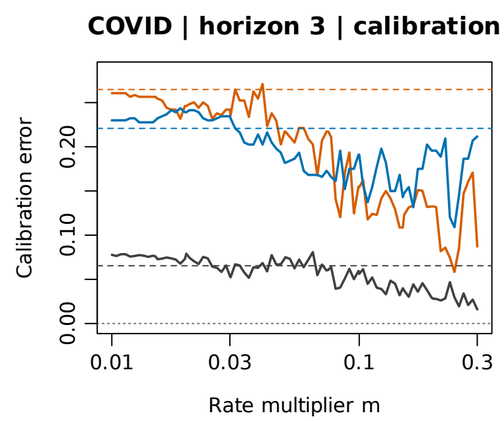



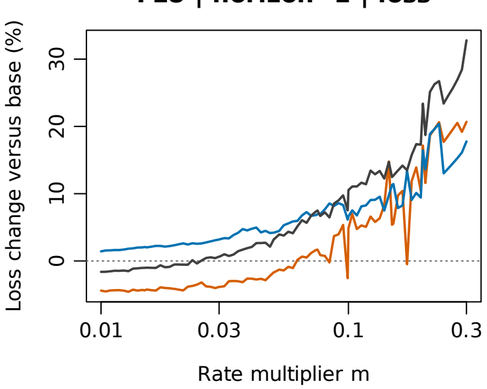



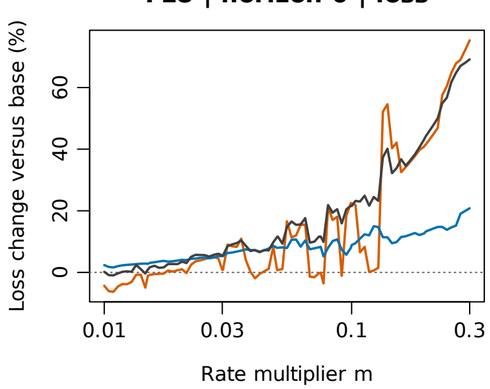



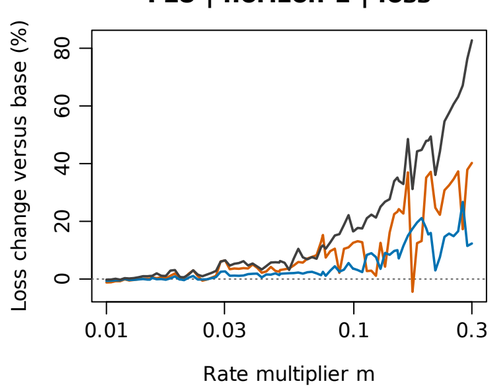



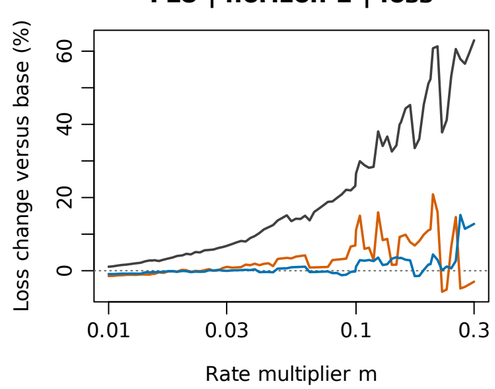



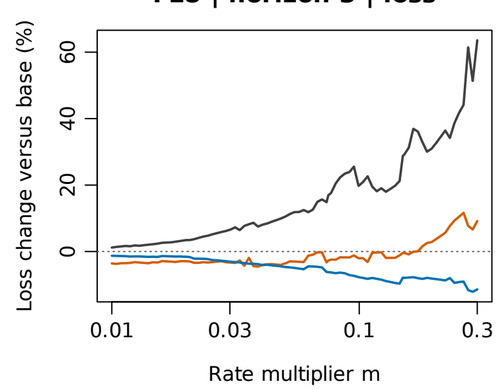



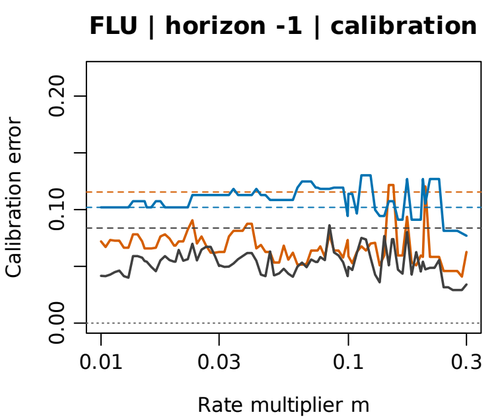



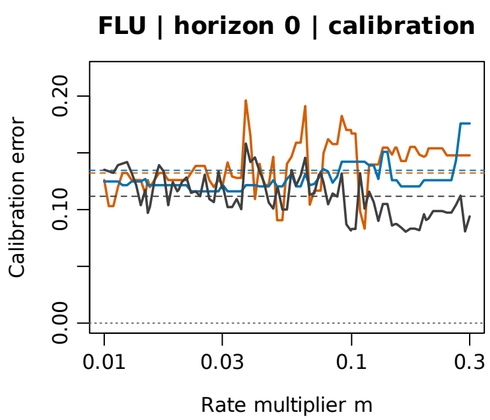



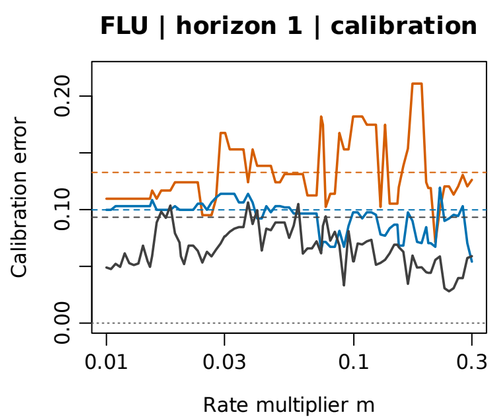



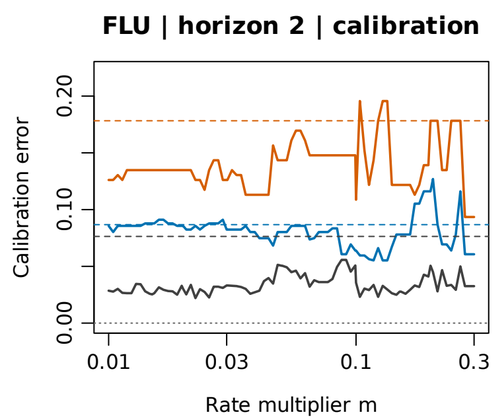



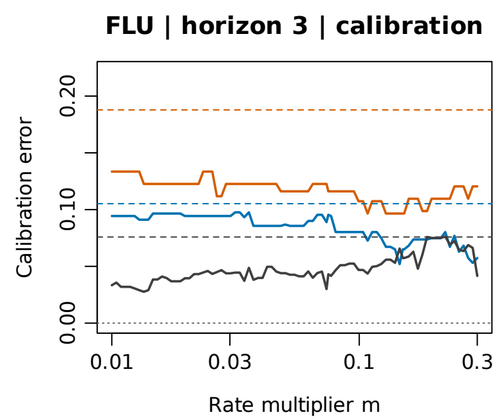



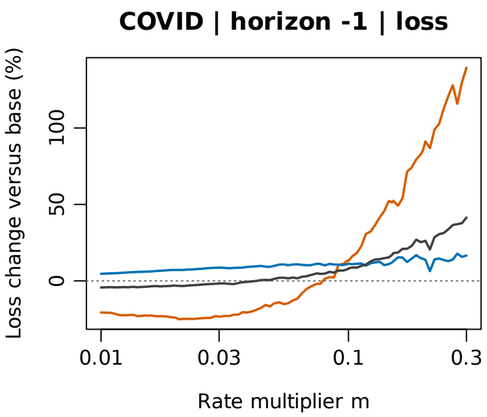



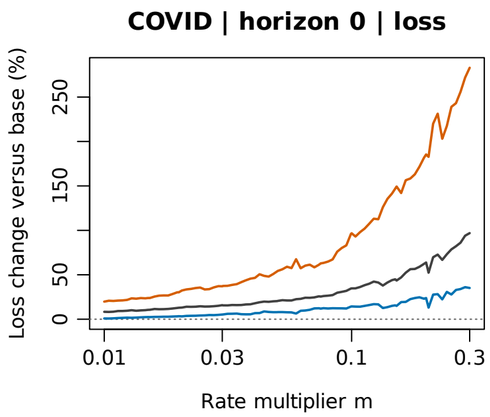

Before peak (weeks -7 to 0) After peak (weeks 1 to 8) Overall (Jun 2025 to Sep 2026)

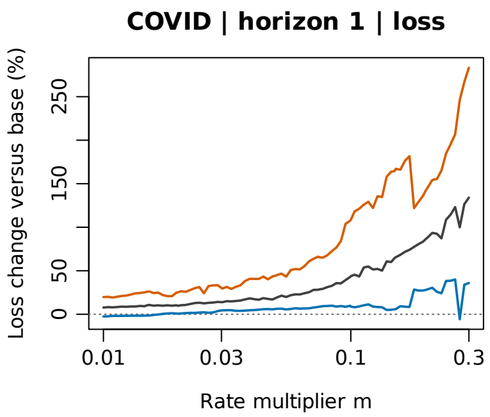
Loss: % change from m = 0 in the same phase (negative is better). Calibration: mean |coverage - alpha| over levels (lower is better); dashed: m = 0.

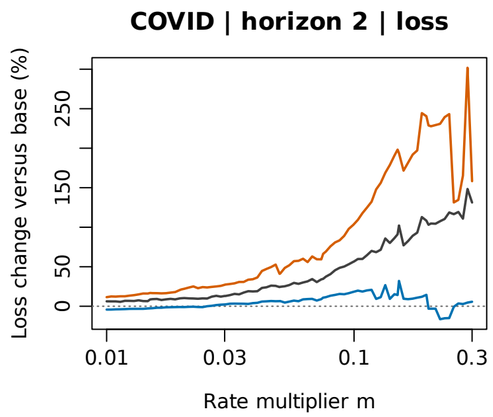
# New York | delay 0 | Fixed-rate MultiQT: loss and calibration before and after the peak

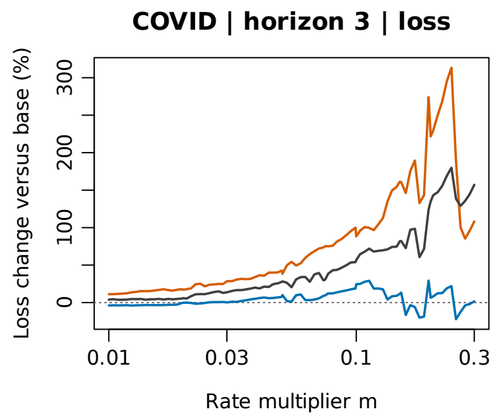
Count tracking | eta = m * S0, S0 frozen after 20 released rows (in hindsight: warmup replayed) | Feedback delay 0 | Scored against latest reported counts in counts per 100k residents

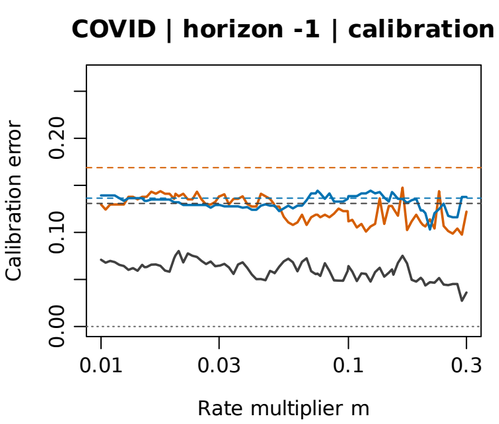


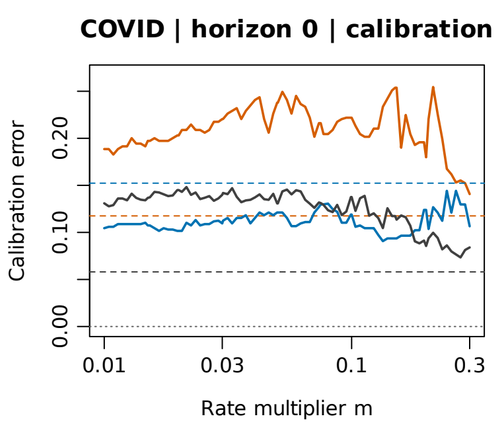



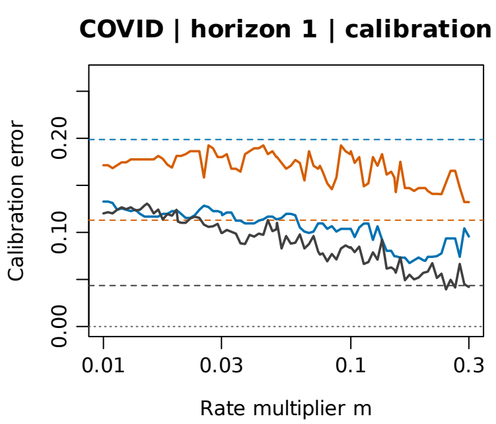



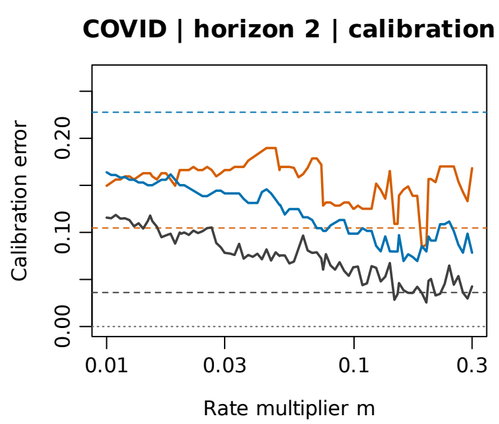



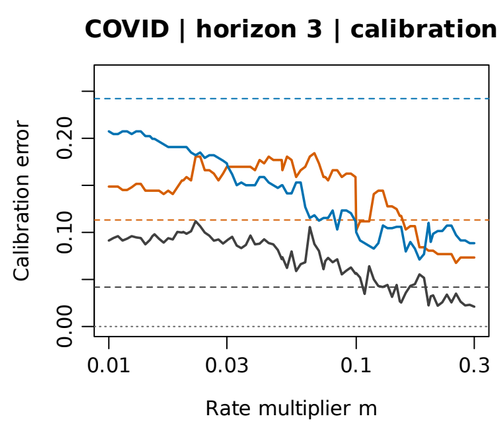



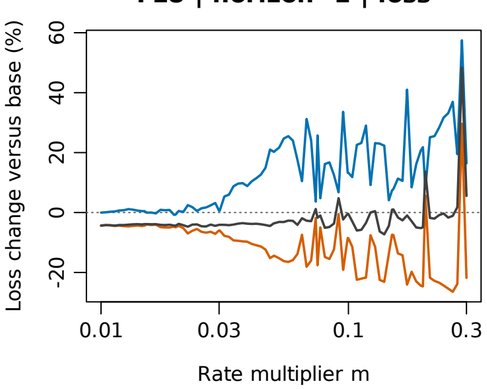



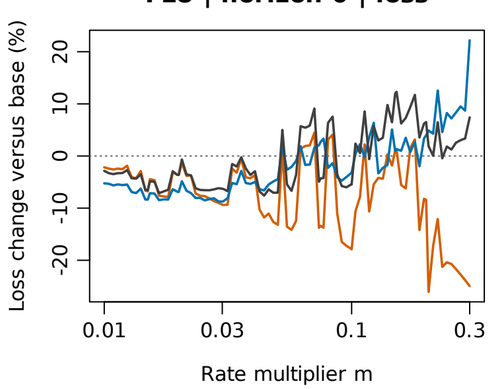



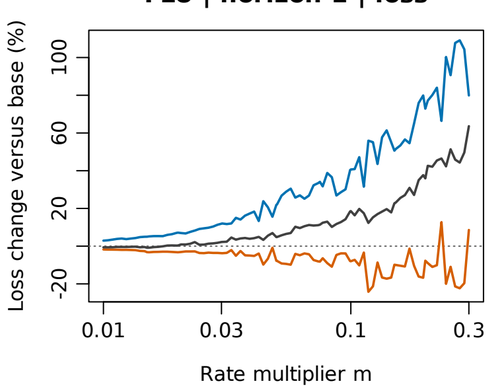



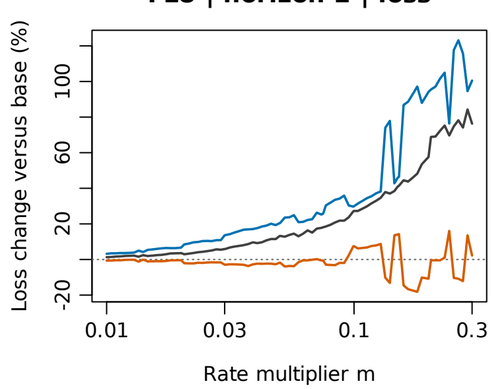



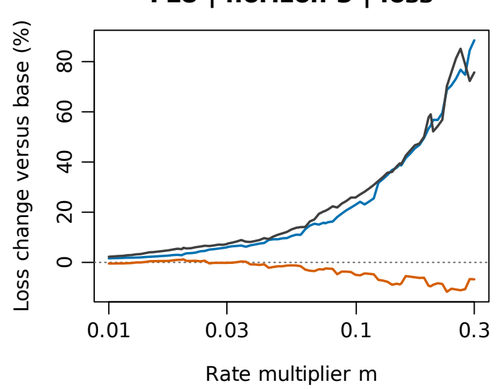



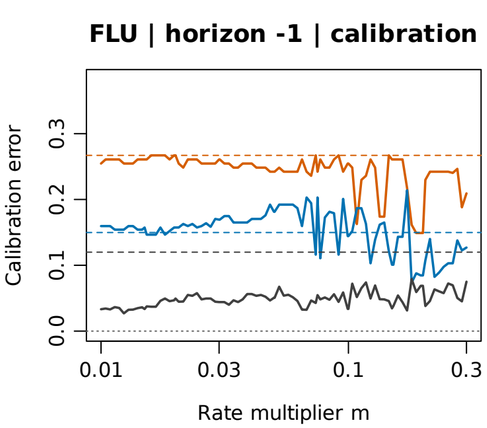



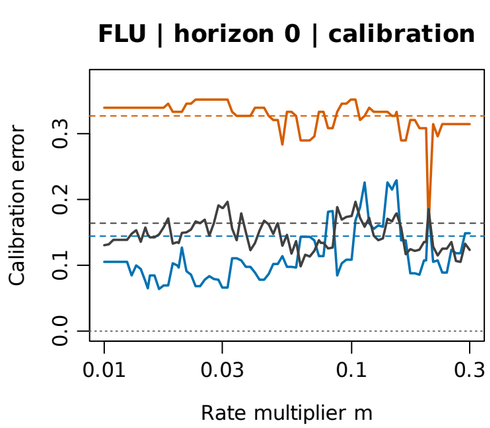



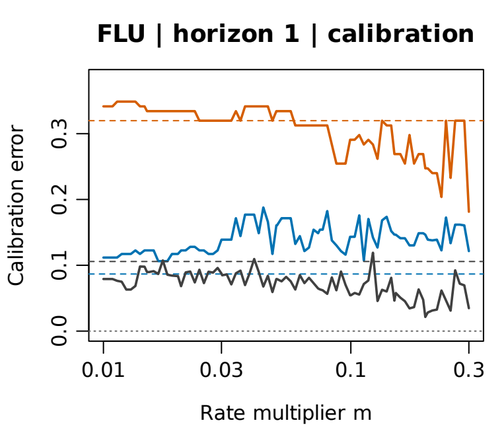



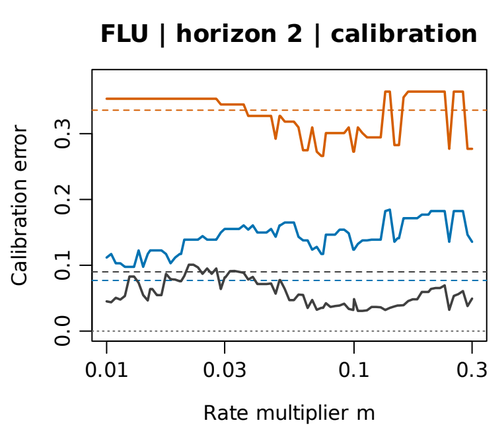



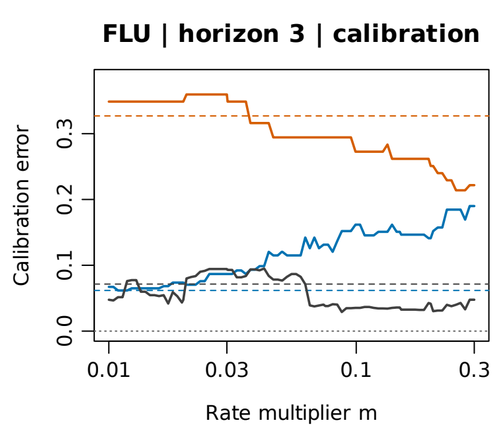



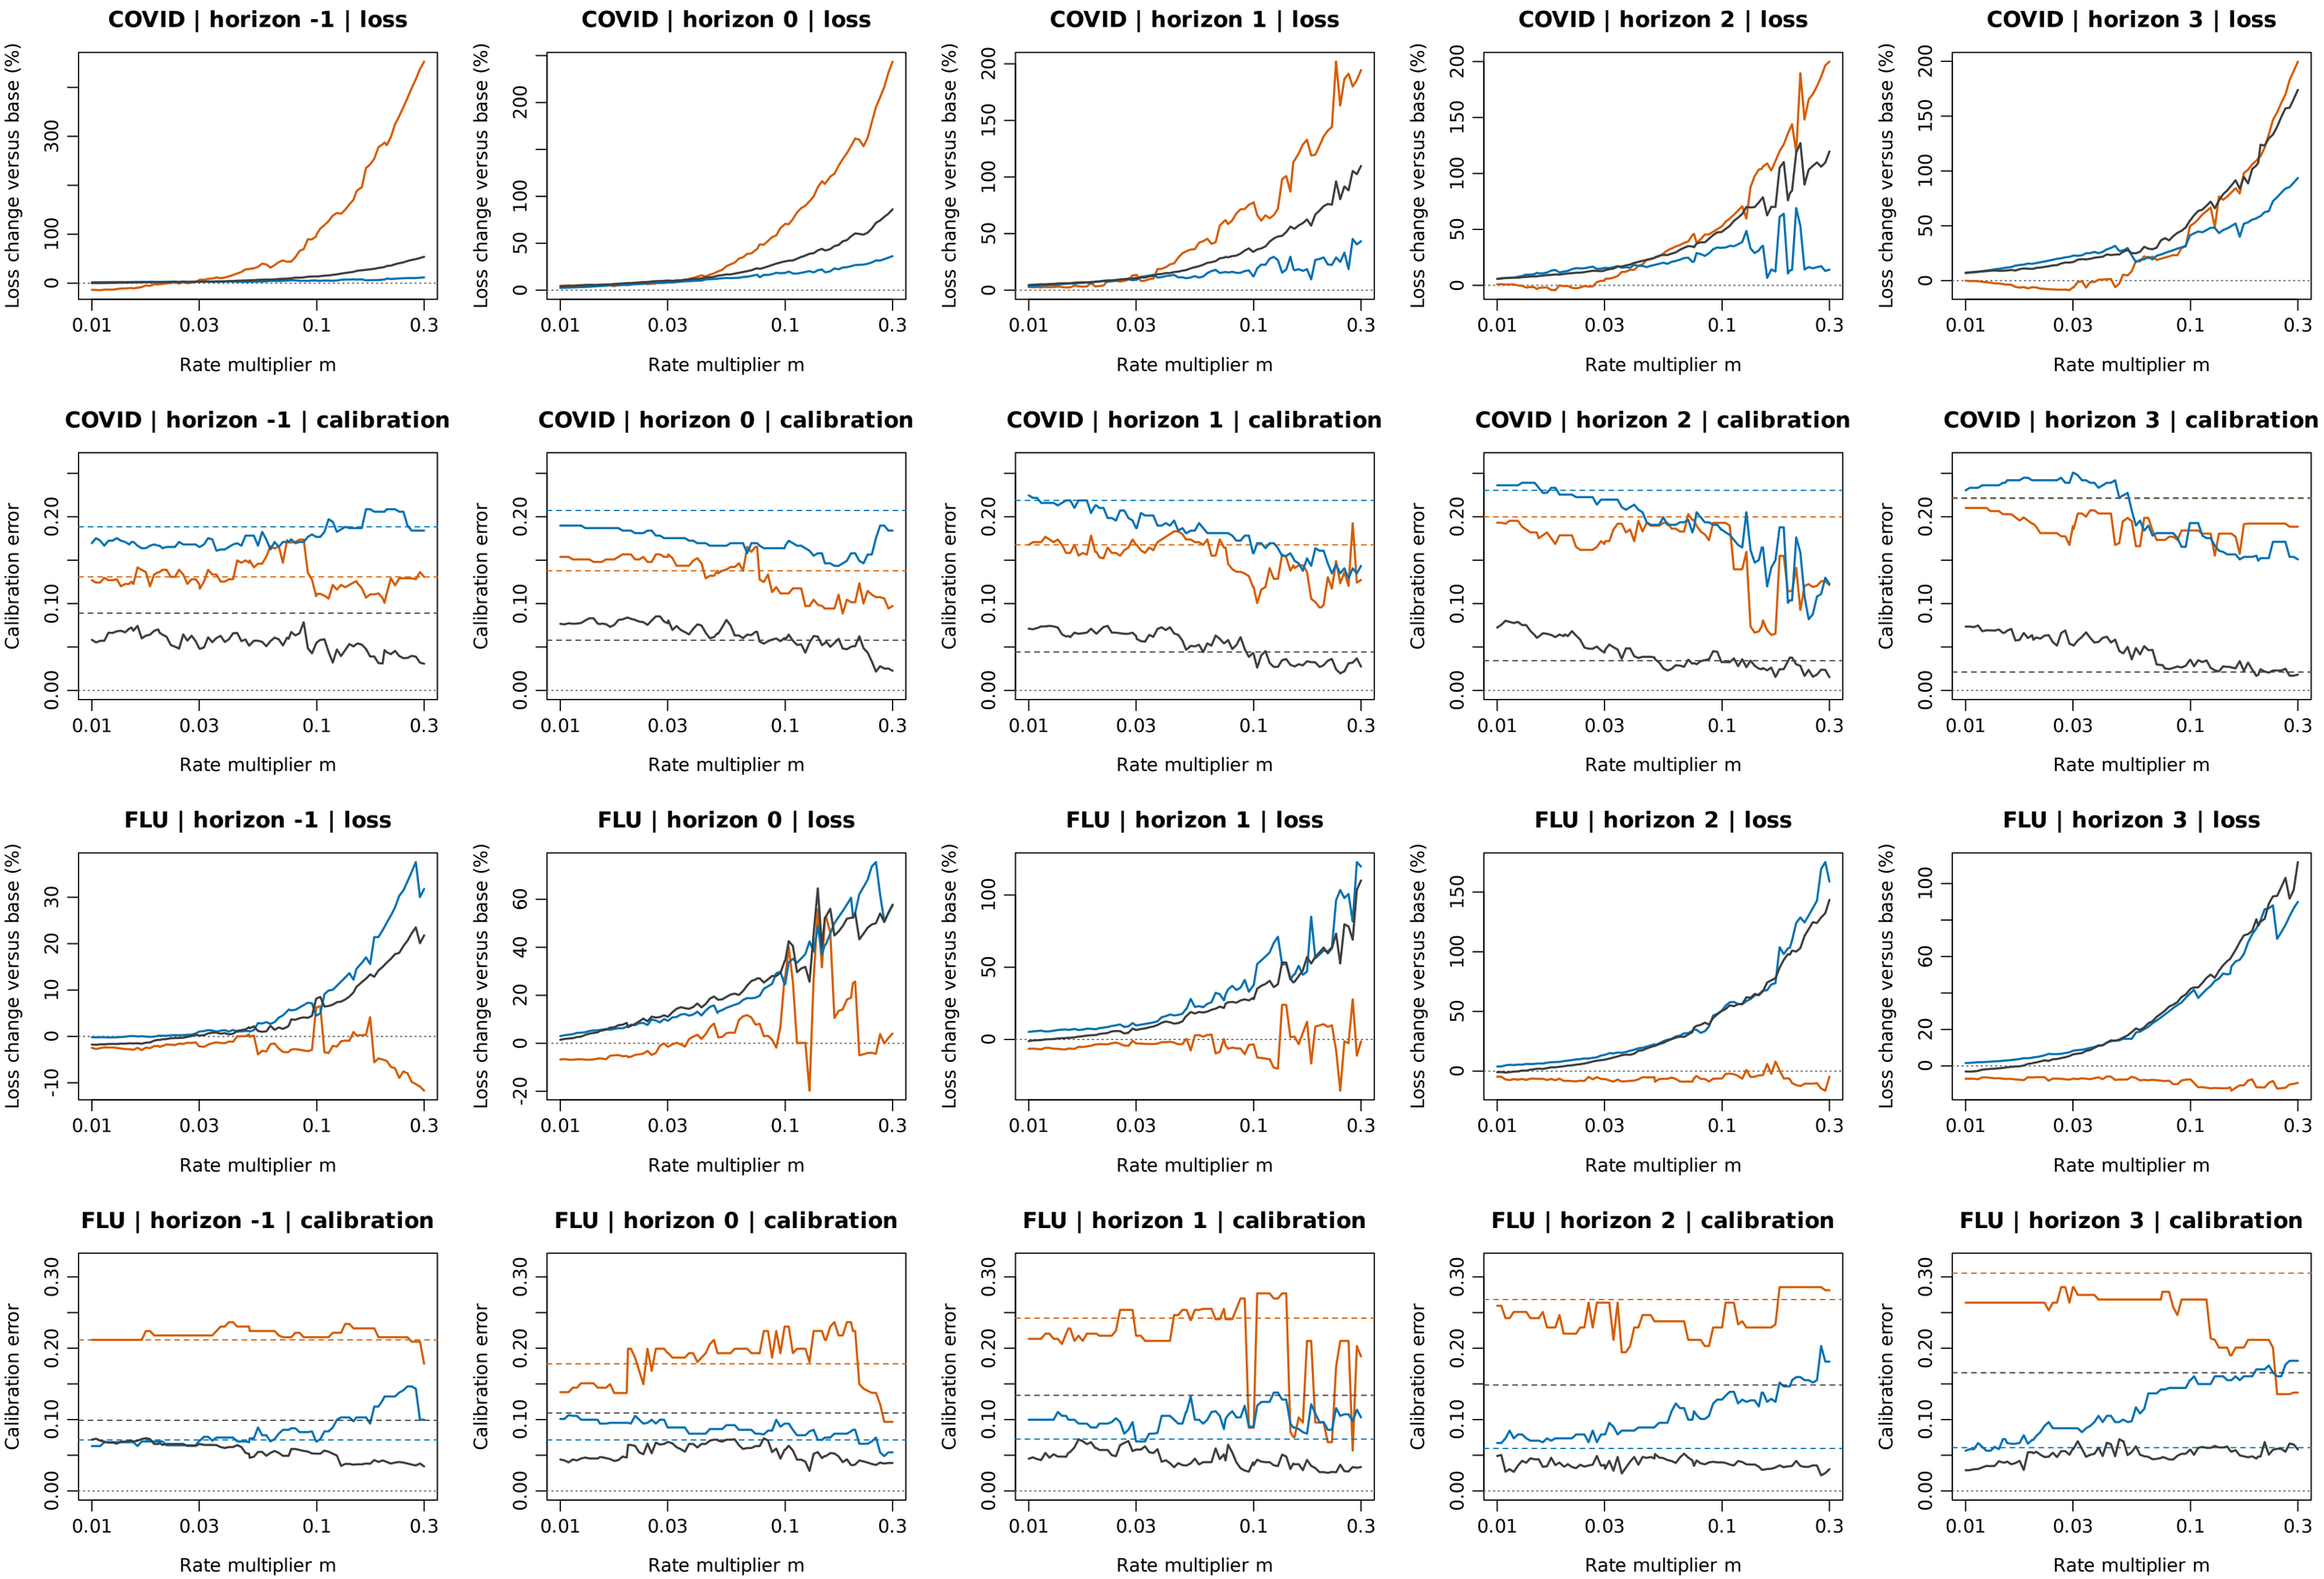




Before peak (weeks -7 to 0) | After peak (weeks 1 to 8) | Overall (Jun 2025 to Sep 2026)

Loss: % change from m = 0 in the same phase (negative is better). Calibration: mean |coverage - alpha| over levels (lower is better); dashed: m = 0.

# Pennsylvania | delay 0 | Fixed-rate MultiQT: loss and calibration before and after the peak

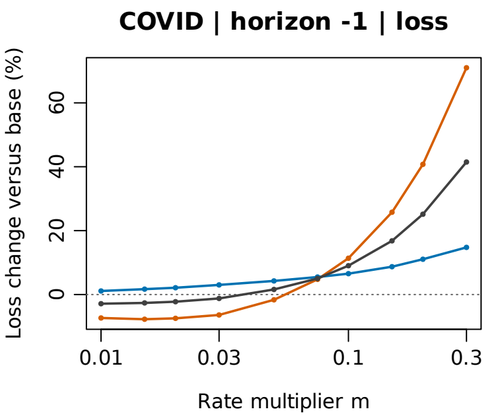
Count tracking | eta = m * S0, S0 frozen after 20 released rows (in hindsight: warmup replayed) | Feedback delay 0 | Scored against latest reported counts in counts per 100k residents

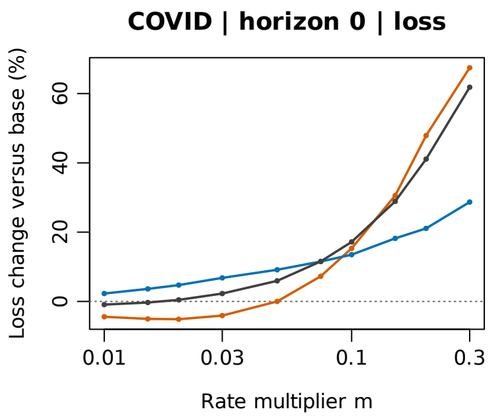


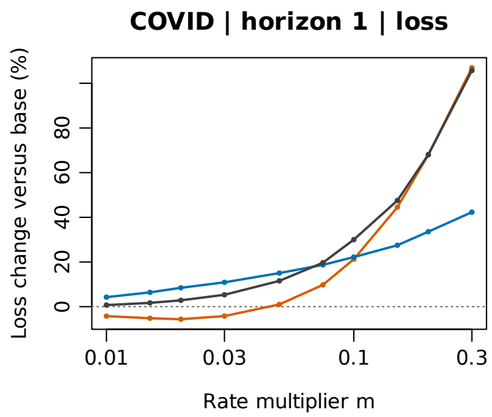

Loss: % change from m = 0 in the same phase (negative is better). Calibration: mean |coverage - alpha| over levels (lower is better); dashed: m = 0.

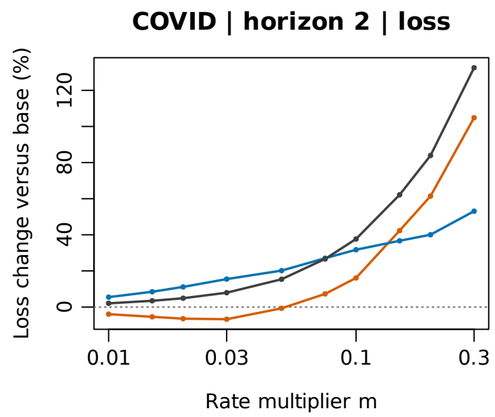
All 52 locations pooled (multipliers of the dots) | delay 1 | Fixed-rate MultiQT: loss and calibration before and after the peak

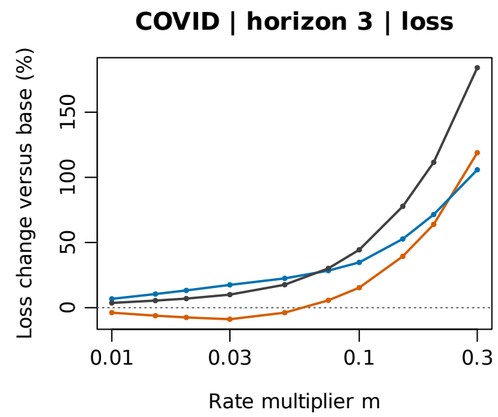
Count tracking | eta = m * S0, S0 frozen after 20 released rows (in hindsight: warmup replayed) | Feedback delay 1 | Scored against latest reported counts in counts per 100k residents

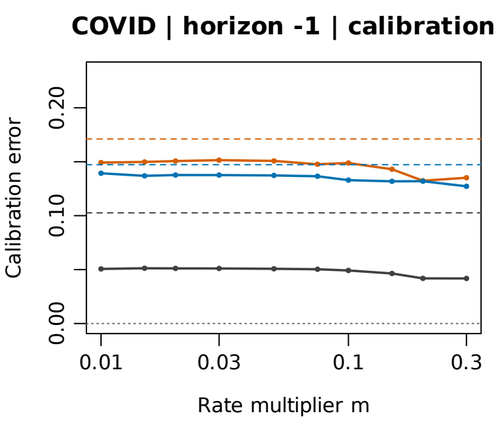


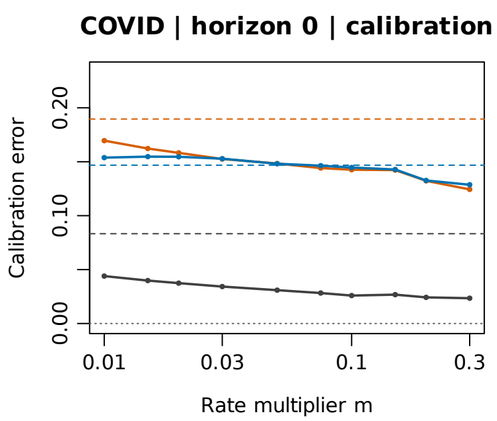



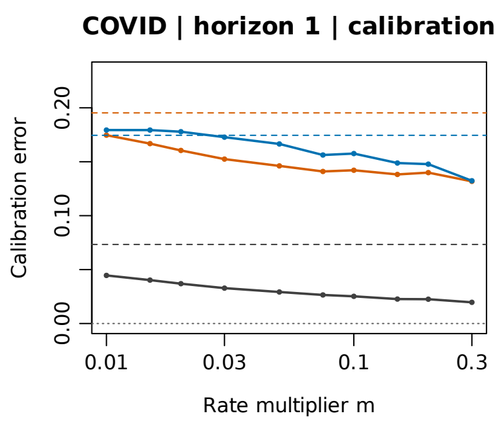



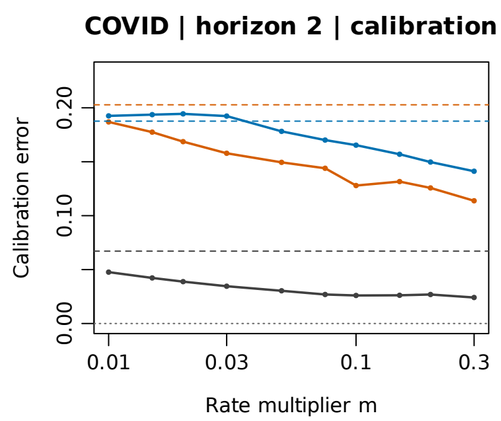



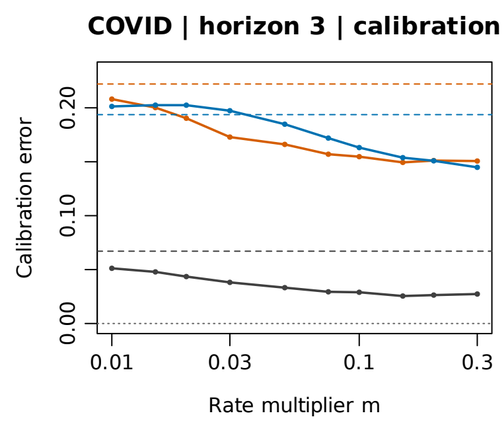



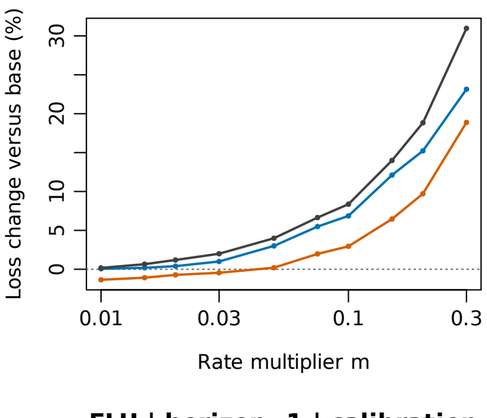



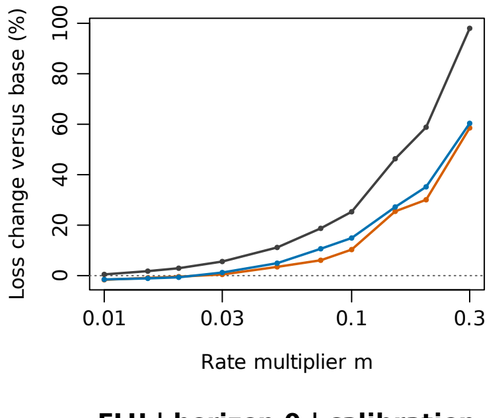



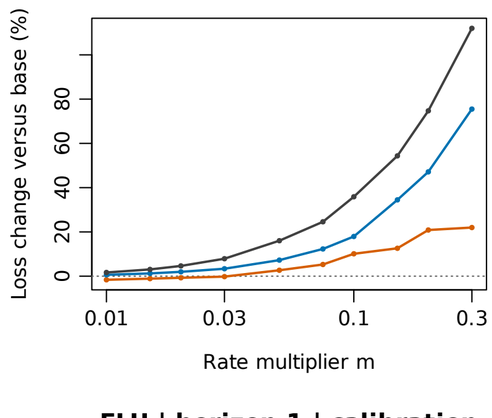



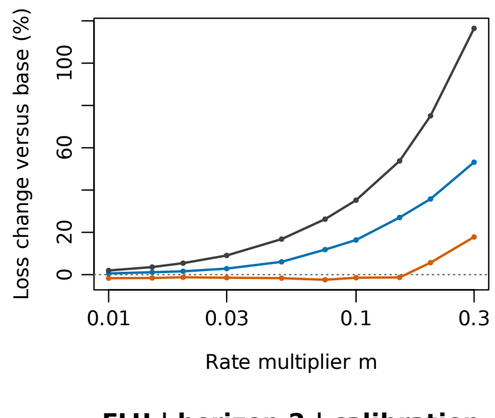



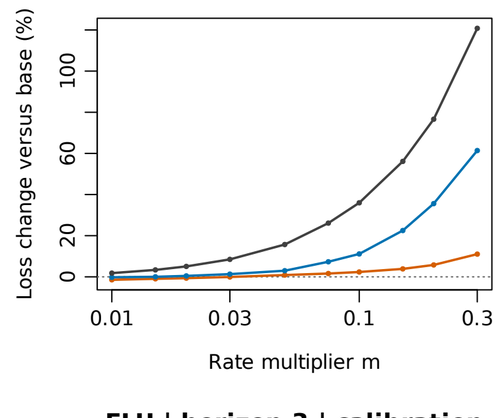



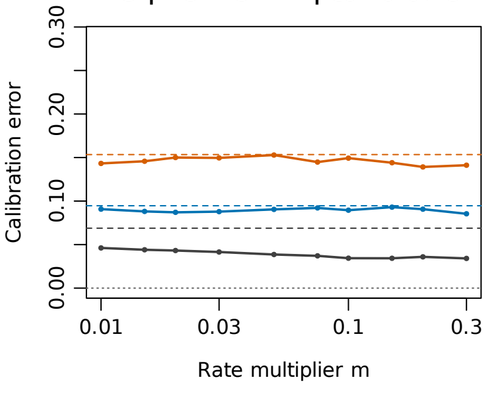



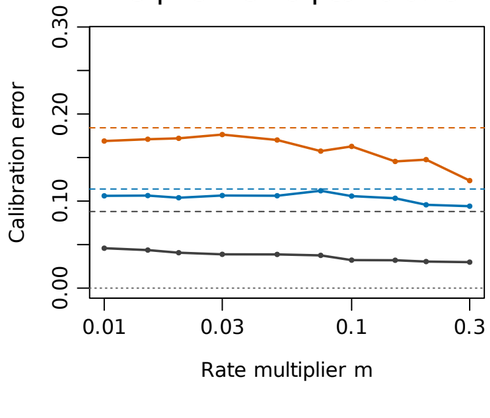



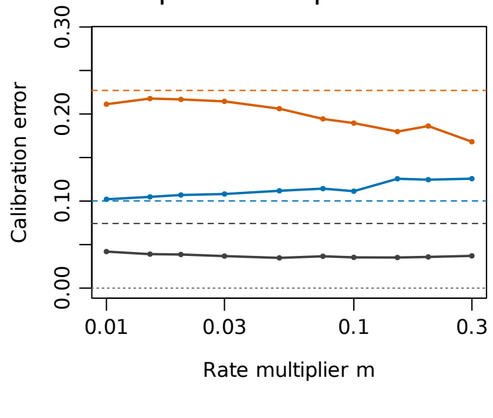



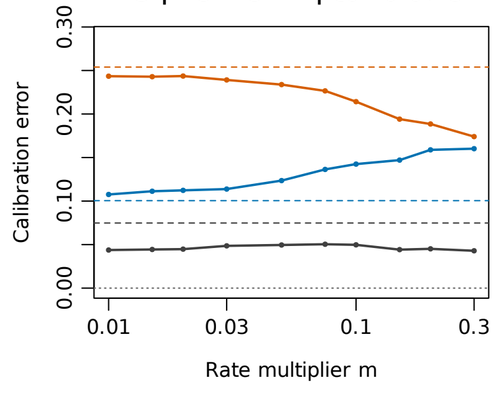



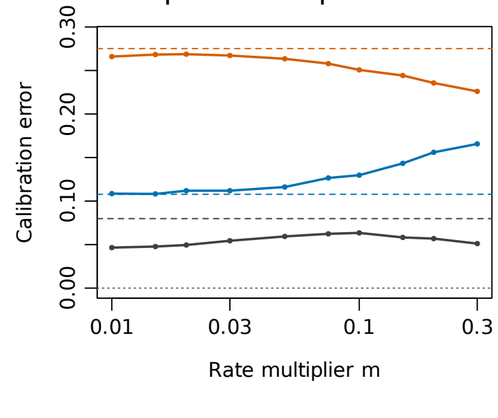



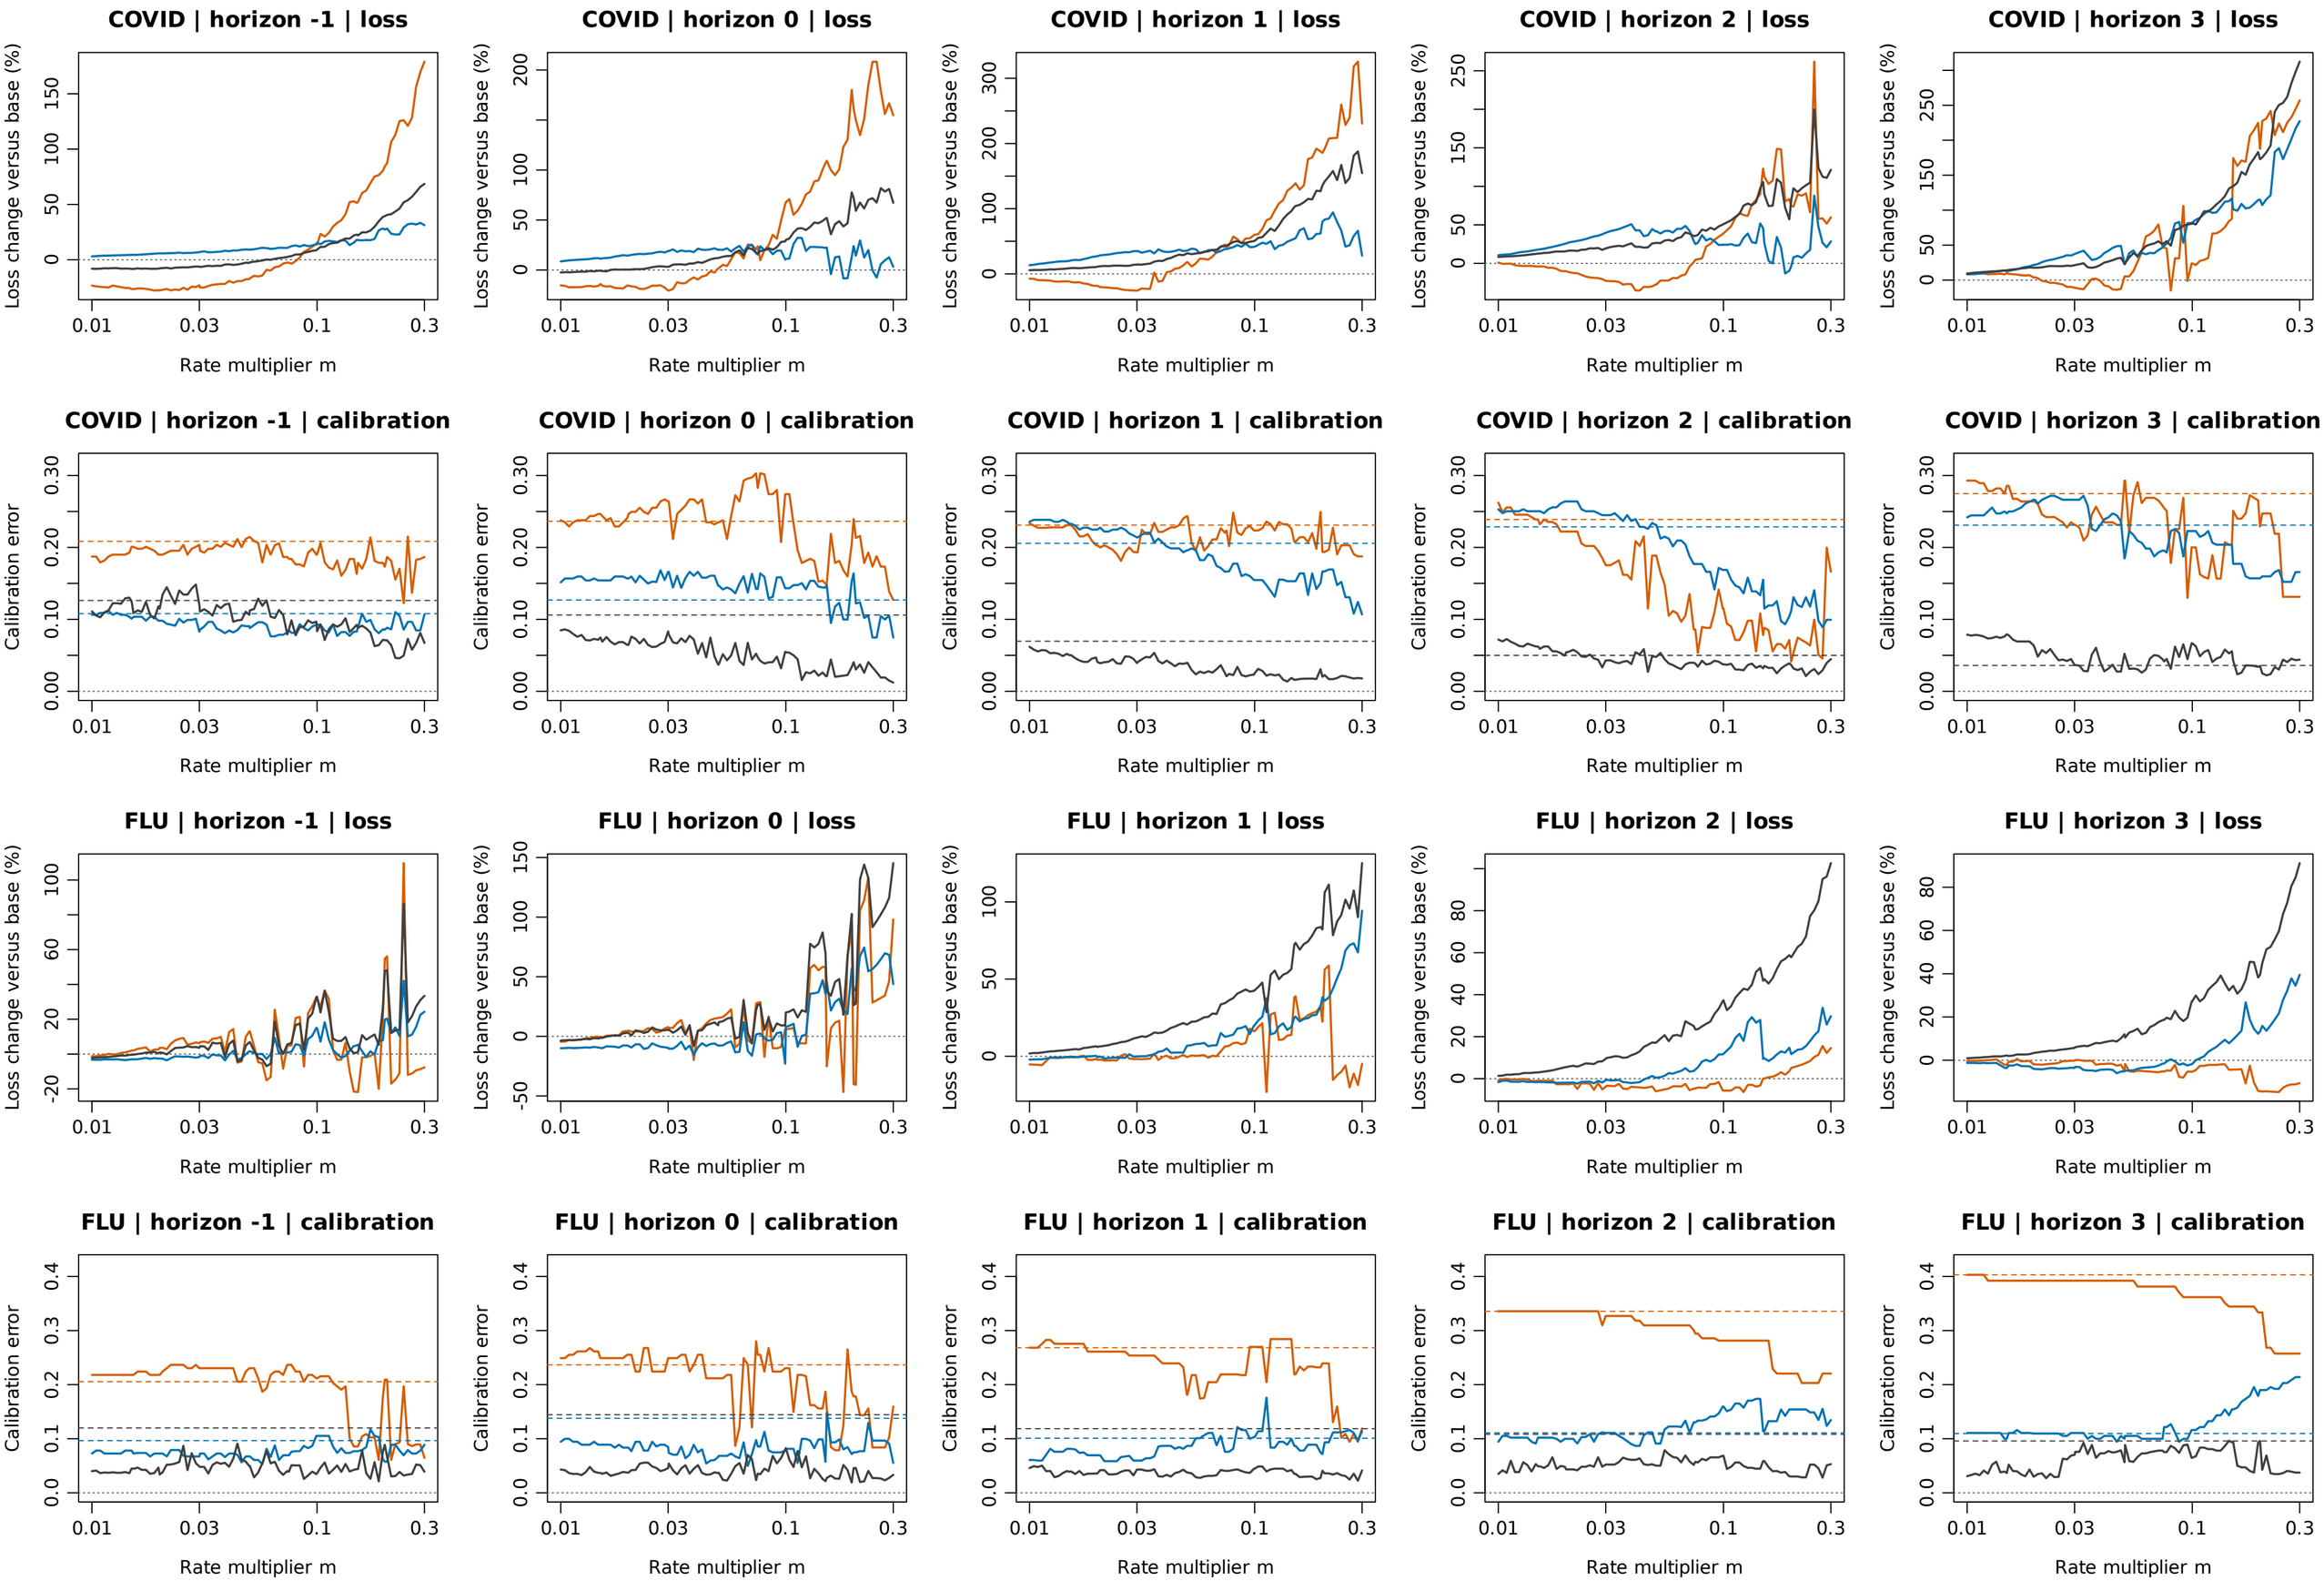




Before peak (weeks -7 to 0) | After peak (weeks 1 to 8) | Overall (Jun 2025 to Sep 2026)

Loss: % change from m = 0 in the same phase (negative is better). Calibration: mean |coverage - alpha| over levels (lower is better); dashed: m = 0. Pooled: each location weighted by its weeks.

# United States | delay 1 | Fixed-rate MultiQT: loss and calibration before and after the peak

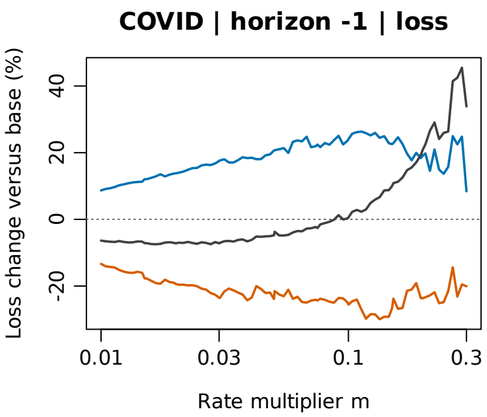
Count tracking | eta = m * S0, S0 frozen after 20 released rows (in hindsight: warmup replayed) | Feedback delay 1 | Scored against latest reported counts in counts per 100k residents

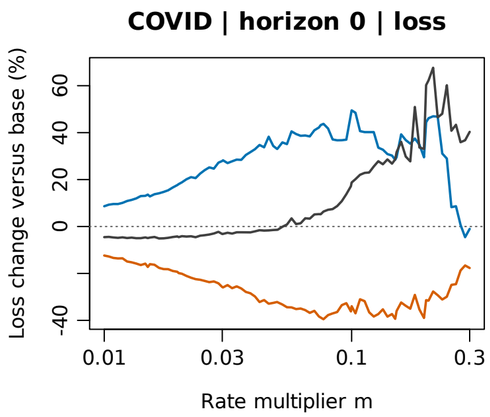


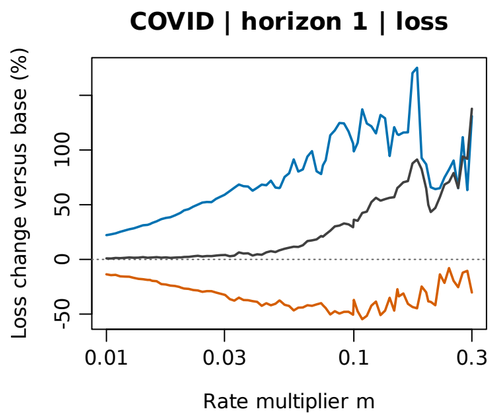

Loss: % change from m = 0 in the same phase (negative is better). Calibration: mean |coverage - alpha| over levels (lower is better); dashed: m = 0.

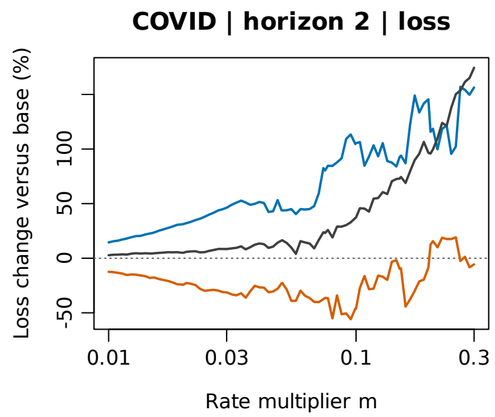
# California | delay 1 | Fixed-rate MultiQT: loss and calibration before and after the peak

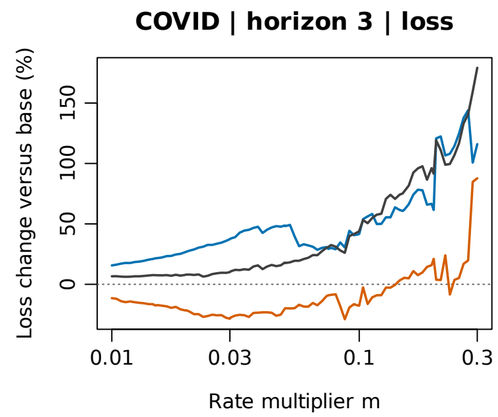
Count tracking | eta = m * S0, S0 frozen after 20 released rows (in hindsight: warmup replayed) | Feedback delay 1 | Scored against latest reported counts in counts per 100k residents

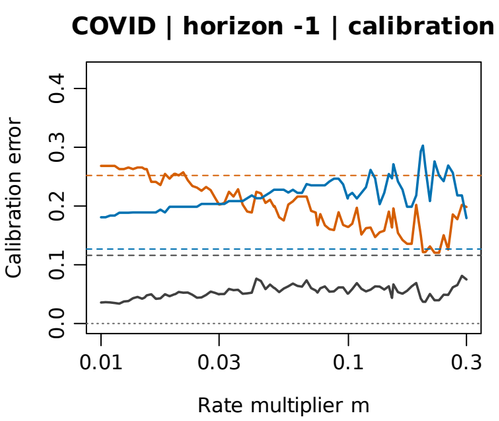


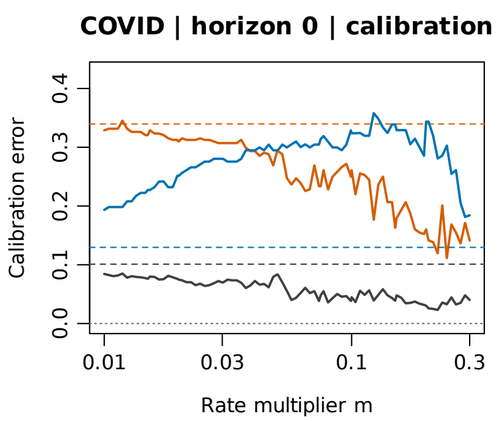



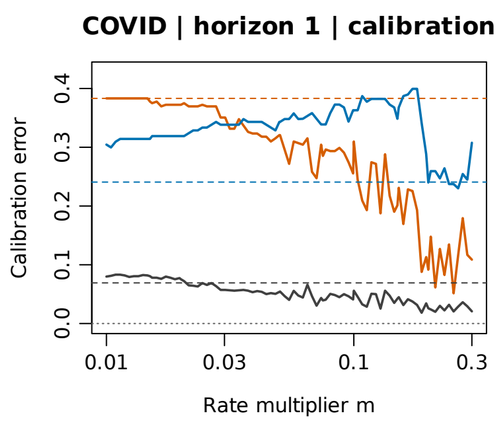



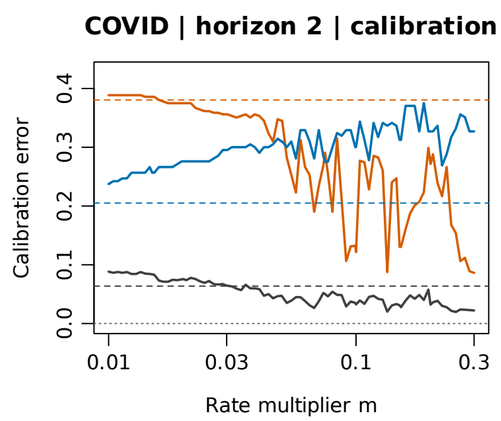



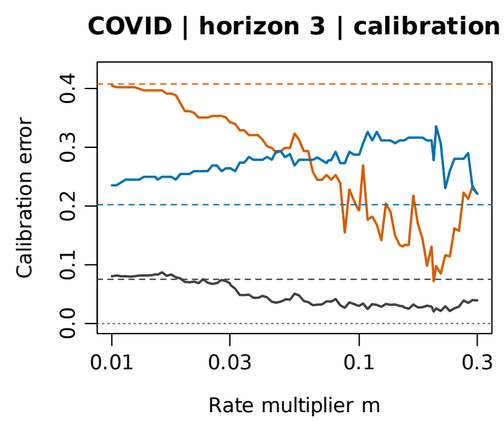



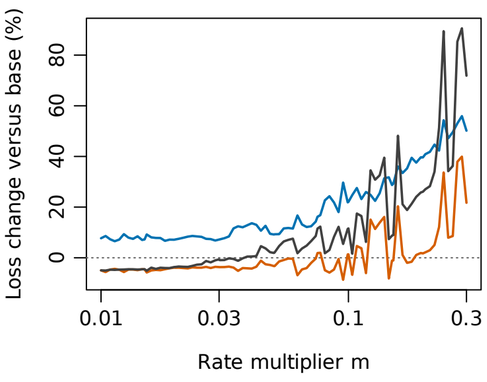



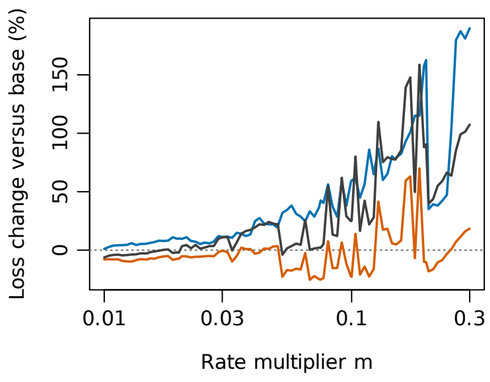



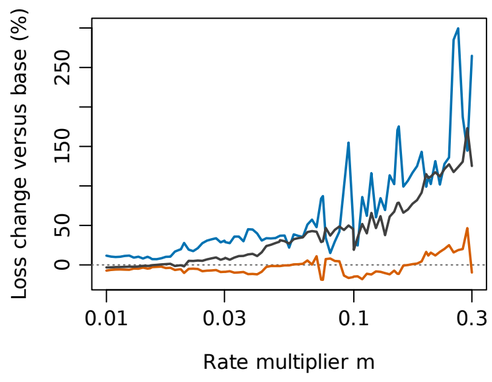



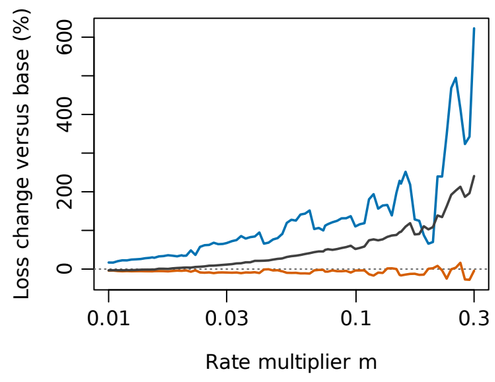



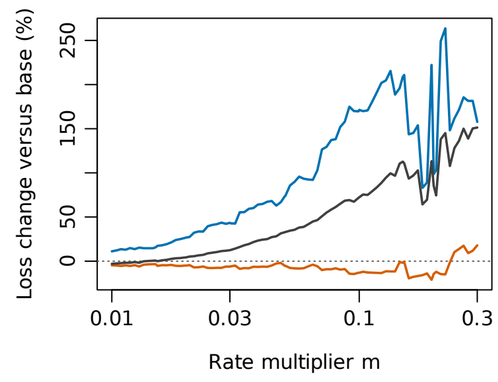



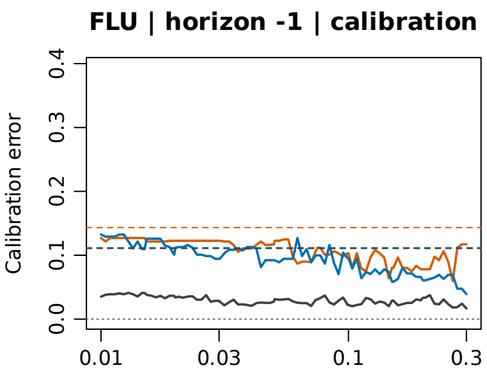



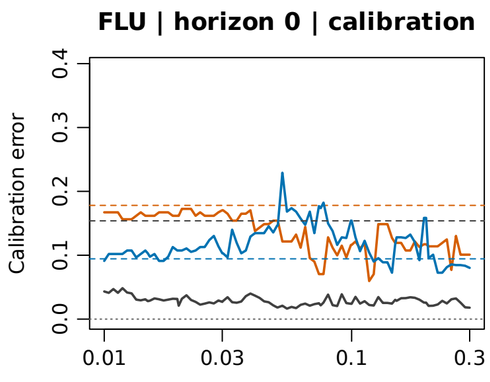



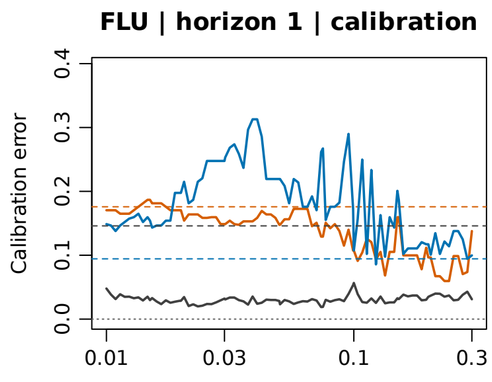



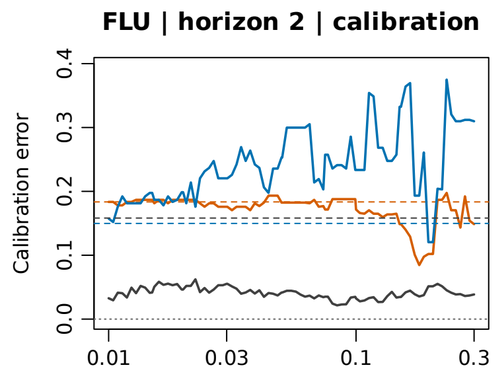



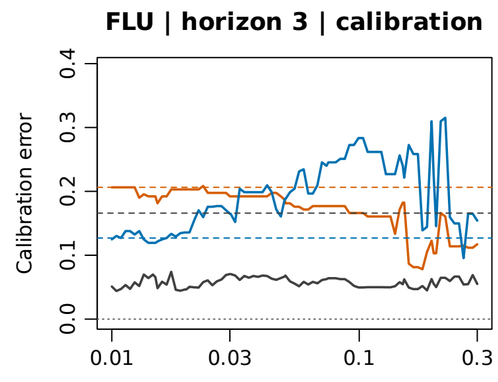



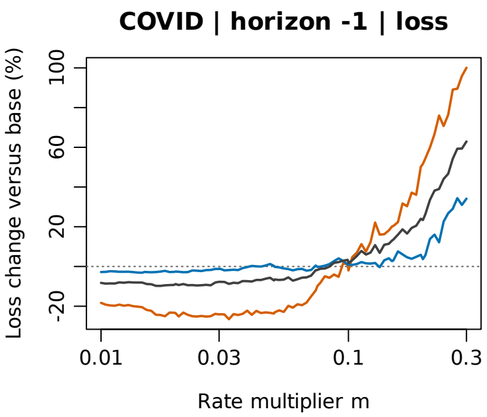



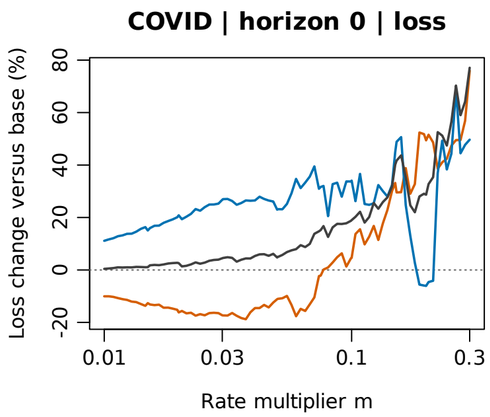

Before peak (weeks -7 to 0) After peak (weeks 1 to 8) Overall (Jun 2025 to Sep 2026)

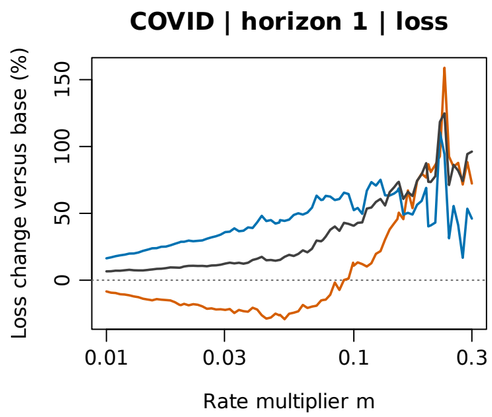
Loss: % change from m = 0 in the same phase (negative is better). Calibration: mean |coverage - alpha| over levels (lower is better); dashed: m = 0.

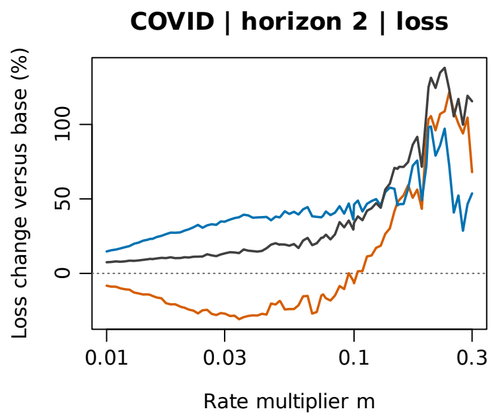
# Texas | delay 1 | Fixed-rate MultiQT: loss and calibration before and after the peak

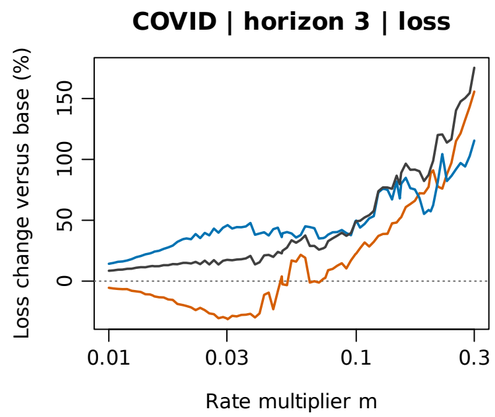
Count tracking | eta = m * S0, S0 frozen after 20 released rows (in hindsight: warmup replayed) | Feedback delay 1 | Scored against latest reported counts in counts per 100k residents

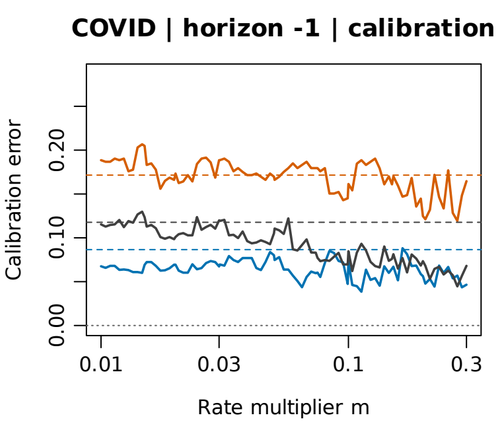


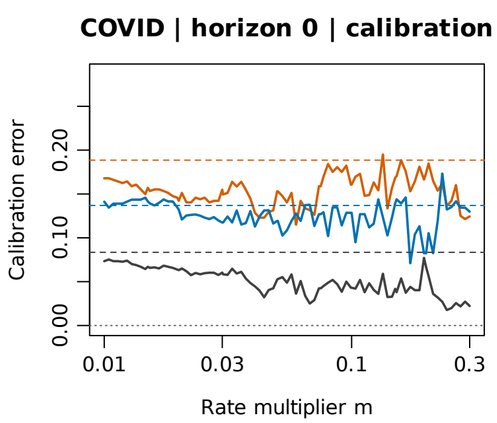



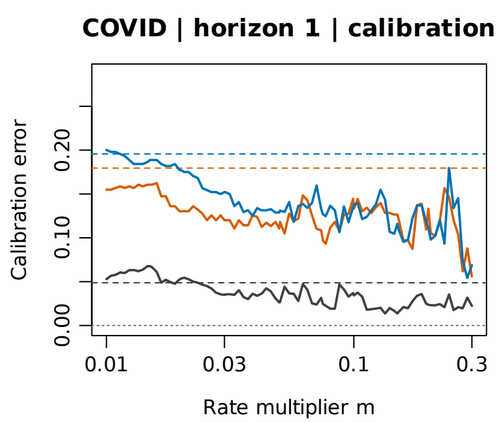



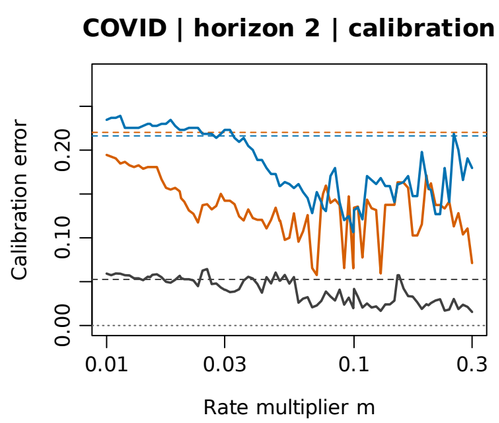



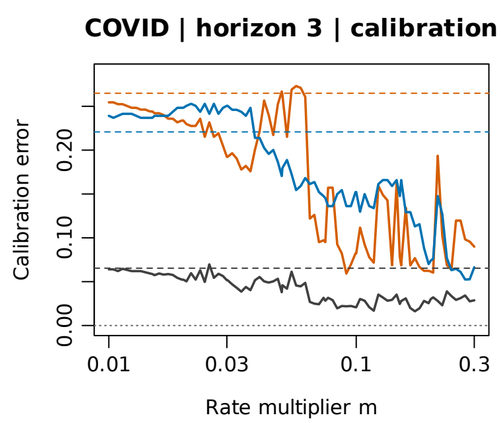



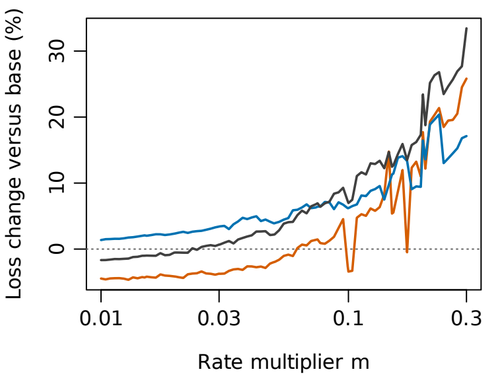



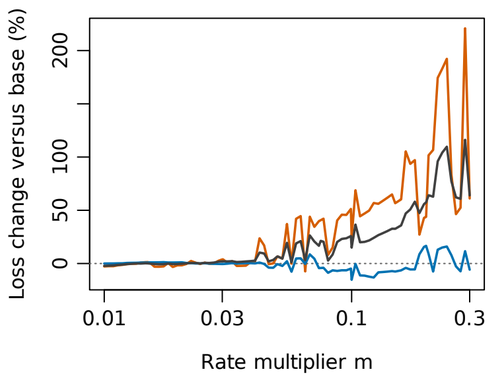



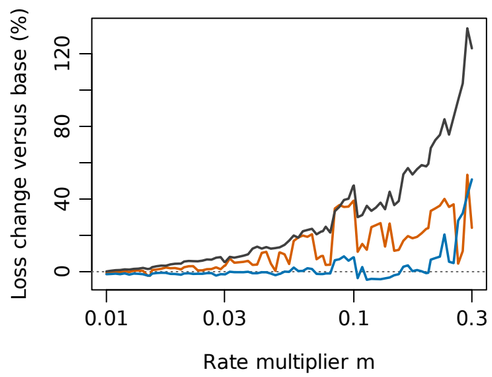



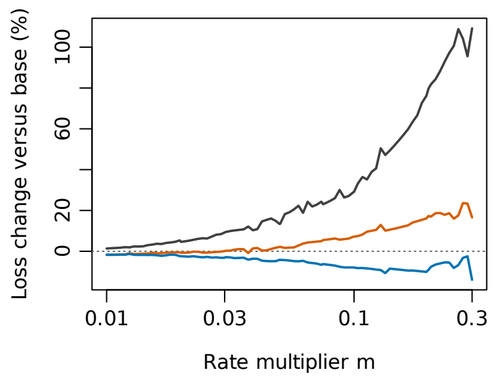



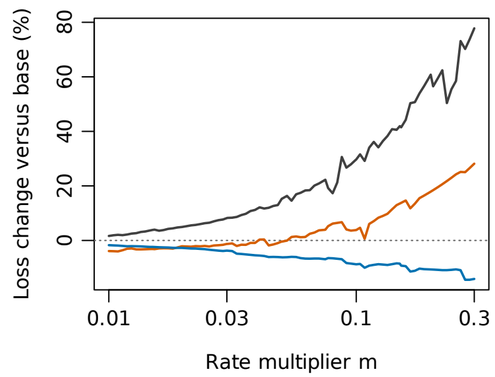



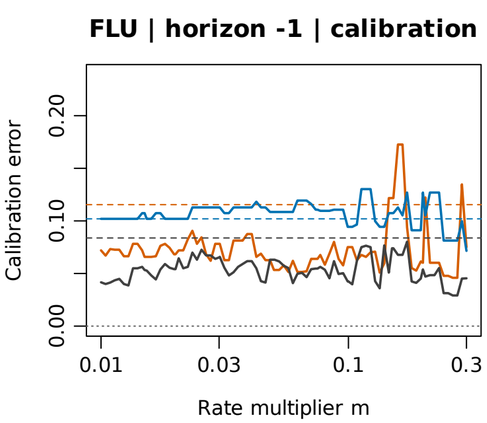



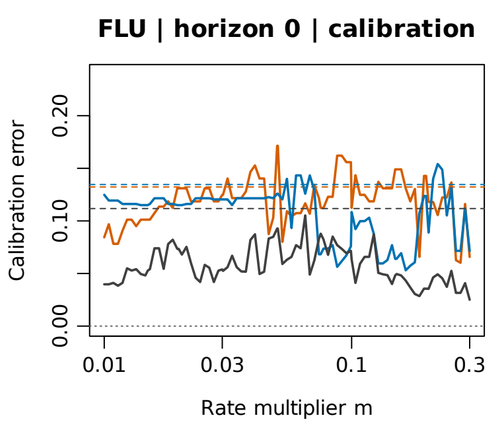



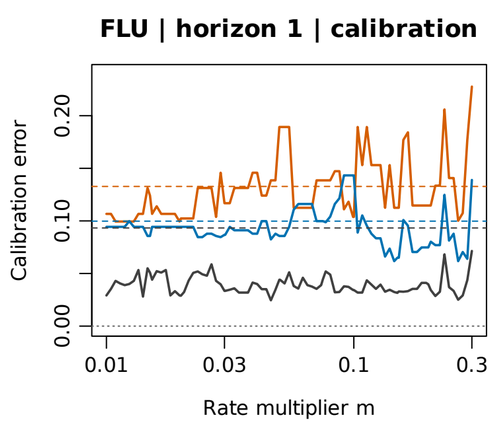



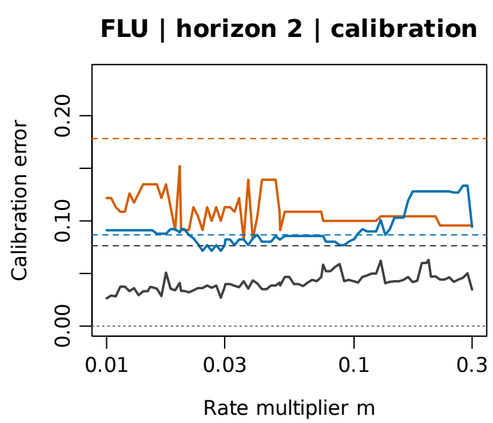



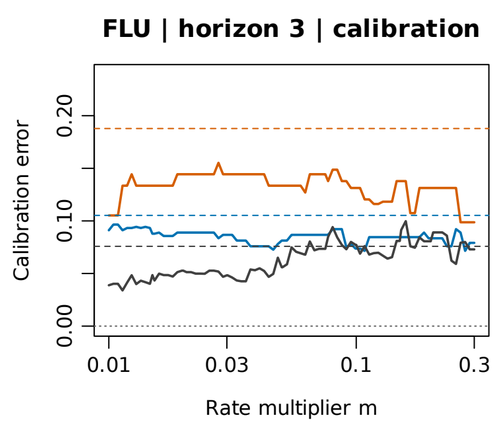



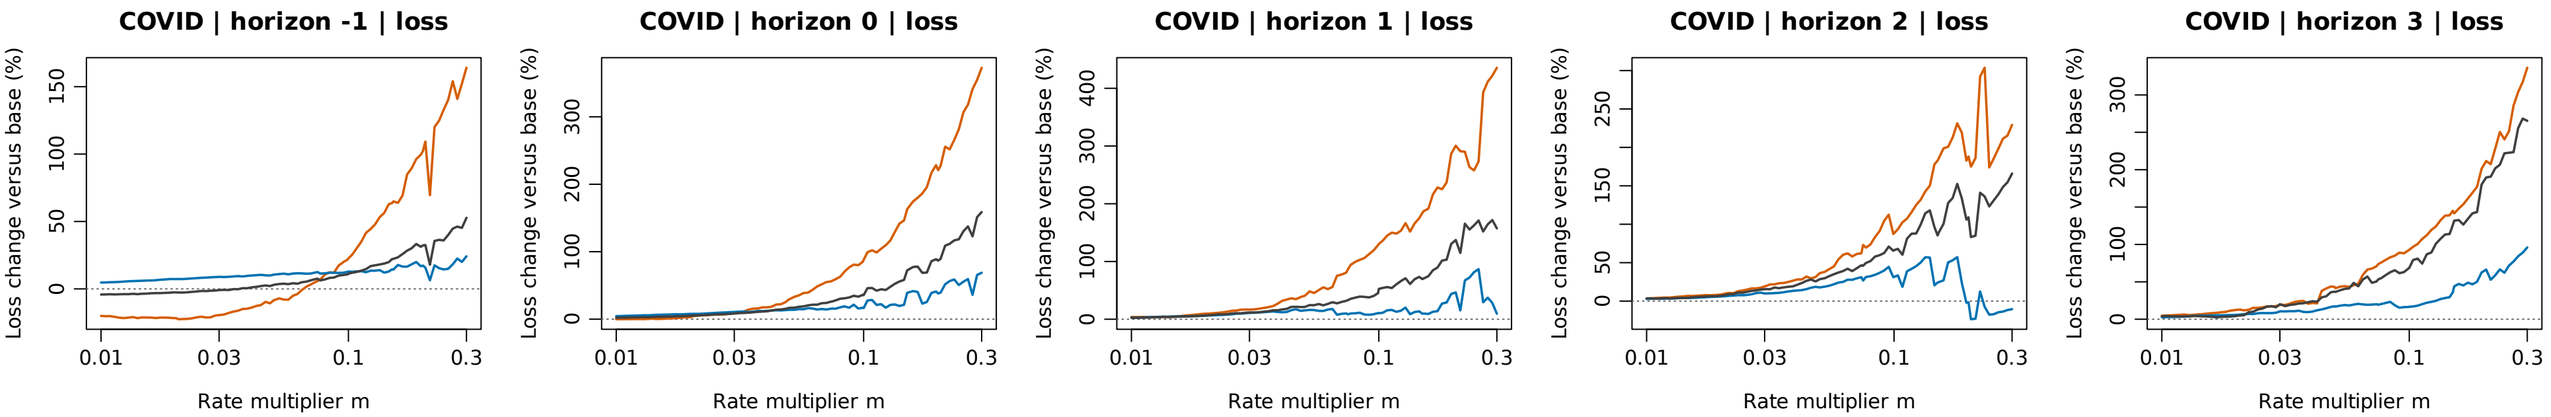



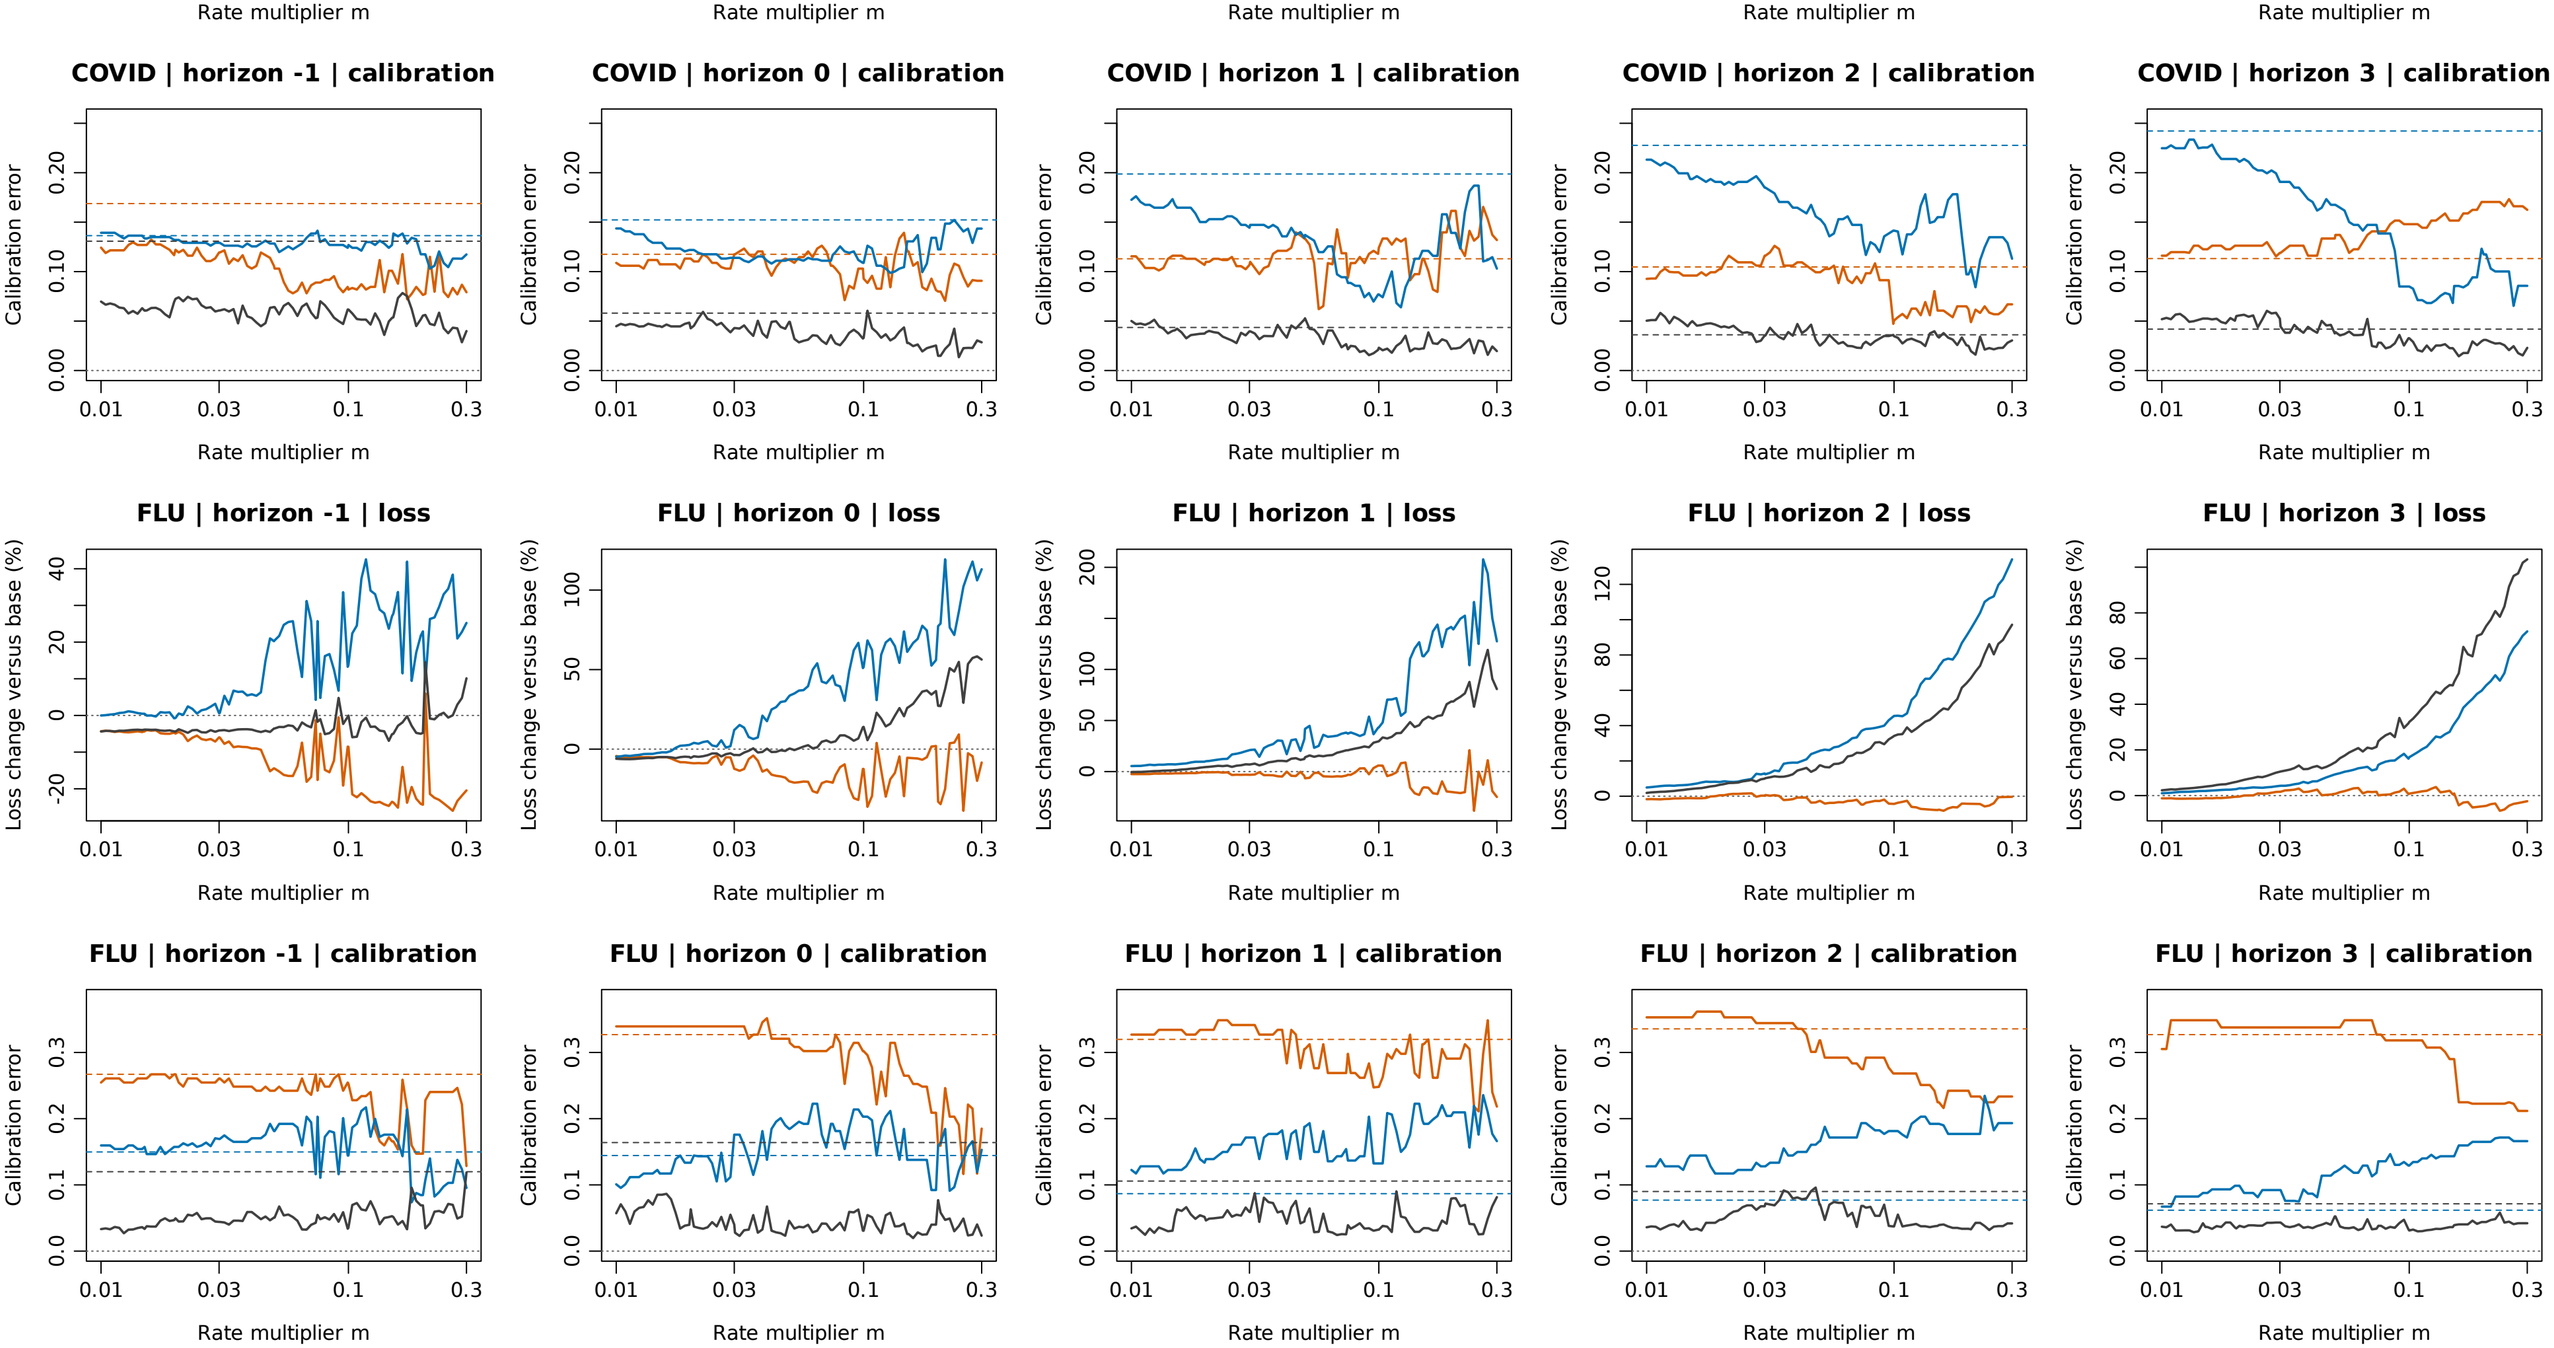

Before peak (weeks -7 to 0) | After peak (weeks 1 to 8) | Overall (Jun 2025 to Sep 2026)

Loss: % change from m = 0 in the same phase (negative is better). Calibration: mean |coverage - alpha| over levels (lower is better); dashed: m = 0.

# New York | delay 1 | Fixed-rate MultiQT: loss and calibration before and after the peak

Count tracking | eta = m * S0, S0 frozen after 20 released rows (in hindsight: warmup replayed) | Feedback delay 1 | Scored against latest reported counts in counts per 100k residents



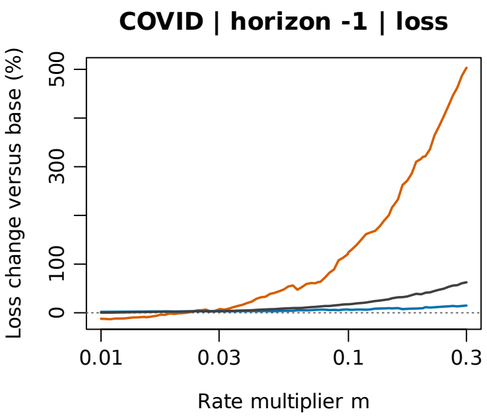



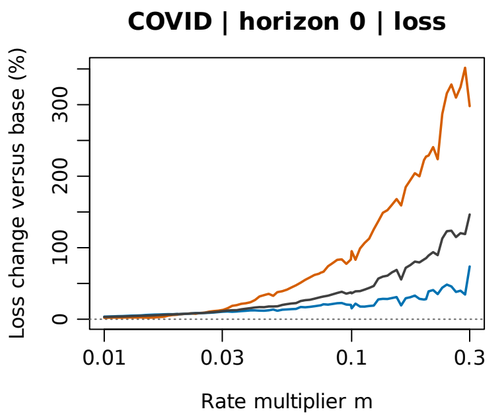

Before peak (weeks -7 to 0) | After peak (weeks 1 to 8) | Overall (Jun 2025 to Sep 2026)

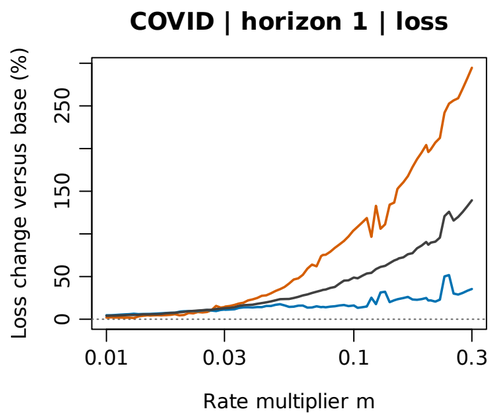
Loss: % change from m = 0 in the same phase (negative is better). Calibration: mean |coverage - alpha| over levels (lower is better); dashed: m = 0.

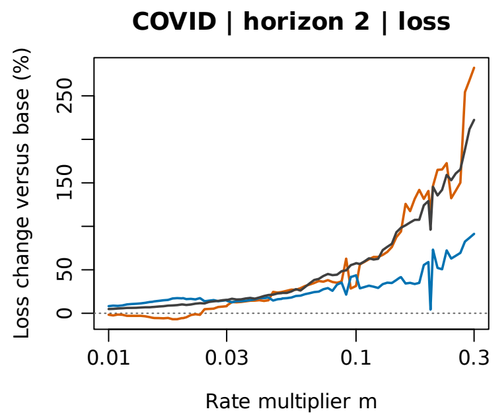
# Pennsylvania | delay 1 | Fixed-rate MultiQT: loss and calibration before and after the peak

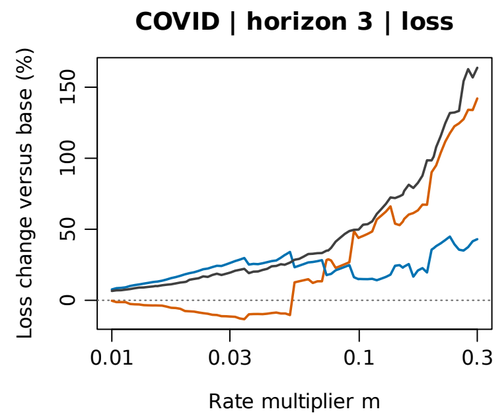
Count tracking | eta = m * S0, S0 frozen after 20 released rows (in hindsight: warmup replayed) | Feedback delay 1 | Scored against latest reported counts in counts per 100k residents

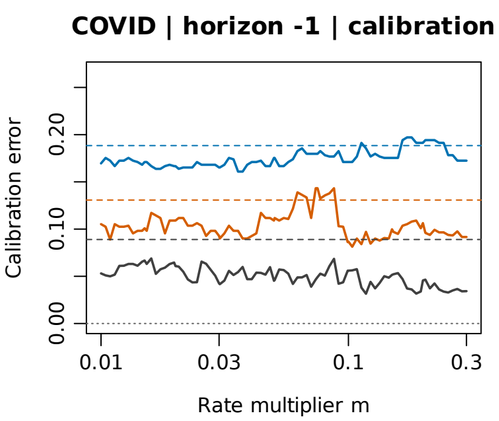


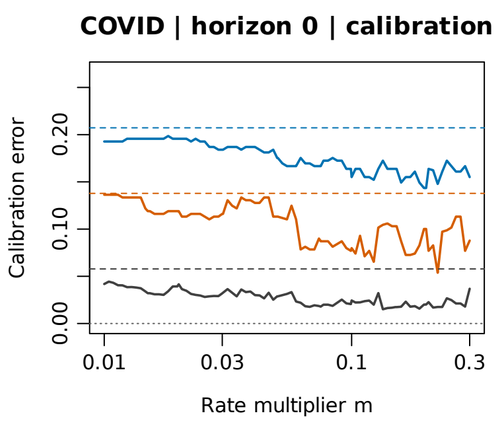



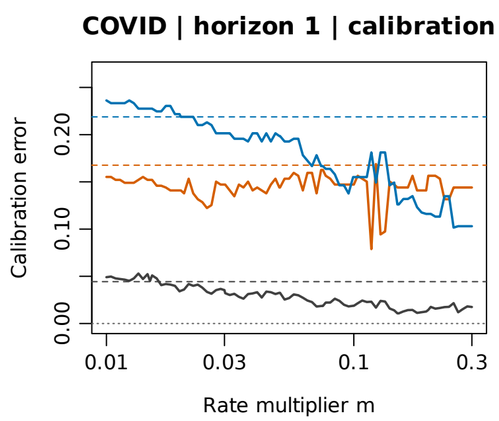



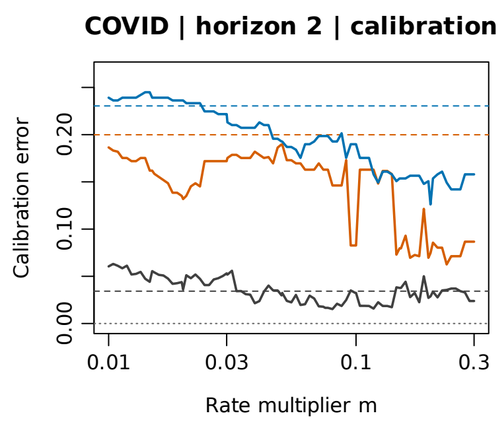



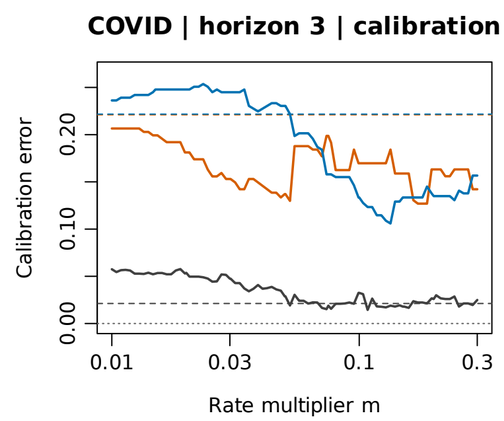



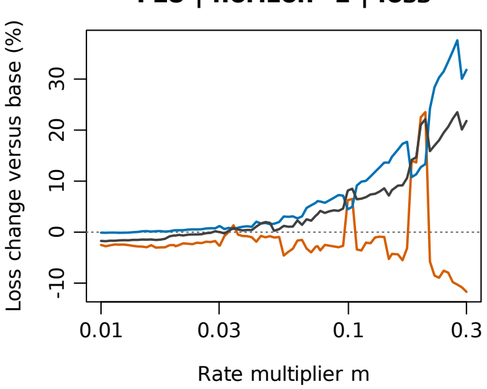



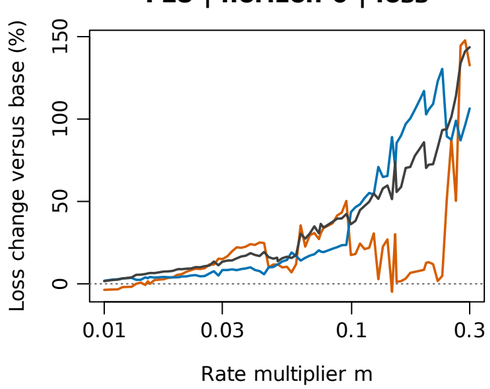



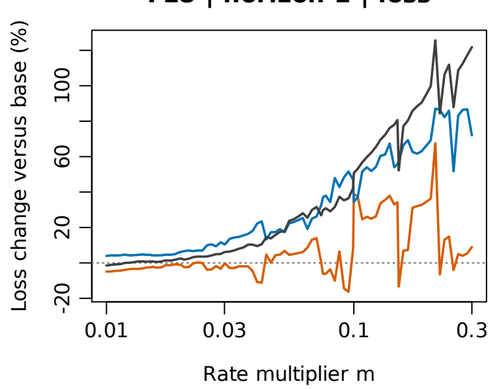



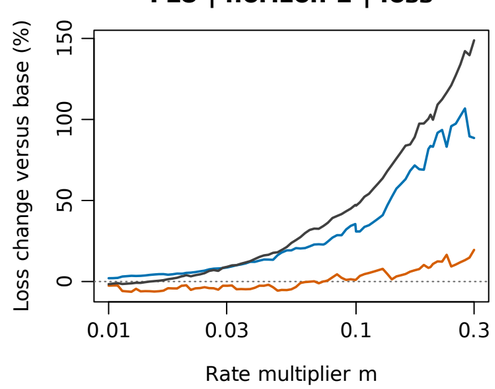



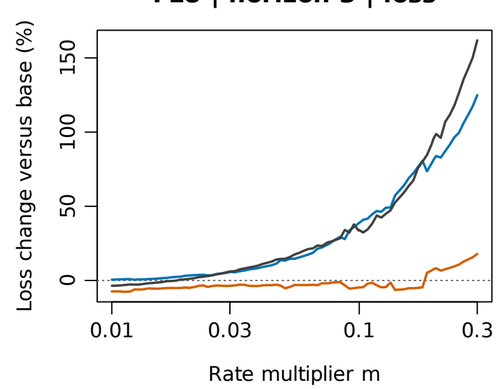



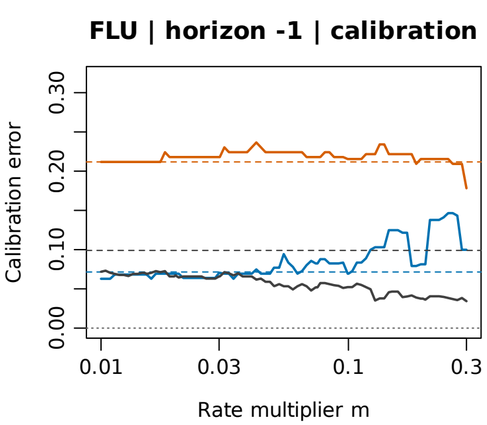



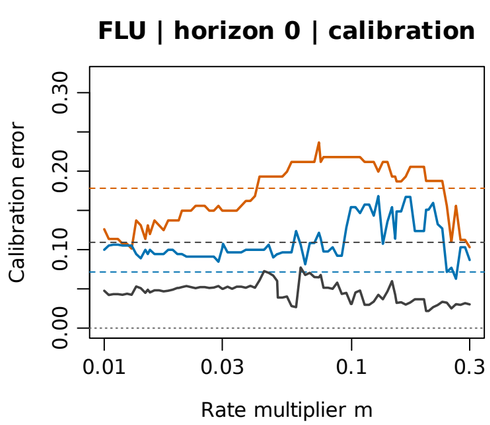



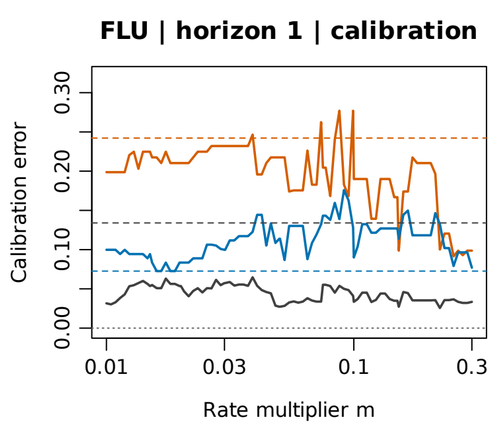



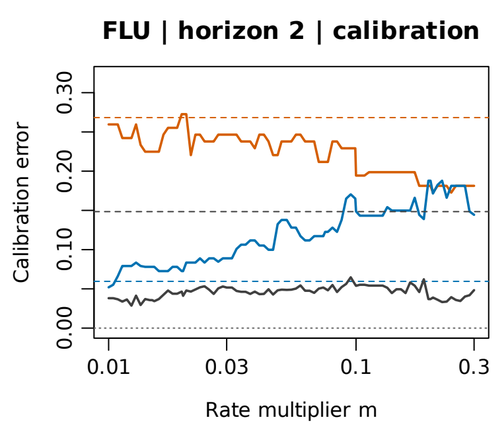



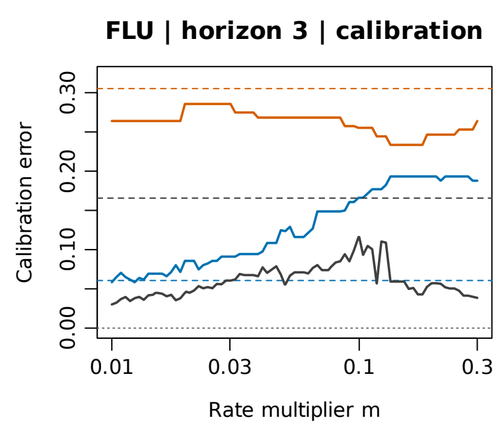



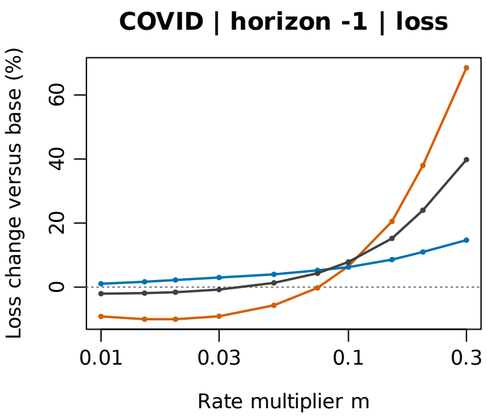



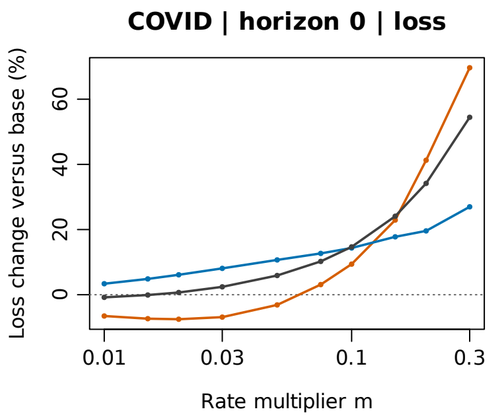

Before peak (weeks -7 to 0) After peak (weeks 1 to 8) Overall (Jun 2025 to Sep 2026)

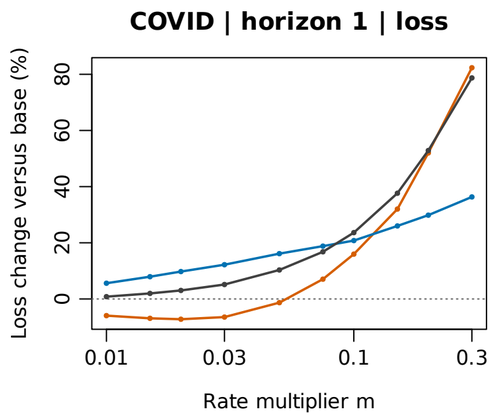
Loss: % change from m = 0 in the same phase (negative is better). Calibration: mean |coverage - alpha| over levels (lower is better); dashed: m = 0.

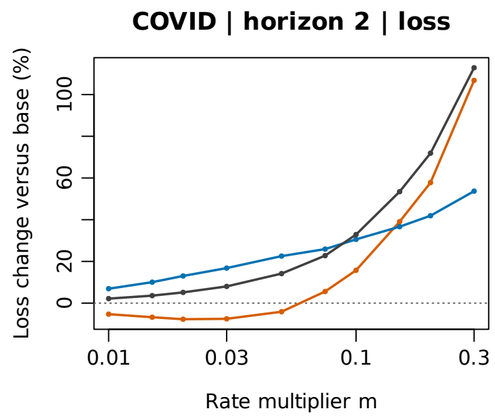
All 52 locations pooled (multipliers of the dots) | re-run | Fixed-rate MultiQT: loss and calibration before and after the peak

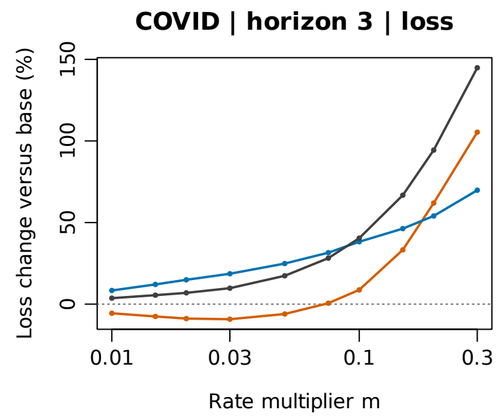
Count tracking | eta = m * S0, S0 frozen after 20 released rows (in hindsight: warmup replayed) | Feedback re-run | Scored against latest reported counts in counts per 100k residents

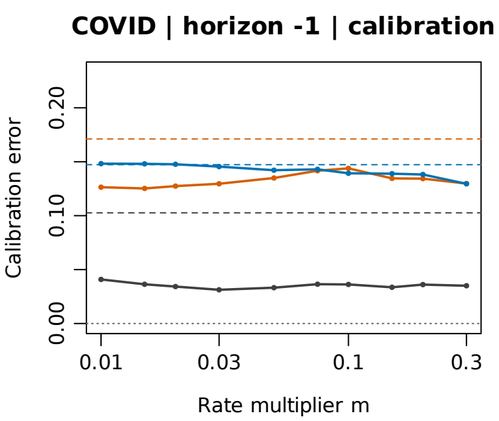


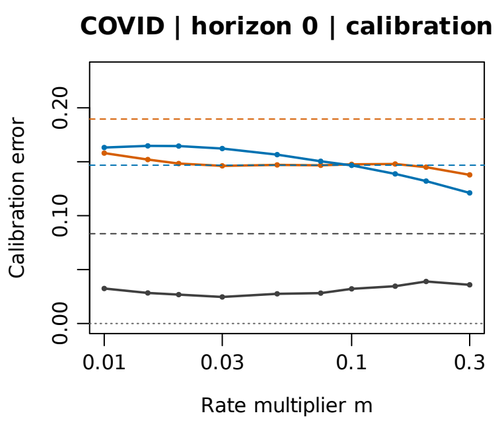



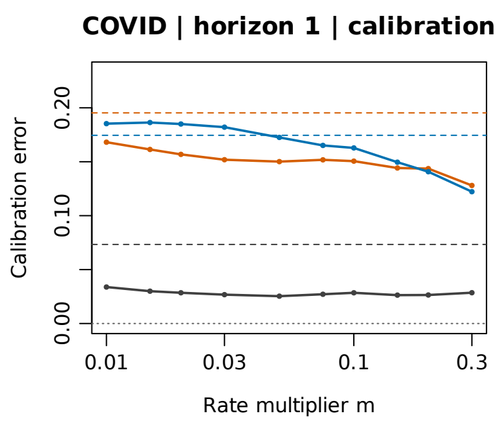



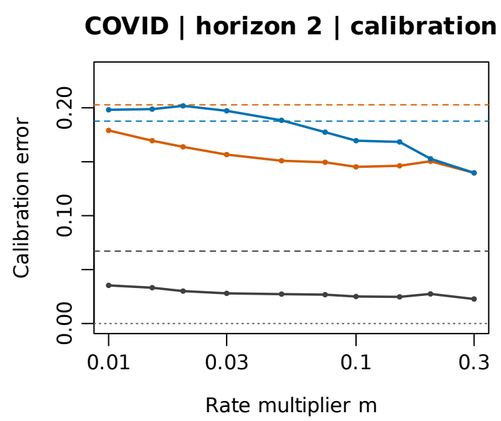



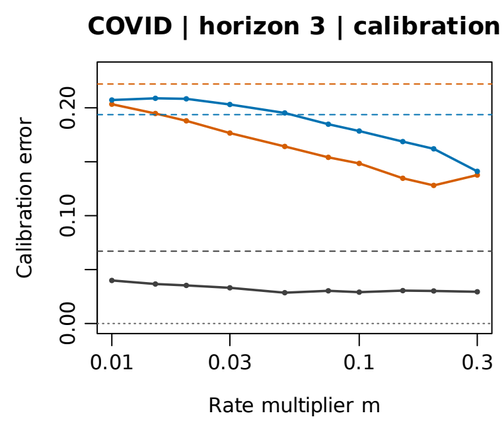



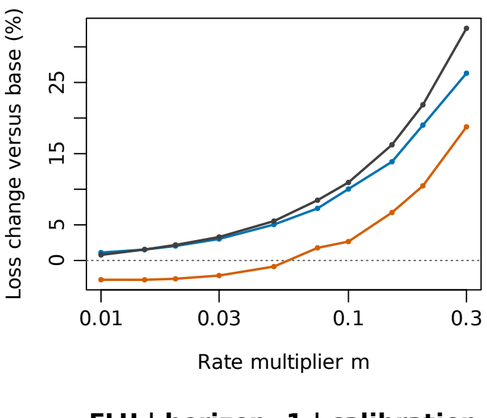



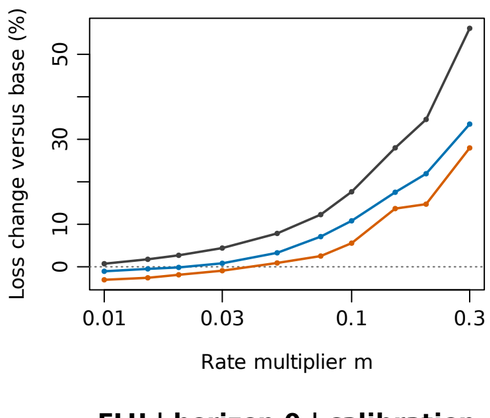



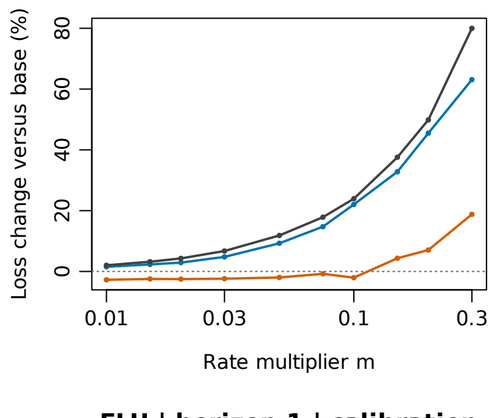



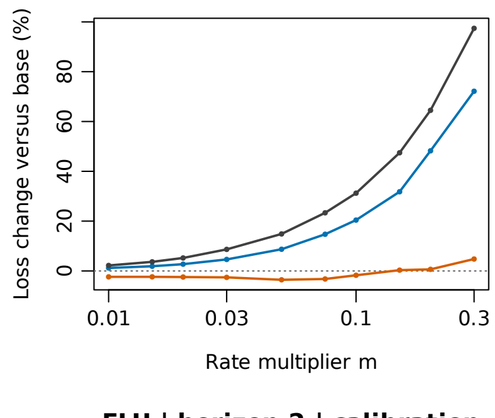



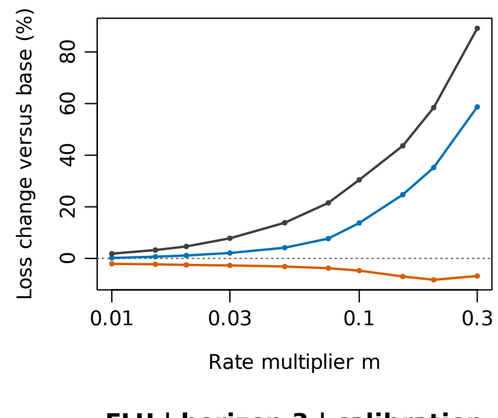



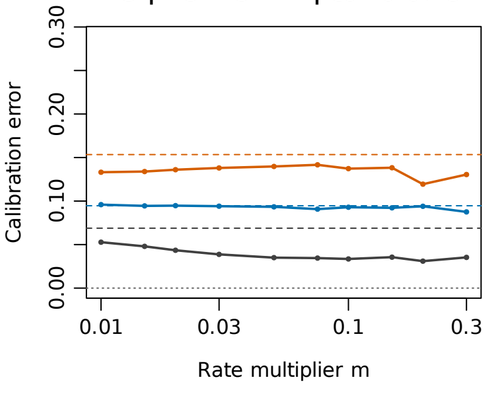



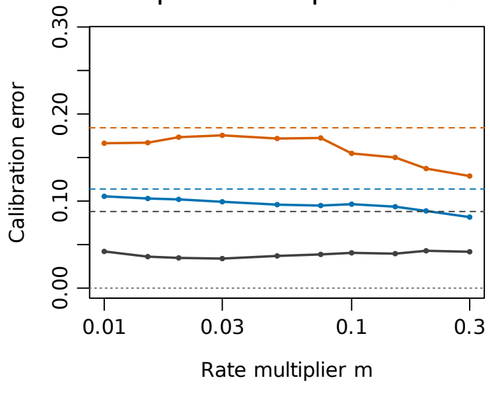



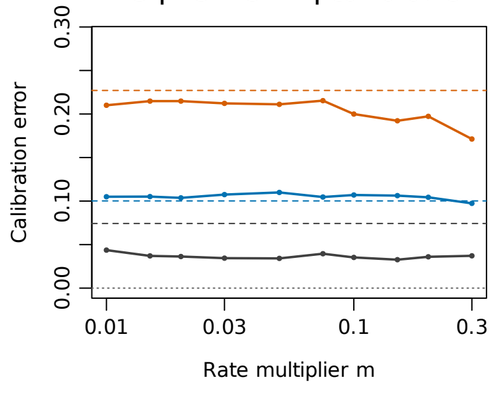



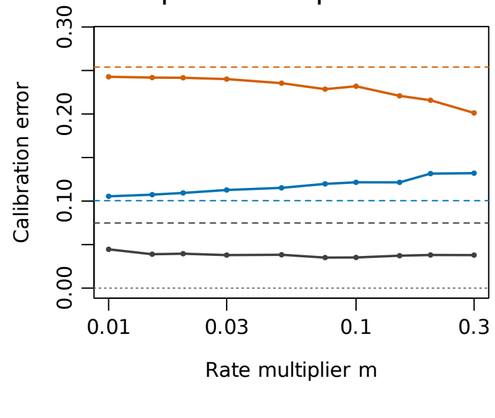



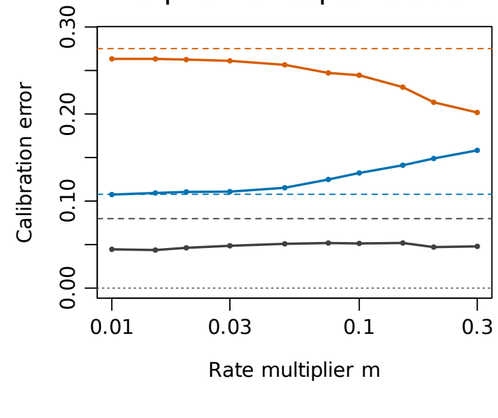



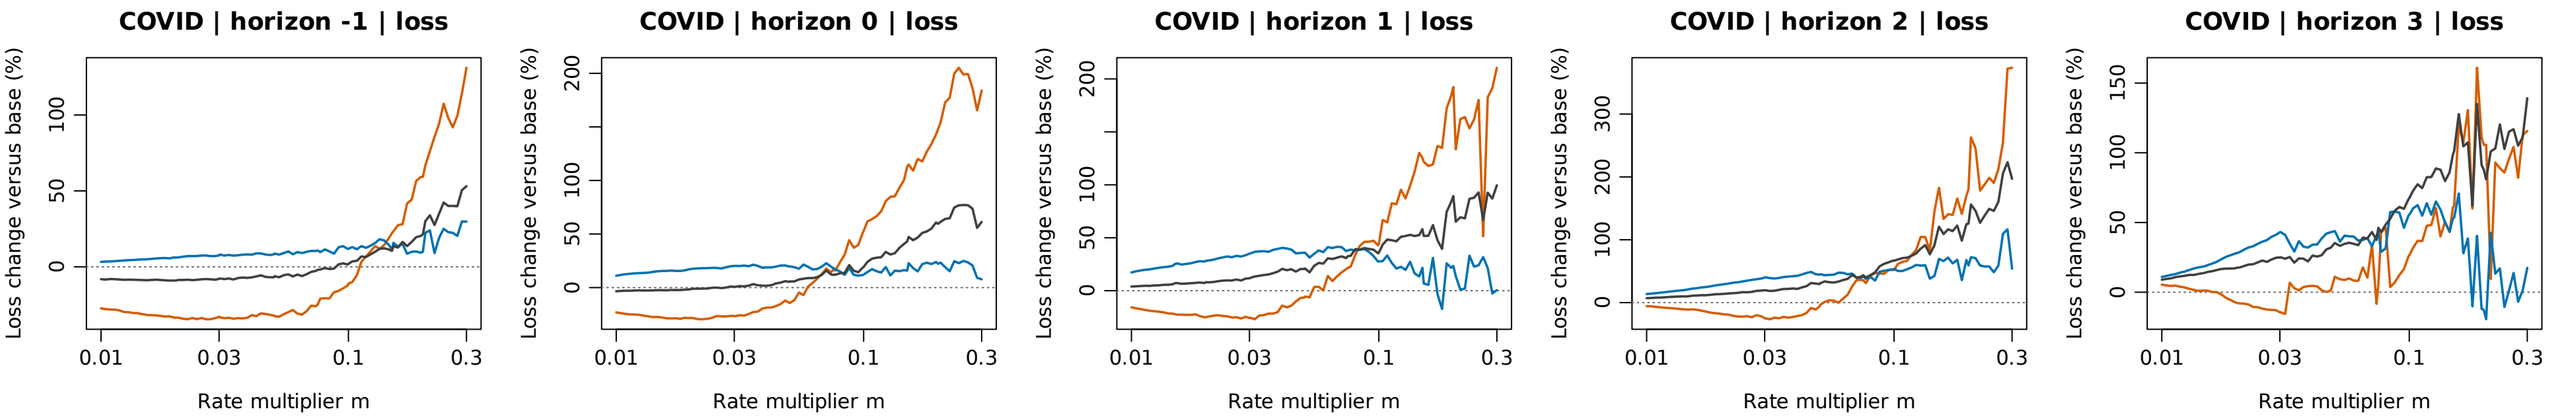



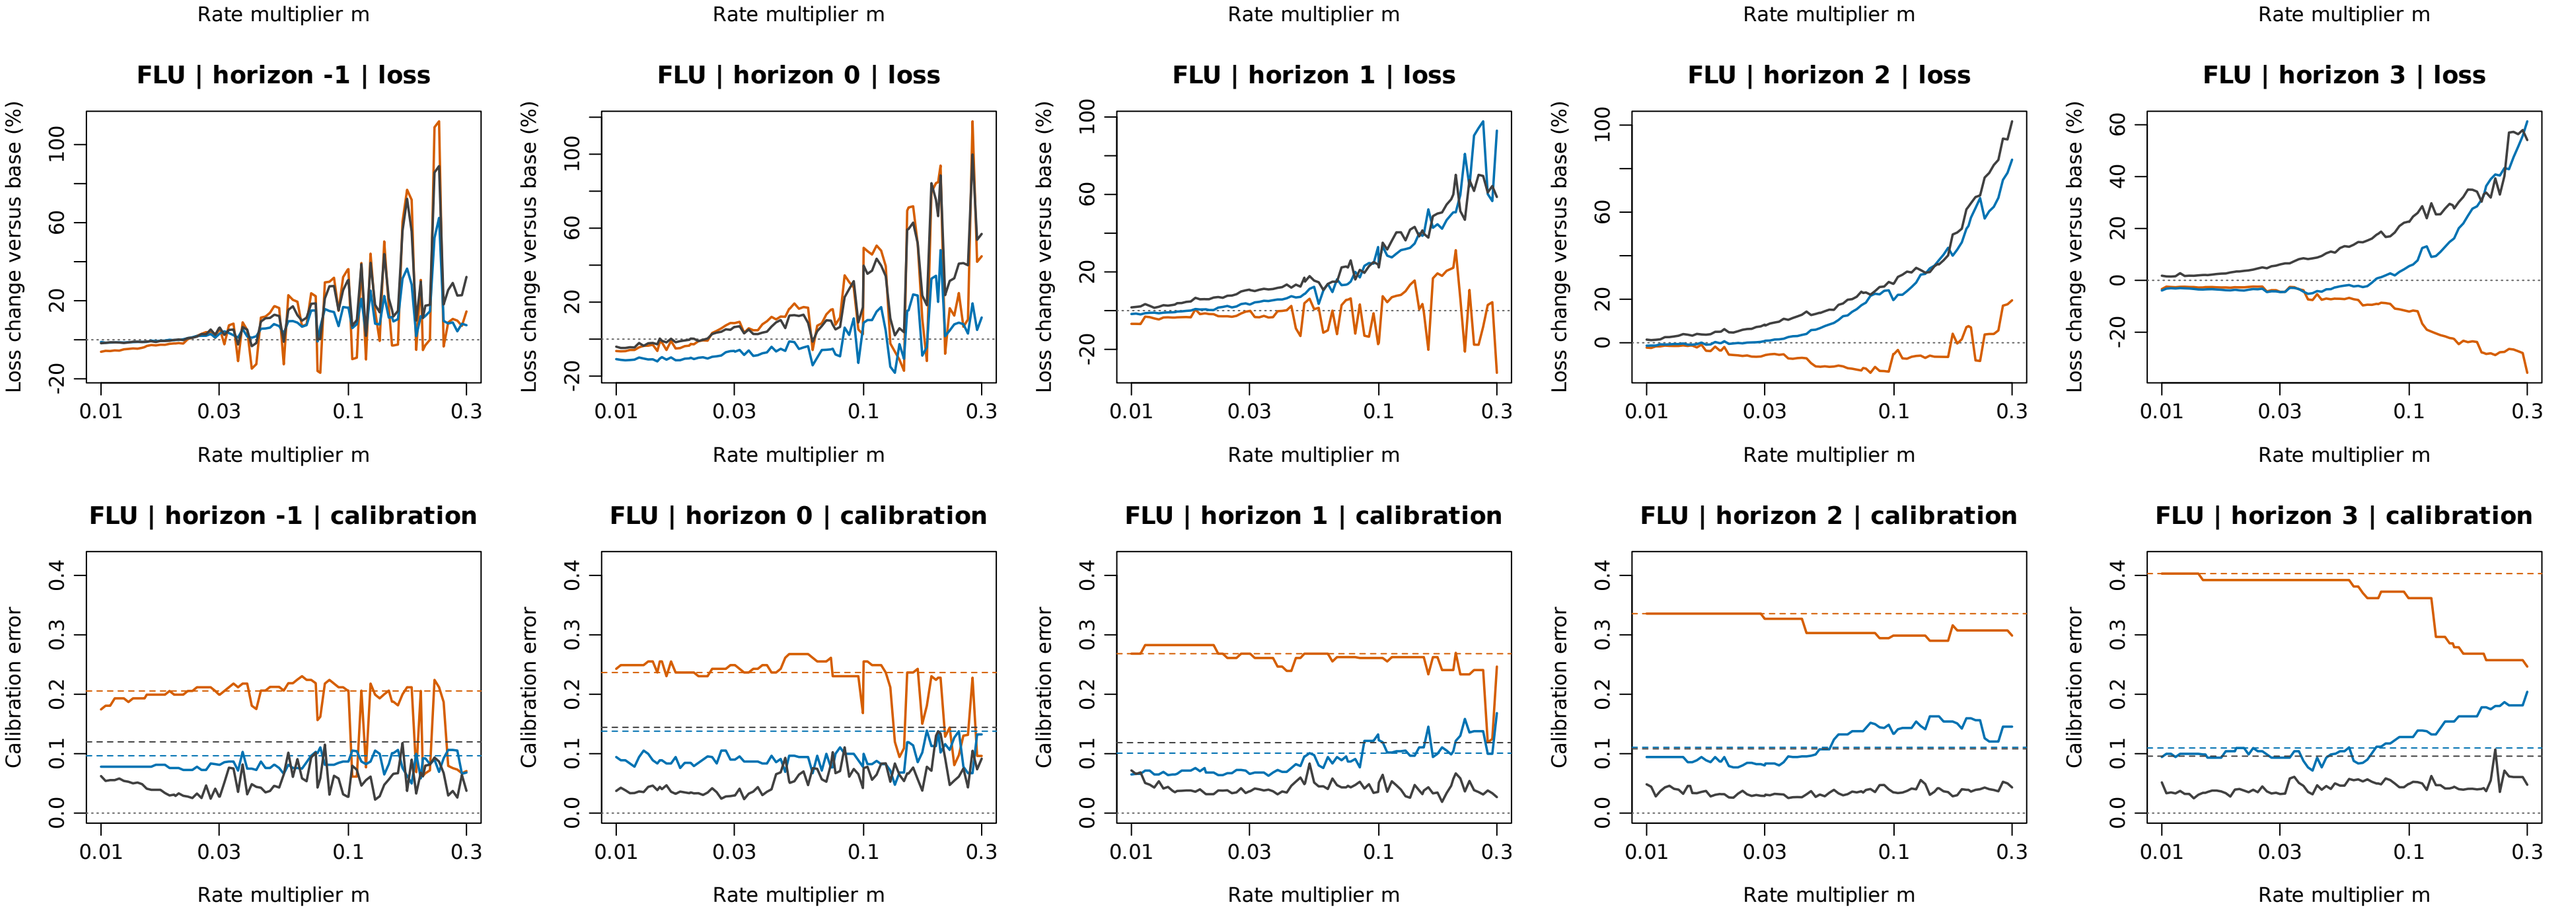

Before peak (weeks -7 to 0) After peak (weeks 1 to 8) Overall (Jun 2025 to Sep 2026)

Loss: % change from m = 0 in the same phase (negative is better). Calibration: mean |coverage - alpha| over levels (lower is better); dashed: m = 0. Pooled: each location weighted by its weeks.

# United States | re-run | Fixed-rate MultiQT: loss and calibration before and after the peak

Count tracking | eta = m * S0, S0 frozen after 20 released rows (in hindsight: warmup replayed) | Feedback re-run | Scored against latest reported counts in counts per 100k residents



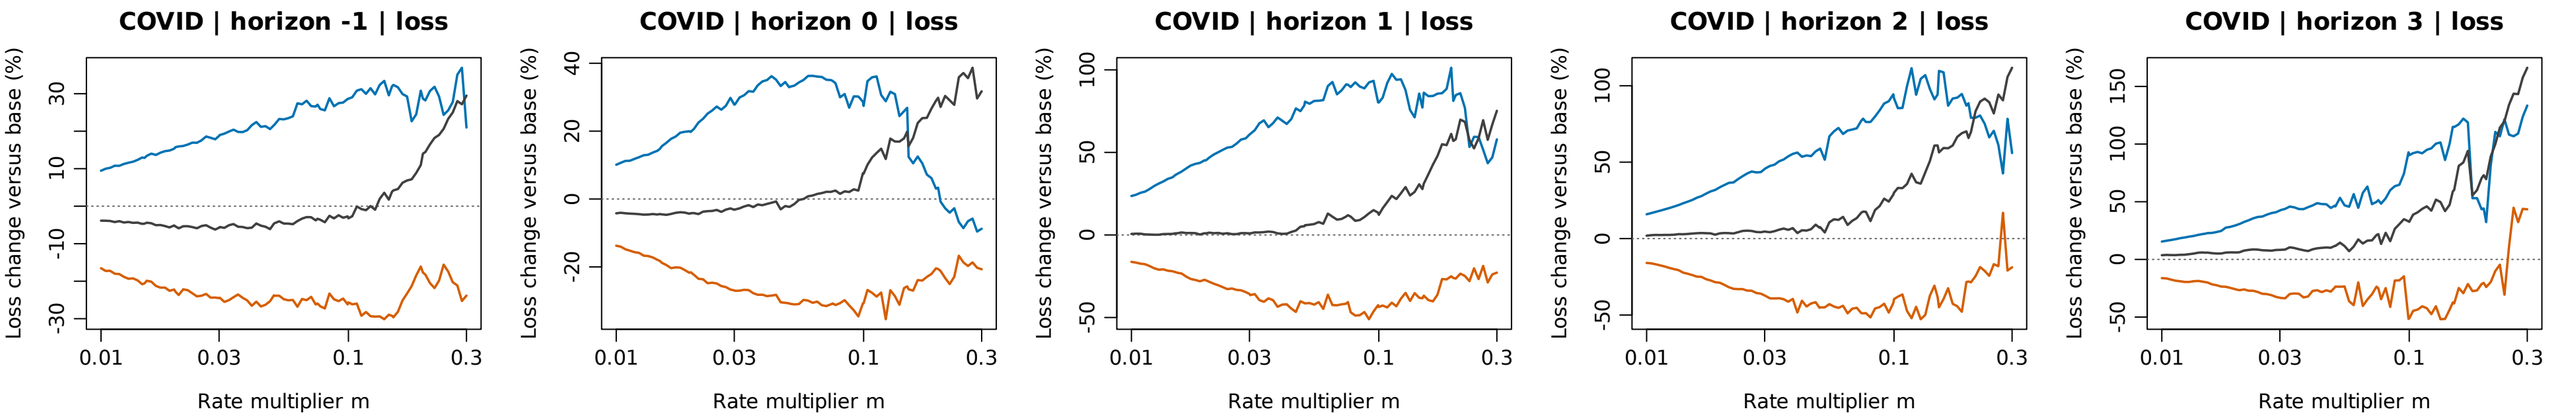



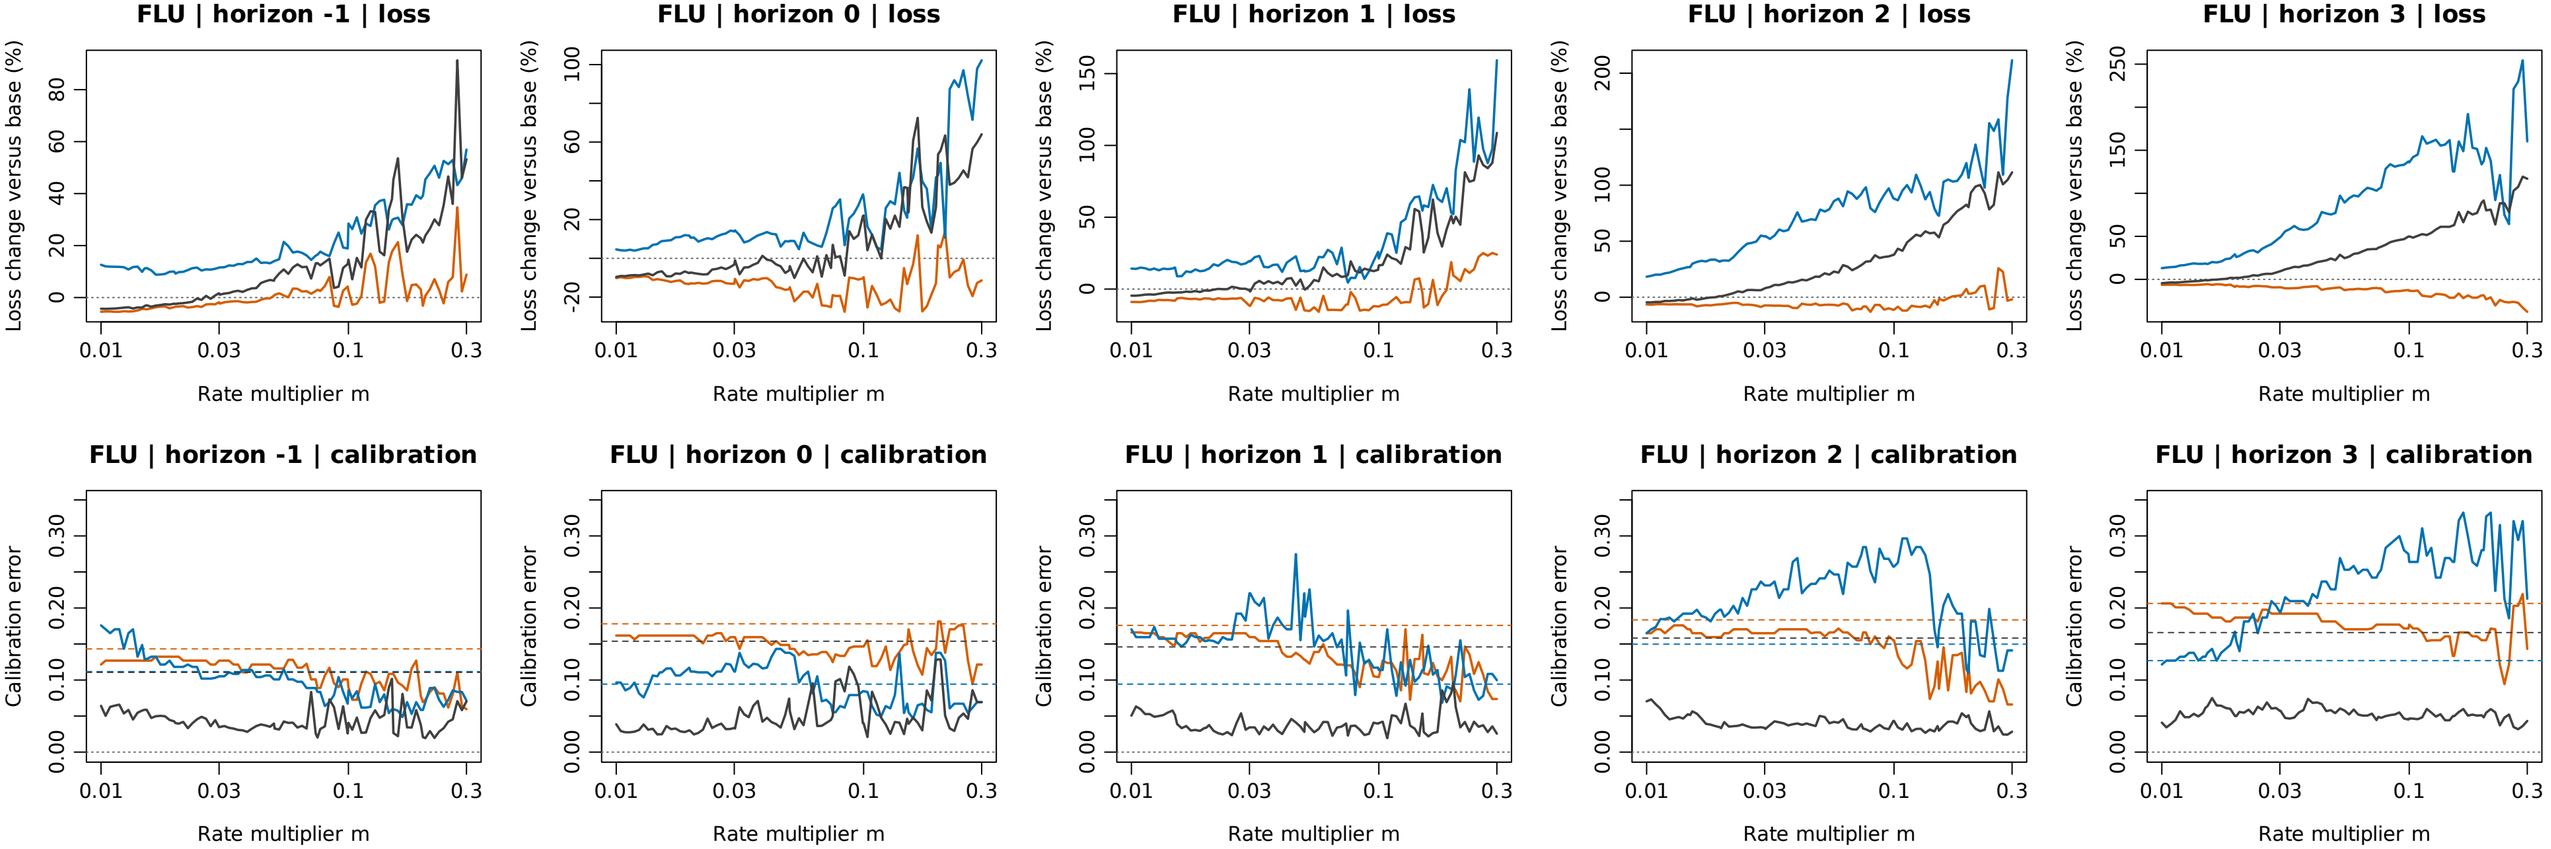

Before peak (weeks -7 to 0) | After peak (weeks 1 to 8) | Overall (Jun 2025 to Sep 2026)

Loss: % change from m = 0 in the same phase (negative is better). Calibration: mean |coverage - alpha| over levels (lower is better); dashed: m = 0.

# California | re-run | Fixed-rate MultiQT: loss and calibration before and after the peak

Count tracking | eta = m * S0, S0 frozen after 20 released rows (in hindsight: warmup replayed) | Feedback re-run | Scored against latest reported counts in counts per 100k residents



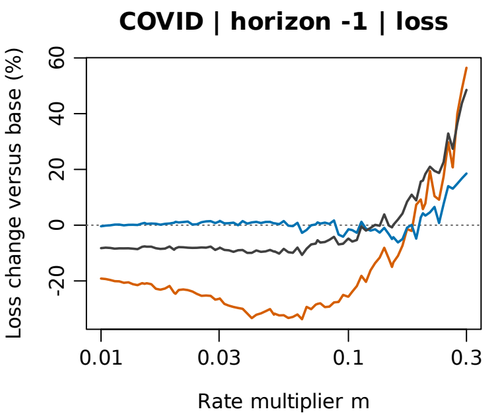



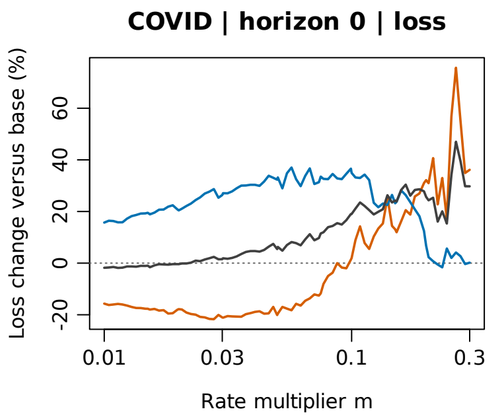

Before peak (weeks -7 to 0) | After peak (weeks 1 to 8) | Overall (Jun 2025 to Sep 2026)

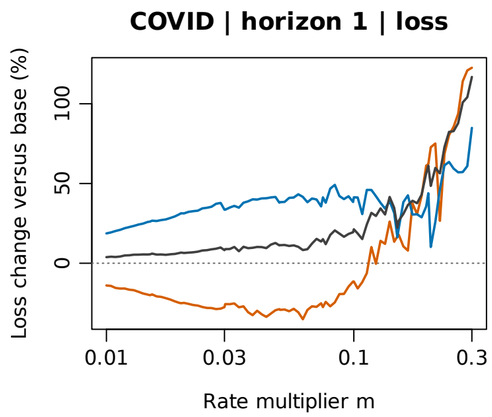
Loss: % change from m = 0 in the same phase (negative is better). Calibration: mean |coverage - alpha| over levels (lower is better); dashed: m = 0.

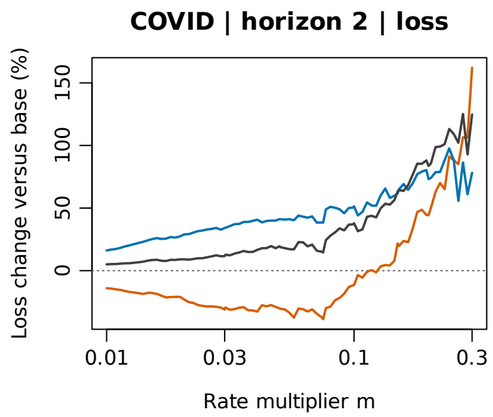
# Texas | re-run | Fixed-rate MultiQT: loss and calibration before and after the peak

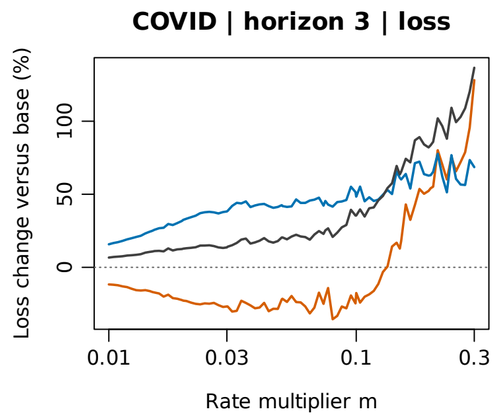
Count tracking | eta = m * S0, S0 frozen after 20 released rows (in hindsight: warmup replayed) | Feedback re-run | Scored against latest reported counts in counts per 100k residents

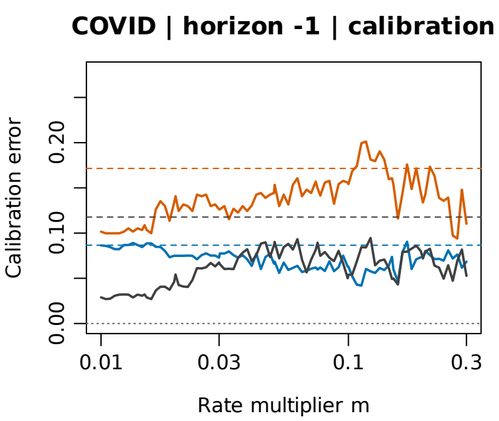


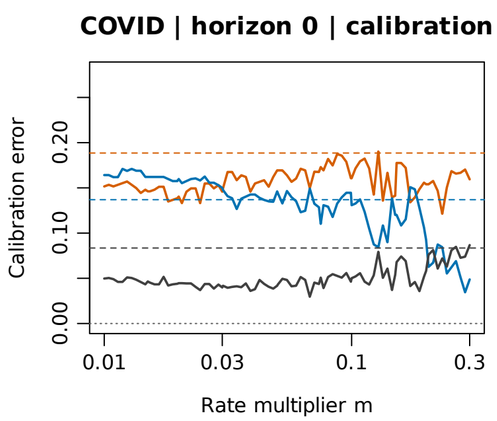



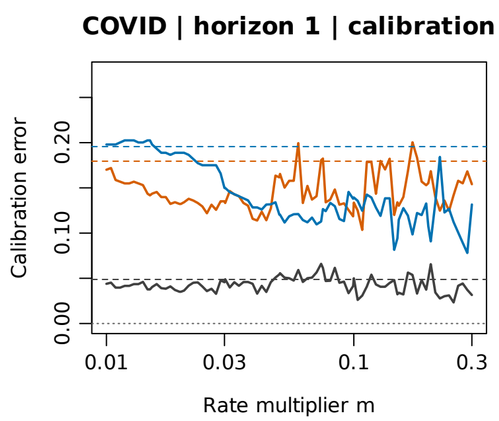



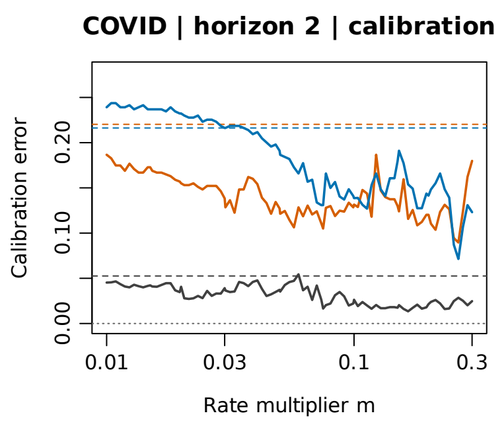



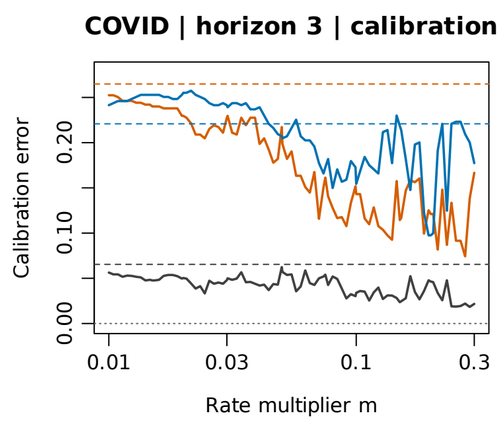



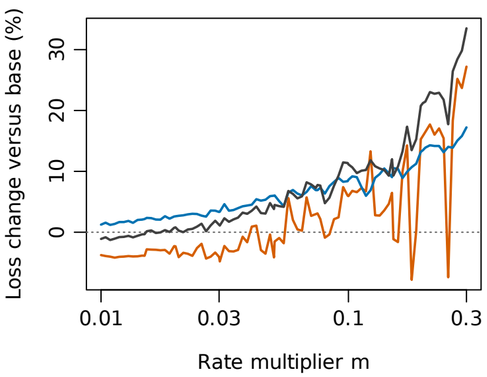



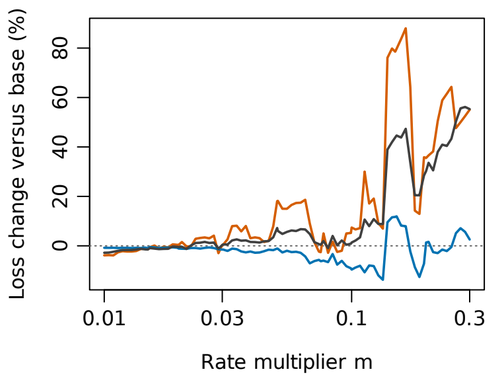



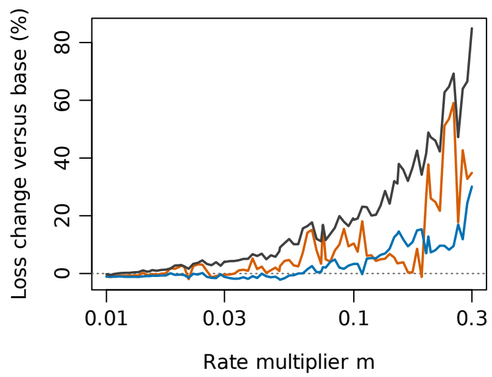



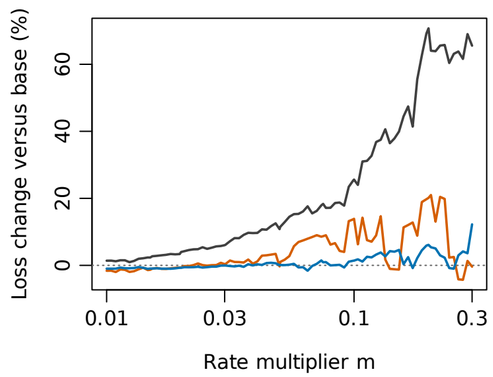



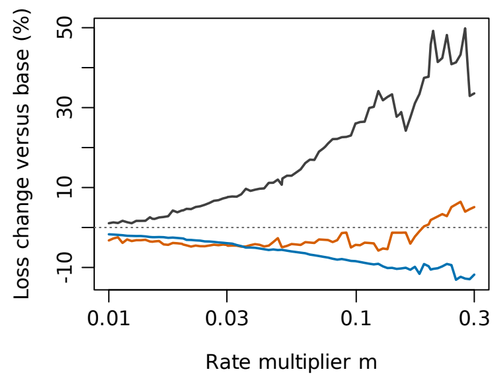



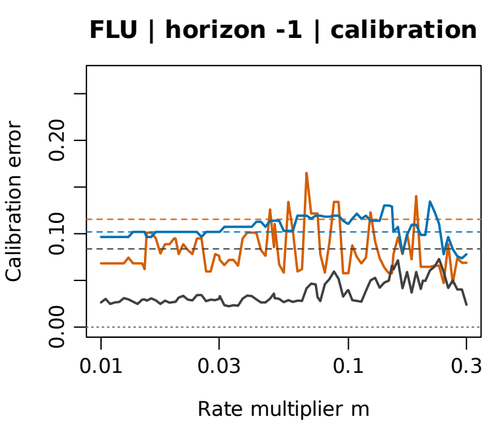



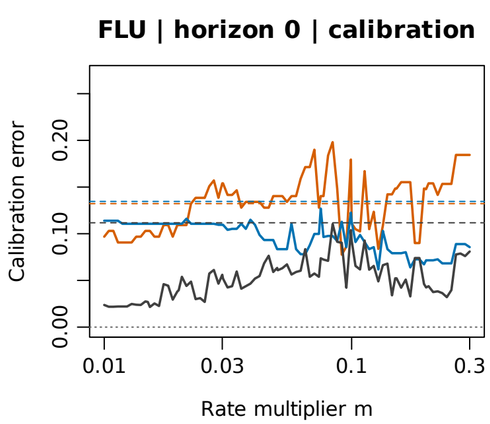



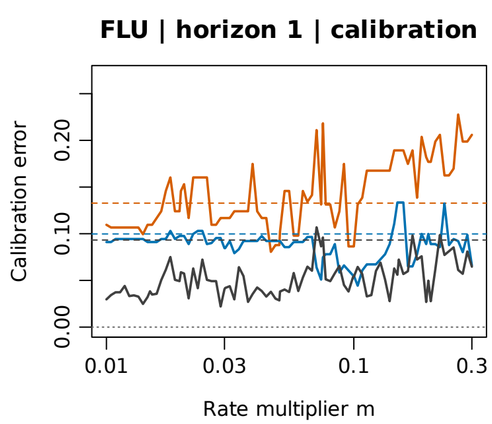



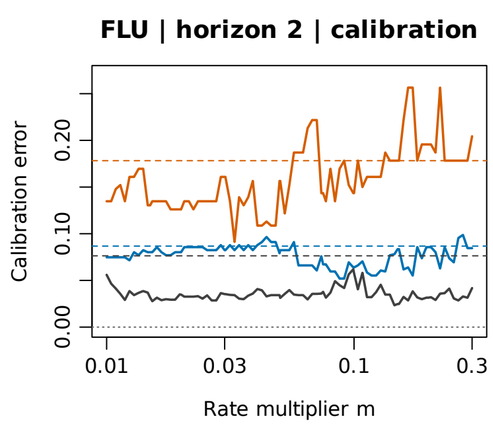



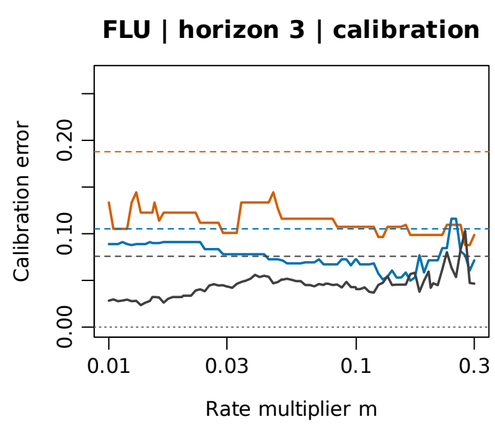



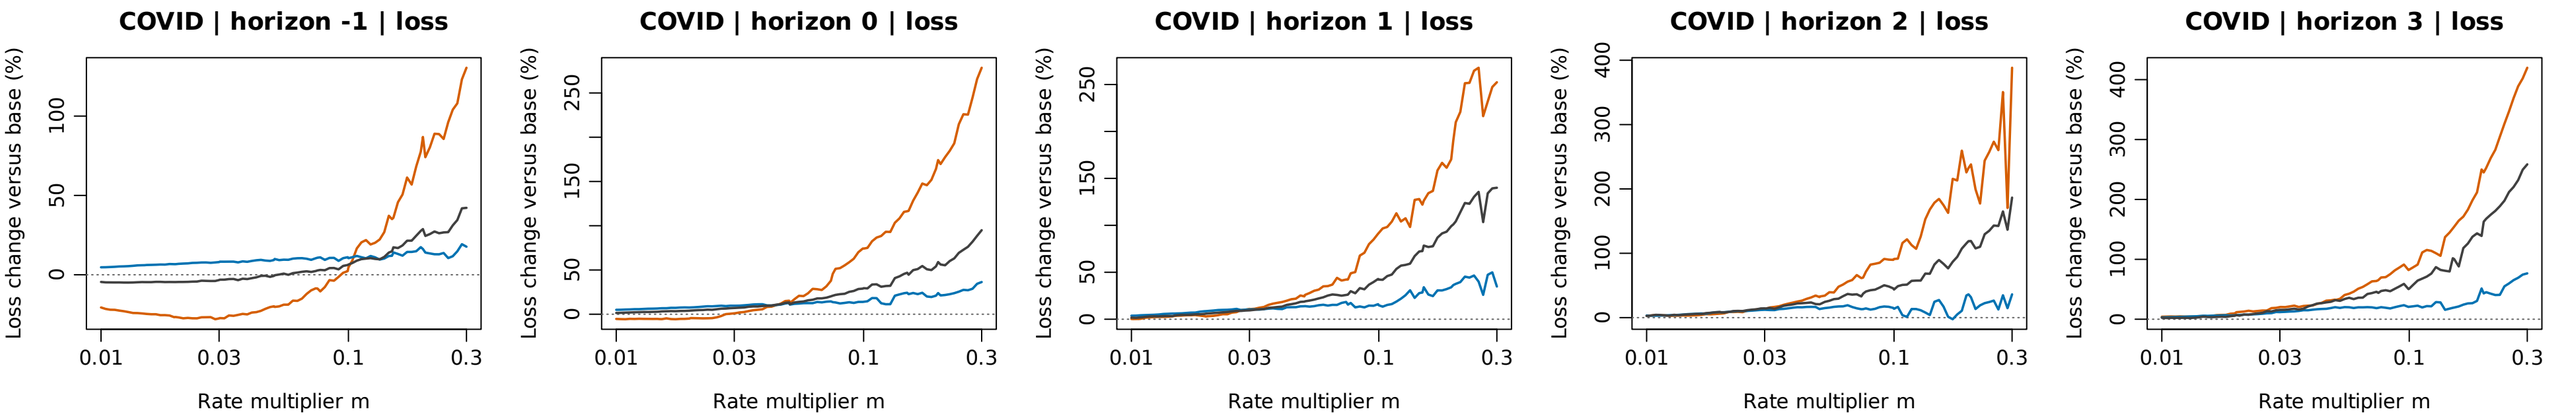



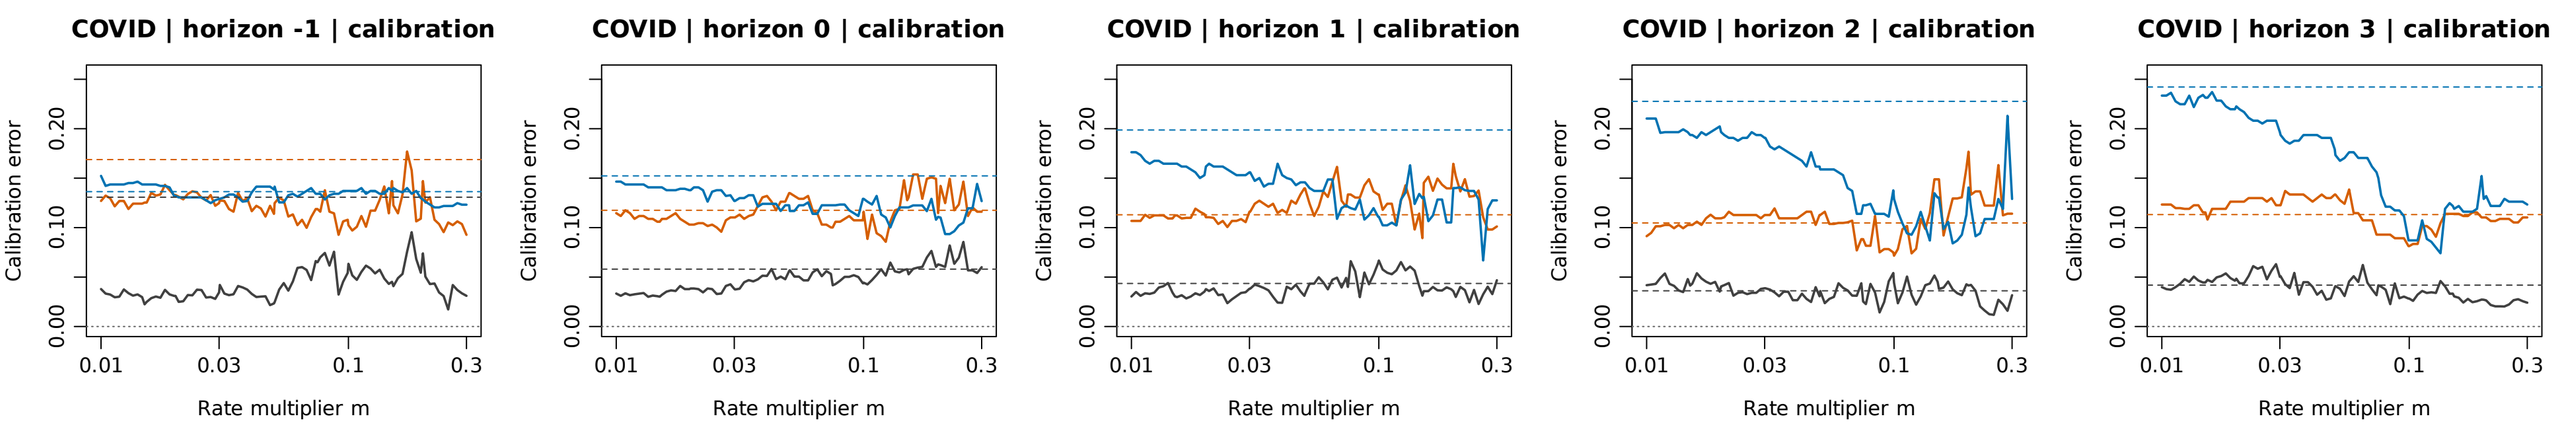

Before peak (weeks -7 to 0) | After peak (weeks 1 to 8) | Overall (Jun 2025 to Sep 2026)

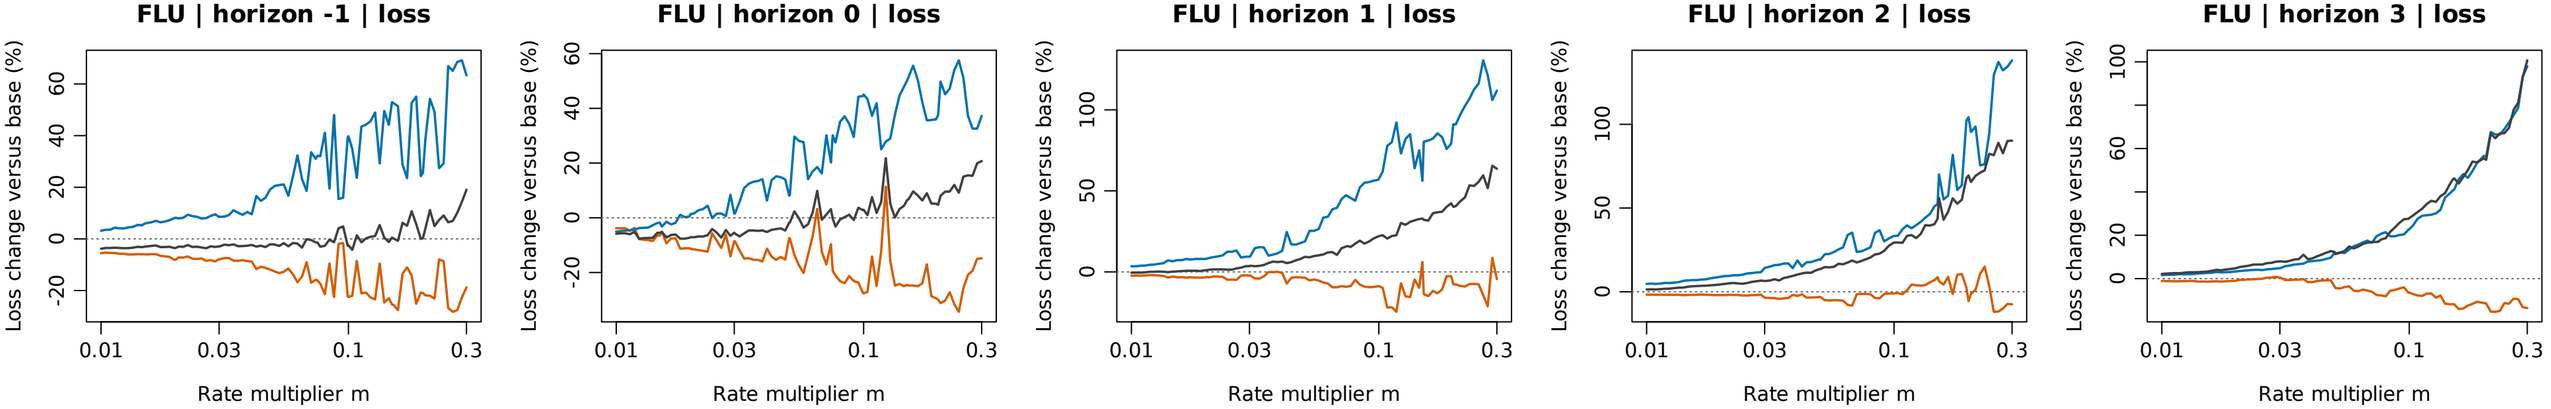
Loss: % change from m = 0 in the same phase (negative is better). Calibration: mean |coverage - alpha| over levels (lower is better); dashed: m = 0.

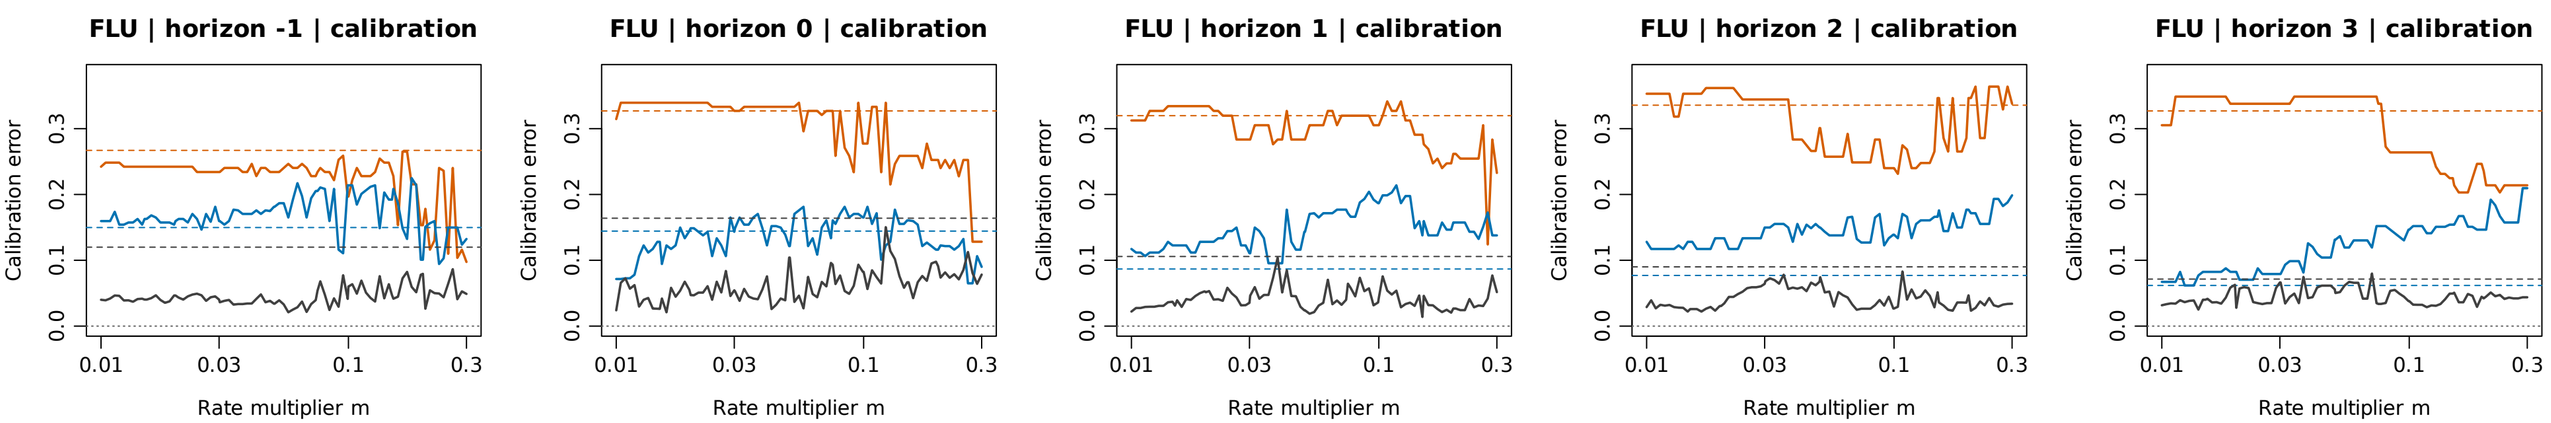
# New York | re-run | Fixed-rate MultiQT: loss and calibration before and after the peak

Count tracking | eta = m * S0, S0 frozen after 20 released rows (in hindsight: warmup replayed) | Feedback re-run | Scored against latest reported counts in counts per 100k residents



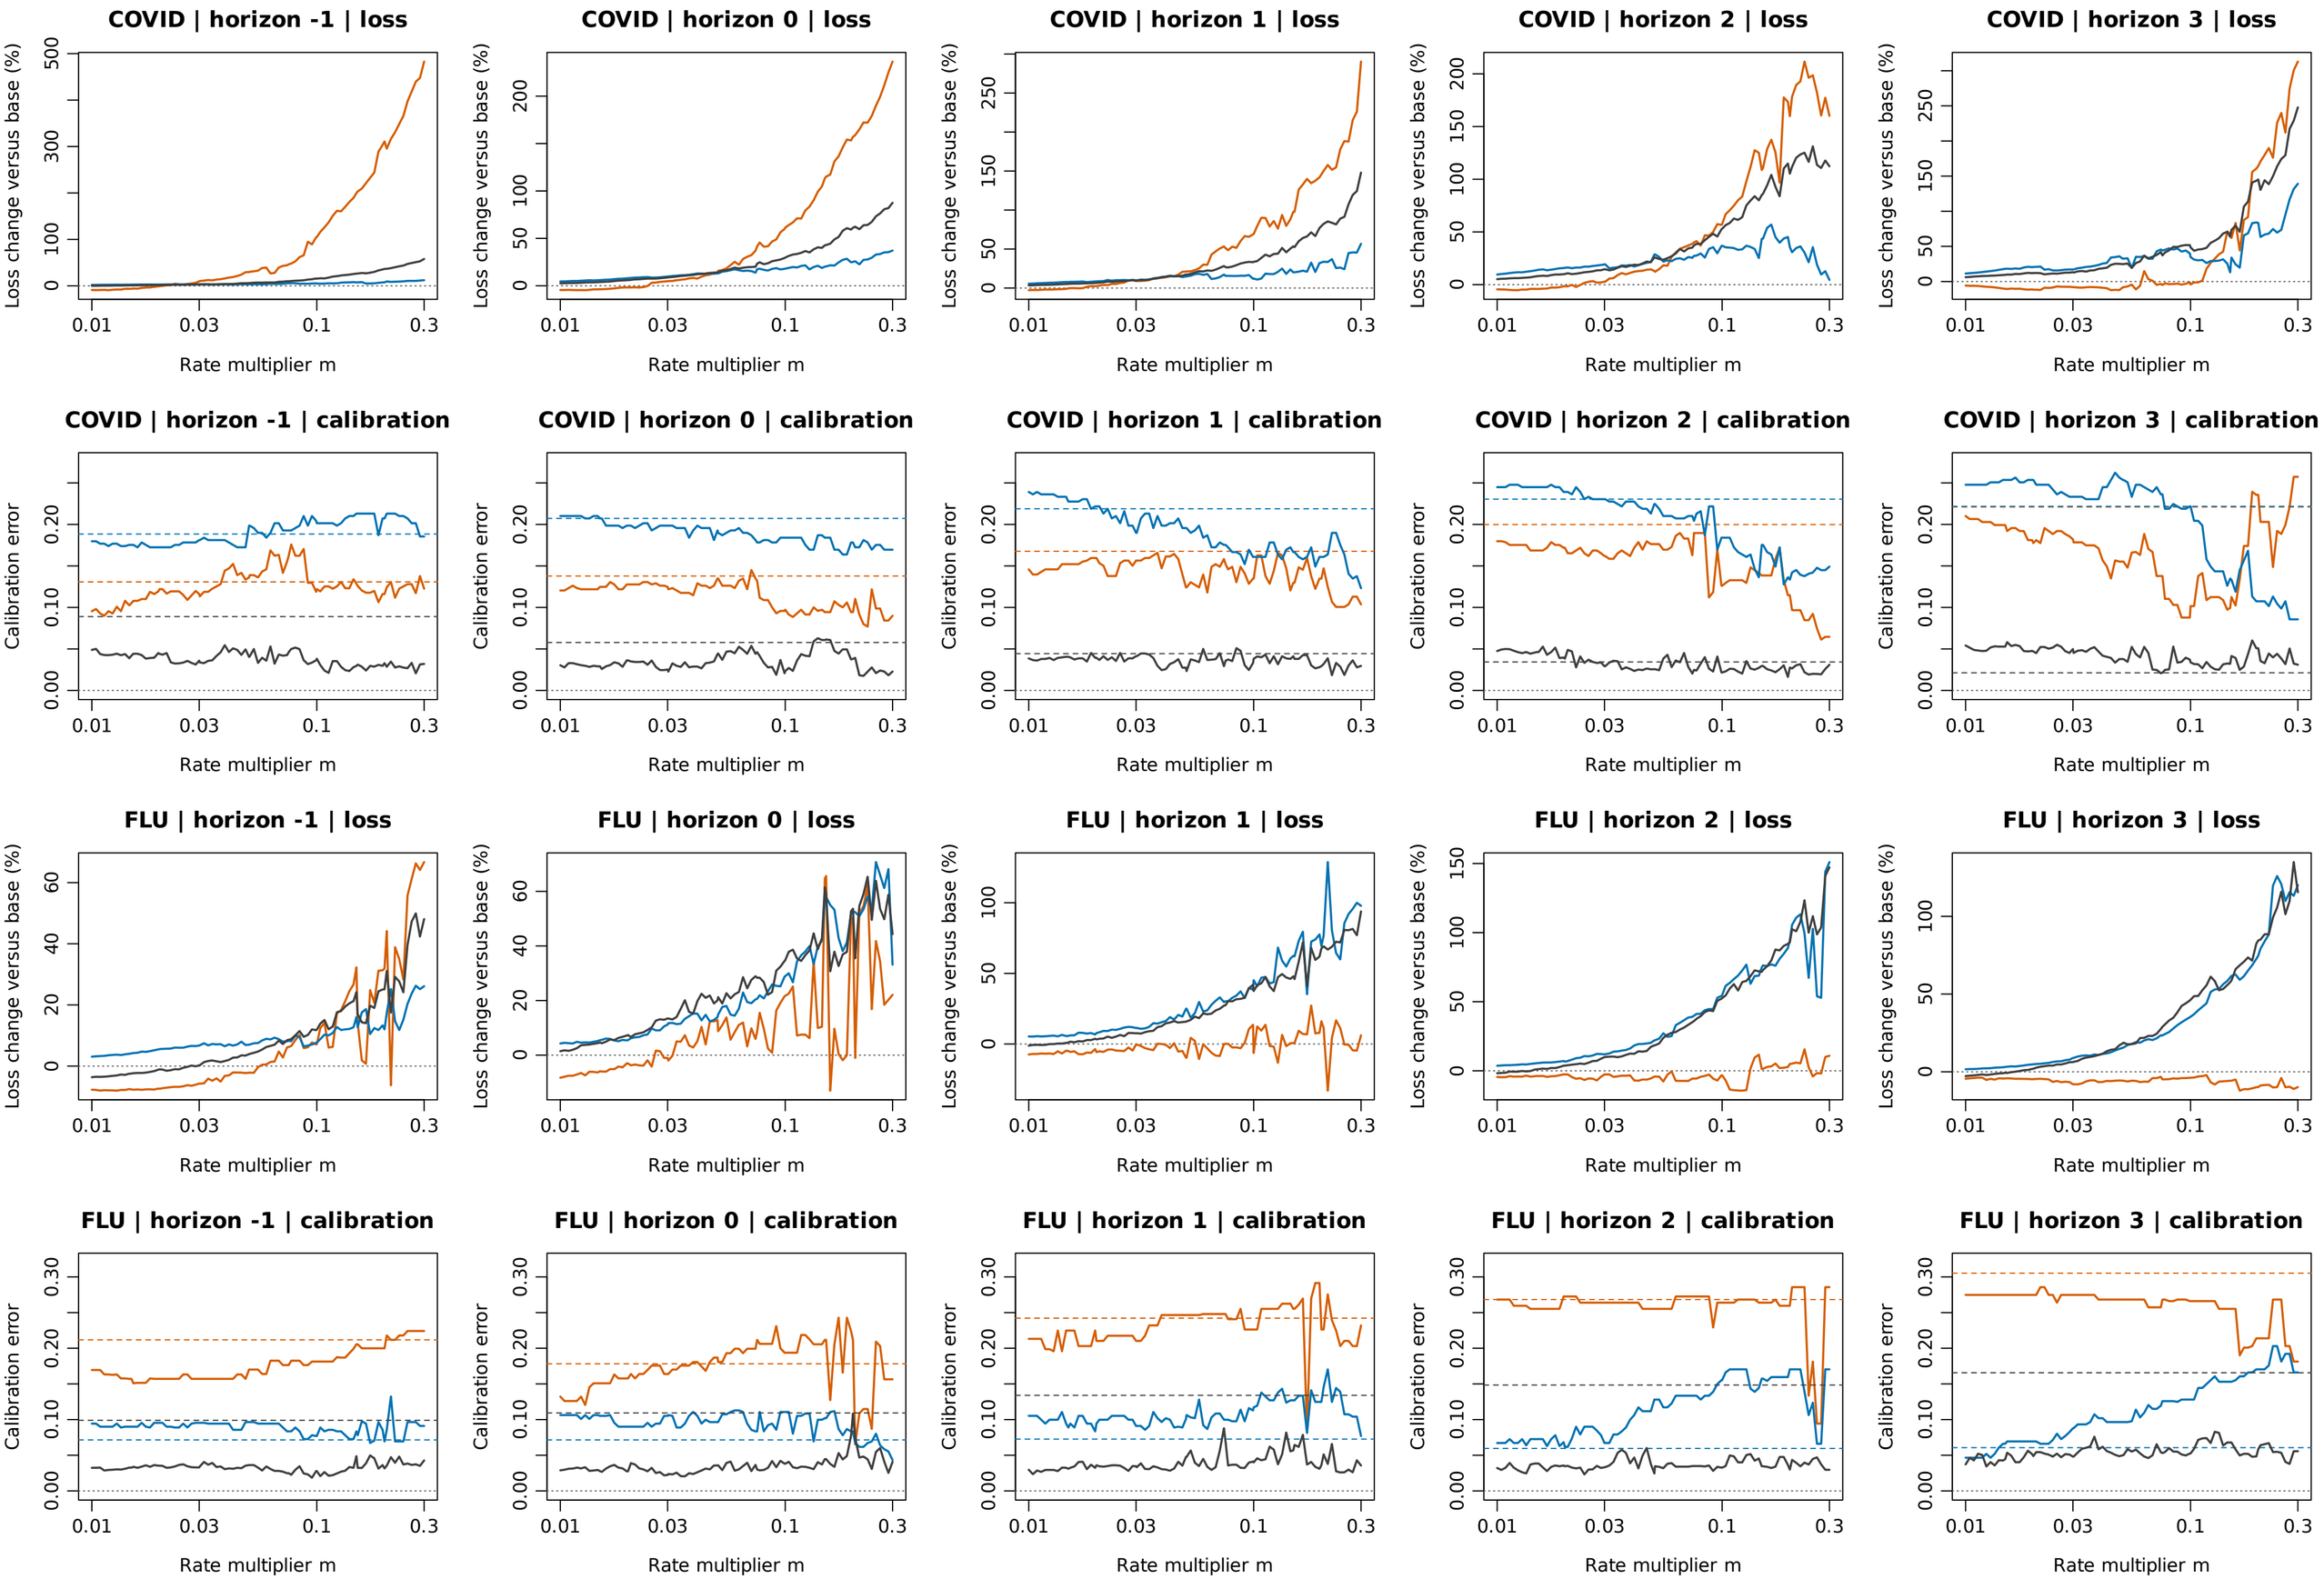




Before peak (weeks -7 to 0) | After peak (weeks 1 to 8) | Overall (Jun 2025 to Sep 2026)

Loss: % change from m = 0 in the same phase (negative is better). Calibration: mean |coverage - alpha| over levels (lower is better); dashed: m = 0.

# Pennsylvania | re-run | Fixed-rate MultiQT: loss and calibration before and after the peak

Count tracking | eta = m * S0, S0 frozen after 20 released rows (in hindsight: warmup replayed) | Feedback re-run | Scored against latest reported counts in counts per 100k residents




Loss: % change from m = 0 in the same phase (negative is better). Calibration: mean |coverage - alpha| over levels (lower is better); dashed: m = 0.