



covid | base cmu_submission | feedback delay 0 | tuning period Nov 2024 to May 2025 | horizons -1 to 3 | 10 largest locations without Florida

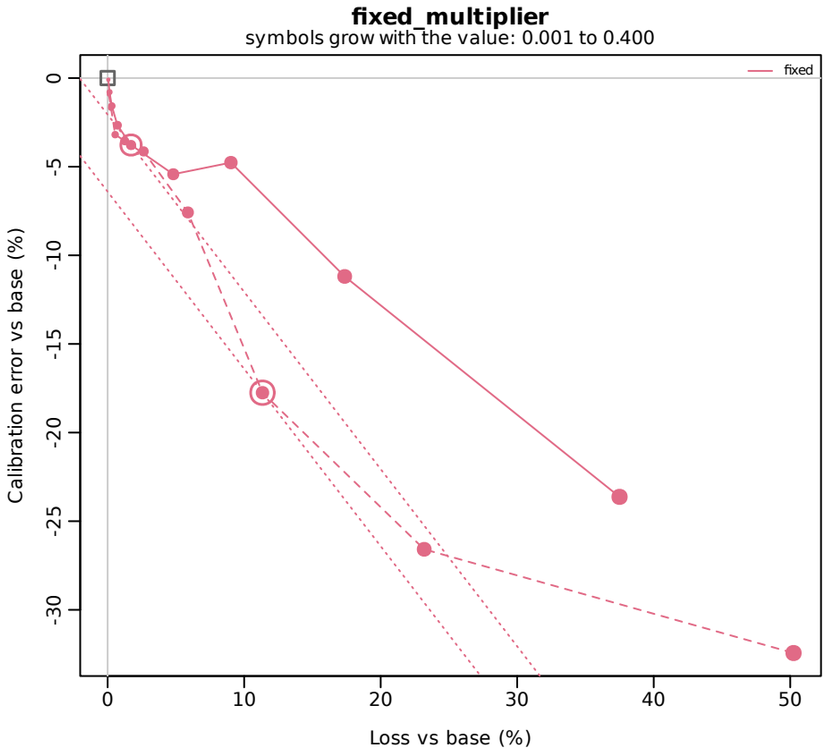

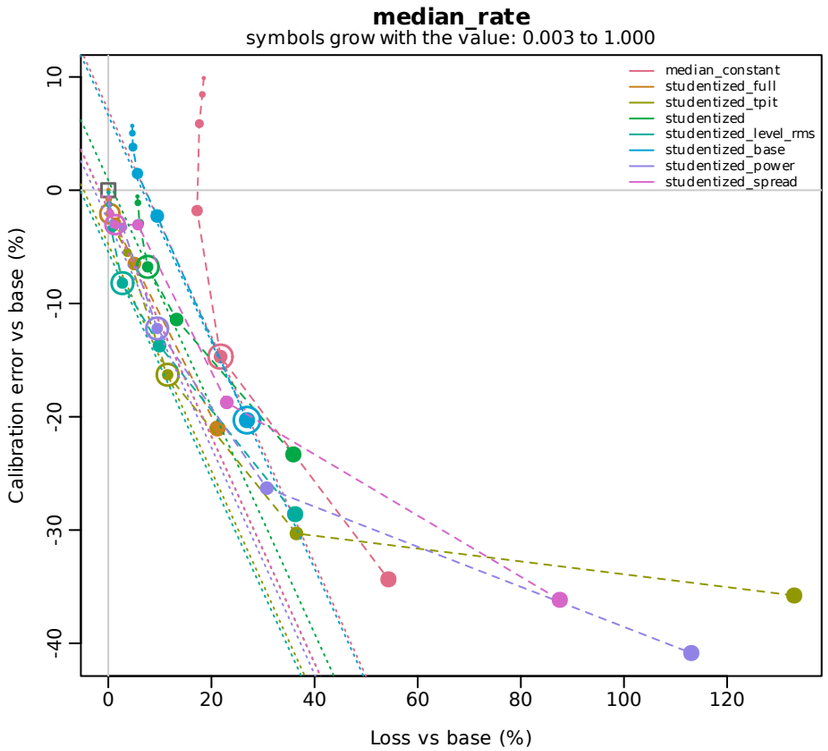

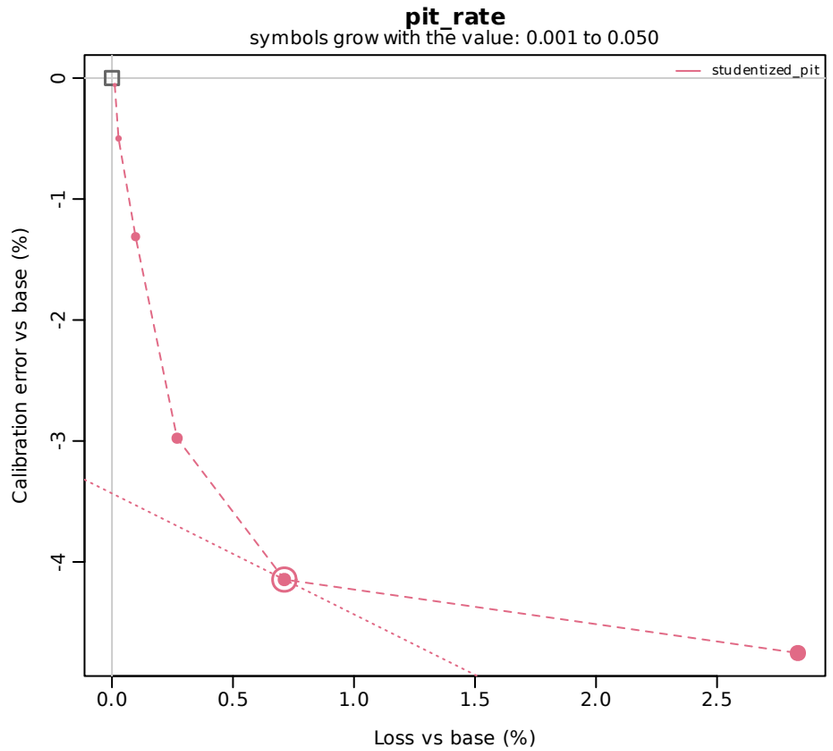


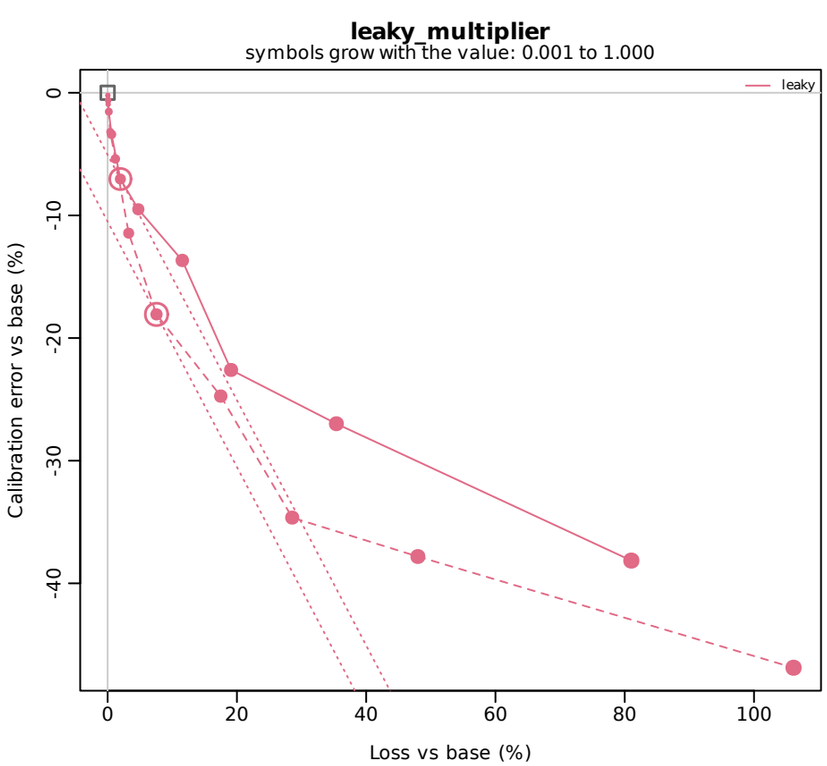



log1p tracker (loss of log(counts + 1))
identity tracker (loss in counts per 100k residents)
chosen value (circled)
equal sum of both changes through it
base forecasts (0, 0)
symbol size: grid value (larger = larger)


Calibration error against mean quantile loss, both relative to the base forecasts (means over locations and horizons) on the scale of each tracker; lower left is better

covid | base cmu_submission | feedback delay 1 | tuning period Nov 2024 to May 2025 | horizons -1 to 3 | 10 largest locations without Florida

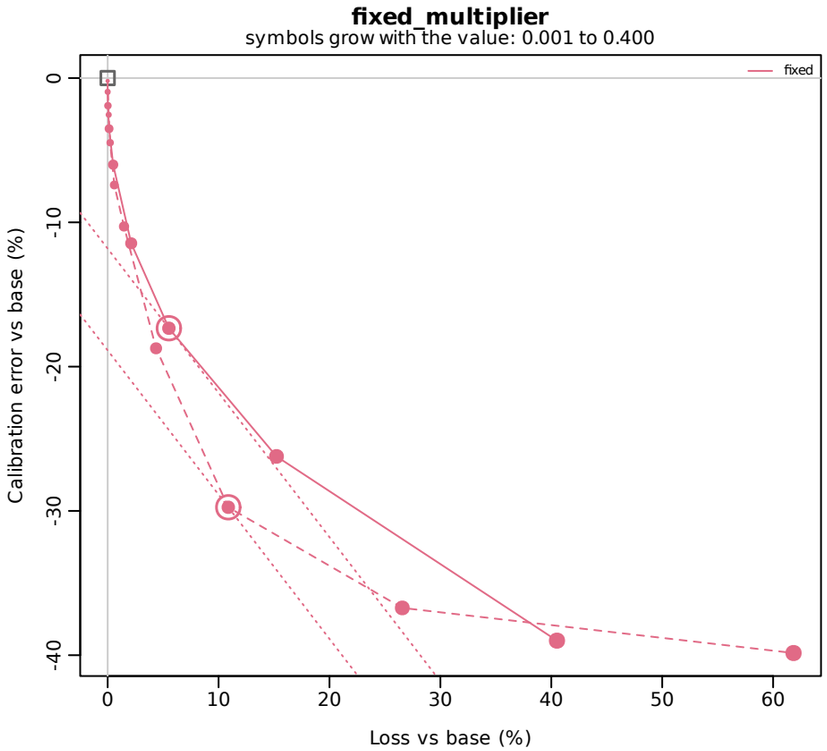

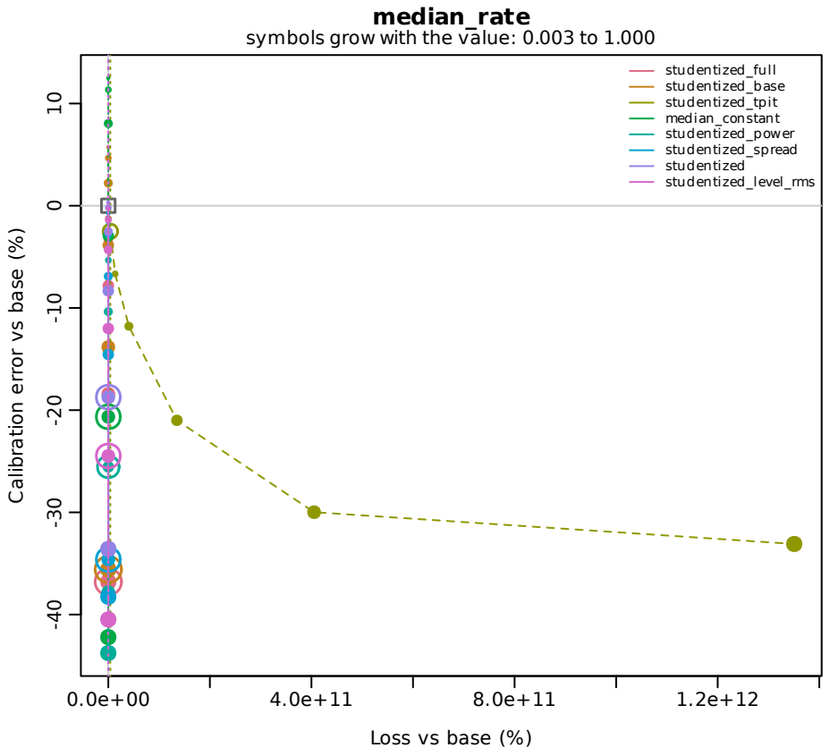

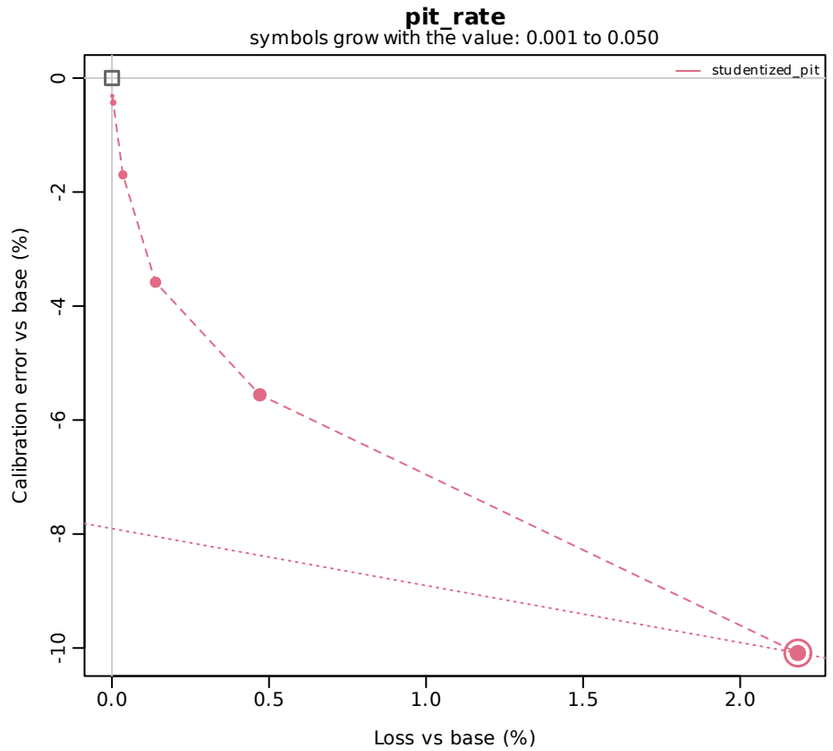


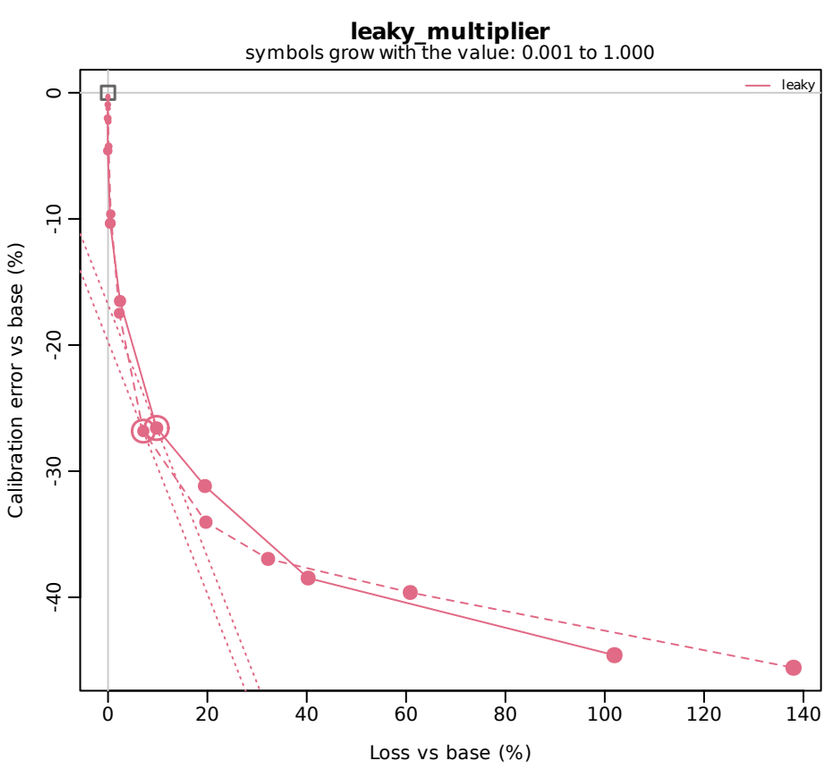

log1p tracker (loss of log(counts + 1))
identity tracker (loss in counts per 100k residents)
chosen value (circled)
equal sum of both changes through it
base forecasts (0, 0)
symbol size: grid value (larger = larger)


Calibration error against mean quantile loss, both relative to the base forecasts (means over locations and horizons) on the scale of each tracker; lower left is better


covid | base cmu_submission | feedback re-run | tuning period Nov 2024 to May 2025 | horizons -1 to 3 | 10 largest locations without Florida

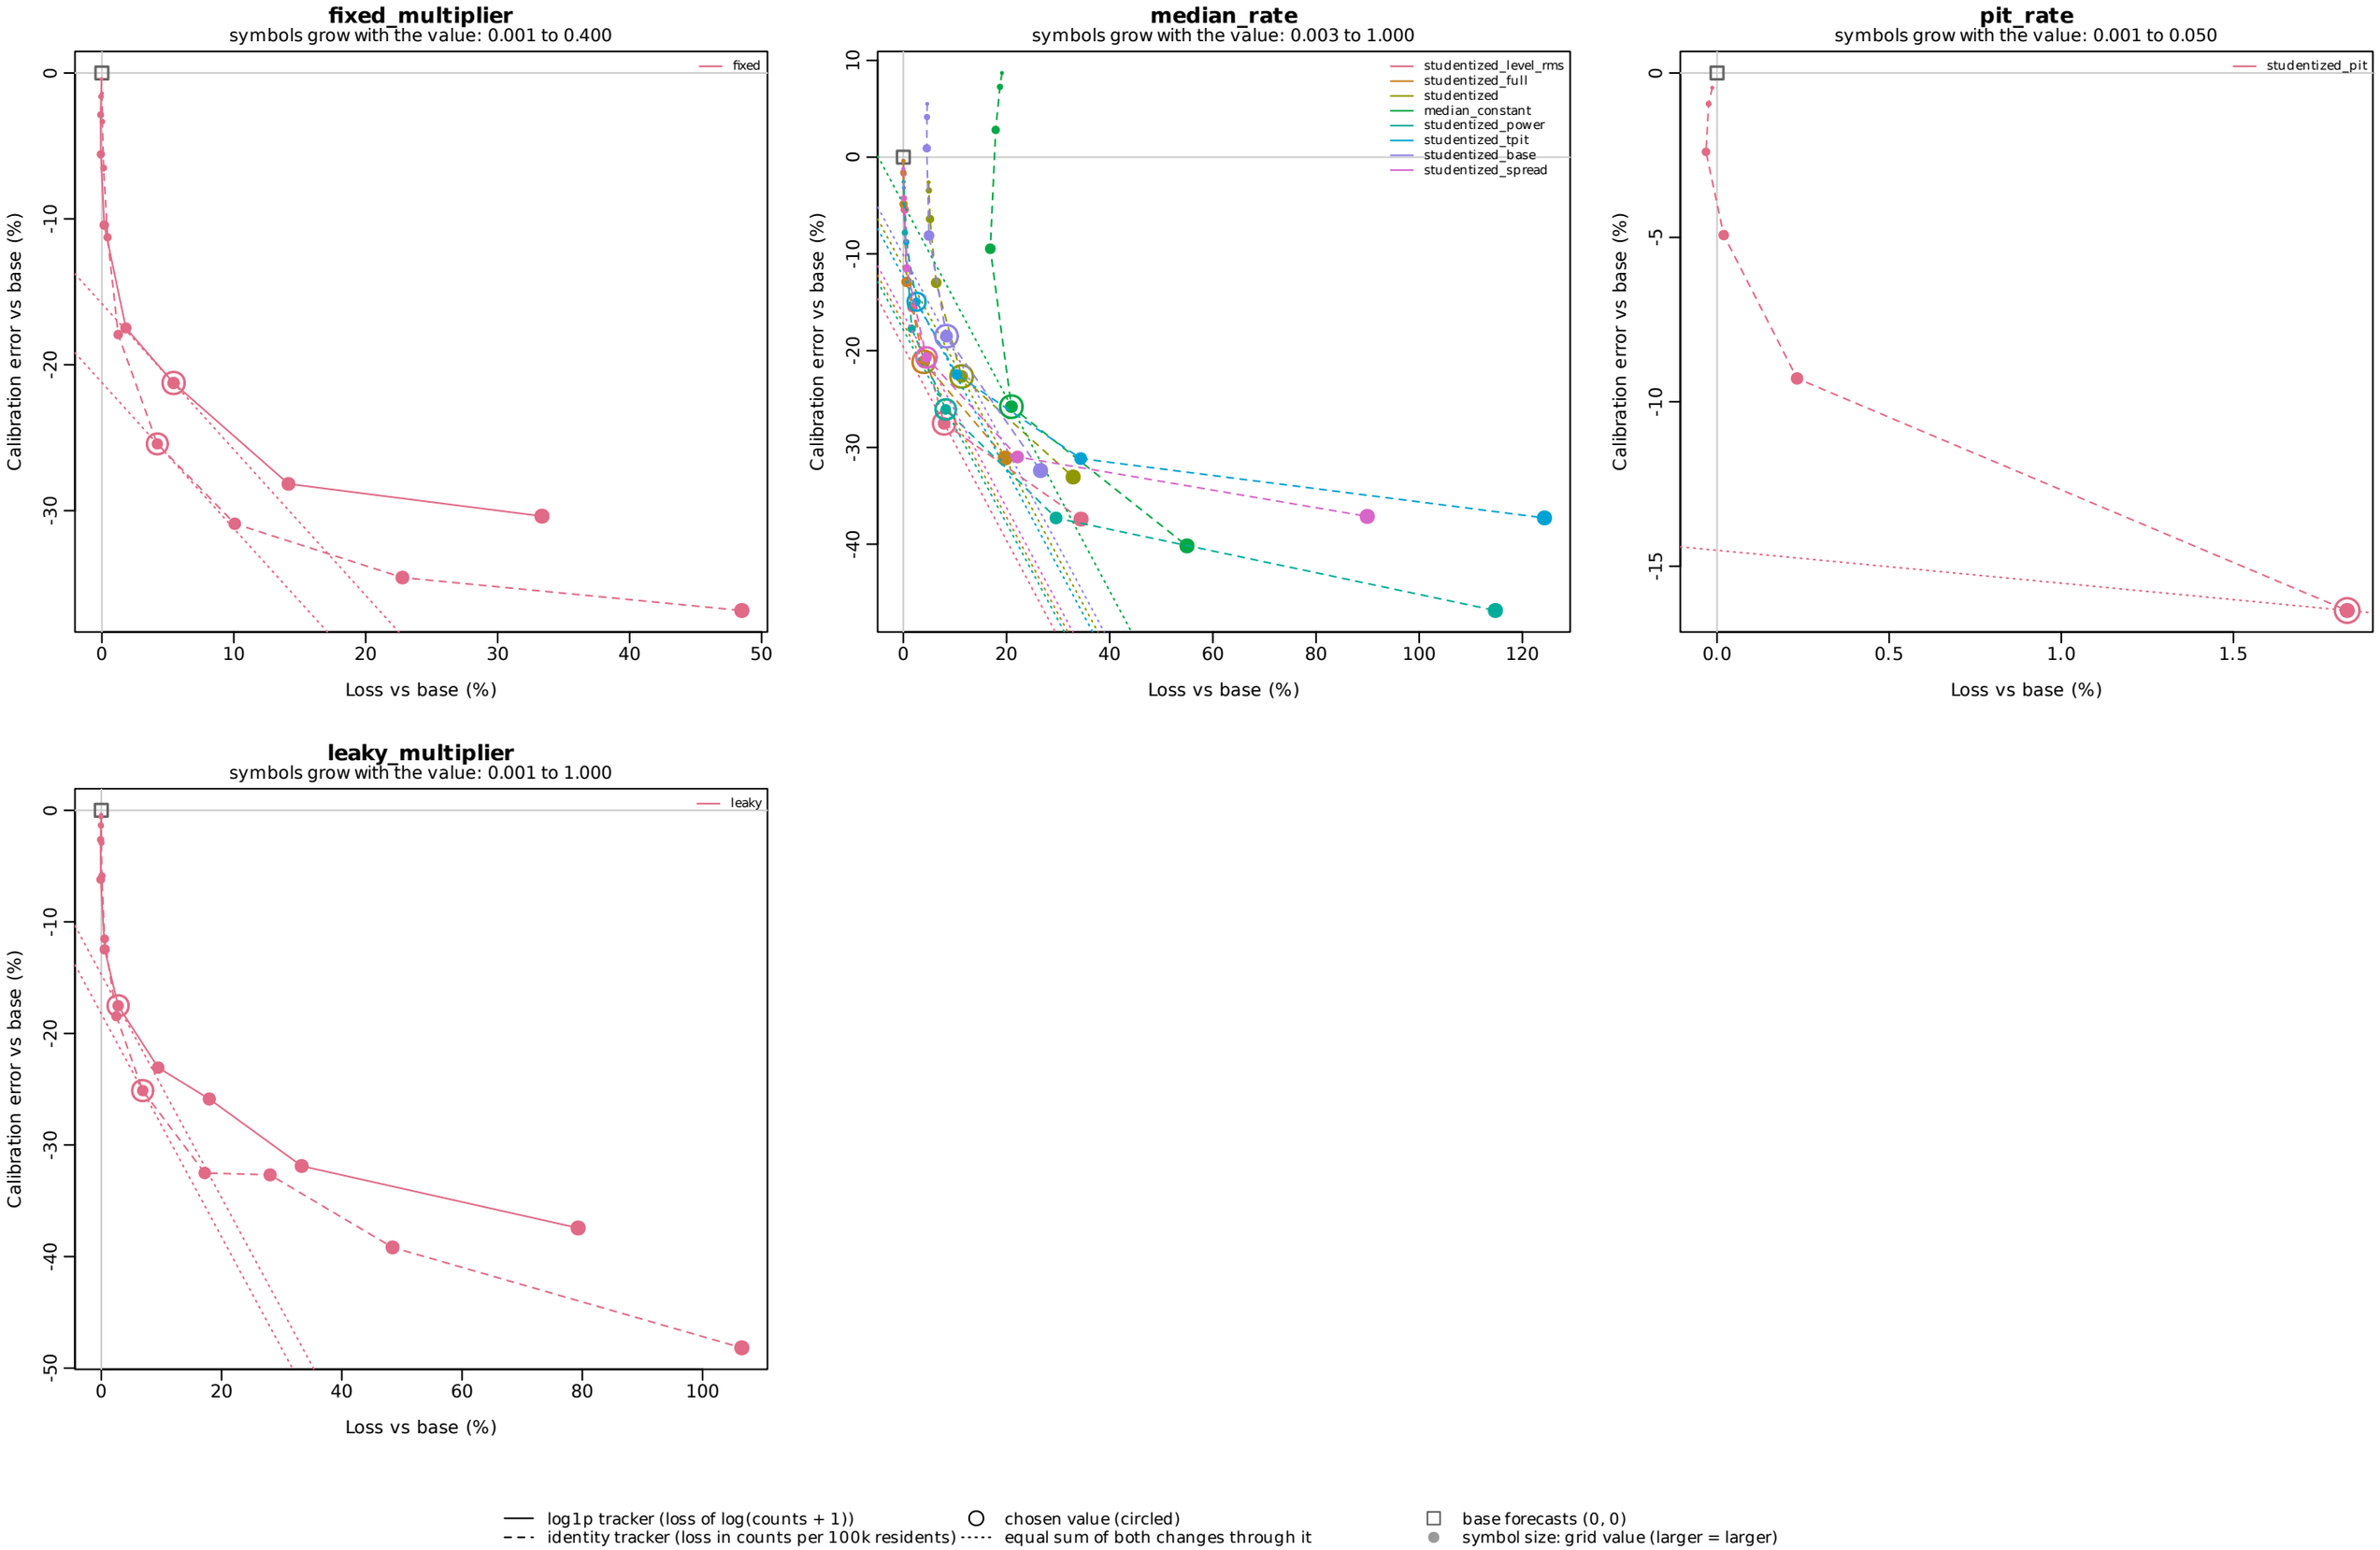



Calibration error against mean quantile loss, both relative to the base forecasts (means over locations and horizons) on the scale of each tracker; lower left is better

flu | base cmu_submission | feedback delay 0 | tuning period Nov 2024 to May 2025 | horizons -1 to 3 | 10 largest locations without Florida

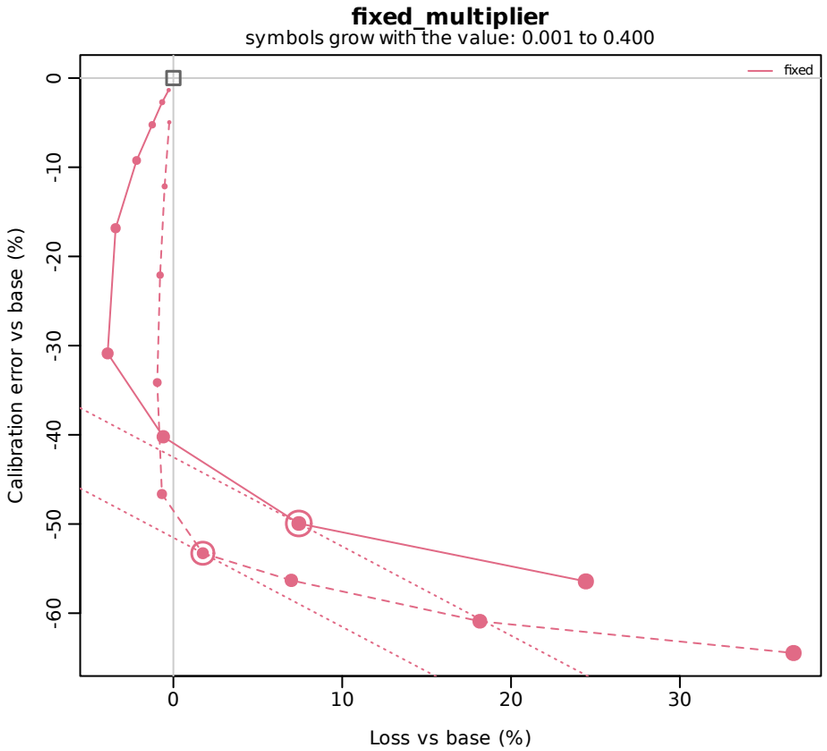

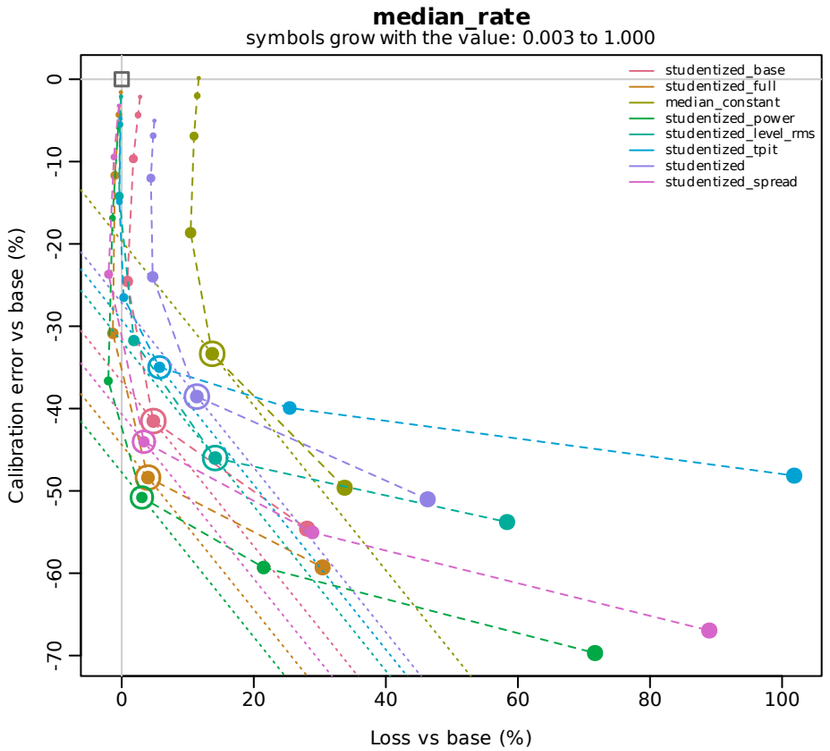

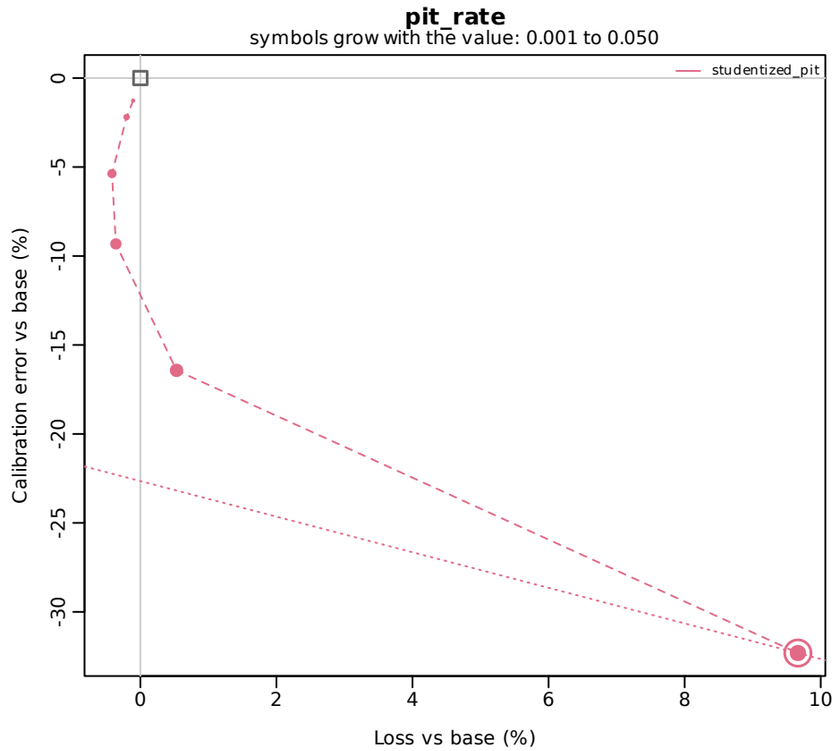


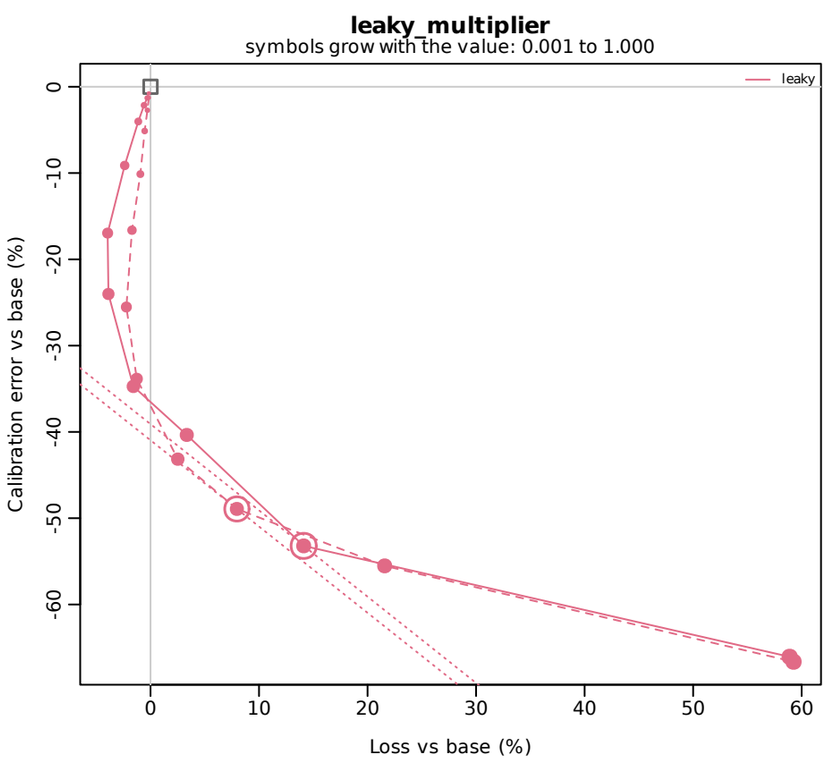



log1p tracker (loss of log(counts + 1))
identity tracker (loss in counts per 100k residents)
chosen value (circled)
equal sum of both changes through it
base forecasts (0, 0)
symbol size: grid value (larger = larger)


Calibration error against mean quantile loss, both relative to the base forecasts (means over locations and horizons) on the scale of each tracker; lower left is better

flu | base cmu_submission | feedback delay 1 | tuning period Nov 2024 to May 2025 | horizons -1 to 3 | 10 largest locations without Florida

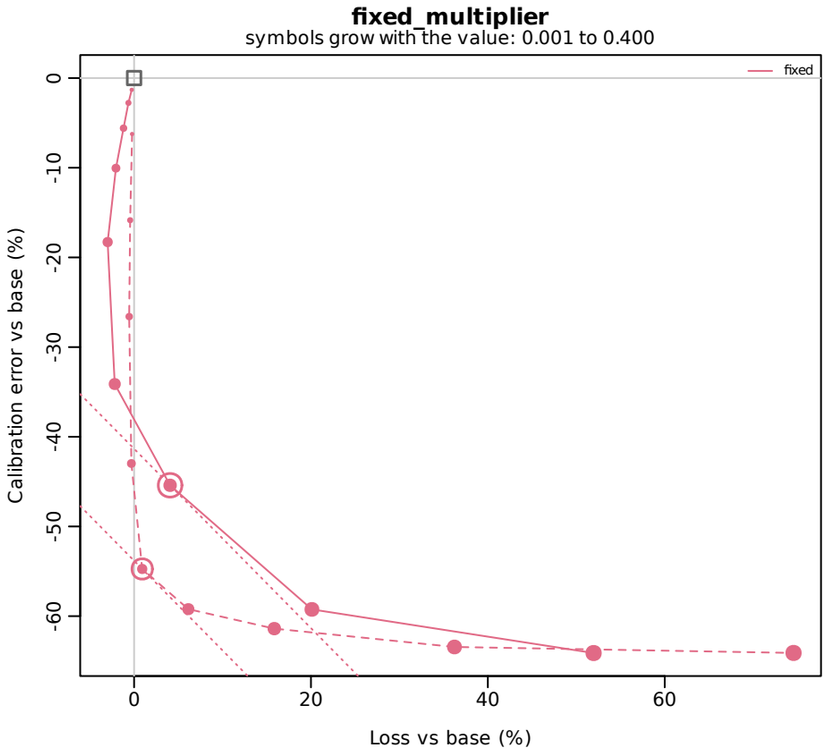

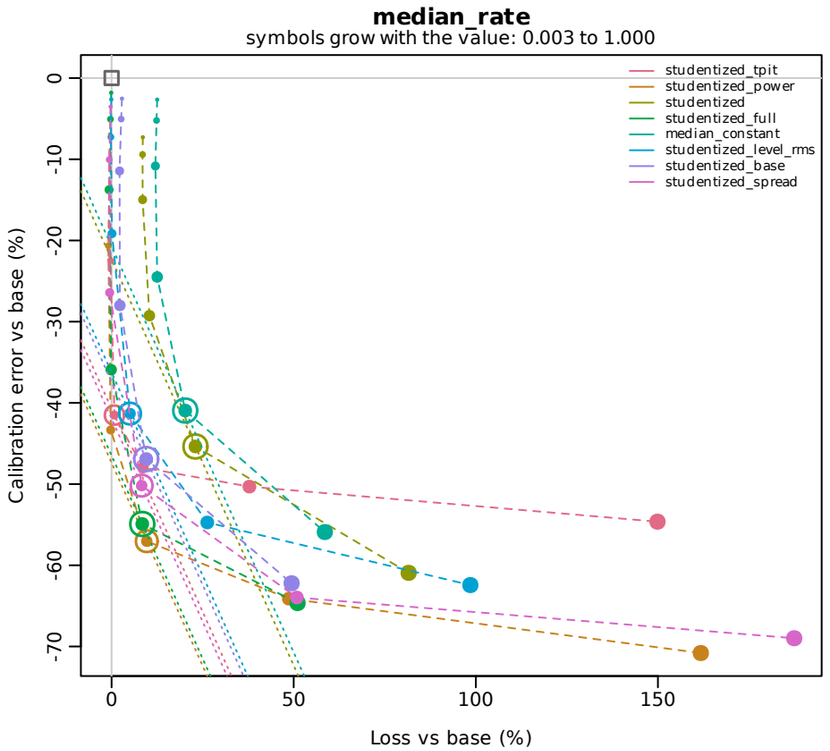

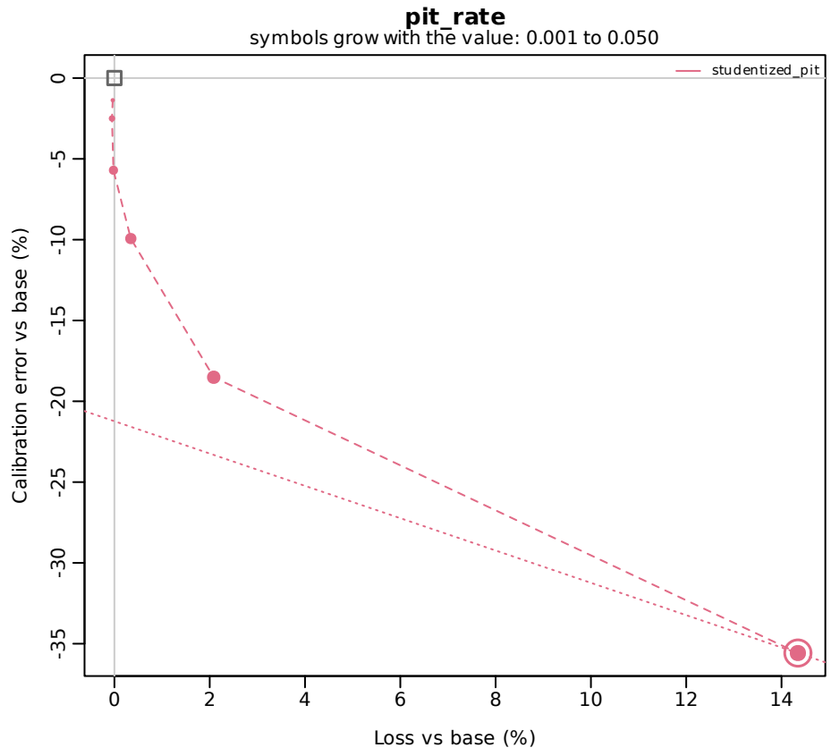


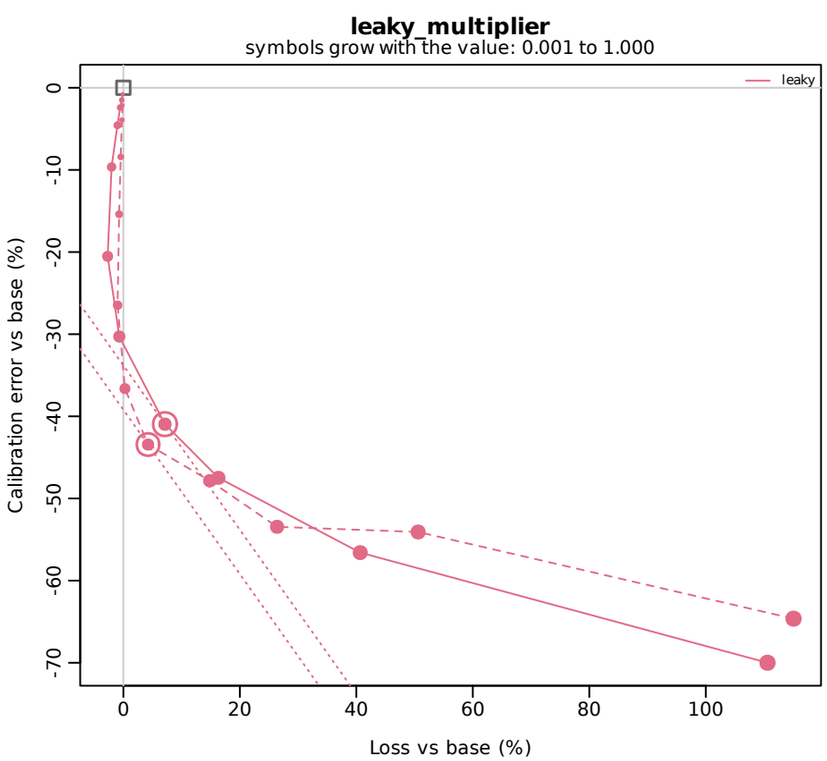



log1p tracker (loss of log(counts + 1))
identity tracker (loss in counts per 100k residents)
chosen value (circled)
equal sum of both changes through it
base forecasts (0, 0)
symbol size: grid value (larger = larger)


Calibration error against mean quantile loss, both relative to the base forecasts (means over locations and horizons) on the scale of each tracker; lower left is better

flu | base cmu_submission | feedback re-run | tuning period Nov 2024 to May 2025 | horizons -1 to 3 | 10 largest locations without Florida

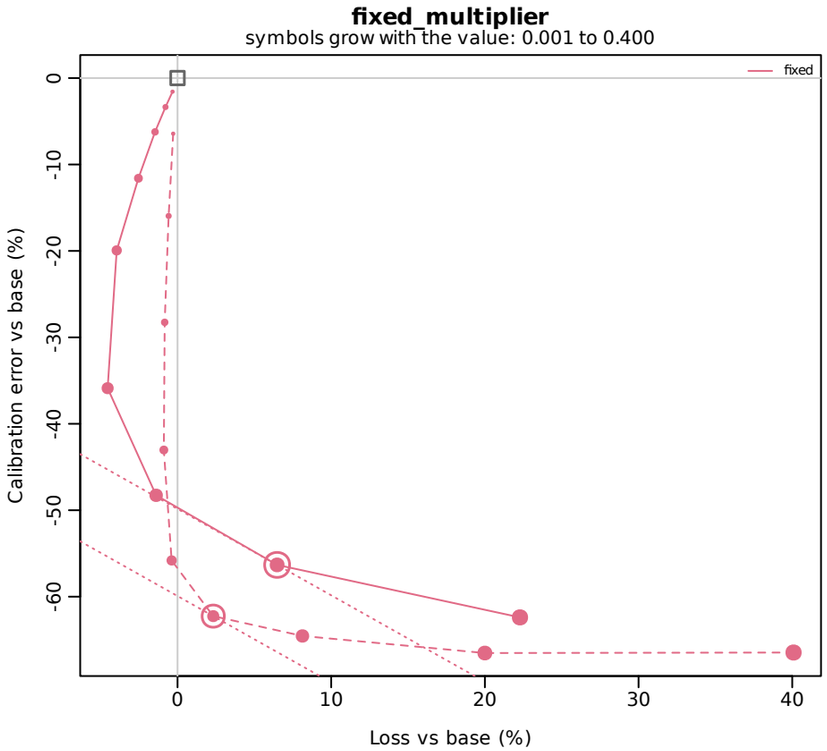

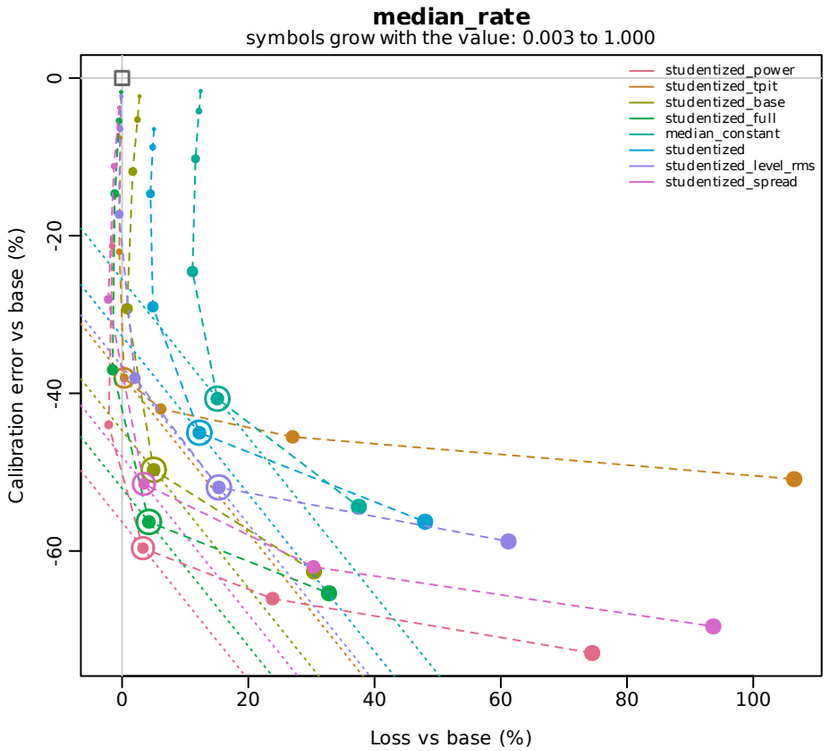

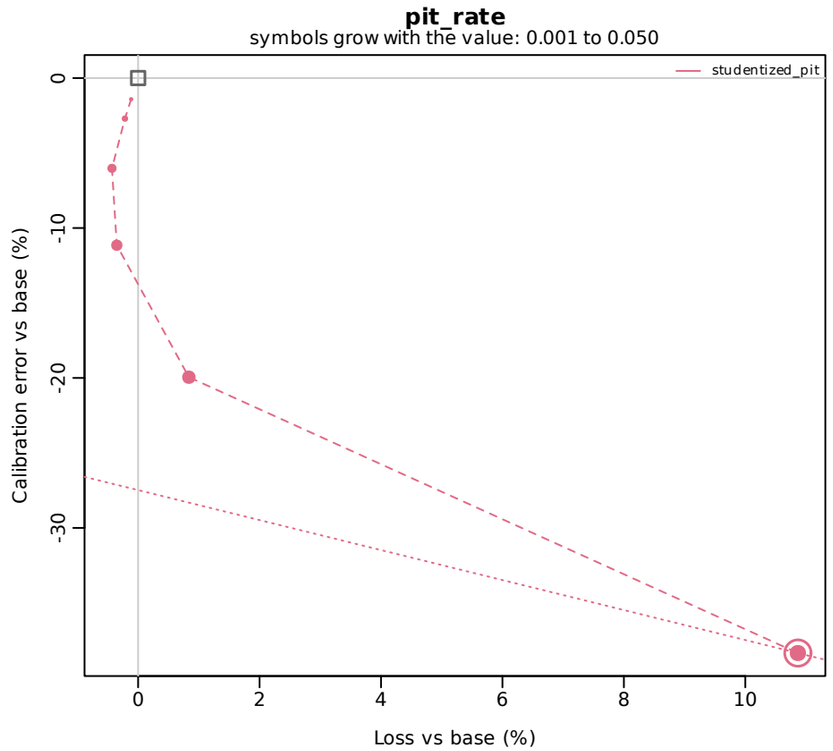

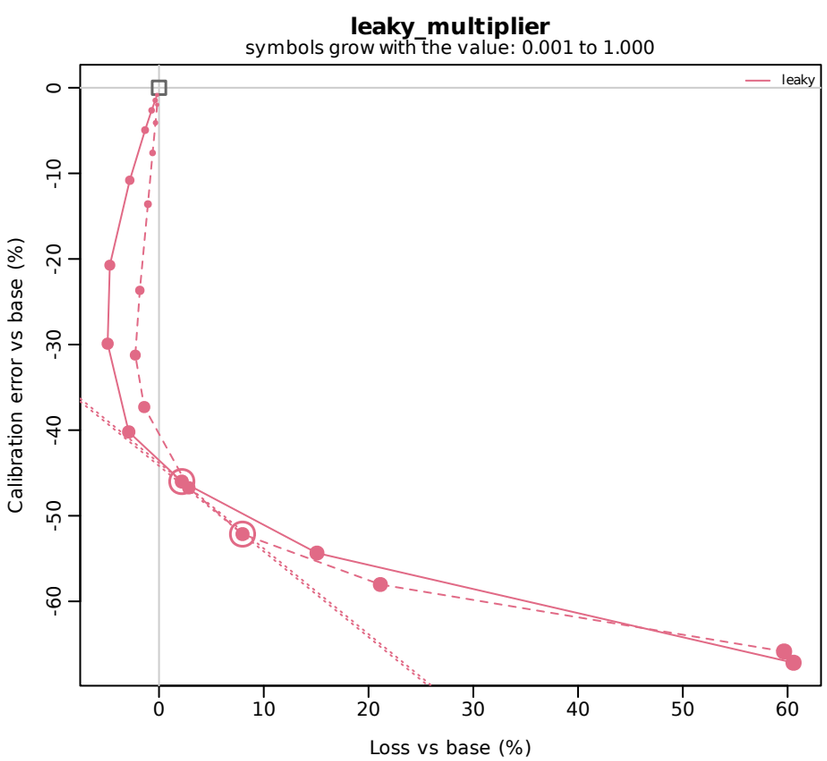

log1p tracker (loss of log(counts + 1))
identity tracker (loss in counts per 100k residents)
chosen value (circled)
equal sum of both changes through it
base forecasts (0, 0)
symbol size: grid value (larger = larger)

Calibration error against mean quantile loss, both relative to the base forecasts (means over locations and horizons) on the scale of each tracker; lower left is better