



United States | Fixed-rate MultiQT: loss and calibration before and after the peak


Count tracking | eta = m * S0, S0 frozen after 20 released rows (warmup replayed) | Feedback delay 2 week(s) | Scored against latest reported counts in counts per 100k residents per location

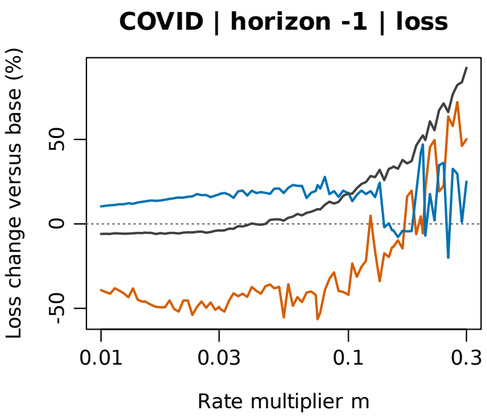


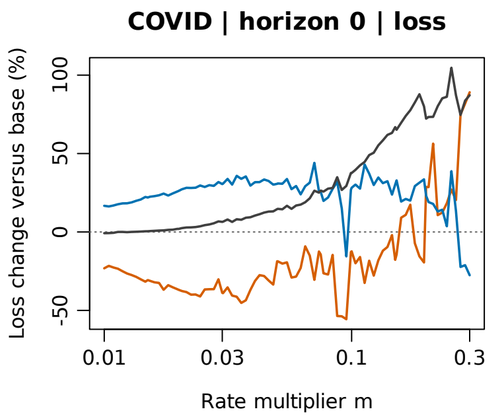


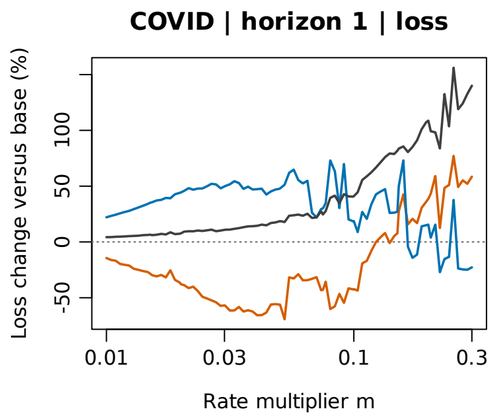


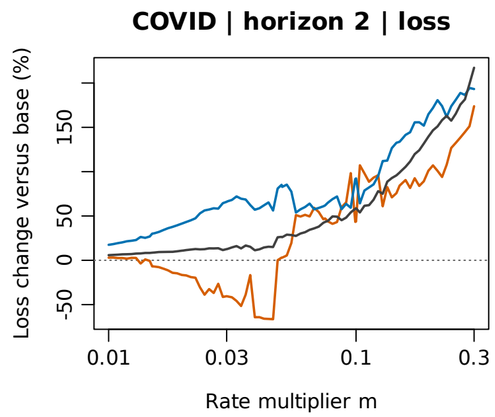


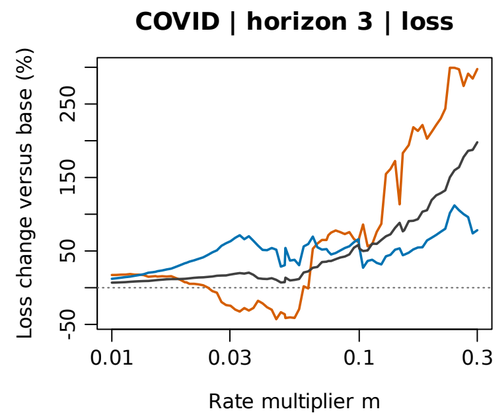


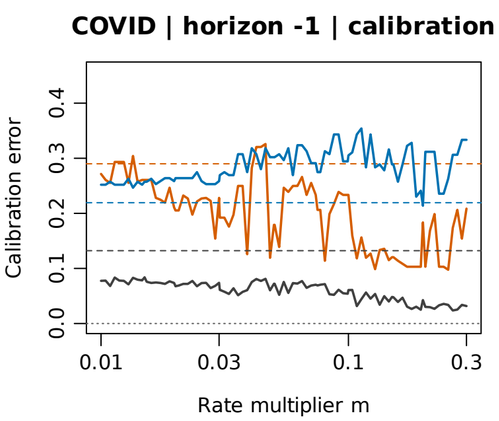


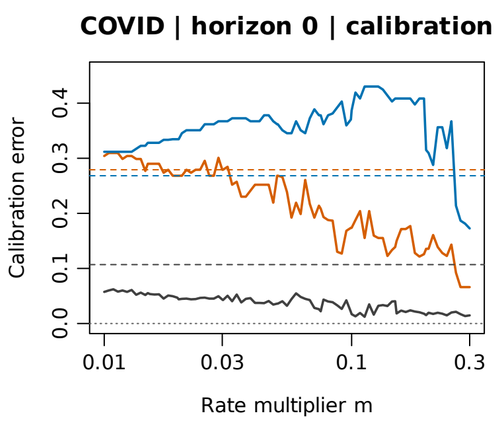


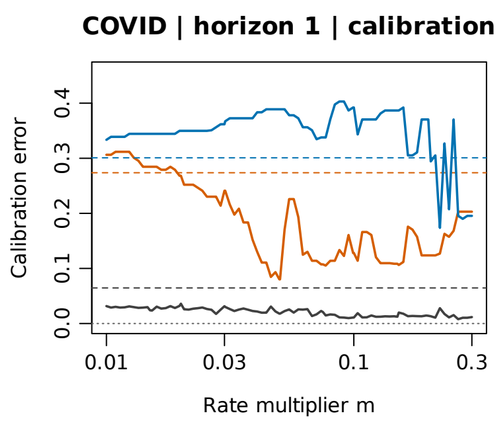


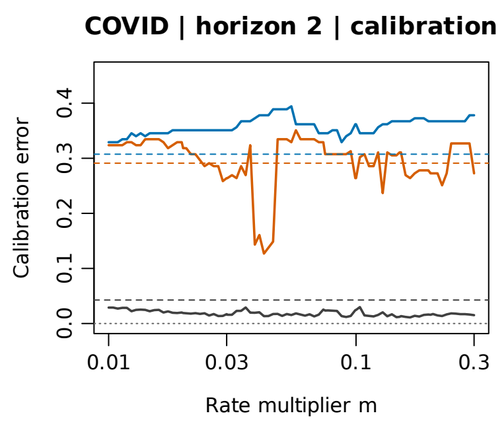


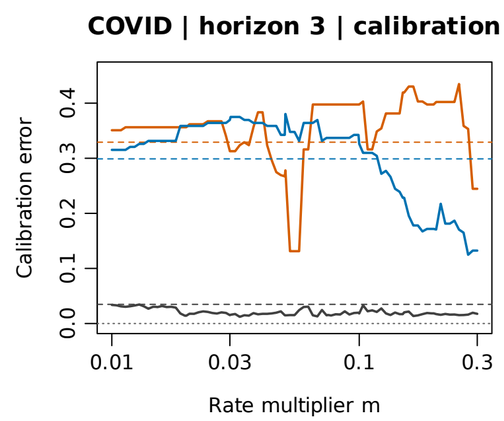


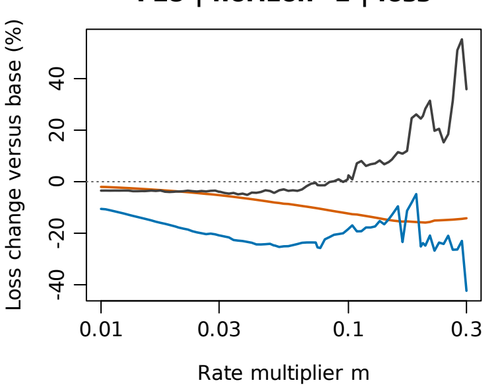


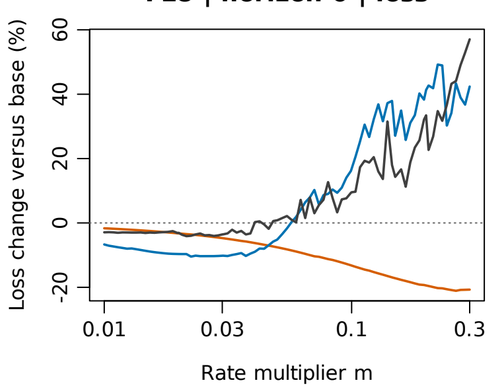


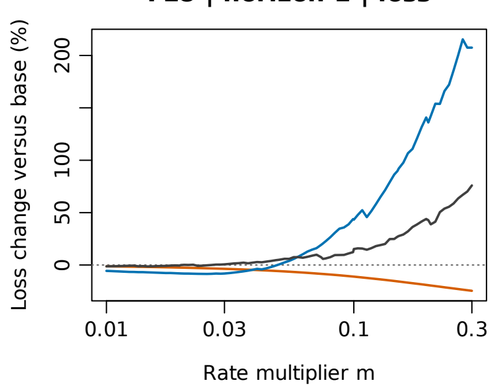


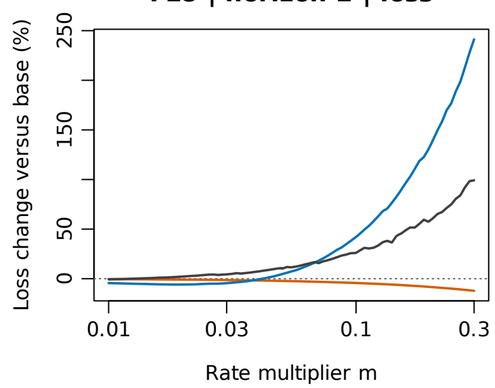


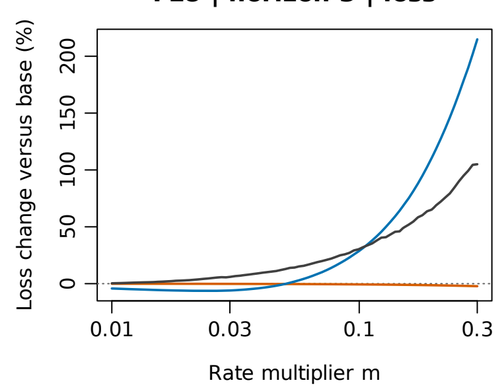


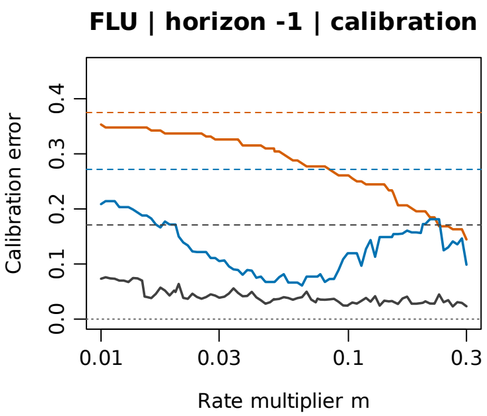

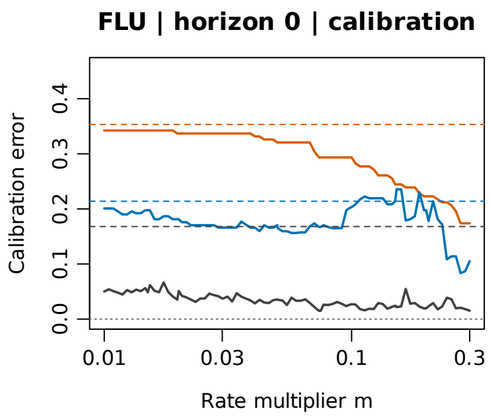

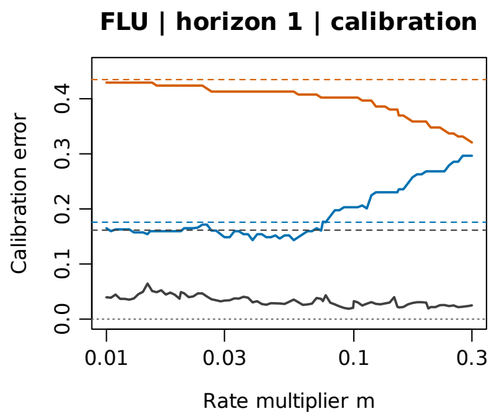

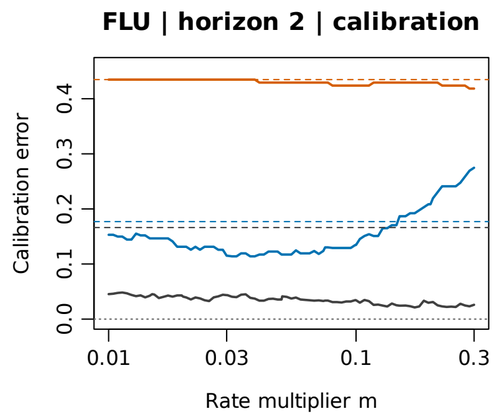

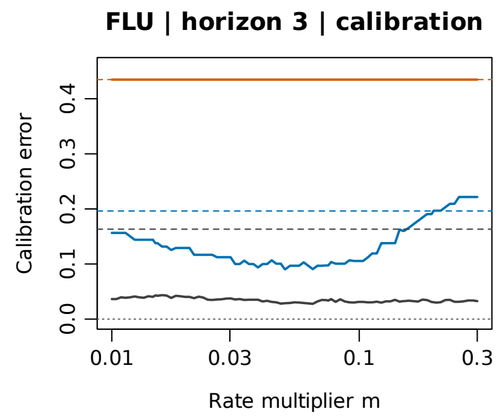



Before peak (weeks -7 to 0) | After peak (weeks 1 to 8) | Overall (full history)


Loss: % change from m = 0 in the same phase (negative is better). Calibration: mean |coverage - alpha| over levels (lower is better); dashed: m = 0.


California | Fixed-rate MultiQT: loss and calibration before and after the peak


Count tracking | eta = m * S0, S0 frozen after 20 released rows (warmup replayed) | Feedback delay 2 week(s) | Scored against latest reported counts in counts per 100k residents per location

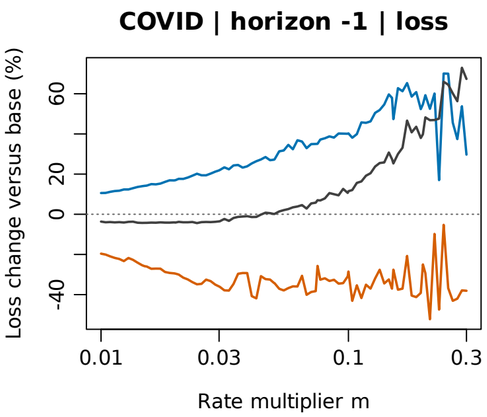


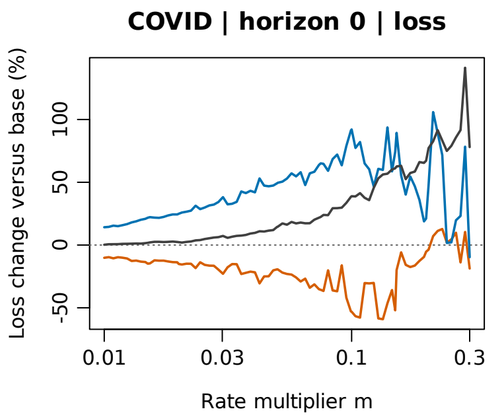


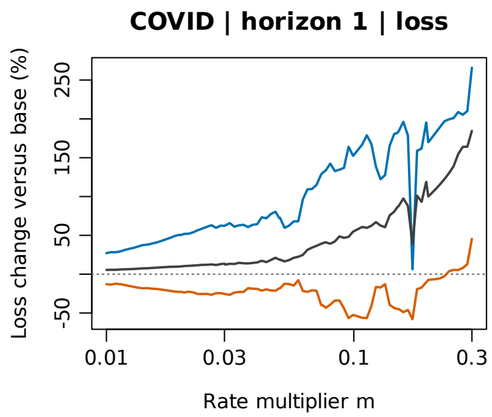


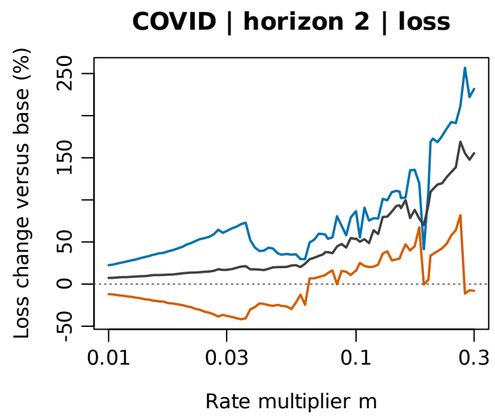


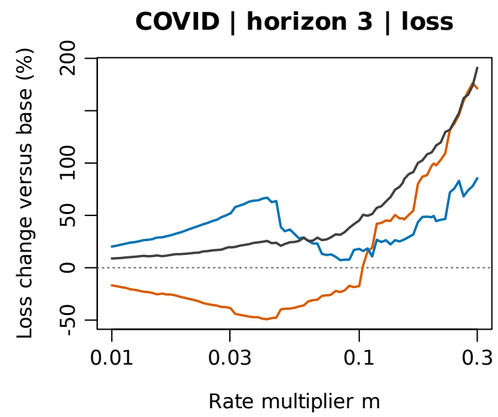


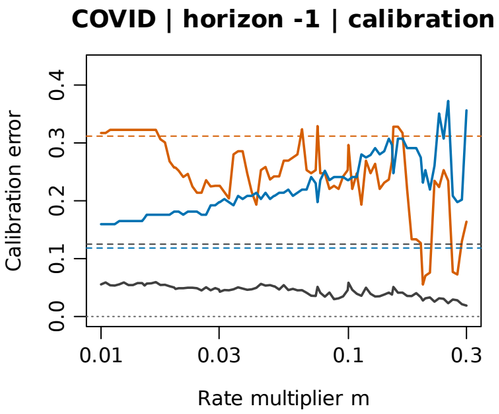


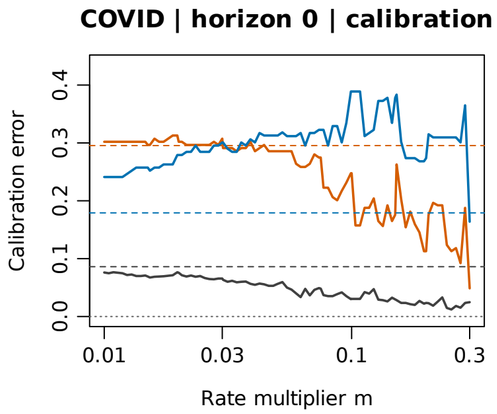


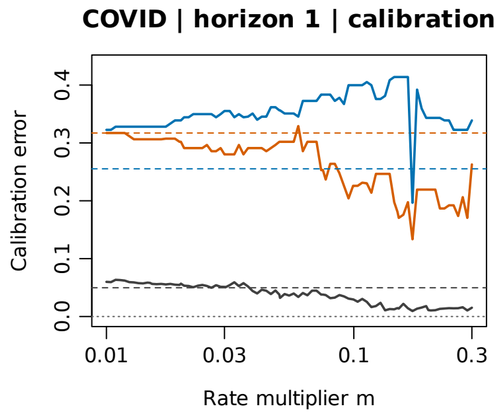


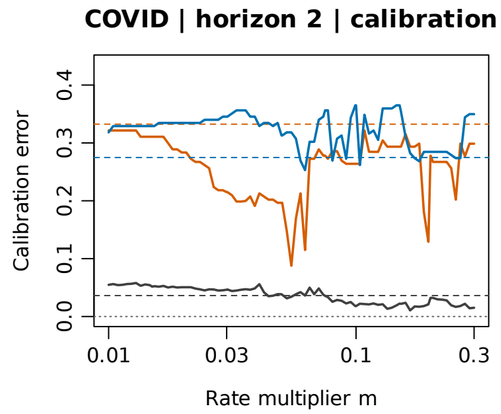


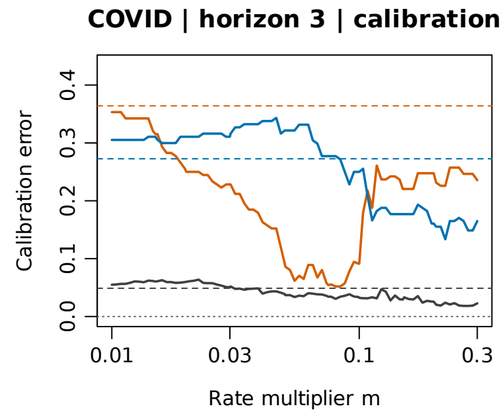


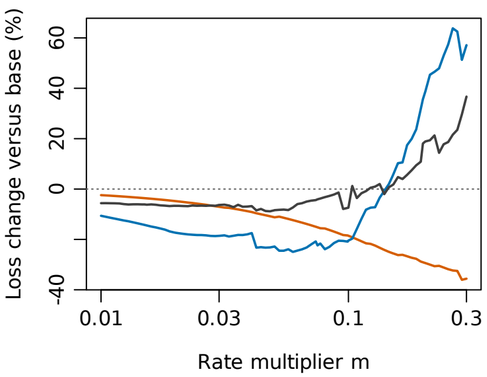


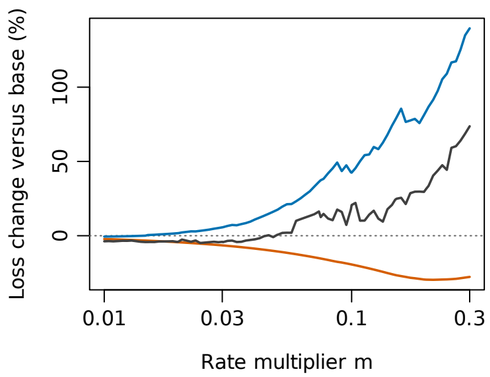


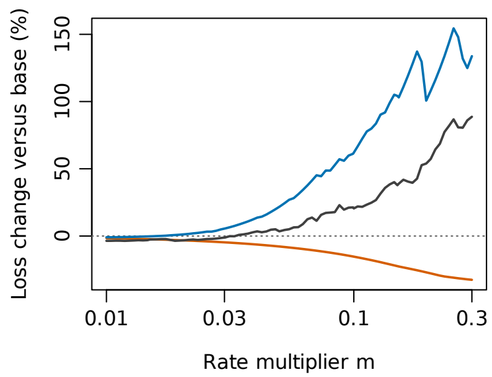


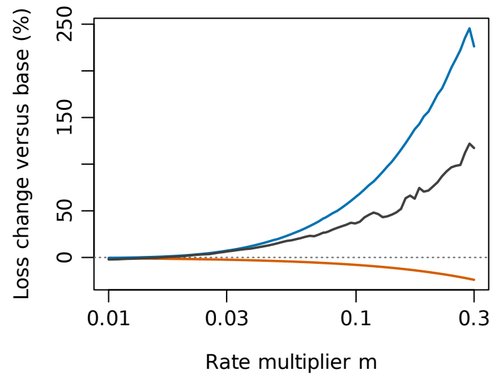


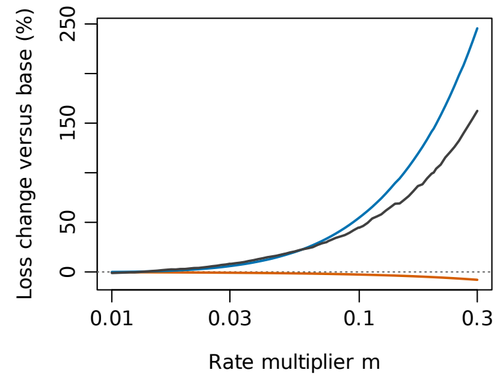


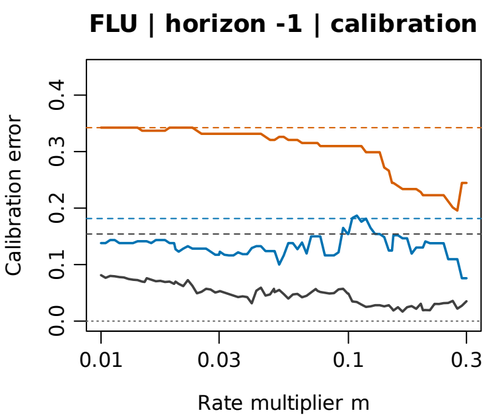

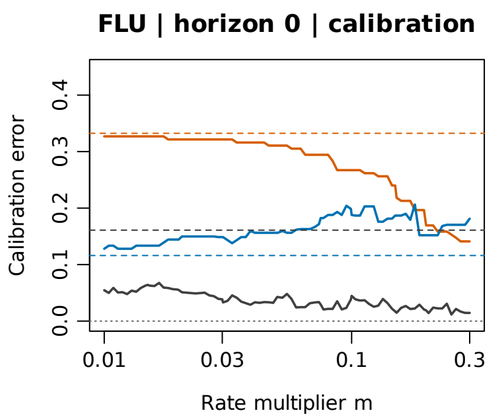

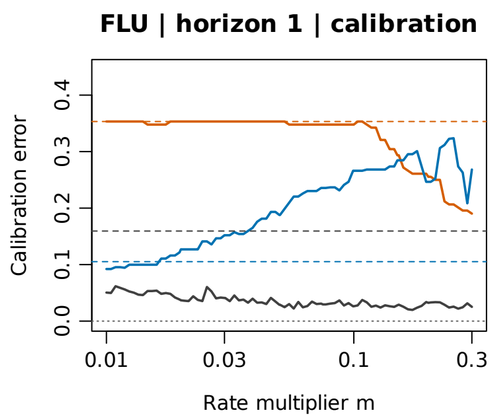

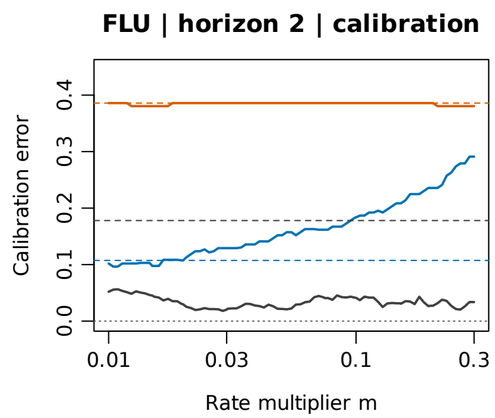

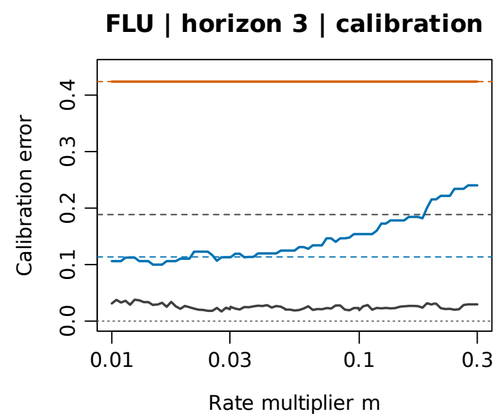



Before peak (weeks -7 to 0) | After peak (weeks 1 to 8) | Overall (full history)


Loss: % change from m = 0 in the same phase (negative is better). Calibration: mean |coverage - alpha| over levels (lower is better); dashed: m = 0.


Texas | Fixed-rate MultiQT: loss and calibration before and after the peak

Count tracking | eta = m * S0, S0 frozen after 20 released rows (warmup replayed) | Feedback delay 2 week(s) | Scored against latest reported counts in counts per 100k residents per location

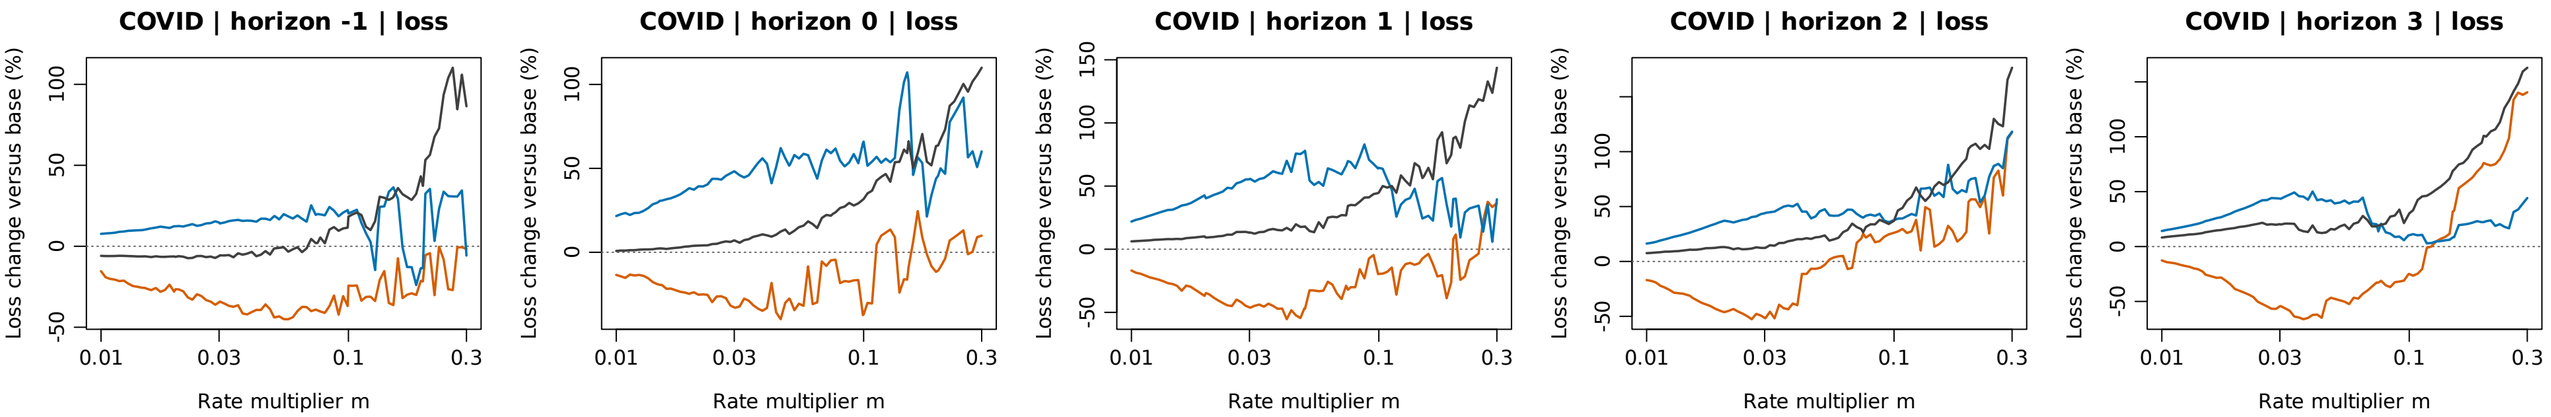

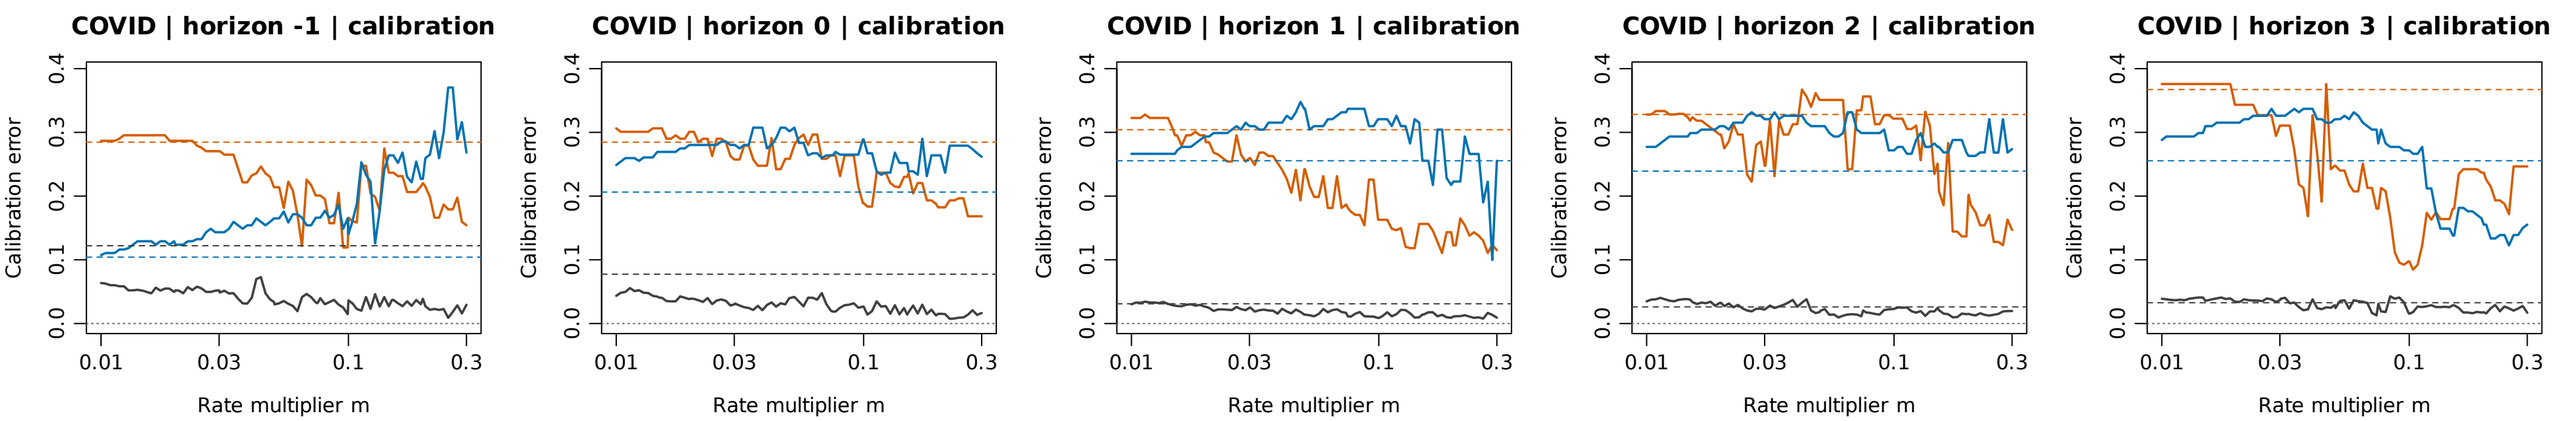

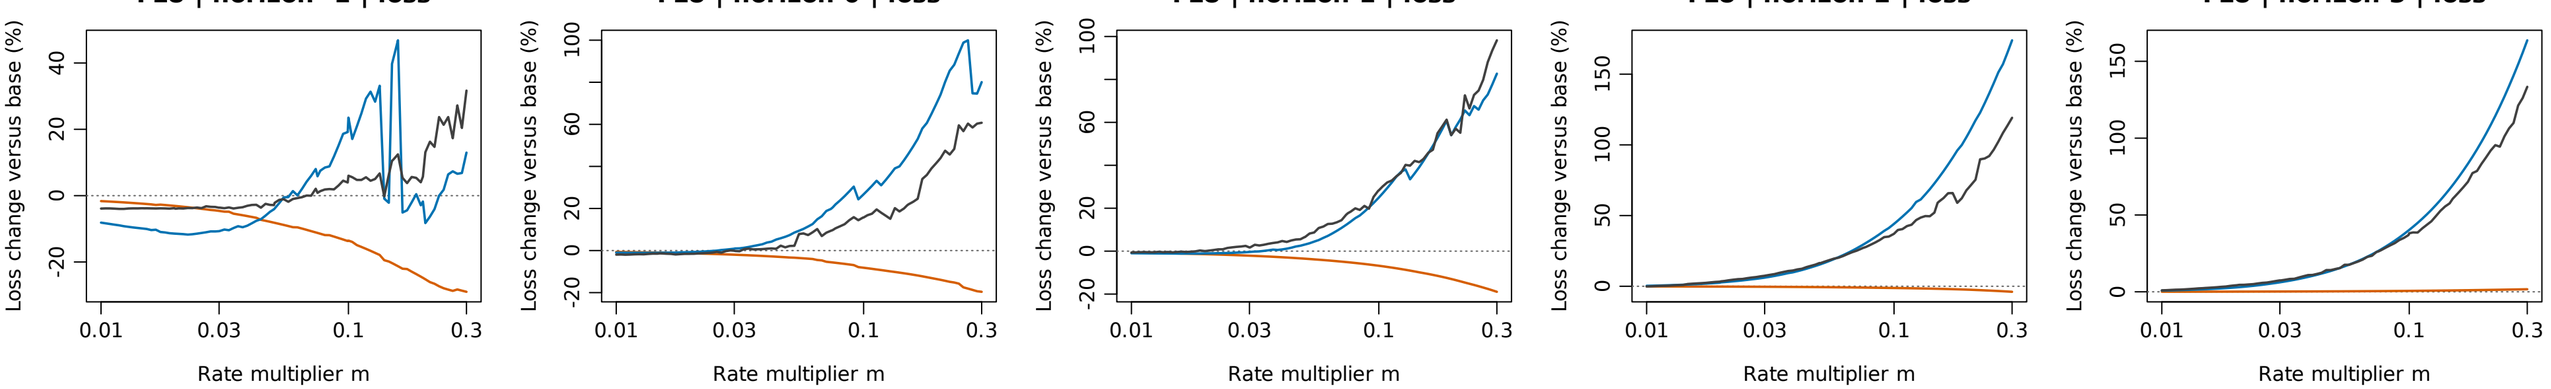

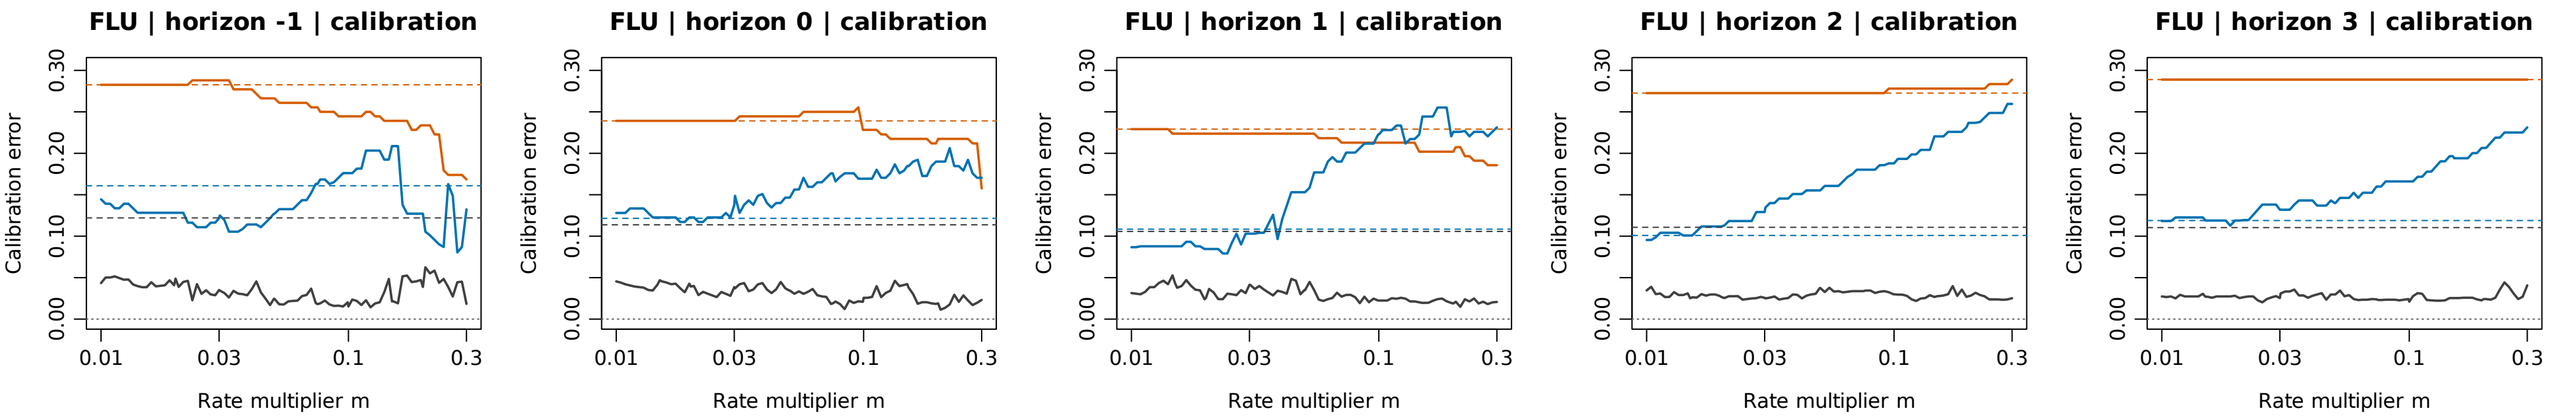



Before peak (weeks -7 to 0) After peak (weeks 1 to 8) Overall (full history)

Loss: % change from m = 0 in the same phase (negative is better). Calibration: mean |coverage - alpha| over levels (lower is better); dashed: m = 0.

New York | Fixed-rate MultiQT: loss and calibration before and after the peak

Count tracking | eta = m * S0, S0 frozen after 20 released rows (warmup replayed) | Feedback delay 2 week(s) | Scored against latest reported counts in counts per 100k residents per location

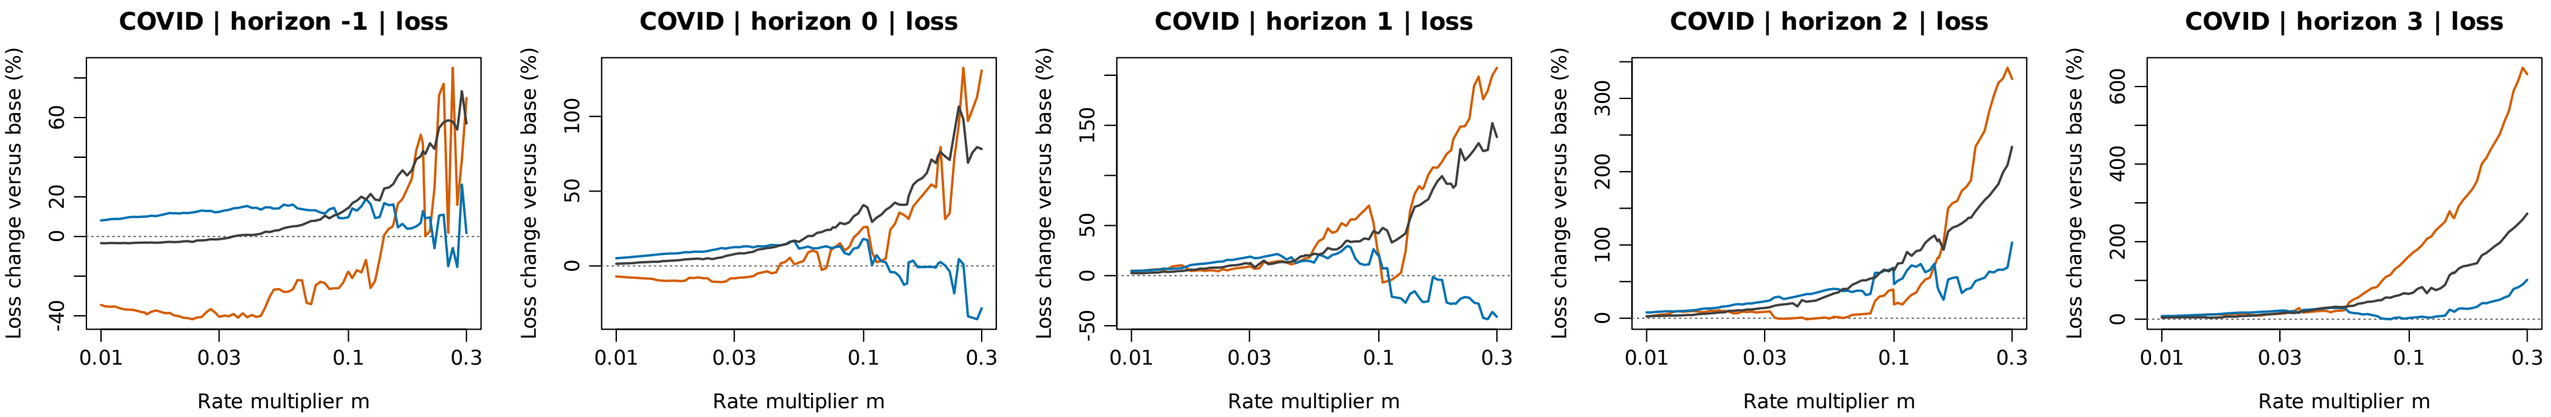

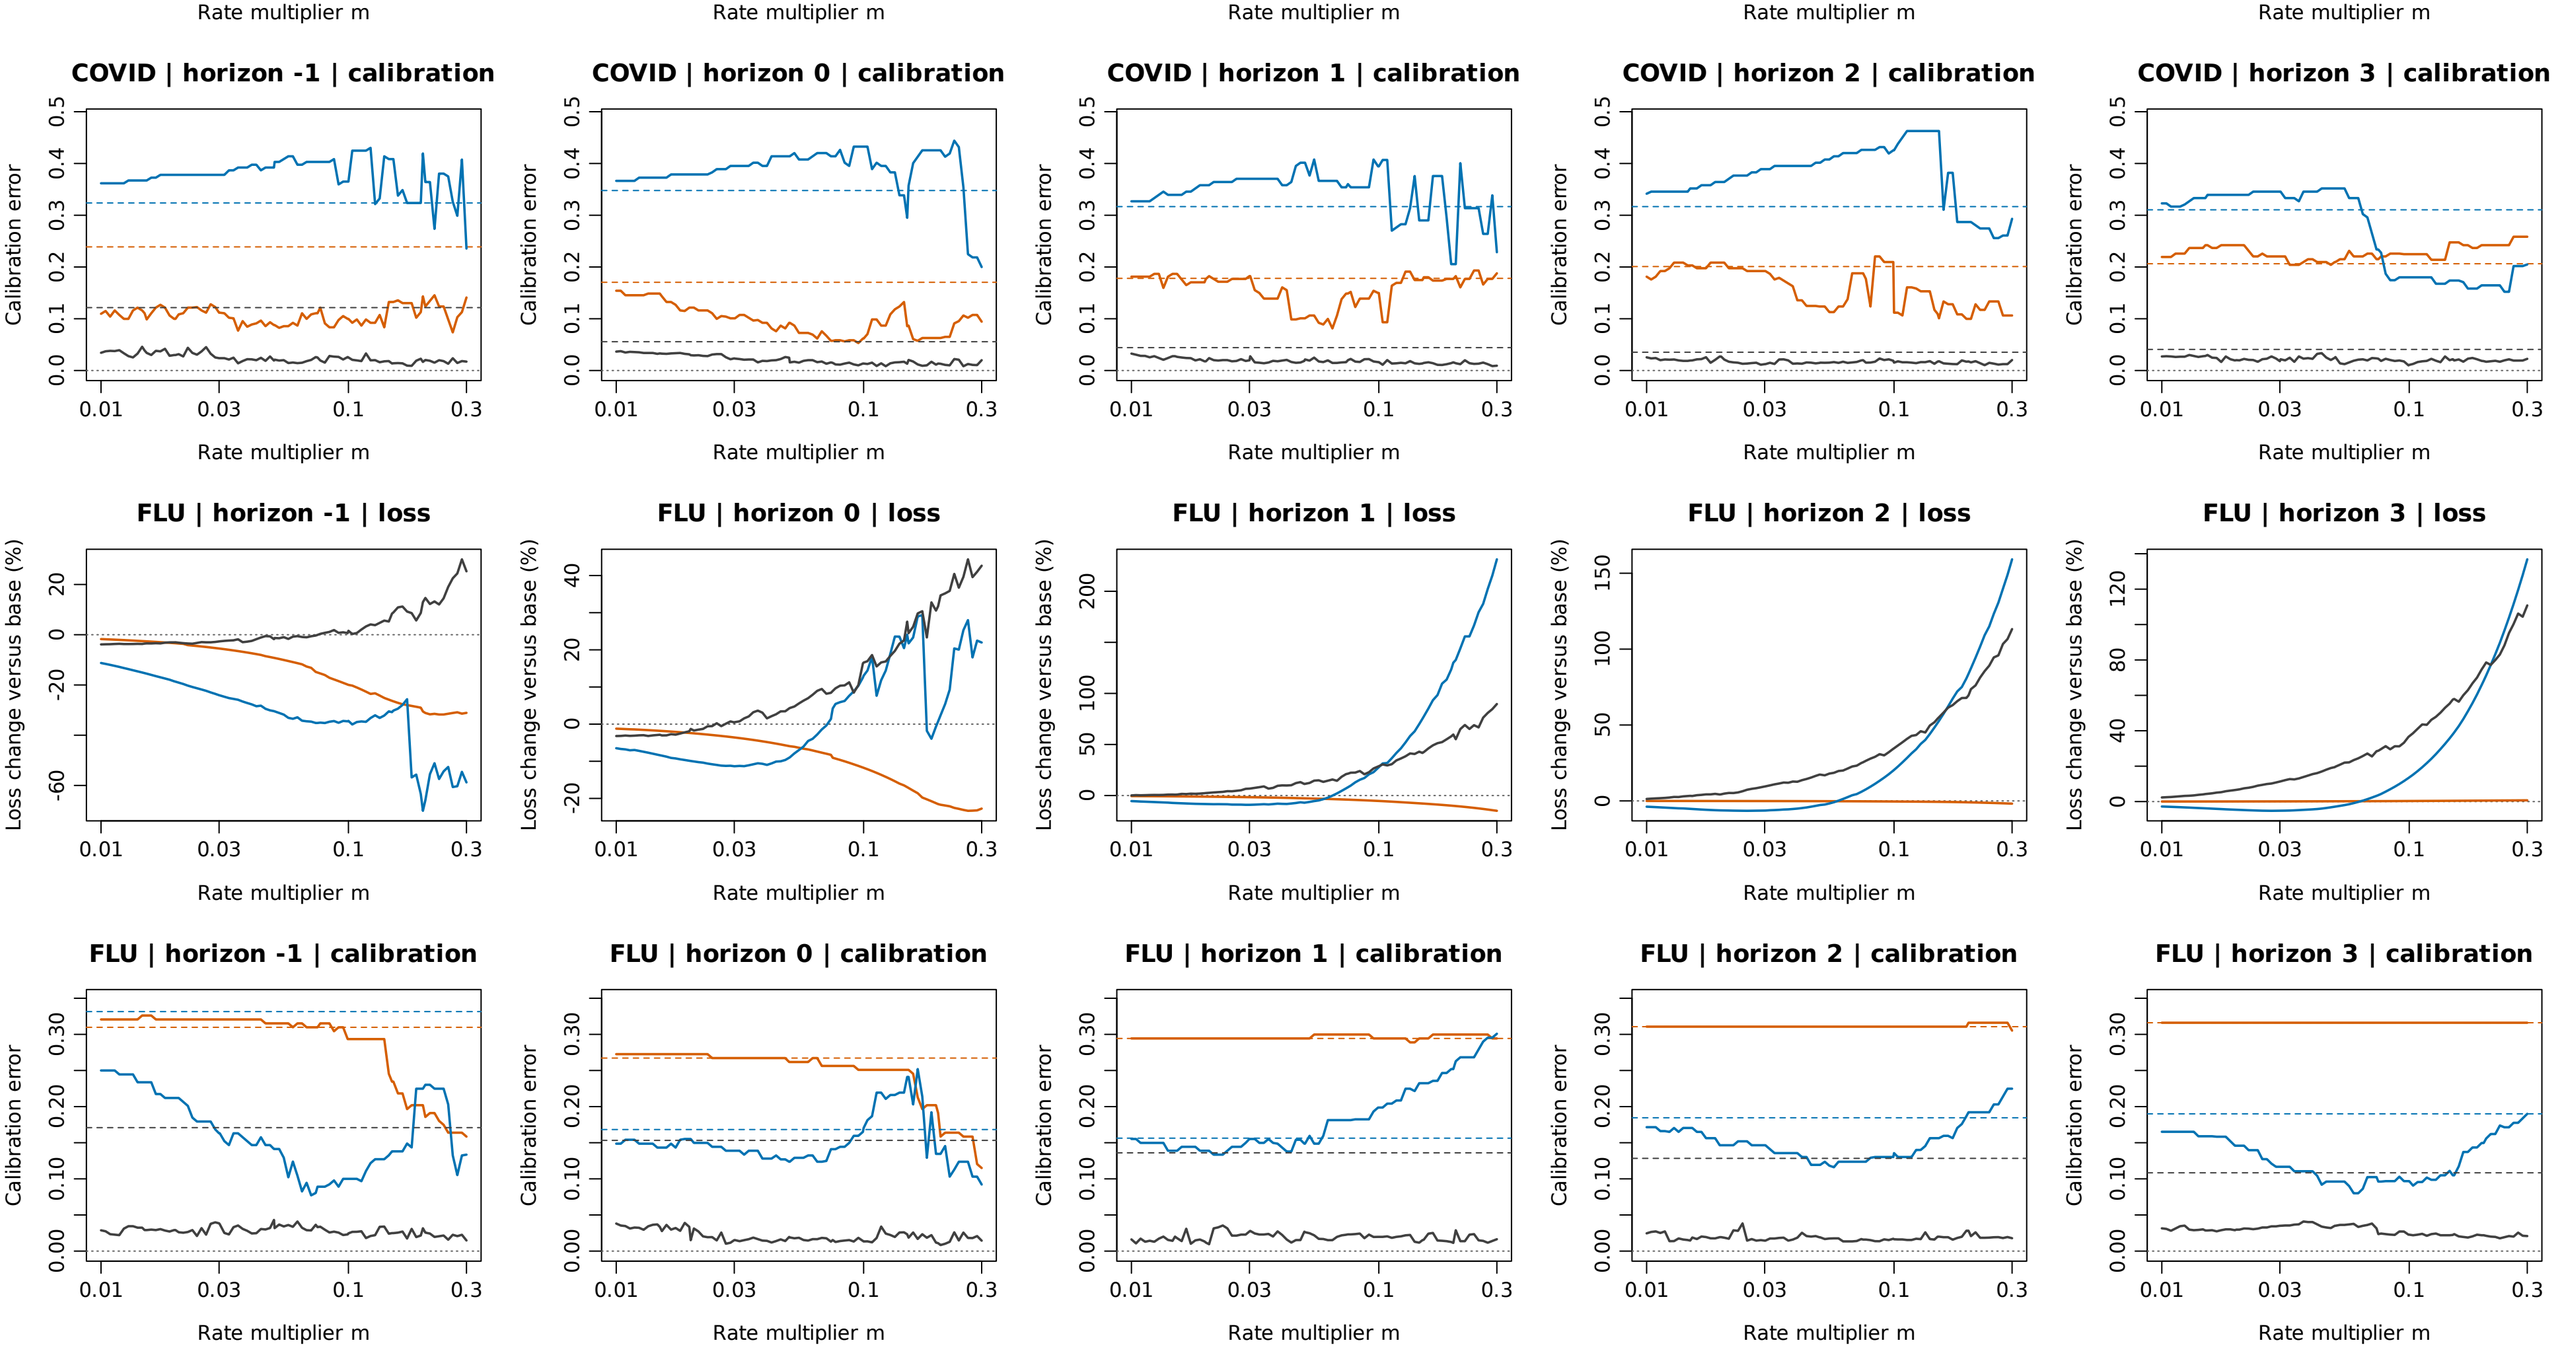



Before peak (weeks -7 to 0) After peak (weeks 1 to 8) Overall (full history)


Loss: % change from m = 0 in the same phase (negative is better). Calibration: mean |coverage - alpha| over levels (lower is better); dashed: m = 0.


Pennsylvania | Fixed-rate MultiQT: loss and calibration before and after the peak

Count tracking | eta = m * S0, S0 frozen after 20 released rows (warmup replayed) | Feedback delay 2 week(s) | Scored against latest reported counts in counts per 100k residents per location

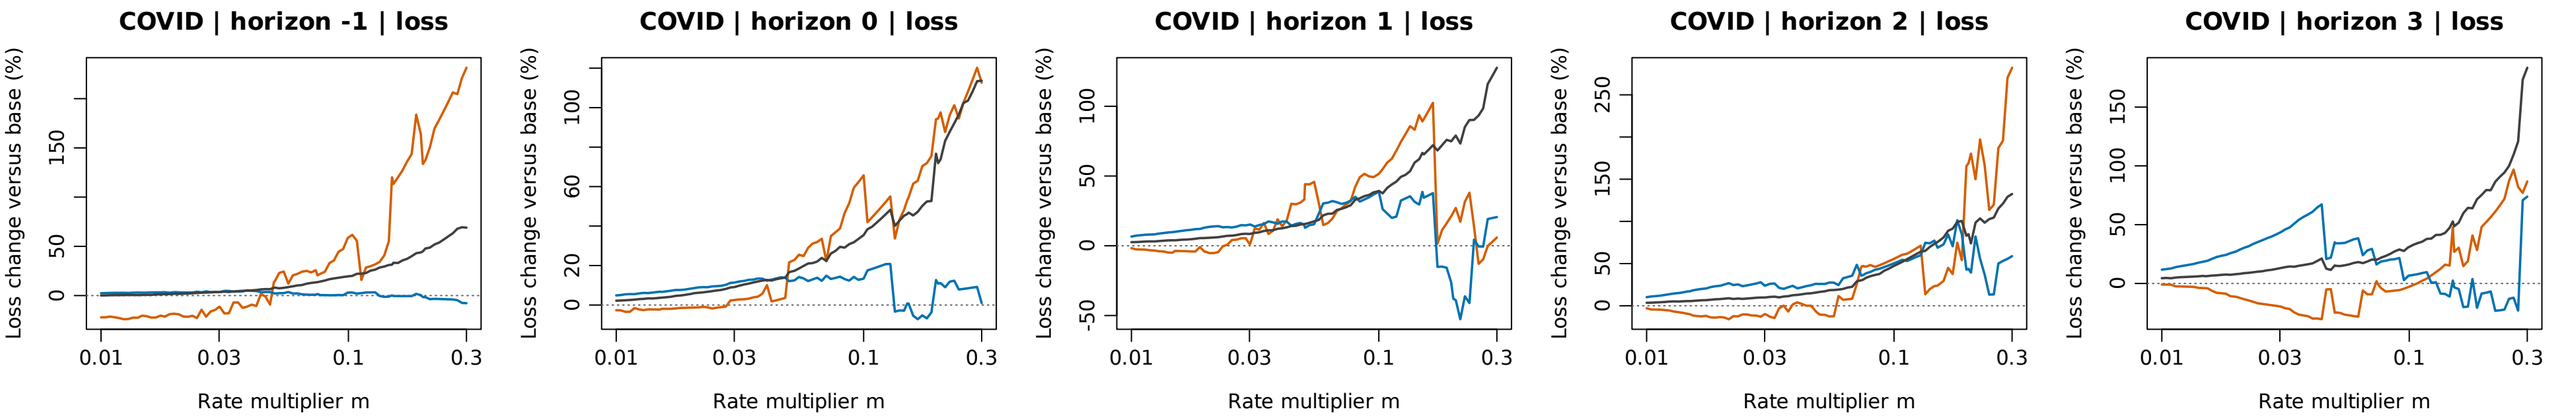

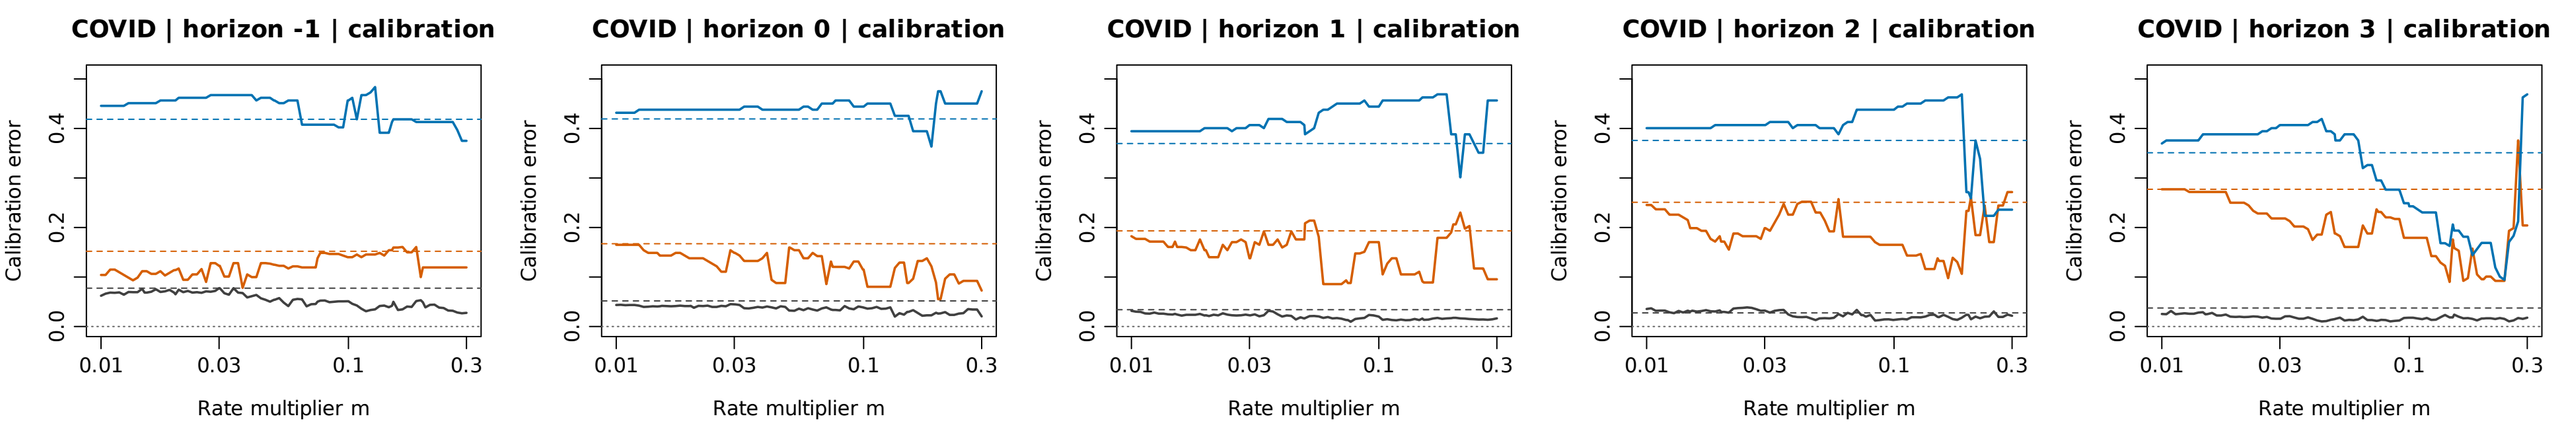

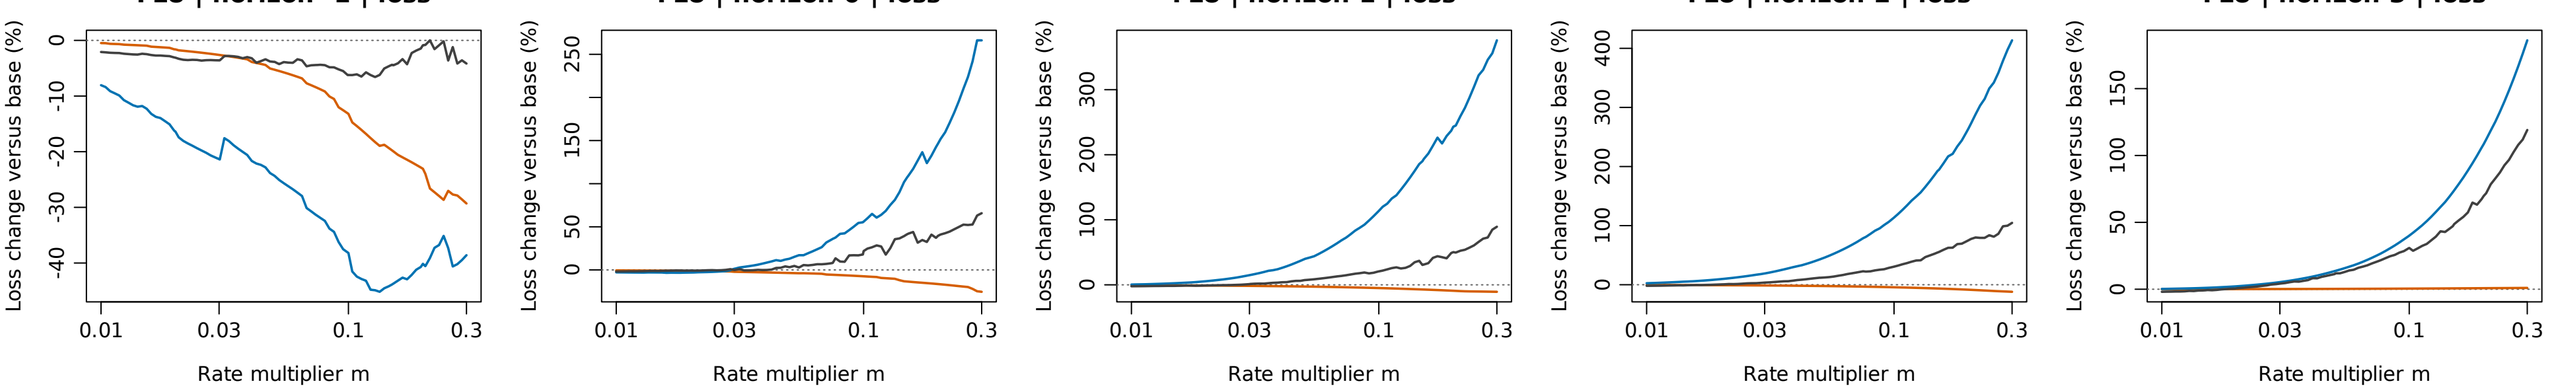

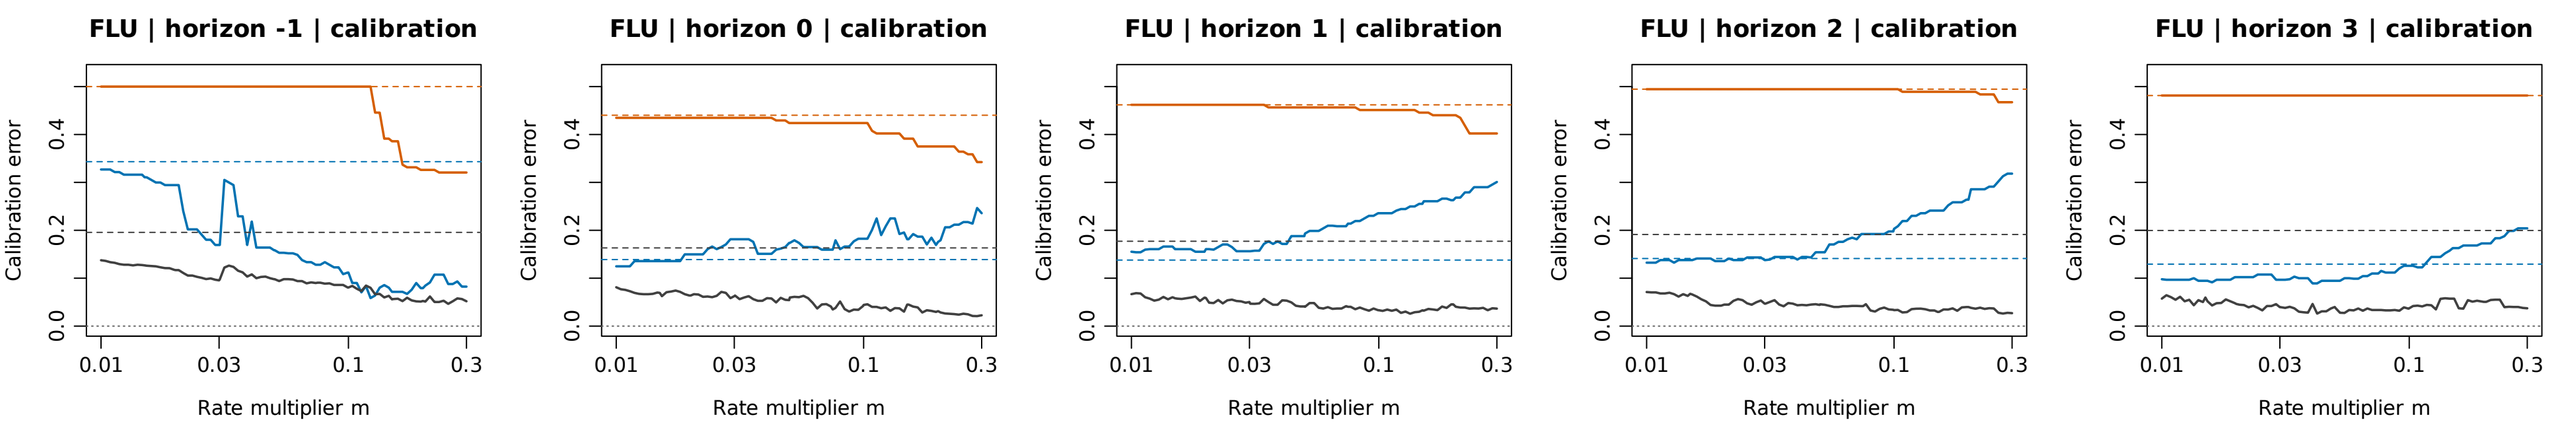



Before peak (weeks -7 to 0) After peak (weeks 1 to 8) Overall (full history)


Loss: % change from m = 0 in the same phase (negative is better). Calibration: mean |coverage - alpha| over levels (lower is better); dashed: m = 0.


Illinois | Fixed-rate MultiQT: loss and calibration before and after the peak

Count tracking | eta = m * S0, S0 frozen after 20 released rows (warmup replayed) | Feedback delay 2 week(s) | Scored against latest reported counts in counts per 100k residents per location

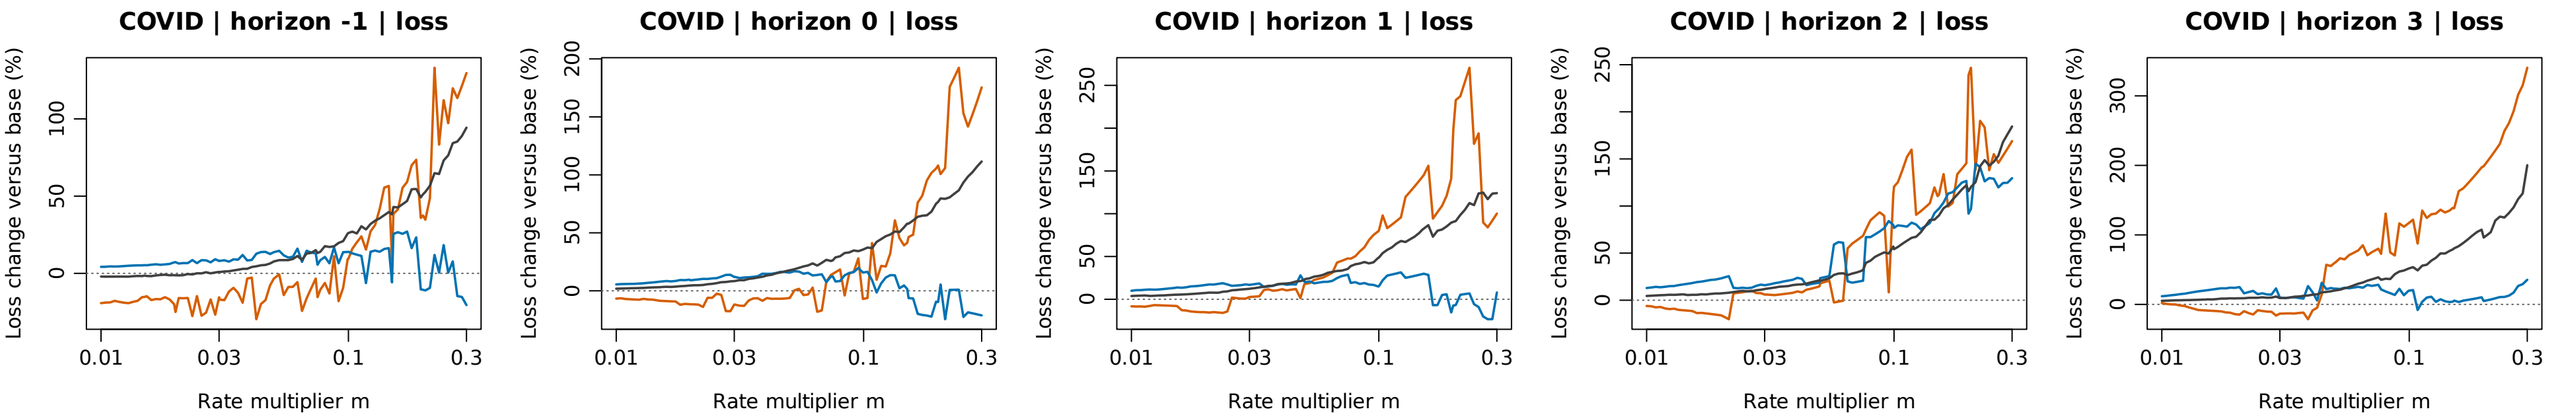

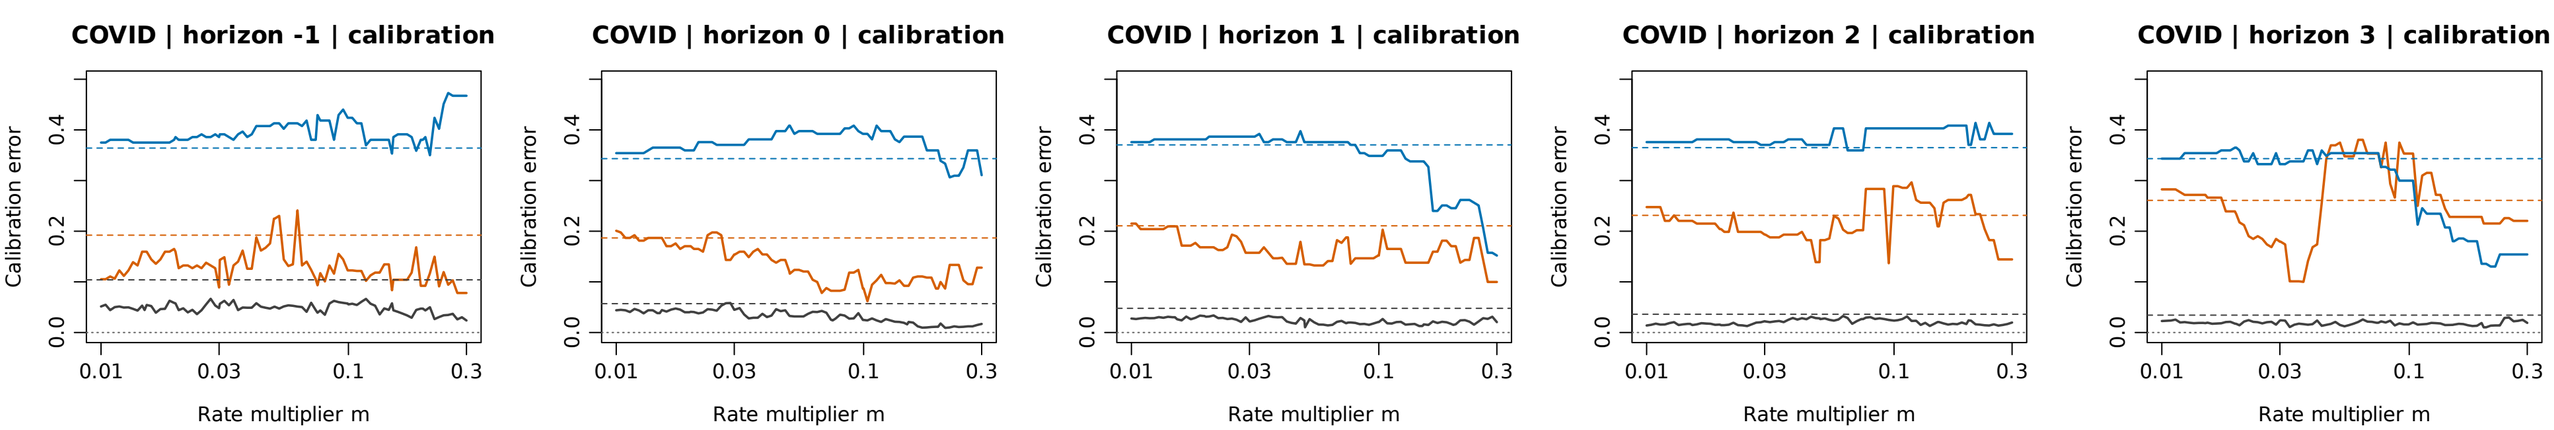

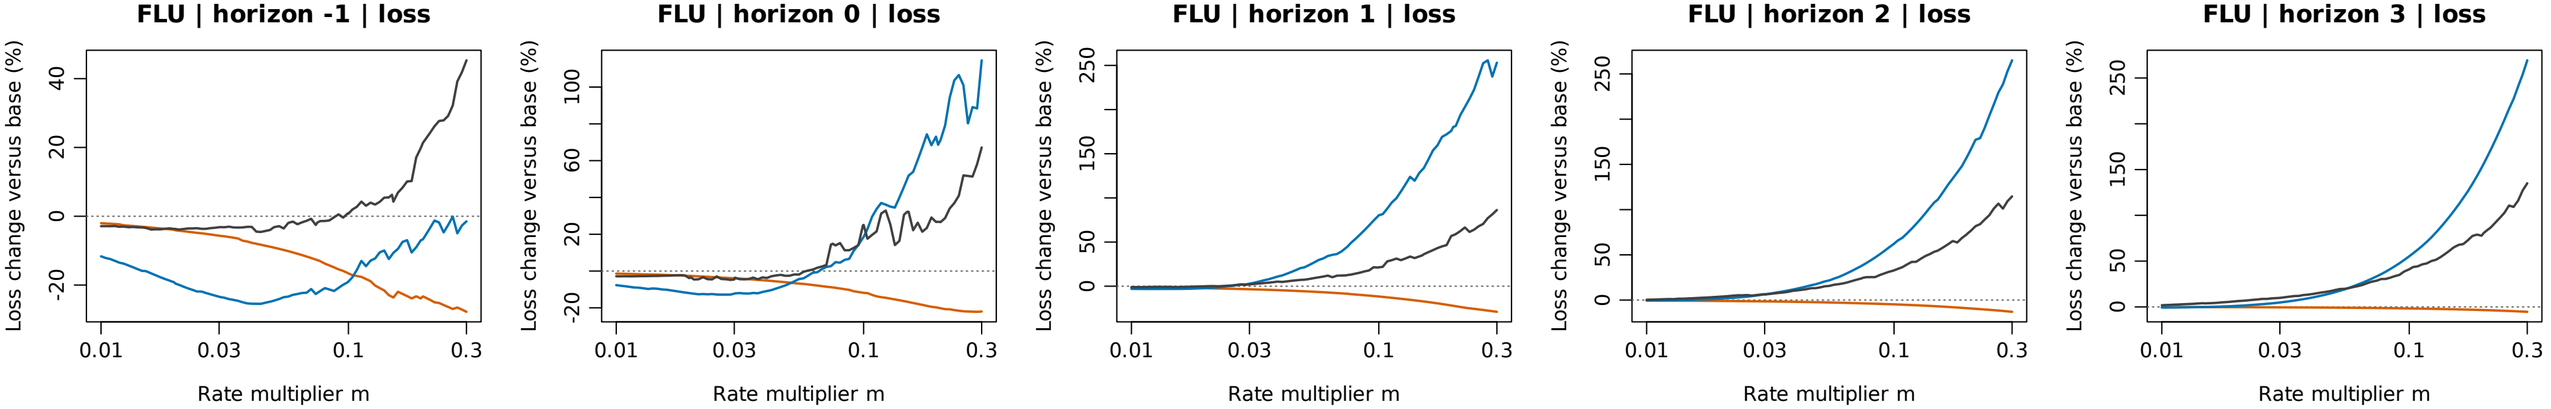

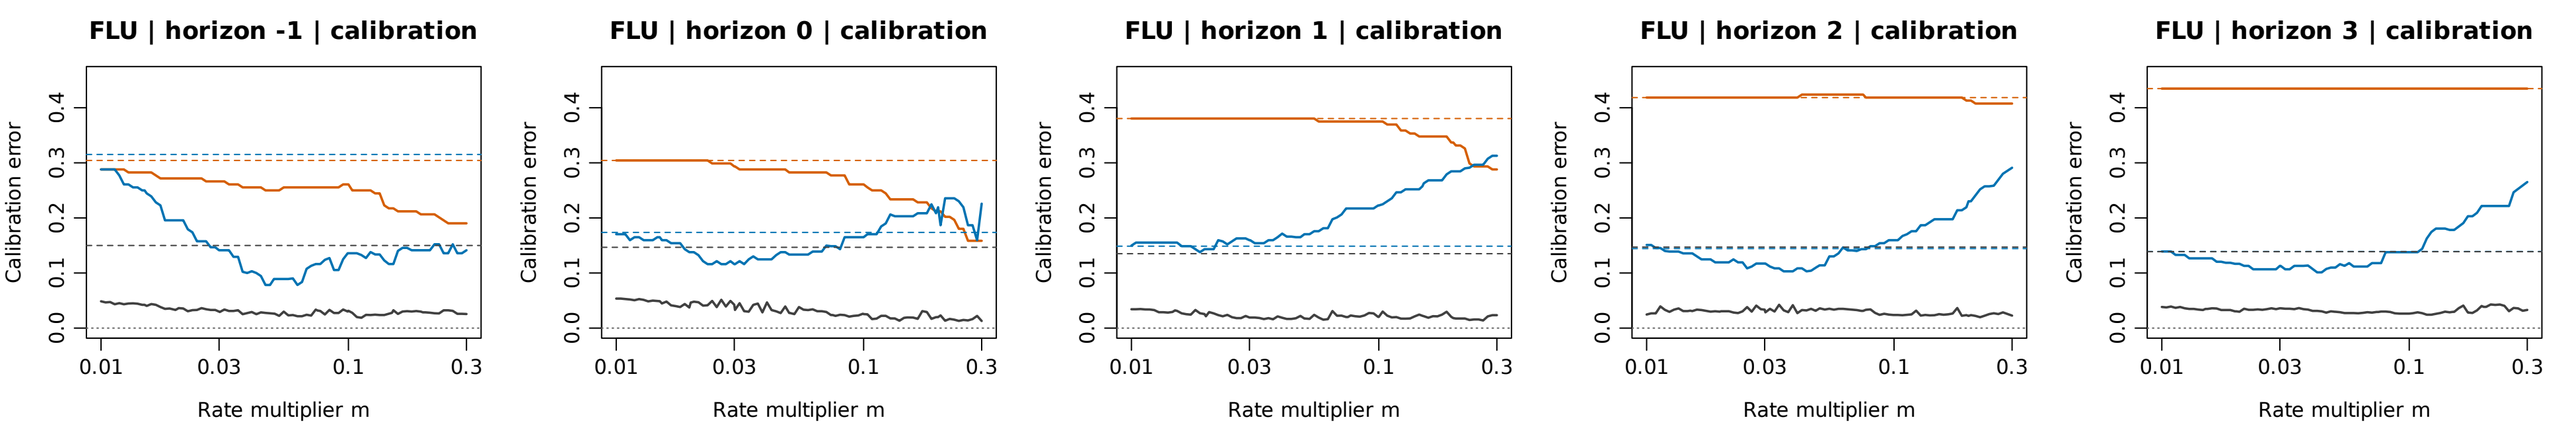

Before peak (weeks -7 to 0) After peak (weeks 1 to 8) Overall (full history)

Loss: % change from m = 0 in the same phase (negative is better). Calibration: mean |coverage - alpha| over levels (lower is better); dashed: m = 0.