

covid | all 52 locations (without US) pooled | evaluation: Jun 2025 to the end of season 2025/26 | loss in counts per 100k residents


Loss reduction against the original forecasts. Left: all feedback designs and horizons pooled; then split by feedback design, then by horizon.
Feedback design (protocol latest-at-use-v2): delay d = learn once, d weeks after the first report, from the report current then; re-run = re-run every week on the reports known then.


Bars, top to bottom

- Fixed MultiQT
- Delphi REF-op (covid prod)
- Delphi sqrt 0.018 (flu prod)
- Studentized median
- Studentized full base (level scales)
- Rate grid: learned, common weights
- Rate grid: learned + sharing, common weights
- Weekly starts: learned
- Diverse experts: equal
- Diverse experts: soft switching

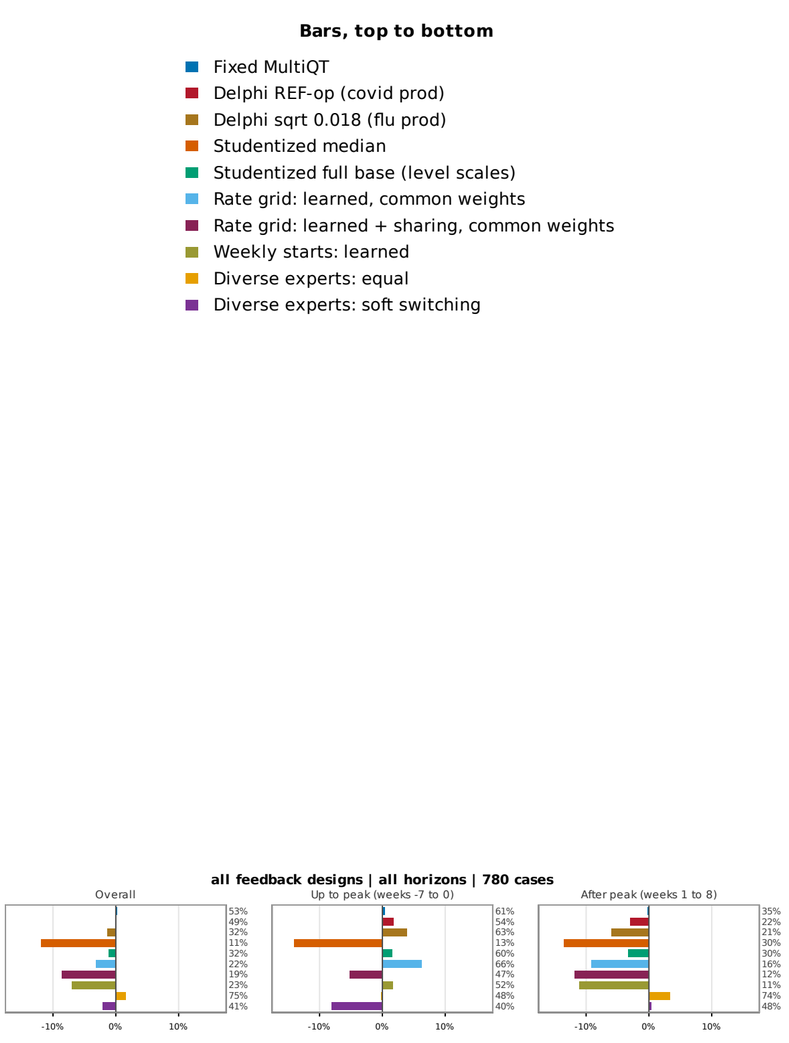

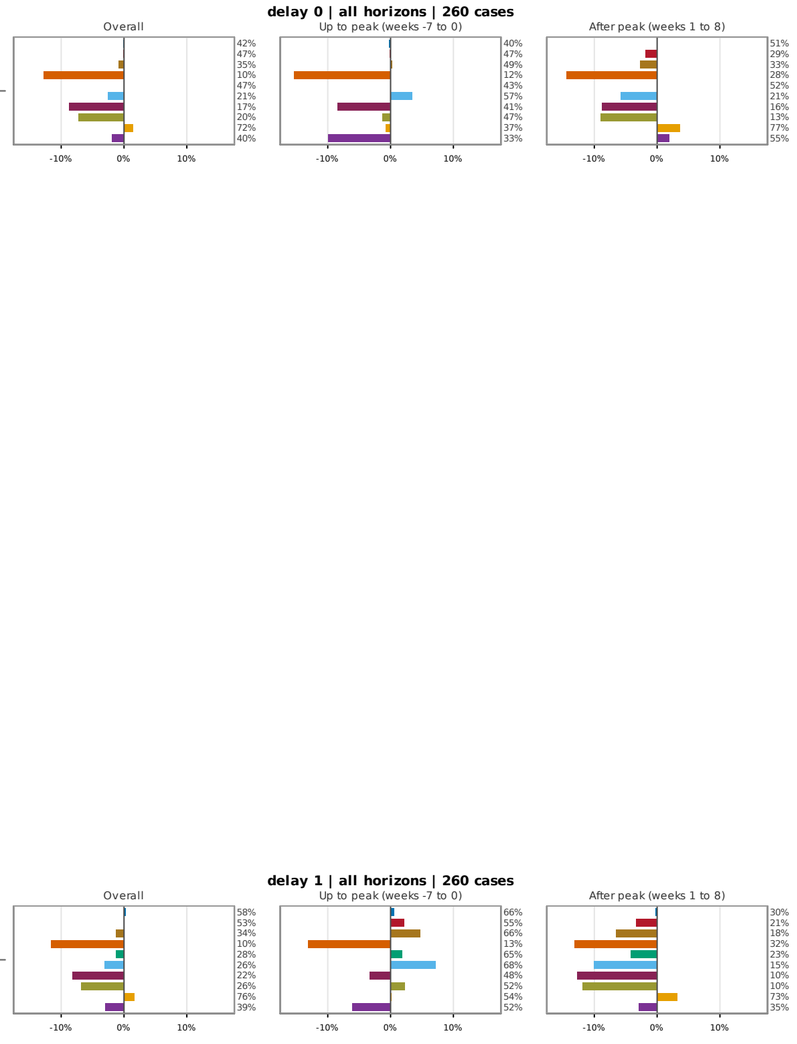

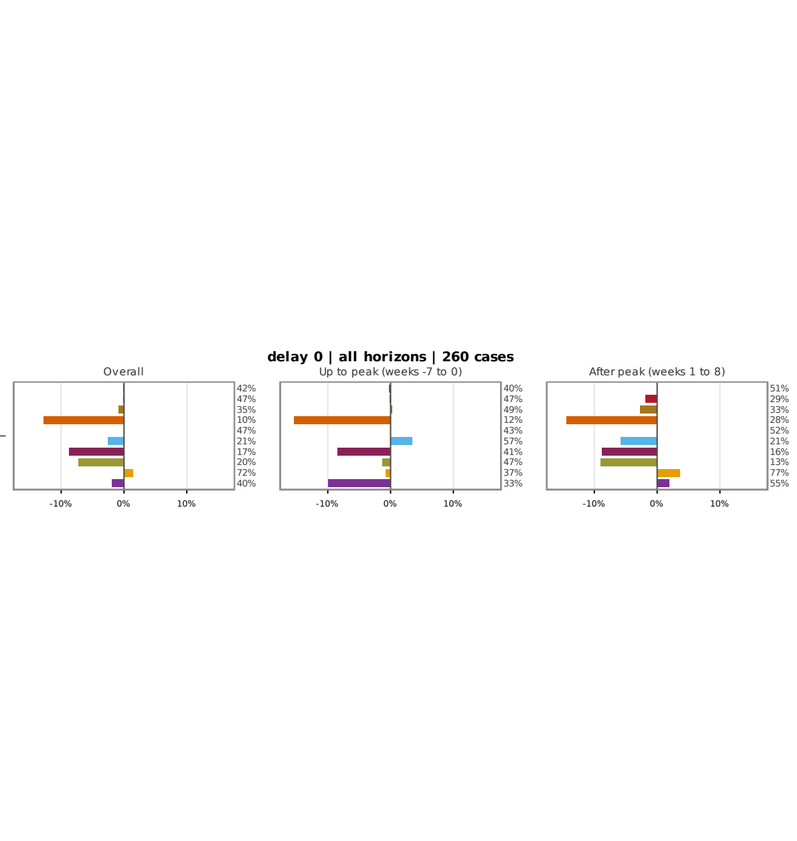

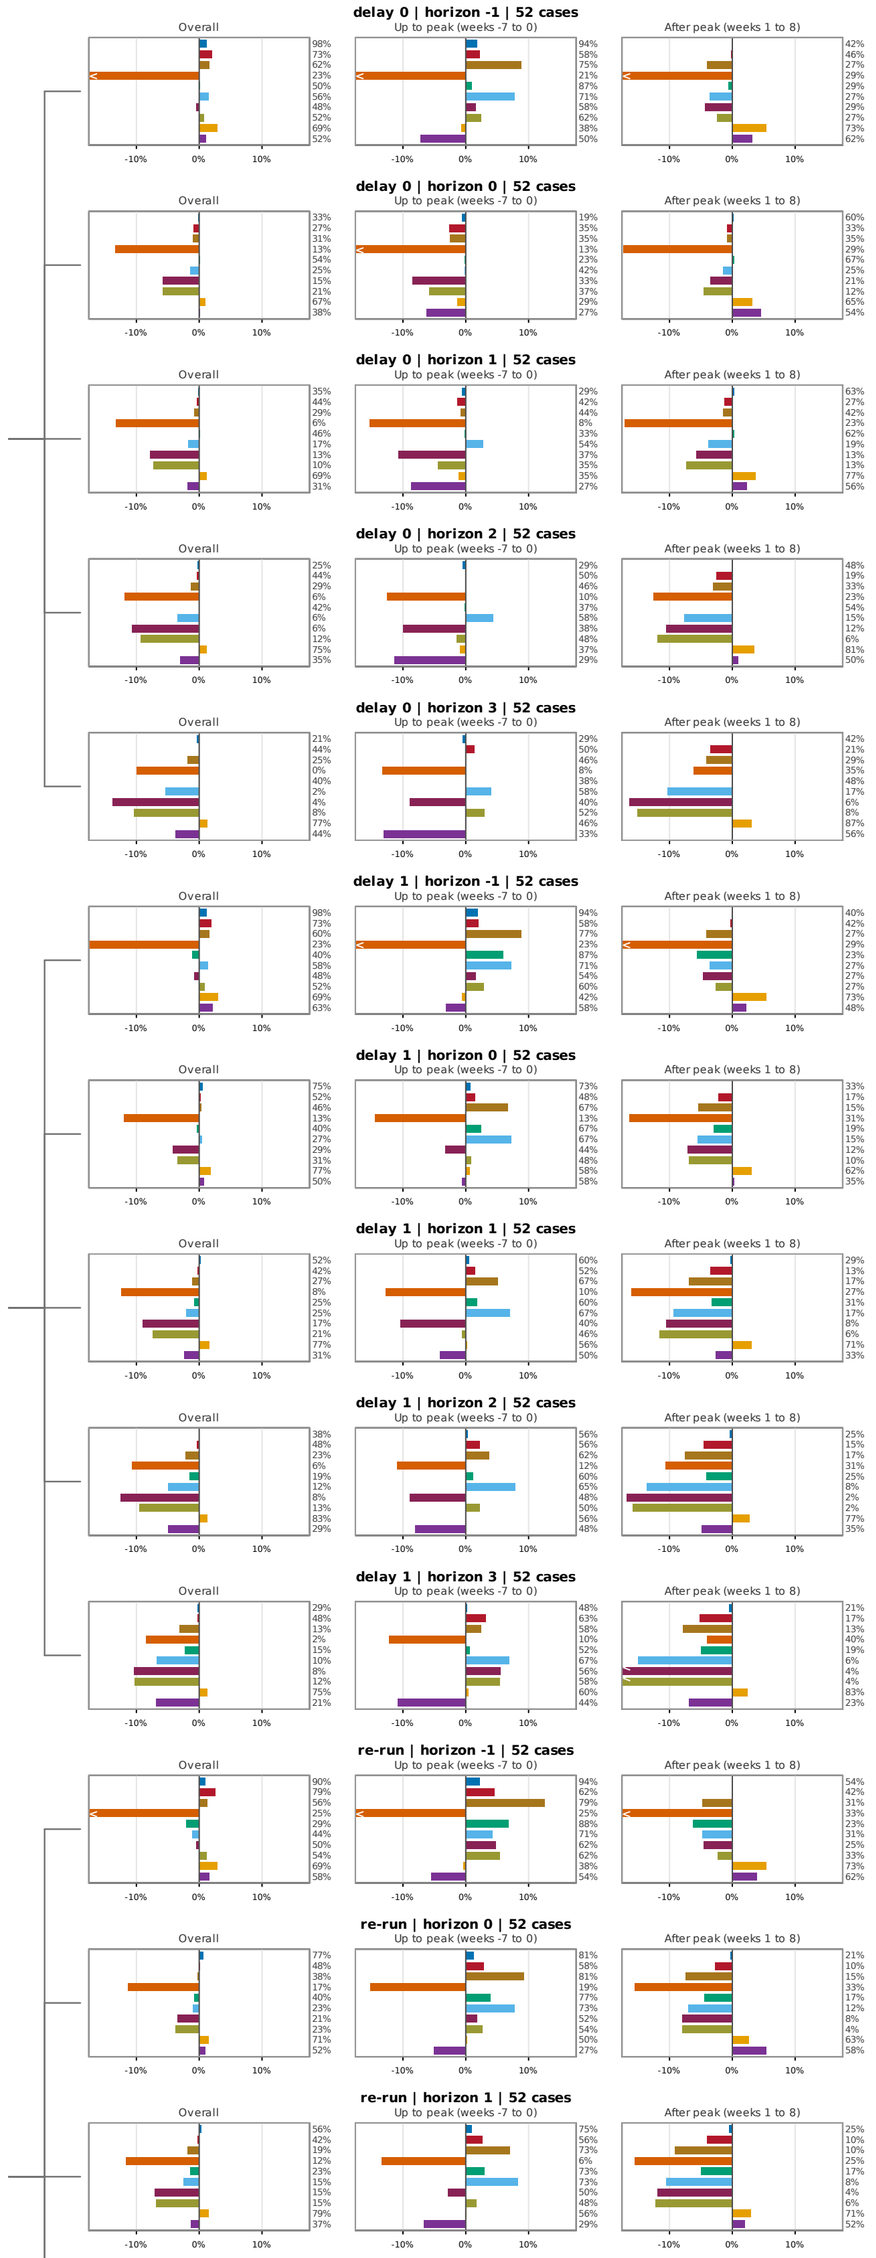


Bar: 100 * (1 - pooled loss / pooled loss of the original), pooled over the node's cases (location x horizon x feedback design), each case's mean loss weighted by its number of weeks; to the right: positive = smaller loss than the original.
Numbers right of each panel: share of the node's cases in which the method's loss is below the original's (nodes with at least 5 cases). Up to peak / after peak: the weeks around every local peak of the latest counts.
Each disease and feedback design uses the settings tuned with it (output/results/tuning); every method: output/results/peak_reasoning/evaluation_tree.csv.
Issue cutoffs: Wednesdays (actual generation dates where known). Every design is scored against the latest reports, version 2026-10-30 (not against the reports learned from).

covid | United States (US) | evaluation: Jun 2025 to the end of season 2025/26 | loss in counts per 100k residents

Loss reduction against the original forecasts. Left: all feedback designs and horizons pooled; then split by feedback design, then by horizon.
Feedback design (protocol latest-at-use-v2): delay d = learn once, d weeks after the first report, from the report current then; re-run = re-run every week on the reports known then.

Bars, top to bottom

- Fixed MultiQT
- Delphi REF-op (covid prod)
- Delphi sqrt 0.018 (flu prod)
- Studentized median
- Studentized full base (level scales)
- Rate grid: learned, common weights
- Rate grid: learned + sharing, common weights
- Weekly starts: learned
- Diverse experts: equal
- Diverse experts: soft switching

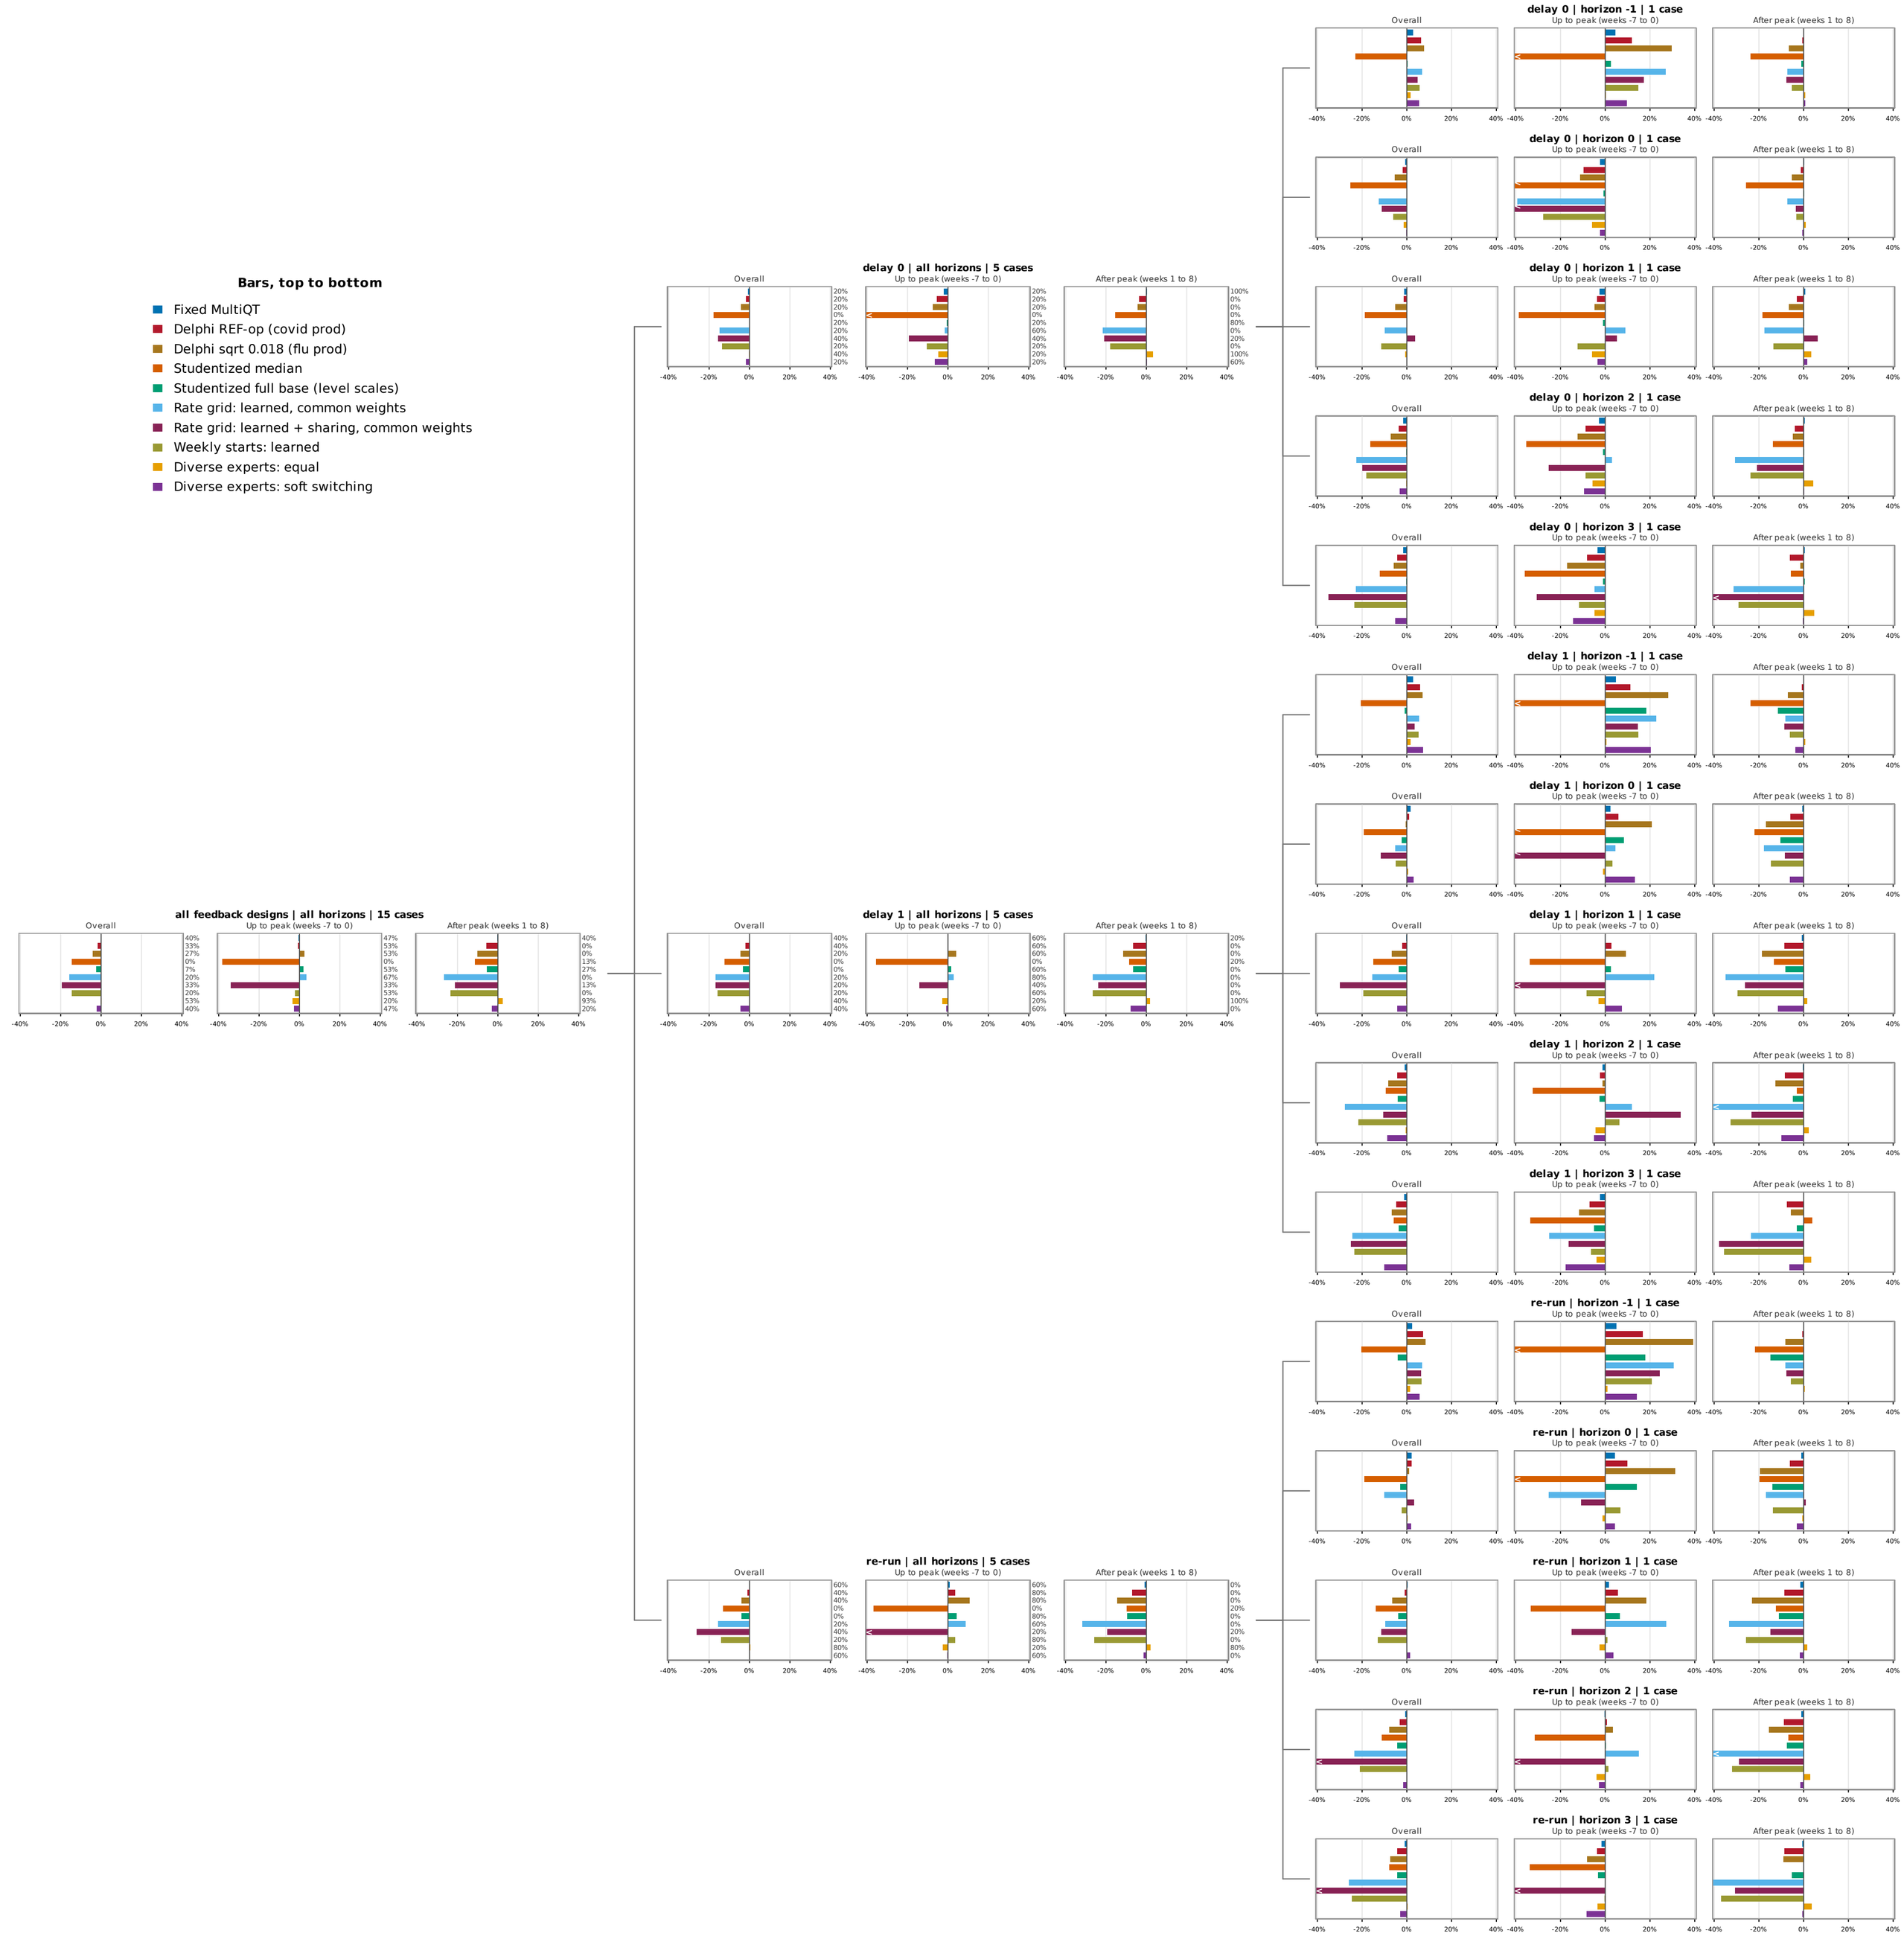


Bar: 100 * (1 - pooled loss / pooled loss of the original), pooled over the node's cases (location x horizon x feedback design), each case's mean loss weighted by its number of weeks; to the right: positive = smaller loss than the original.
Numbers right of each panel: share of the node's cases in which the method's loss is below the original's (nodes with at least 5 cases). Up to peak / after peak: the weeks around every local peak of the latest counts.
Each disease and feedback design uses the settings tuned with it (output/results/tuning); every method: output/results/peak_reasoning/evaluation_tree.csv.
Issue cutoffs: Wednesdays (actual generation dates where known). Every design is scored against the latest reports, version 2026-10-30 (not against the reports learned from).

covid | California (06) | evaluation: Jun 2025 to the end of season 2025/26 | loss in counts per 100k residents

Loss reduction against the original forecasts. Left: all feedback designs and horizons pooled; then split by feedback design, then by horizon.
Feedback design (protocol latest-at-use-v2): delay d = learn once, d weeks after the first report, from the report current then; re-run = re-run every week on the reports known then.

Bars, top to bottom

- Fixed MultiQT
- Delphi REF-op (covid prod)
- Delphi sqrt 0.018 (flu prod)
- Studentized median
- Studentized full base (level scales)
- Rate grid: learned, common weights
- Rate grid: learned + sharing, common weights
- Weekly starts: learned
- Diverse experts: equal
- Diverse experts: soft switching

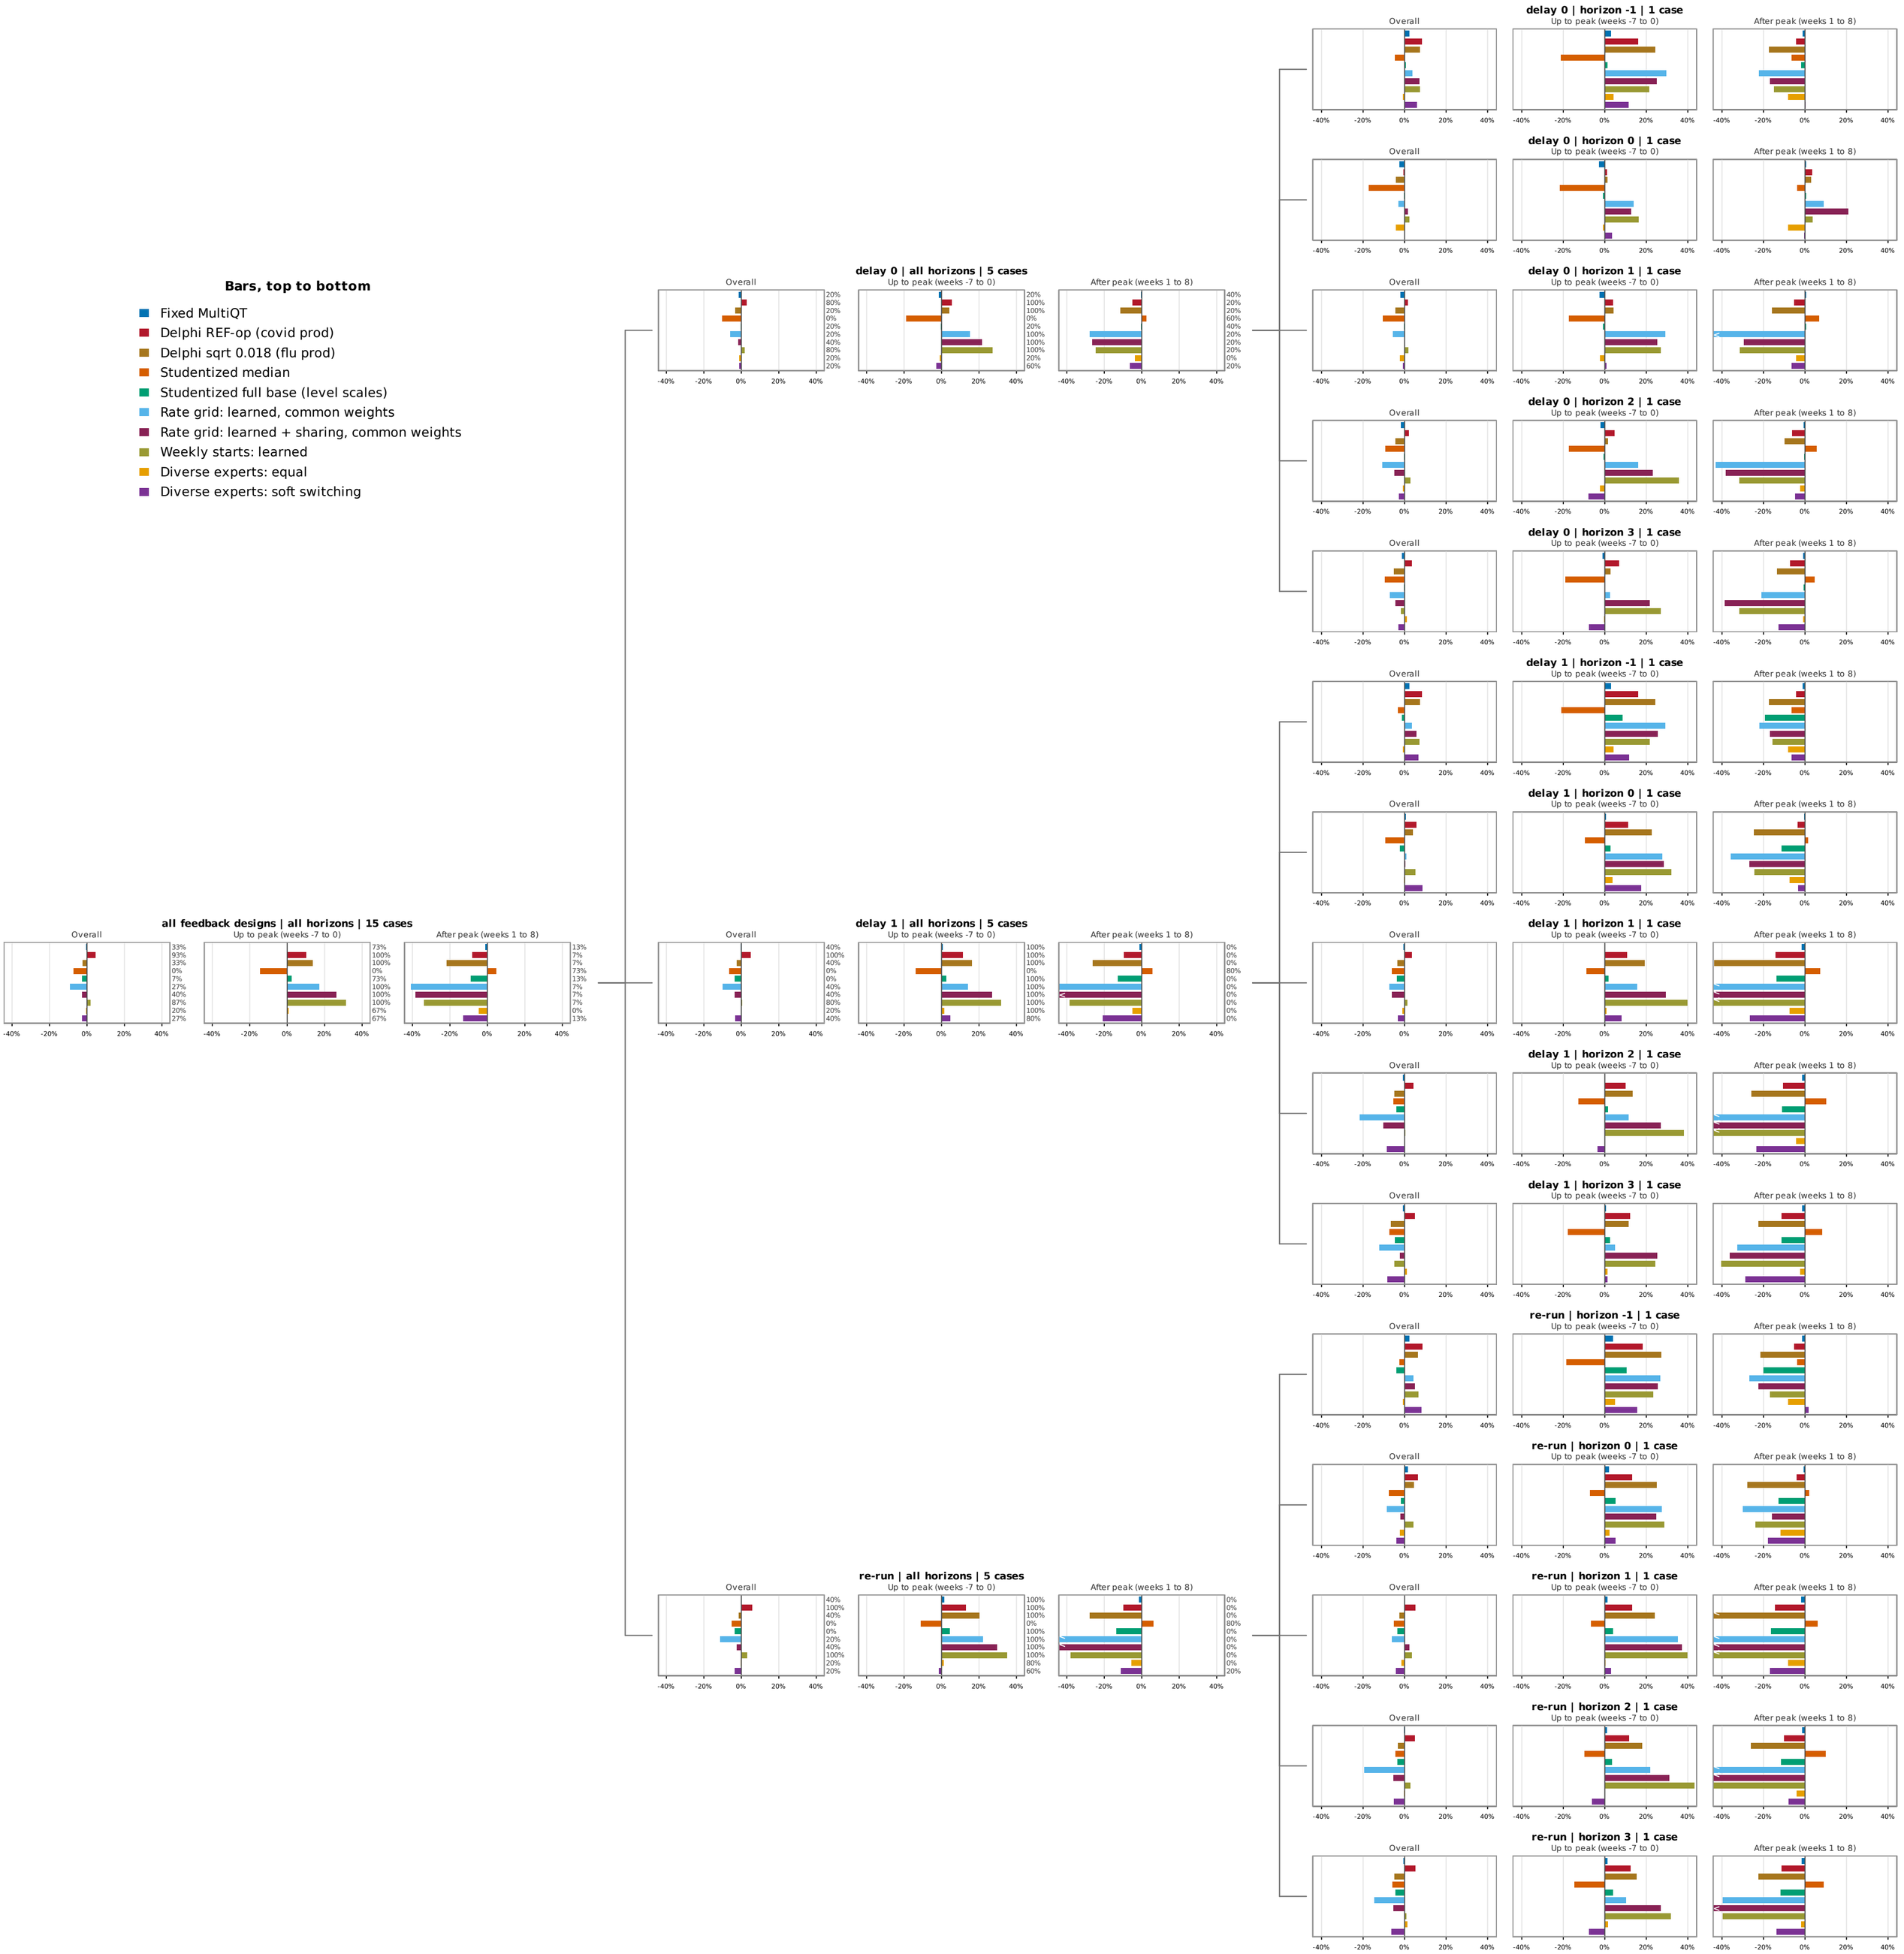

Bar: 100 * (1 - pooled loss / pooled loss of the original), pooled over the node's cases (location x horizon x feedback design), each case's mean loss weighted by its number of weeks; to the right: positive = smaller loss than the original.
Numbers right of each panel: share of the node's cases in which the method's loss is below the original's (nodes with at least 5 cases). Up to peak / after peak: the weeks around every local peak of the latest counts.
Each disease and feedback design uses the settings tuned with it (output/results/tuning); every method: output/results/peak_reasoning/evaluation_tree.csv.
Issue cutoffs: Wednesdays (actual generation dates where known). Every design is scored against the latest reports, version 2026-10-30 (not against the reports learned from).


covid | Texas (48) | evaluation: Jun 2025 to the end of season 2025/26 | loss in counts per 100k residents


Loss reduction against the original forecasts. Left: all feedback designs and horizons pooled; then split by feedback design, then by horizon.
Feedback design (protocol latest-at-use-v2): delay d = learn once, d weeks after the first report, from the report current then; re-run = re-run every week on the reports known then.

Bars, top to bottom

- Fixed MultiQT
- Delphi REF-op (covid prod)
- Delphi sqrt 0.018 (flu prod)
- Studentized median
- Studentized full base (level scales)
- Rate grid: learned, common weights
- Rate grid: learned + sharing, common weights
- Weekly starts: learned
- Diverse experts: equal
- Diverse experts: soft switching



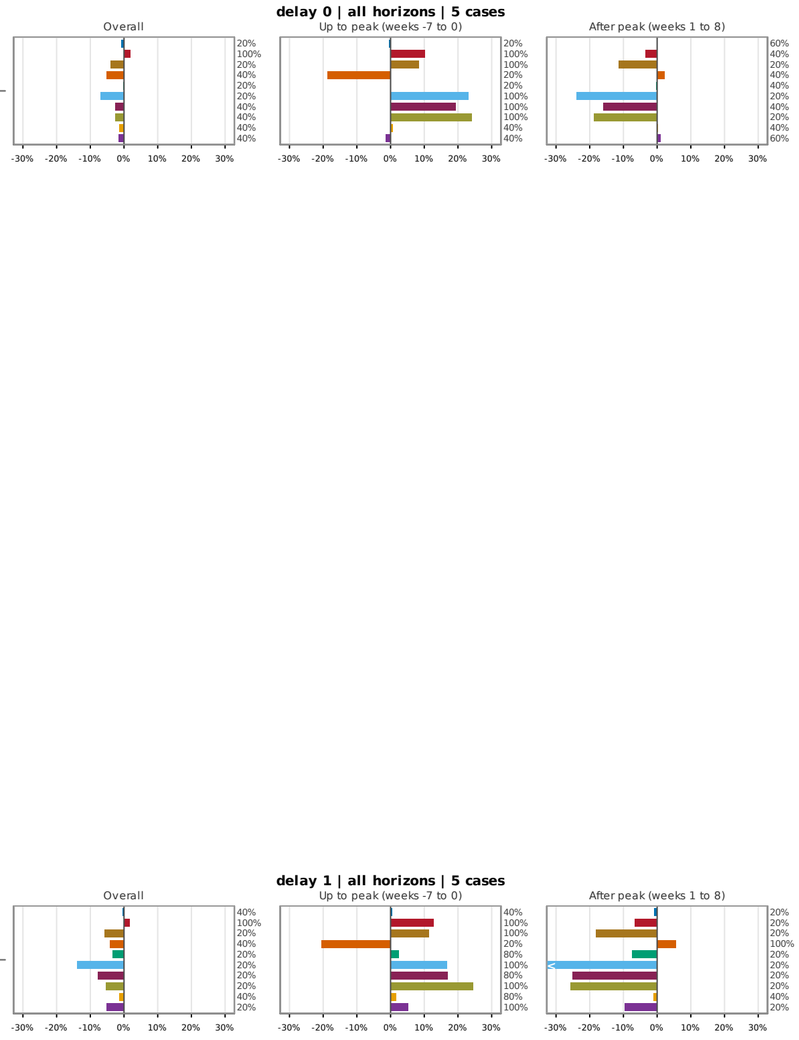

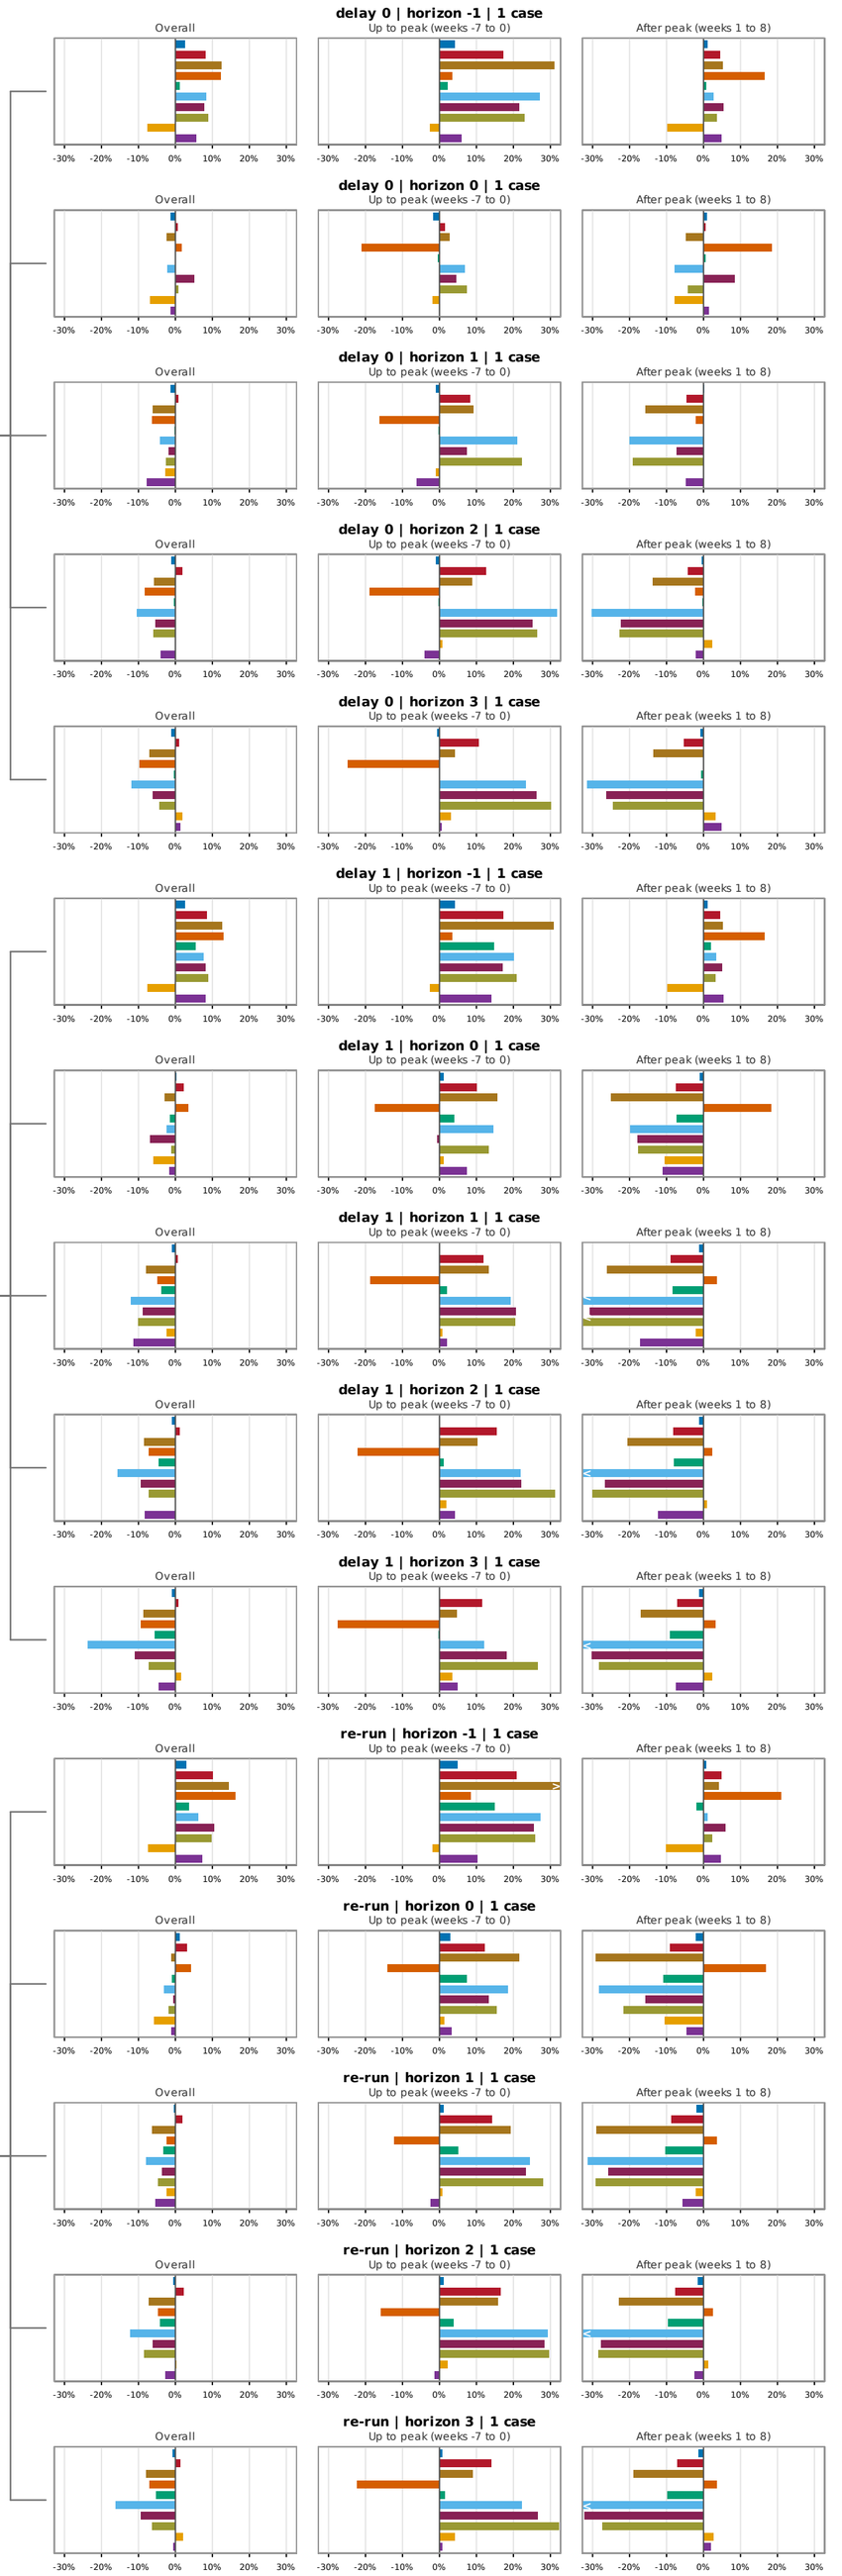


Bar: 100 * (1 - pooled loss / pooled loss of the original), pooled over the node's cases (location x horizon x feedback design), each case's mean loss weighted by its number of weeks; to the right: positive = smaller loss than the original.
Numbers right of each panel: share of the node's cases in which the method's loss is below the original's (nodes with at least 5 cases). Up to peak / after peak: the weeks around every local peak of the latest counts.
Each disease and feedback design uses the settings tuned with it (output/results/tuning); every method: output/results/peak_reasoning/evaluation_tree.csv.
Issue cutoffs: Wednesdays (actual generation dates where known). Every design is scored against the latest reports, version 2026-10-30 (not against the reports learned from).

covid | New York (36) | evaluation: Jun 2025 to the end of season 2025/26 | loss in counts per 100k residents

Loss reduction against the original forecasts. Left: all feedback designs and horizons pooled; then split by feedback design, then by horizon.
Feedback design (protocol latest-at-use-v2): delay d = learn once, d weeks after the first report, from the report current then; re-run = re-run every week on the reports known then.

Bars, top to bottom

- Fixed MultiQT
- Delphi REF-op (covid prod)
- Delphi sqrt 0.018 (flu prod)
- Studentized median
- Studentized full base (level scales)
- Rate grid: learned, common weights
- Rate grid: learned + sharing, common weights
- Weekly starts: learned
- Diverse experts: equal
- Diverse experts: soft switching

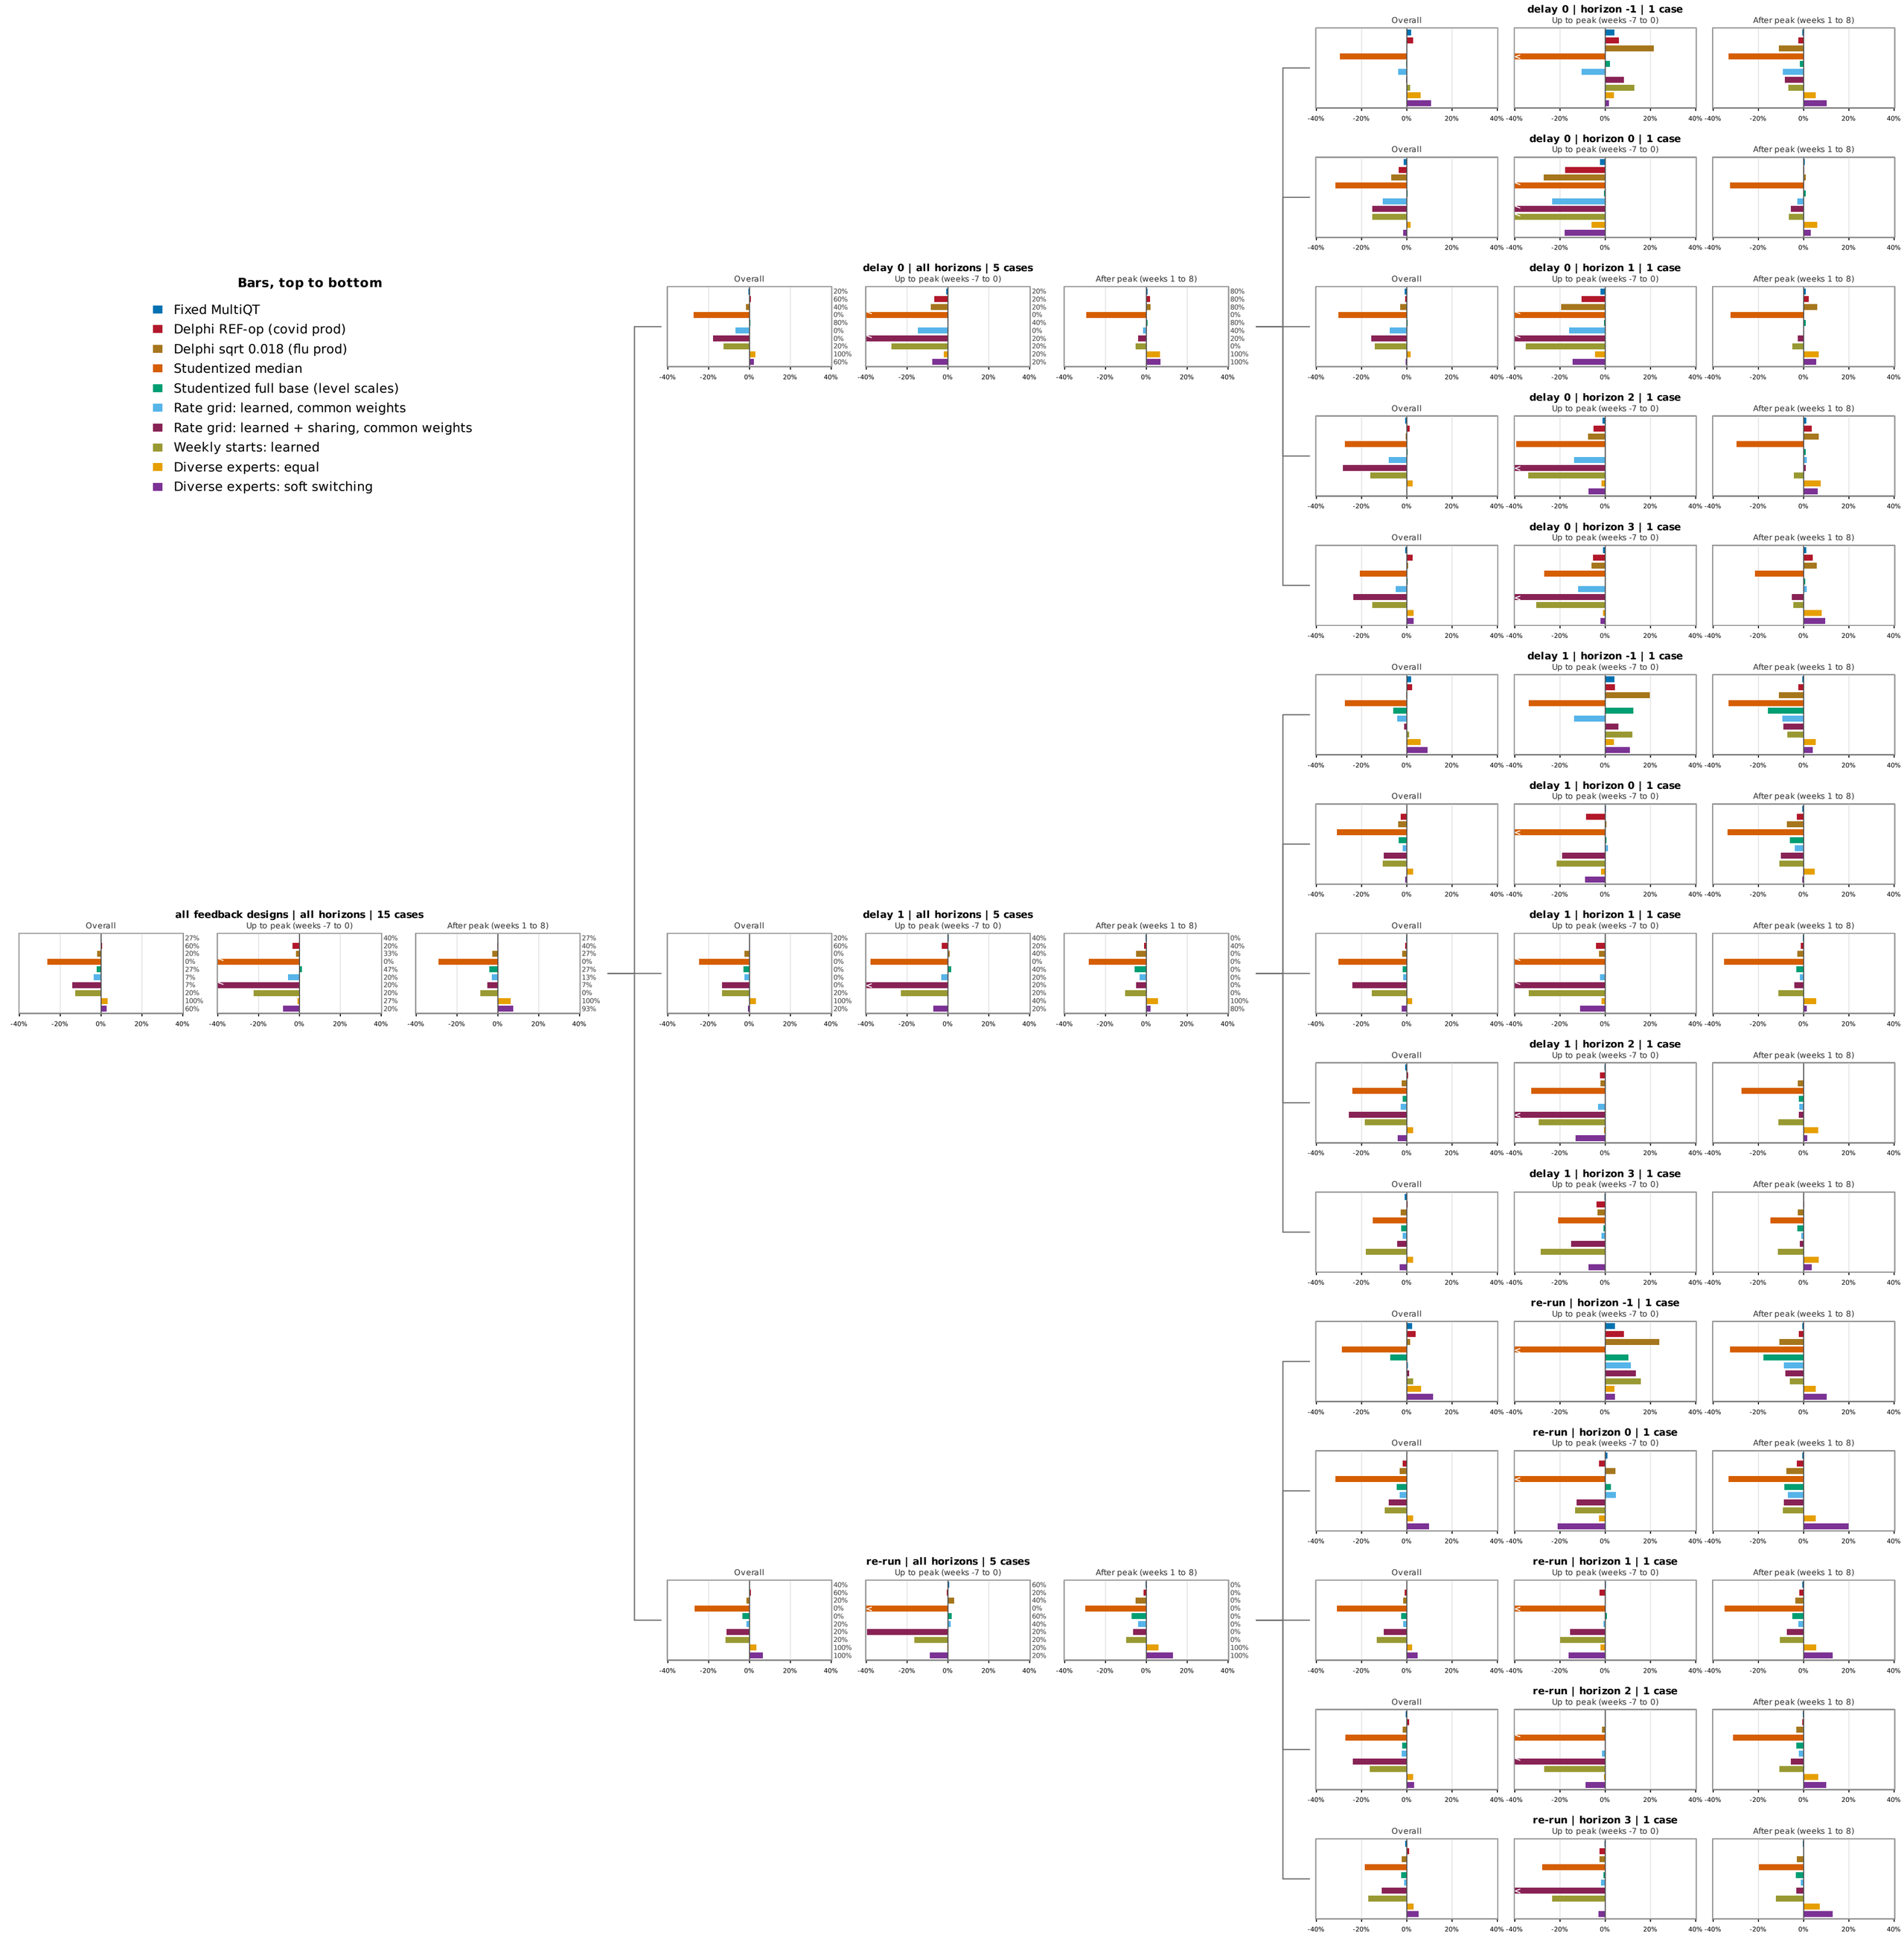

Bar: 100 * (1 - pooled loss / pooled loss of the original), pooled over the node's cases (location x horizon x feedback design), each case's mean loss weighted by its number of weeks; to the right: positive = smaller loss than the original.
Numbers right of each panel: share of the node's cases in which the method's loss is below the original's (nodes with at least 5 cases). Up to peak / after peak: the weeks around every local peak of the latest counts.
Each disease and feedback design uses the settings tuned with it (output/results/tuning); every method: output/results/peak_reasoning/evaluation_tree.csv.
Issue cutoffs: Wednesdays (actual generation dates where known). Every design is scored against the latest reports, version 2026-10-30 (not against the reports learned from).


covid | Pennsylvania (42) | evaluation: Jun 2025 to the end of season 2025/26 | loss in counts per 100k residents


Loss reduction against the original forecasts. Left: all feedback designs and horizons pooled; then split by feedback design, then by horizon.
Feedback design (protocol latest-at-use-v2): delay d = learn once, d weeks after the first report, from the report current then; re-run = re-run every week on the reports known then.

Bars, top to bottom

- Fixed MultiQT
- Delphi REF-op (covid prod)
- Delphi sqrt 0.018 (flu prod)
- Studentized median
- Studentized full base (level scales)
- Rate grid: learned, common weights
- Rate grid: learned + sharing, common weights
- Weekly starts: learned
- Diverse experts: equal
- Diverse experts: soft switching



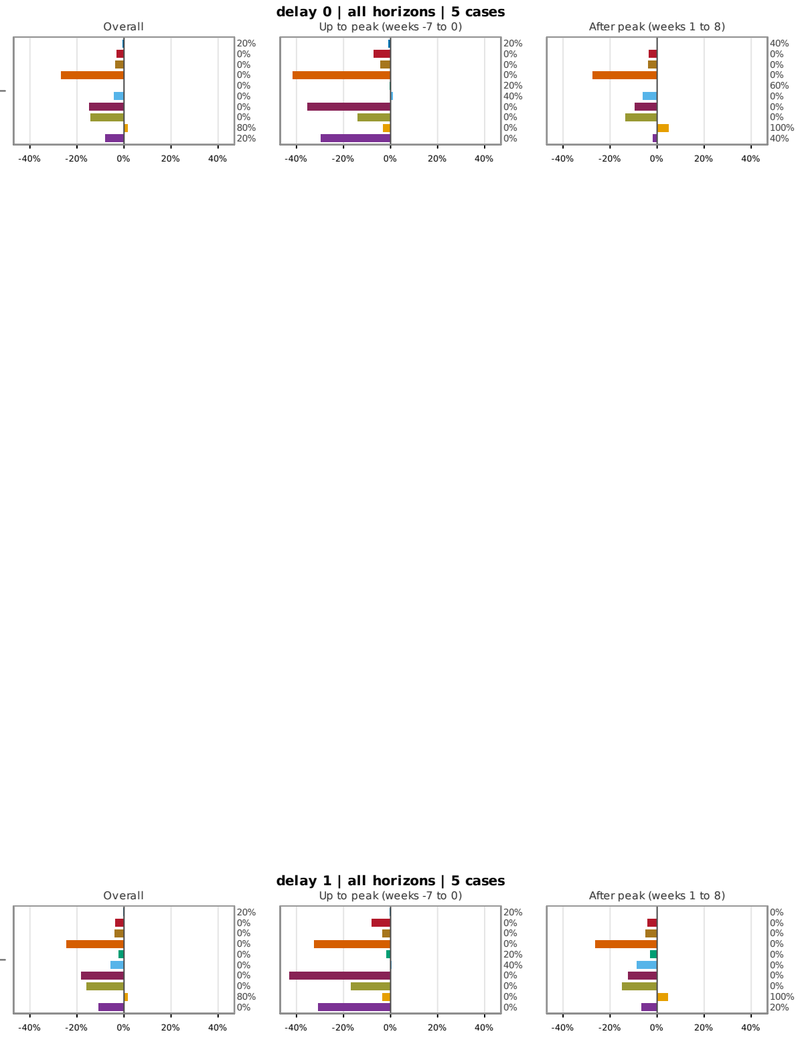

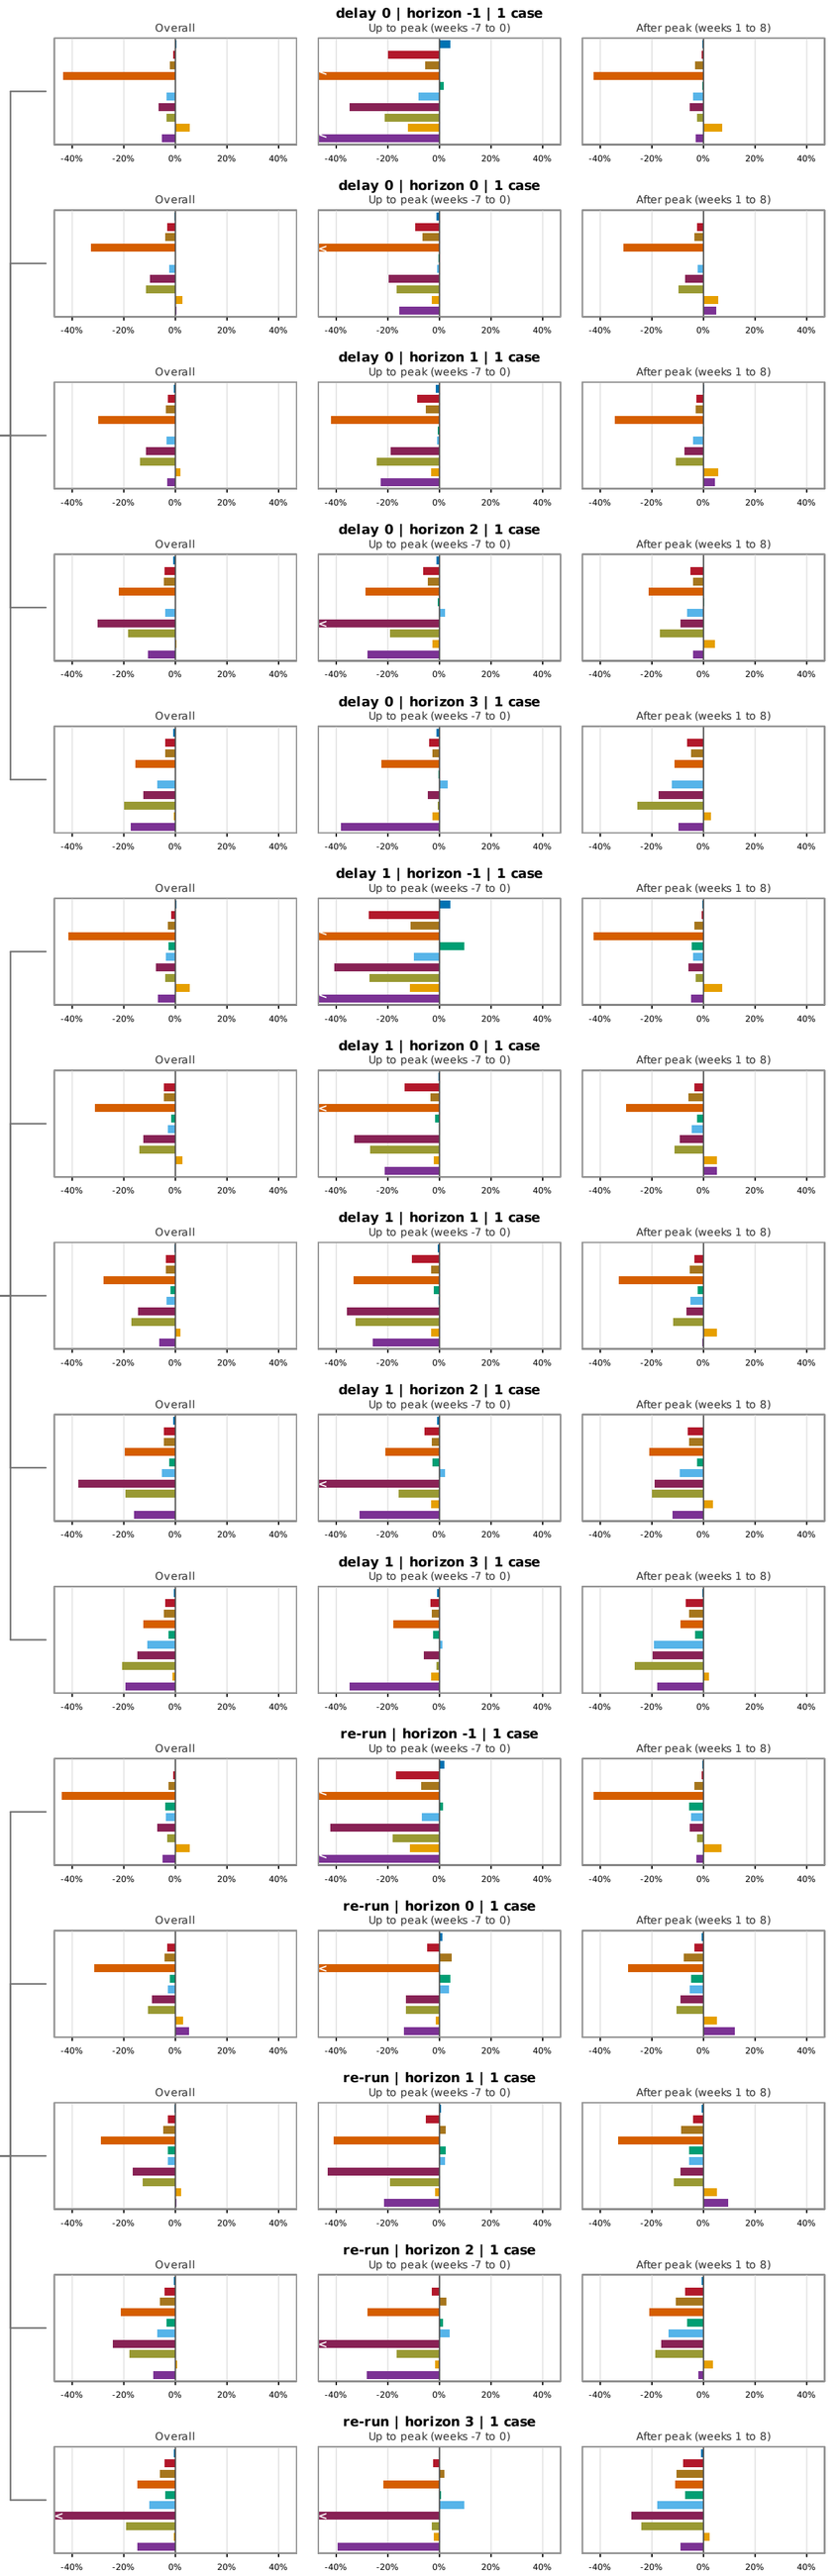


Bar: 100 * (1 - pooled loss / pooled loss of the original), pooled over the node's cases (location x horizon x feedback design), each case's mean loss weighted by its number of weeks; to the right: positive = smaller loss than the original.
Numbers right of each panel: share of the node's cases in which the method's loss is below the original's (nodes with at least 5 cases). Up to peak / after peak: the weeks around every local peak of the latest counts.
Each disease and feedback design uses the settings tuned with it (output/results/tuning); every method: output/results/peak_reasoning/evaluation_tree.csv.
Issue cutoffs: Wednesdays (actual generation dates where known). Every design is scored against the latest reports, version 2026-10-30 (not against the reports learned from).


flu | all 52 locations (without US) pooled | evaluation: Jun 2025 to the end of season 2025/26 | loss in counts per 100k residents


Loss reduction against the original forecasts. Left: all feedback designs and horizons pooled; then split by feedback design, then by horizon.
Feedback design (protocol latest-at-use-v2): delay d = learn once, d weeks after the first report, from the report current then; re-run = re-run every week on the reports known then.

Bars, top to bottom

- Fixed MultiQT
- Delphi REF-op (covid prod)
- Delphi sqrt 0.018 (flu prod)
- Studentized median
- Studentized full base (level scales)
- Rate grid: learned, common weights
- Rate grid: learned + sharing, common weights
- Weekly starts: learned
- Diverse experts: equal
- Diverse experts: soft switching

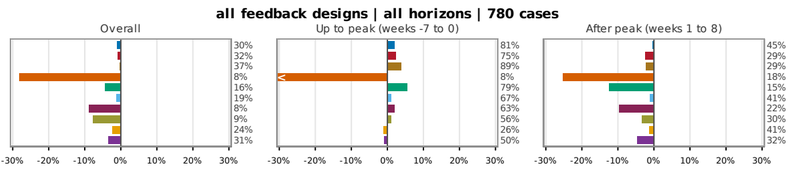

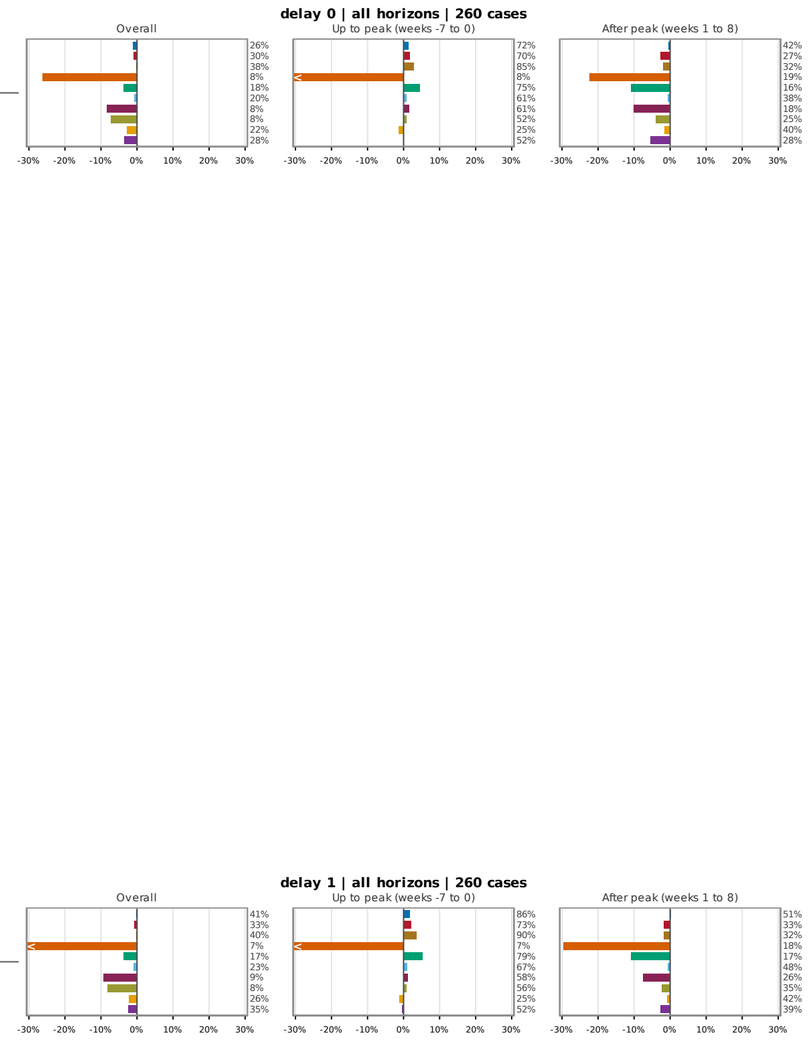

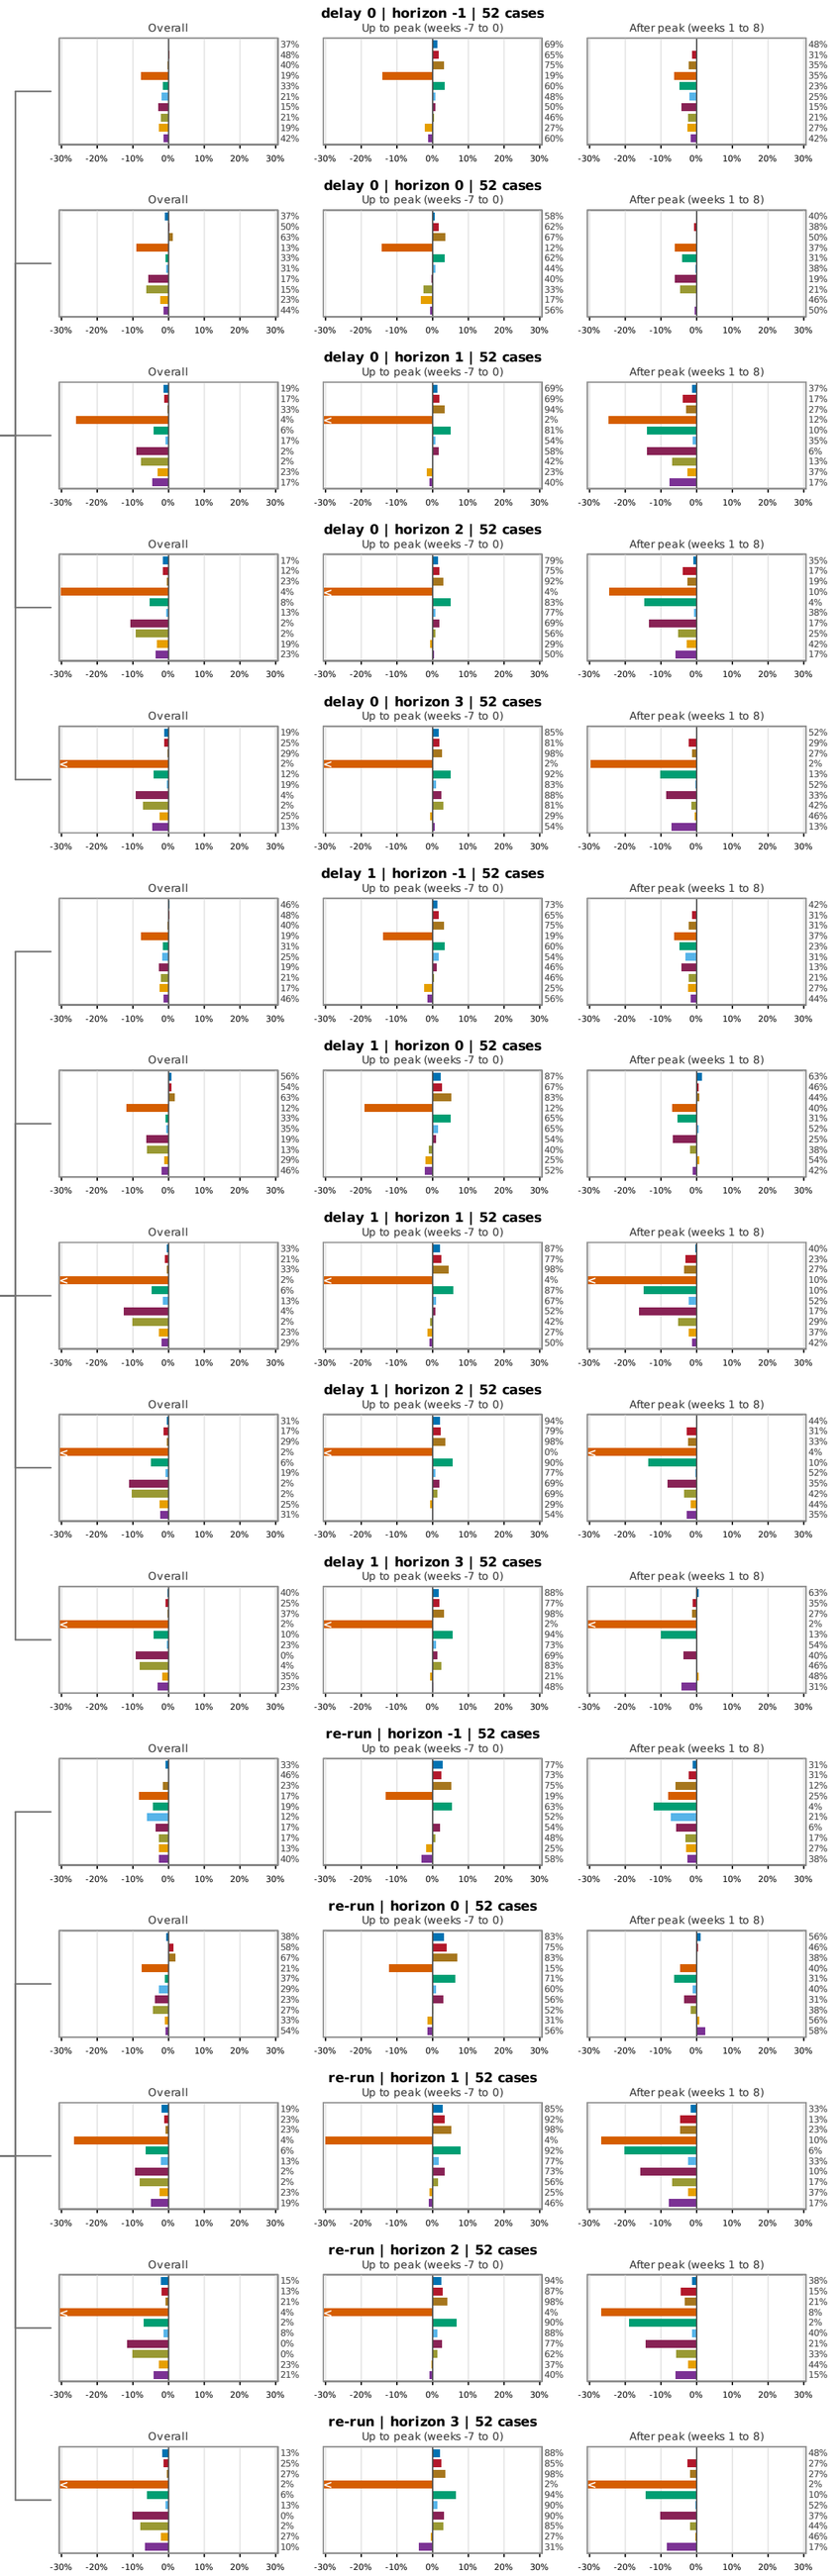


Bar: 100 * (1 - pooled loss / pooled loss of the original), pooled over the node's cases (location x horizon x feedback design), each case's mean loss weighted by its number of weeks; to the right: positive = smaller loss than the original.
Numbers right of each panel: share of the node's cases in which the method's loss is below the original's (nodes with at least 5 cases). Up to peak / after peak: the weeks around every local peak of the latest counts.
Each disease and feedback design uses the settings tuned with it (output/results/tuning); every method: output/results/peak_reasoning/evaluation_tree.csv.
Issue cutoffs: Wednesdays (actual generation dates where known). Every design is scored against the latest reports, version 2026-10-30 (not against the reports learned from).


flu | United States (US) | evaluation: Jun 2025 to the end of season 2025/26 | loss in counts per 100k residents


Loss reduction against the original forecasts. Left: all feedback designs and horizons pooled; then split by feedback design, then by horizon.
Feedback design (protocol latest-at-use-v2): delay d = learn once, d weeks after the first report, from the report current then; re-run = re-run every week on the reports known then.

Bars, top to bottom

- Fixed MultiQT
- Delphi REF-op (covid prod)
- Delphi sqrt 0.018 (flu prod)
- Studentized median
- Studentized full base (level scales)
- Rate grid: learned, common weights
- Rate grid: learned + sharing, common weights
- Weekly starts: learned
- Diverse experts: equal
- Diverse experts: soft switching

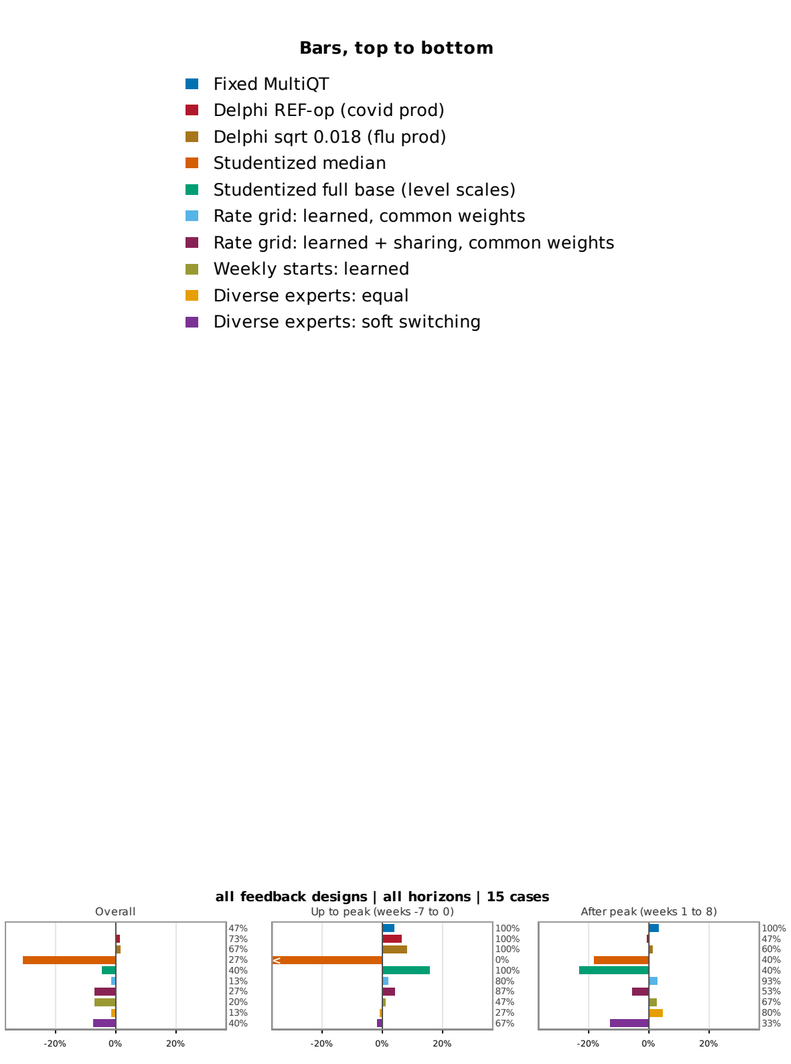

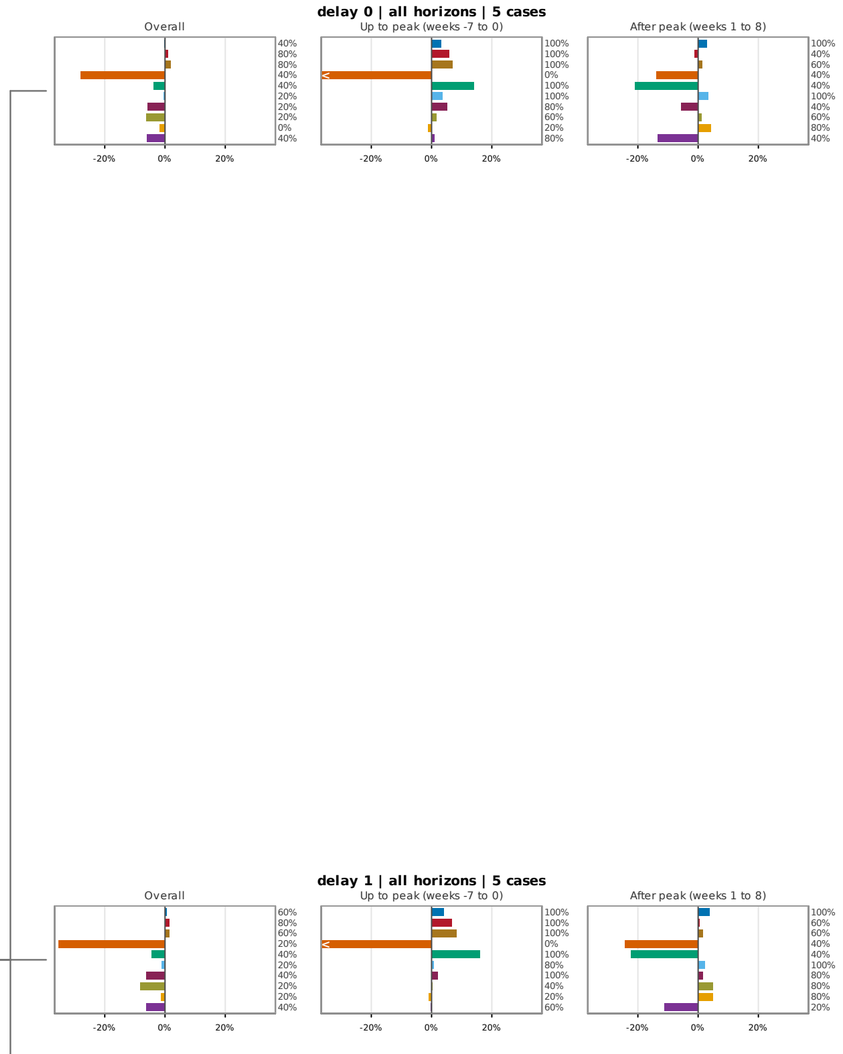

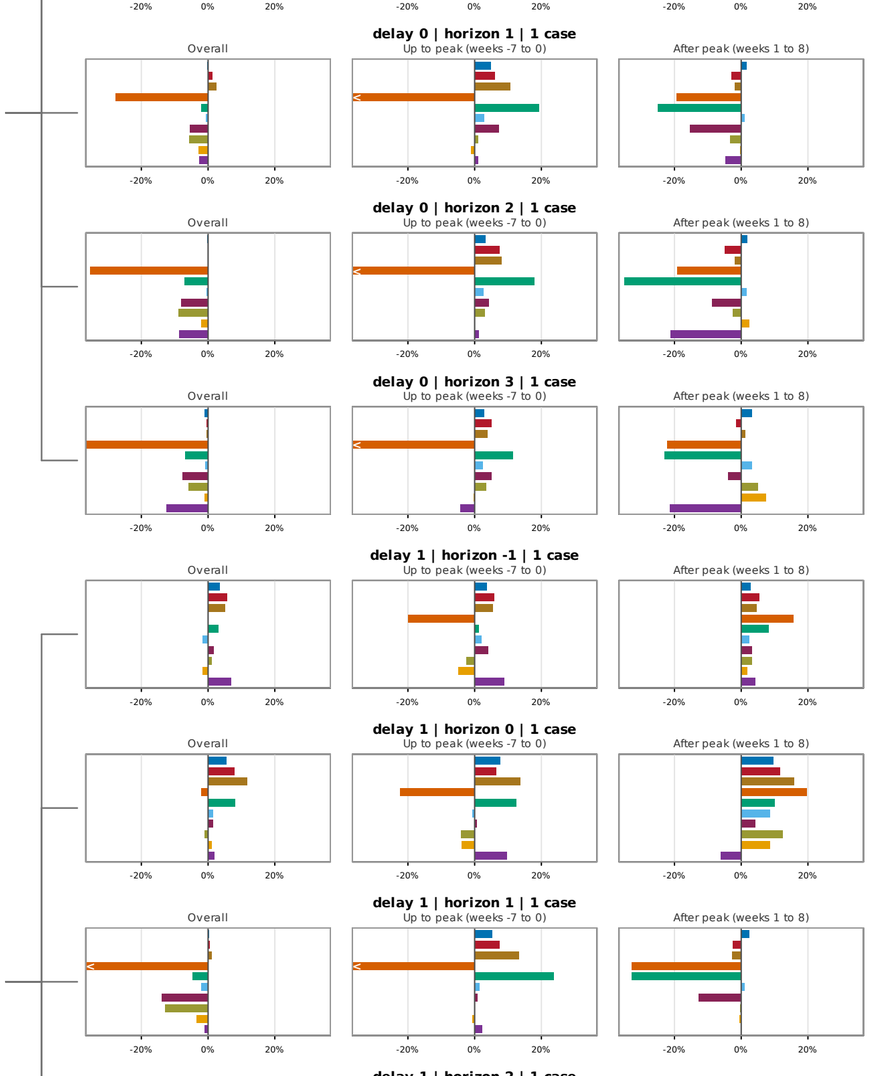


Bar: 100 * (1 - pooled loss / pooled loss of the original), pooled over the node's cases (location x horizon x feedback design), each case's mean loss weighted by its number of weeks; to the right: positive = smaller loss than the original.
Numbers right of each panel: share of the node's cases in which the method's loss is below the original's (nodes with at least 5 cases). Up to peak / after peak: the weeks around every local peak of the latest counts.
Each disease and feedback design uses the settings tuned with it (output/results/tuning); every method: output/results/peak_reasoning/evaluation_tree.csv.
Issue cutoffs: Wednesdays (actual generation dates where known). Every design is scored against the latest reports, version 2026-10-30 (not against the reports learned from).


flu | California (06) | evaluation: Jun 2025 to the end of season 2025/26 | loss in counts per 100k residents


Loss reduction against the original forecasts. Left: all feedback designs and horizons pooled; then split by feedback design, then by horizon.
Feedback design (protocol latest-at-use-v2): delay d = learn once, d weeks after the first report, from the report current then; re-run = re-run every week on the reports known then.

Bars, top to bottom

- Fixed MultiQT
- Delphi REF-op (covid prod)
- Delphi sqrt 0.018 (flu prod)
- Studentized median
- Studentized full base (level scales)
- Rate grid: learned, common weights
- Rate grid: learned + sharing, common weights
- Weekly starts: learned
- Diverse experts: equal
- Diverse experts: soft switching

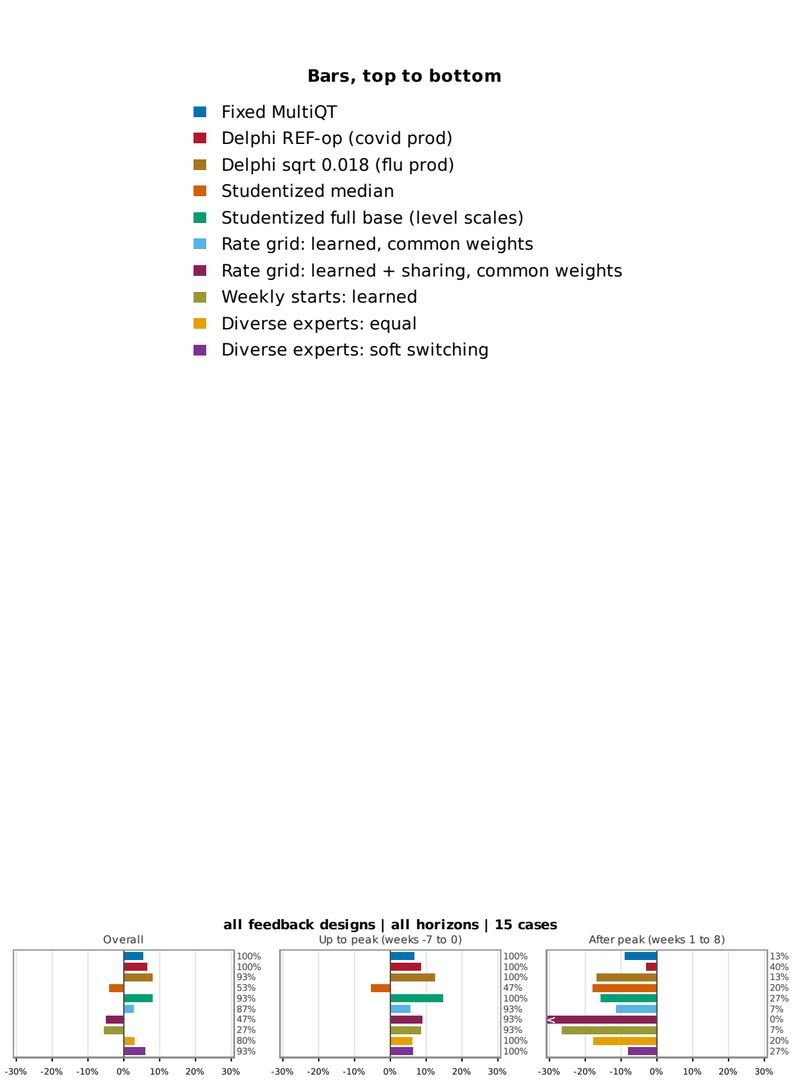

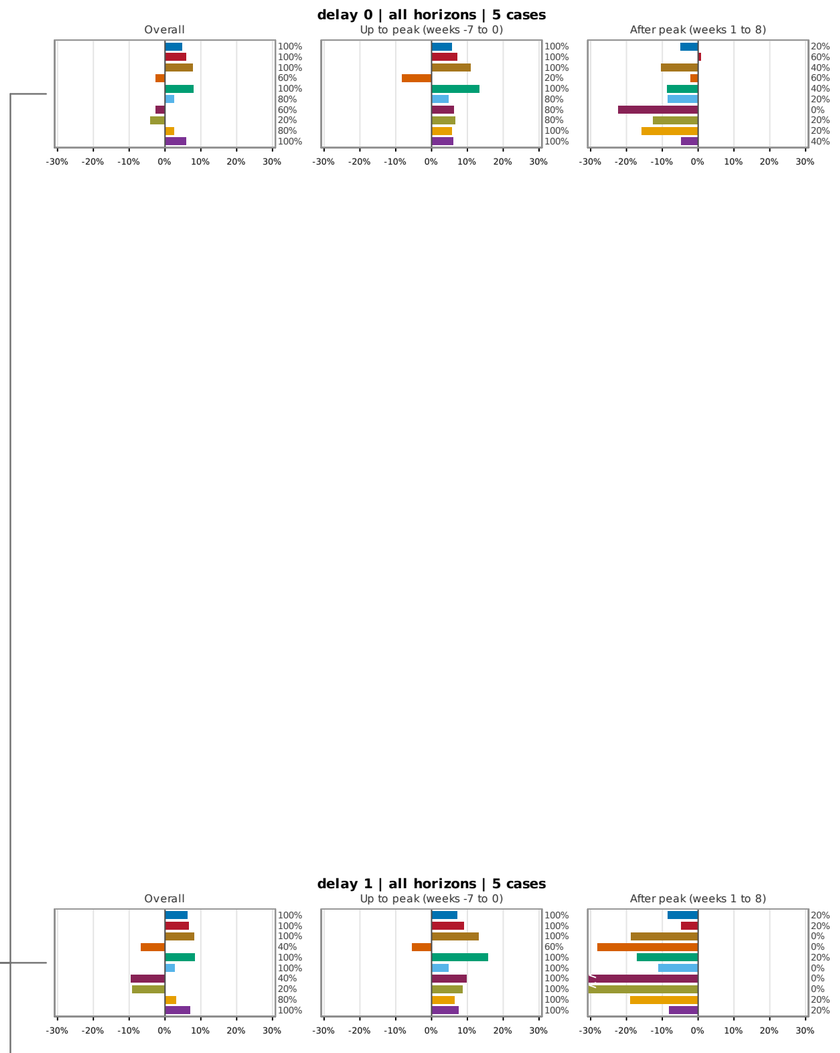

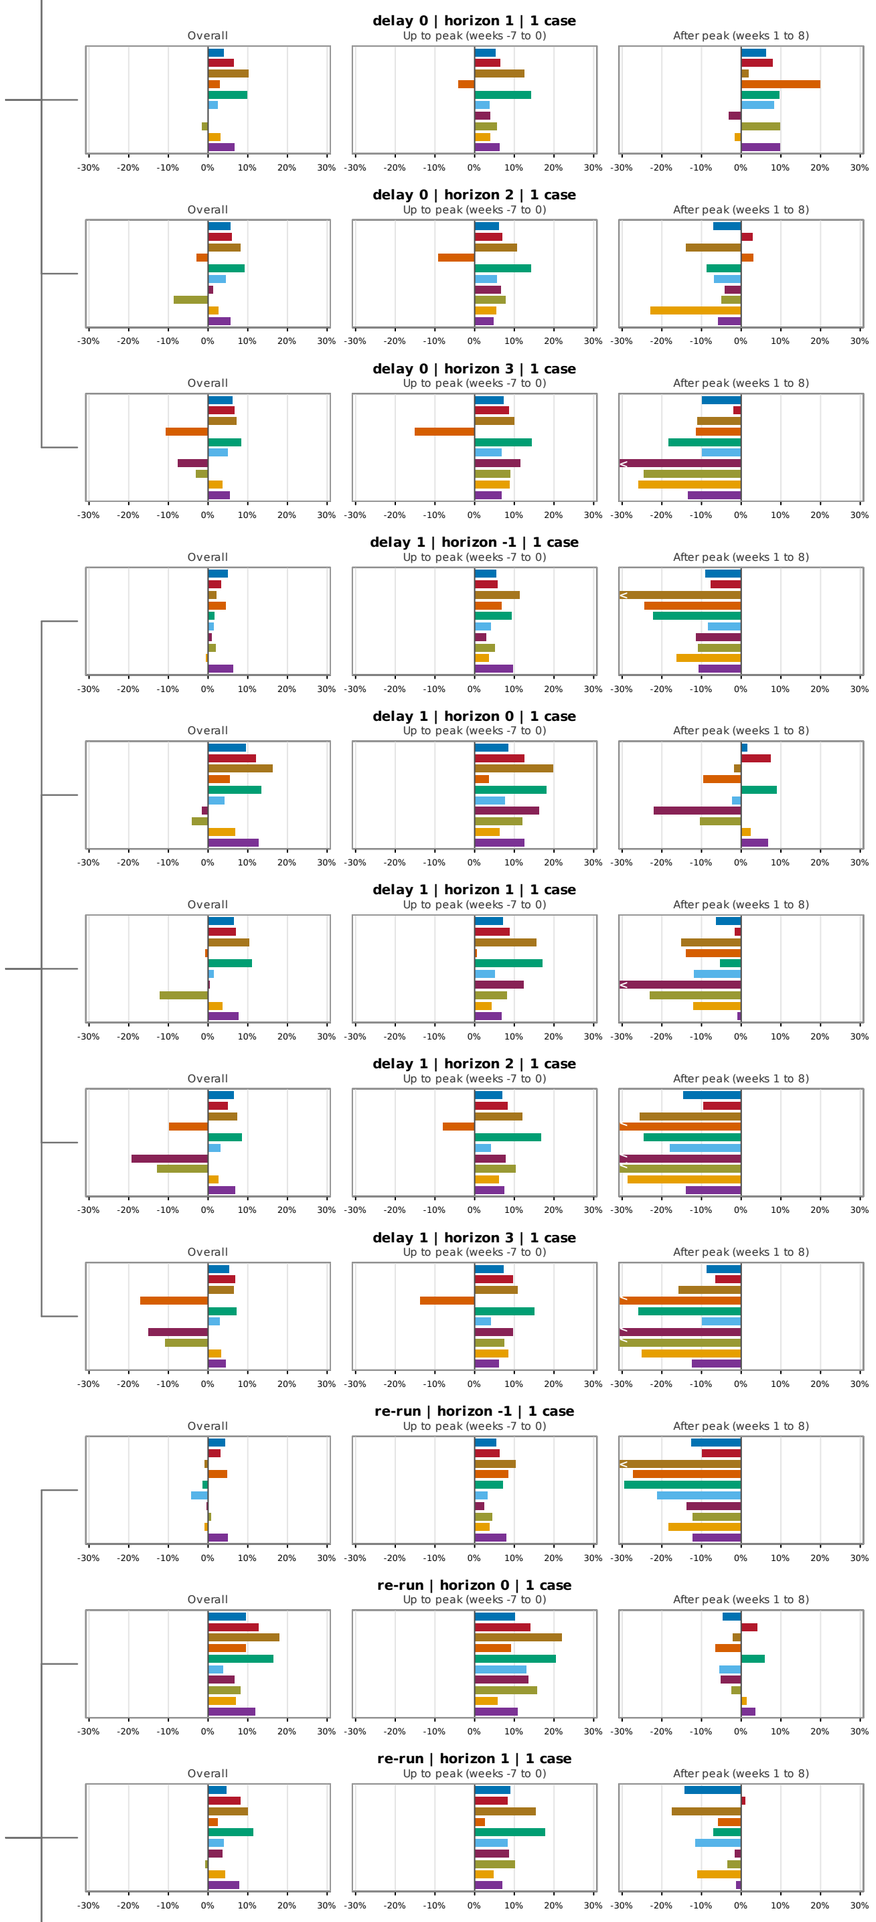


Bar: 100 * (1 - pooled loss / pooled loss of the original), pooled over the node's cases (location x horizon x feedback design), each case's mean loss weighted by its number of weeks; to the right: positive = smaller loss than the original.
Numbers right of each panel: share of the node's cases in which the method's loss is below the original's (nodes with at least 5 cases). Up to peak / after peak: the weeks around every local peak of the latest counts.
Each disease and feedback design uses the settings tuned with it (output/results/tuning); every method: output/results/peak_reasoning/evaluation_tree.csv.
Issue cutoffs: Wednesdays (actual generation dates where known). Every design is scored against the latest reports, version 2026-10-30 (not against the reports learned from).


flu | Texas (48) | evaluation: Jun 2025 to the end of season 2025/26 | loss in counts per 100k residents


Loss reduction against the original forecasts. Left: all feedback designs and horizons pooled; then split by feedback design, then by horizon.
Feedback design (protocol latest-at-use-v2): delay d = learn once, d weeks after the first report, from the report current then; re-run = re-run every week on the reports known then.

Bars, top to bottom

- Fixed MultiQT
- Delphi REF-op (covid prod)
- Delphi sqrt 0.018 (flu prod)
- Studentized median
- Studentized full base (level scales)
- Rate grid: learned, common weights
- Rate grid: learned + sharing, common weights
- Weekly starts: learned
- Diverse experts: equal
- Diverse experts: soft switching

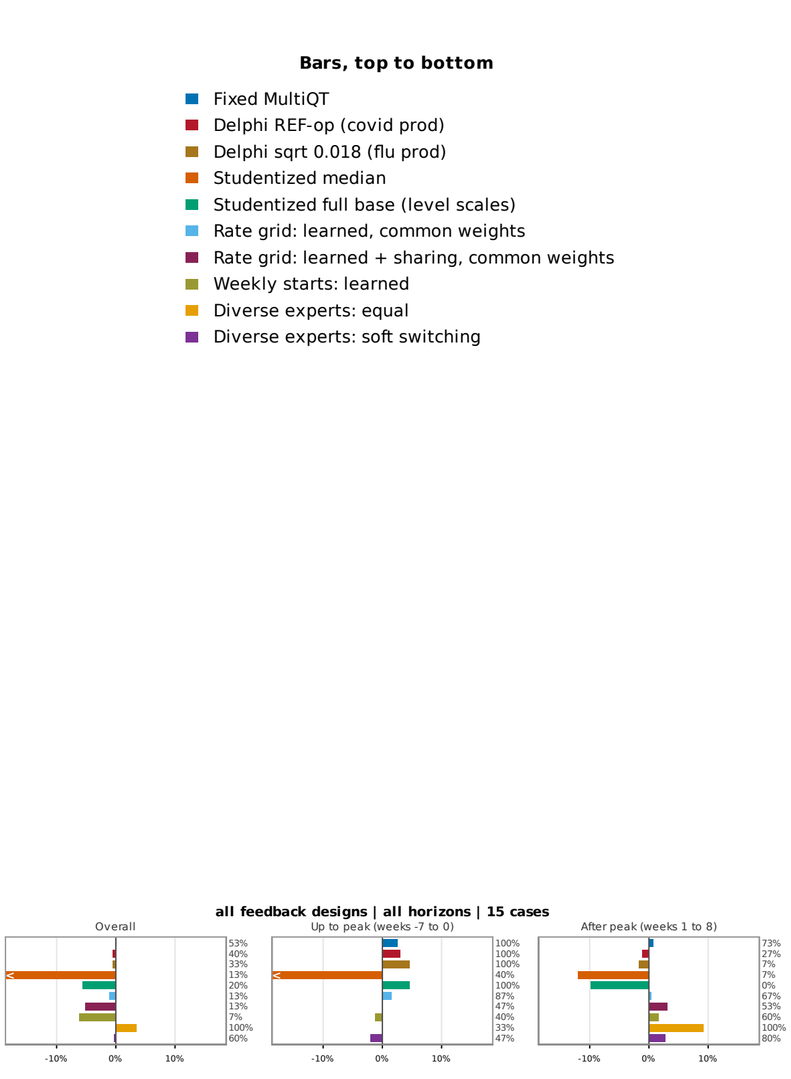

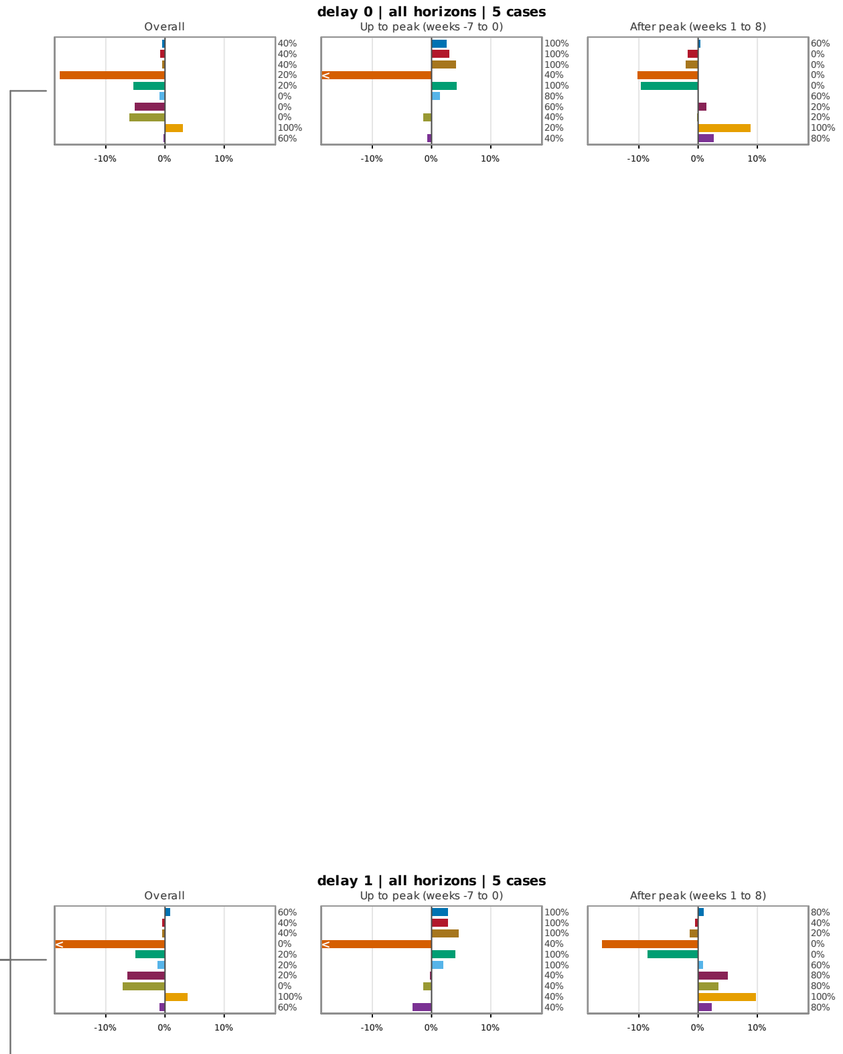

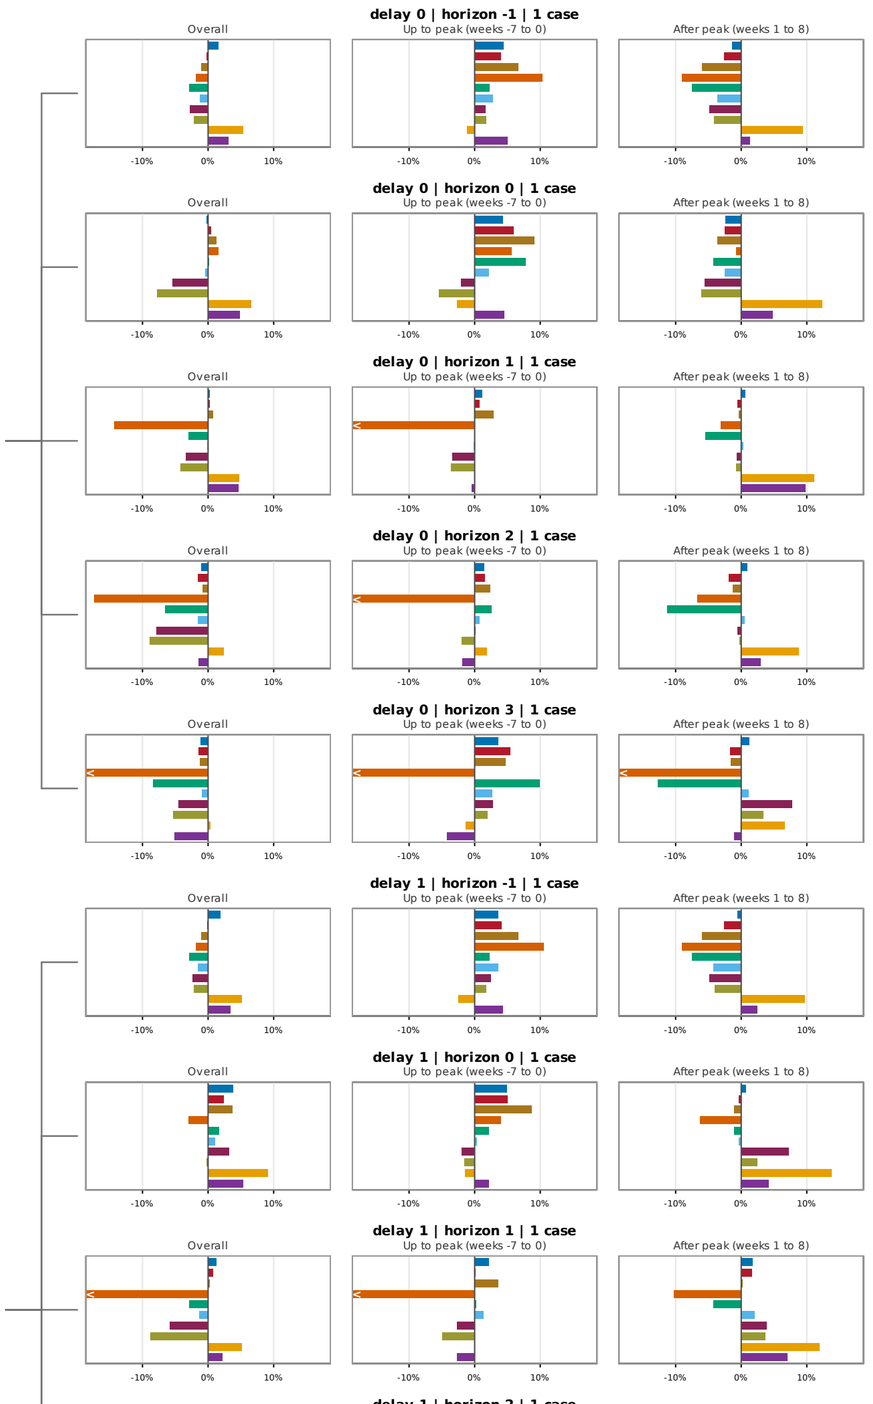


Bar: 100 * (1 - pooled loss / pooled loss of the original), pooled over the node's cases (location x horizon x feedback design), each case's mean loss weighted by its number of weeks; to the right: positive = smaller loss than the original.
Numbers right of each panel: share of the node's cases in which the method's loss is below the original's (nodes with at least 5 cases). Up to peak / after peak: the weeks around every local peak of the latest counts.
Each disease and feedback design uses the settings tuned with it (output/results/tuning); every method: output/results/peak_reasoning/evaluation_tree.csv.
Issue cutoffs: Wednesdays (actual generation dates where known). Every design is scored against the latest reports, version 2026-10-30 (not against the reports learned from).


flu | New York (36) | evaluation: Jun 2025 to the end of season 2025/26 | loss in counts per 100k residents


Loss reduction against the original forecasts. Left: all feedback designs and horizons pooled; then split by feedback design, then by horizon.
Feedback design (protocol latest-at-use-v2): delay d = learn once, d weeks after the first report, from the report current then; re-run = re-run every week on the reports known then.

Bars, top to bottom

- Fixed MultiQT
- Delphi REF-op (covid prod)
- Delphi sqrt 0.018 (flu prod)
- Studentized median
- Studentized full base (level scales)
- Rate grid: learned, common weights
- Rate grid: learned + sharing, common weights
- Weekly starts: learned
- Diverse experts: equal
- Diverse experts: soft switching

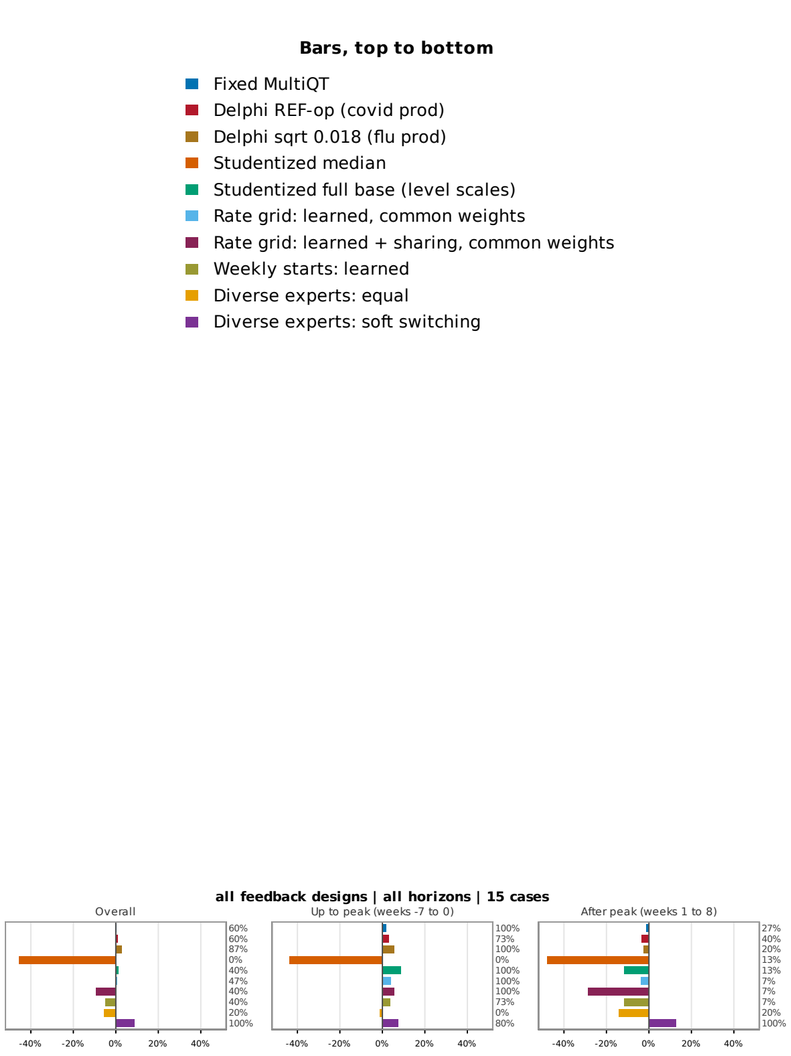

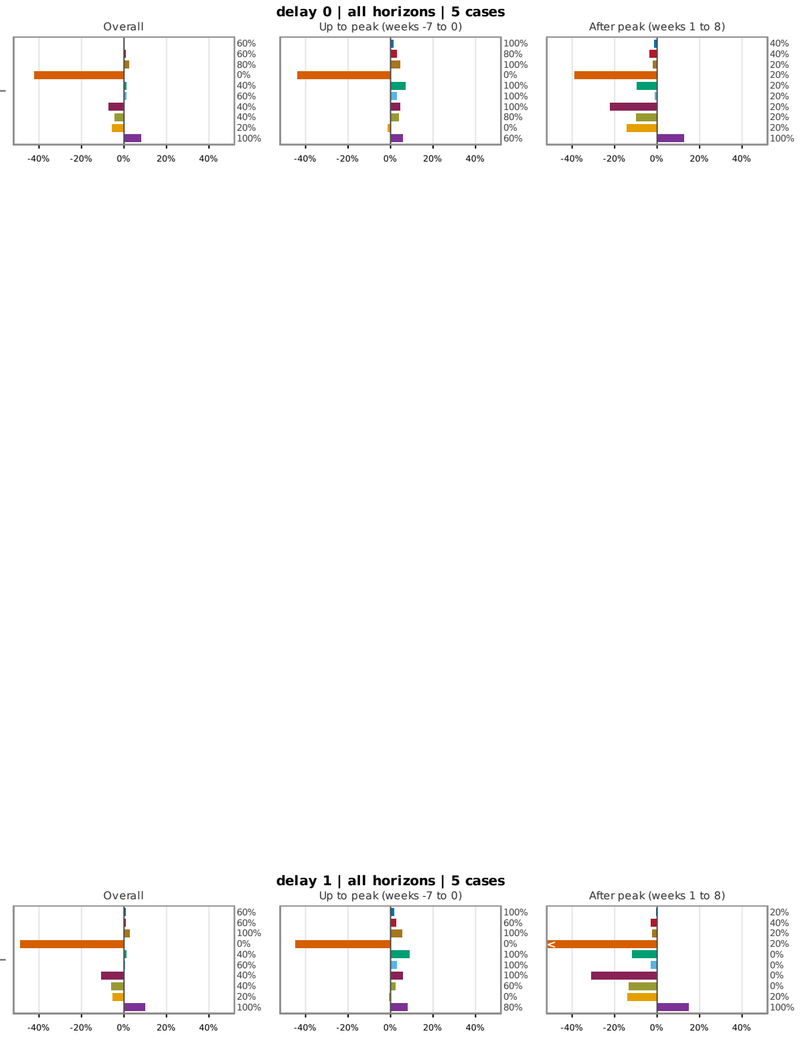

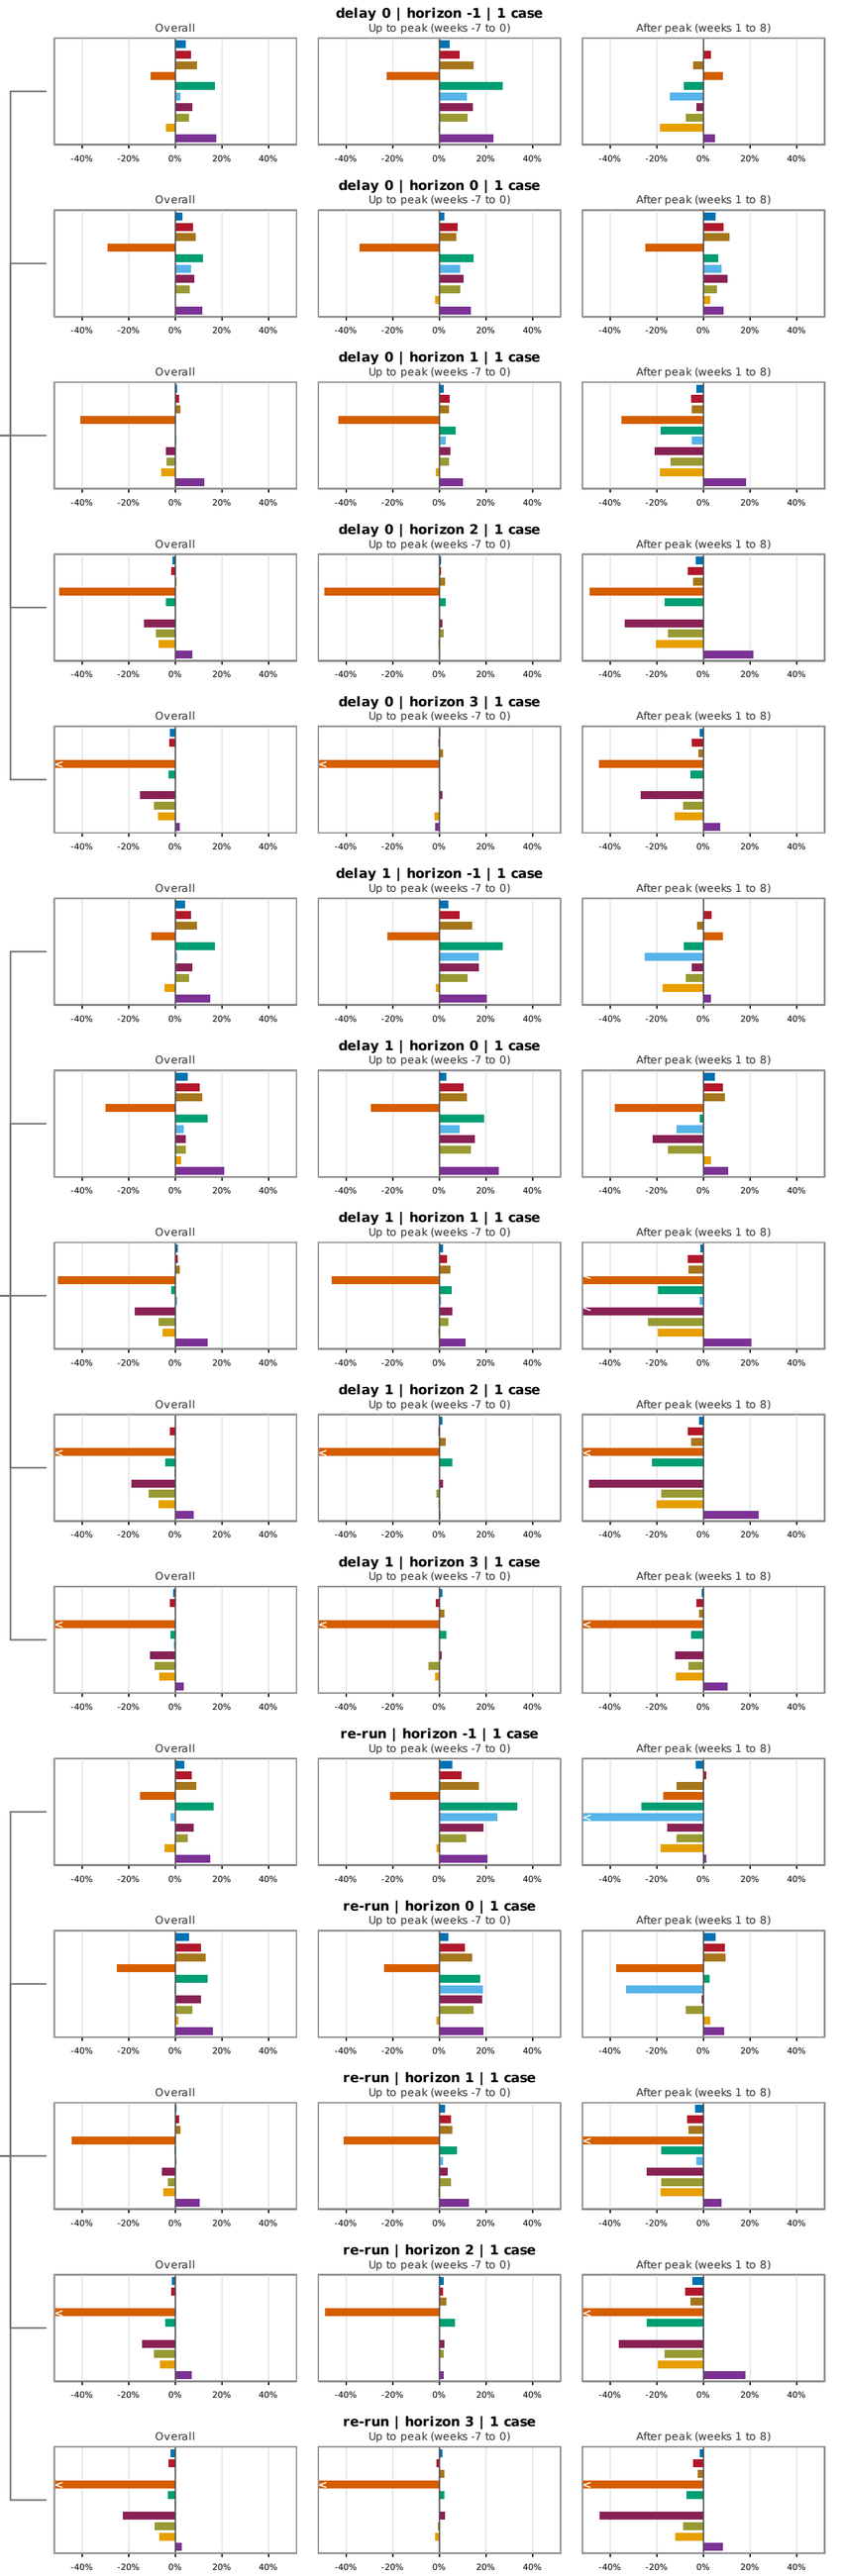


Bar: 100 * (1 - pooled loss / pooled loss of the original), pooled over the node's cases (location x horizon x feedback design), each case's mean loss weighted by its number of weeks; to the right: positive = smaller loss than the original.
Numbers right of each panel: share of the node's cases in which the method's loss is below the original's (nodes with at least 5 cases). Up to peak / after peak: the weeks around every local peak of the latest counts.
Each disease and feedback design uses the settings tuned with it (output/results/tuning); every method: output/results/peak_reasoning/evaluation_tree.csv.
Issue cutoffs: Wednesdays (actual generation dates where known). Every design is scored against the latest reports, version 2026-10-30 (not against the reports learned from).

flu | Pennsylvania (42) | evaluation: Jun 2025 to the end of season 2025/26 | loss in counts per 100k residents

Loss reduction against the original forecasts. Left: all feedback designs and horizons pooled; then split by feedback design, then by horizon.
Feedback design (protocol latest-at-use-v2): delay d = learn once, d weeks after the first report, from the report current then; re-run = re-run every week on the reports known then.

Bars, top to bottom

- Fixed MultiQT
- Delphi REF-op (covid prod)
- Delphi sqrt 0.018 (flu prod)
- Studentized median
- Studentized full base (level scales)
- Rate grid: learned, common weights
- Rate grid: learned + sharing, common weights
- Weekly starts: learned
- Diverse experts: equal
- Diverse experts: soft switching

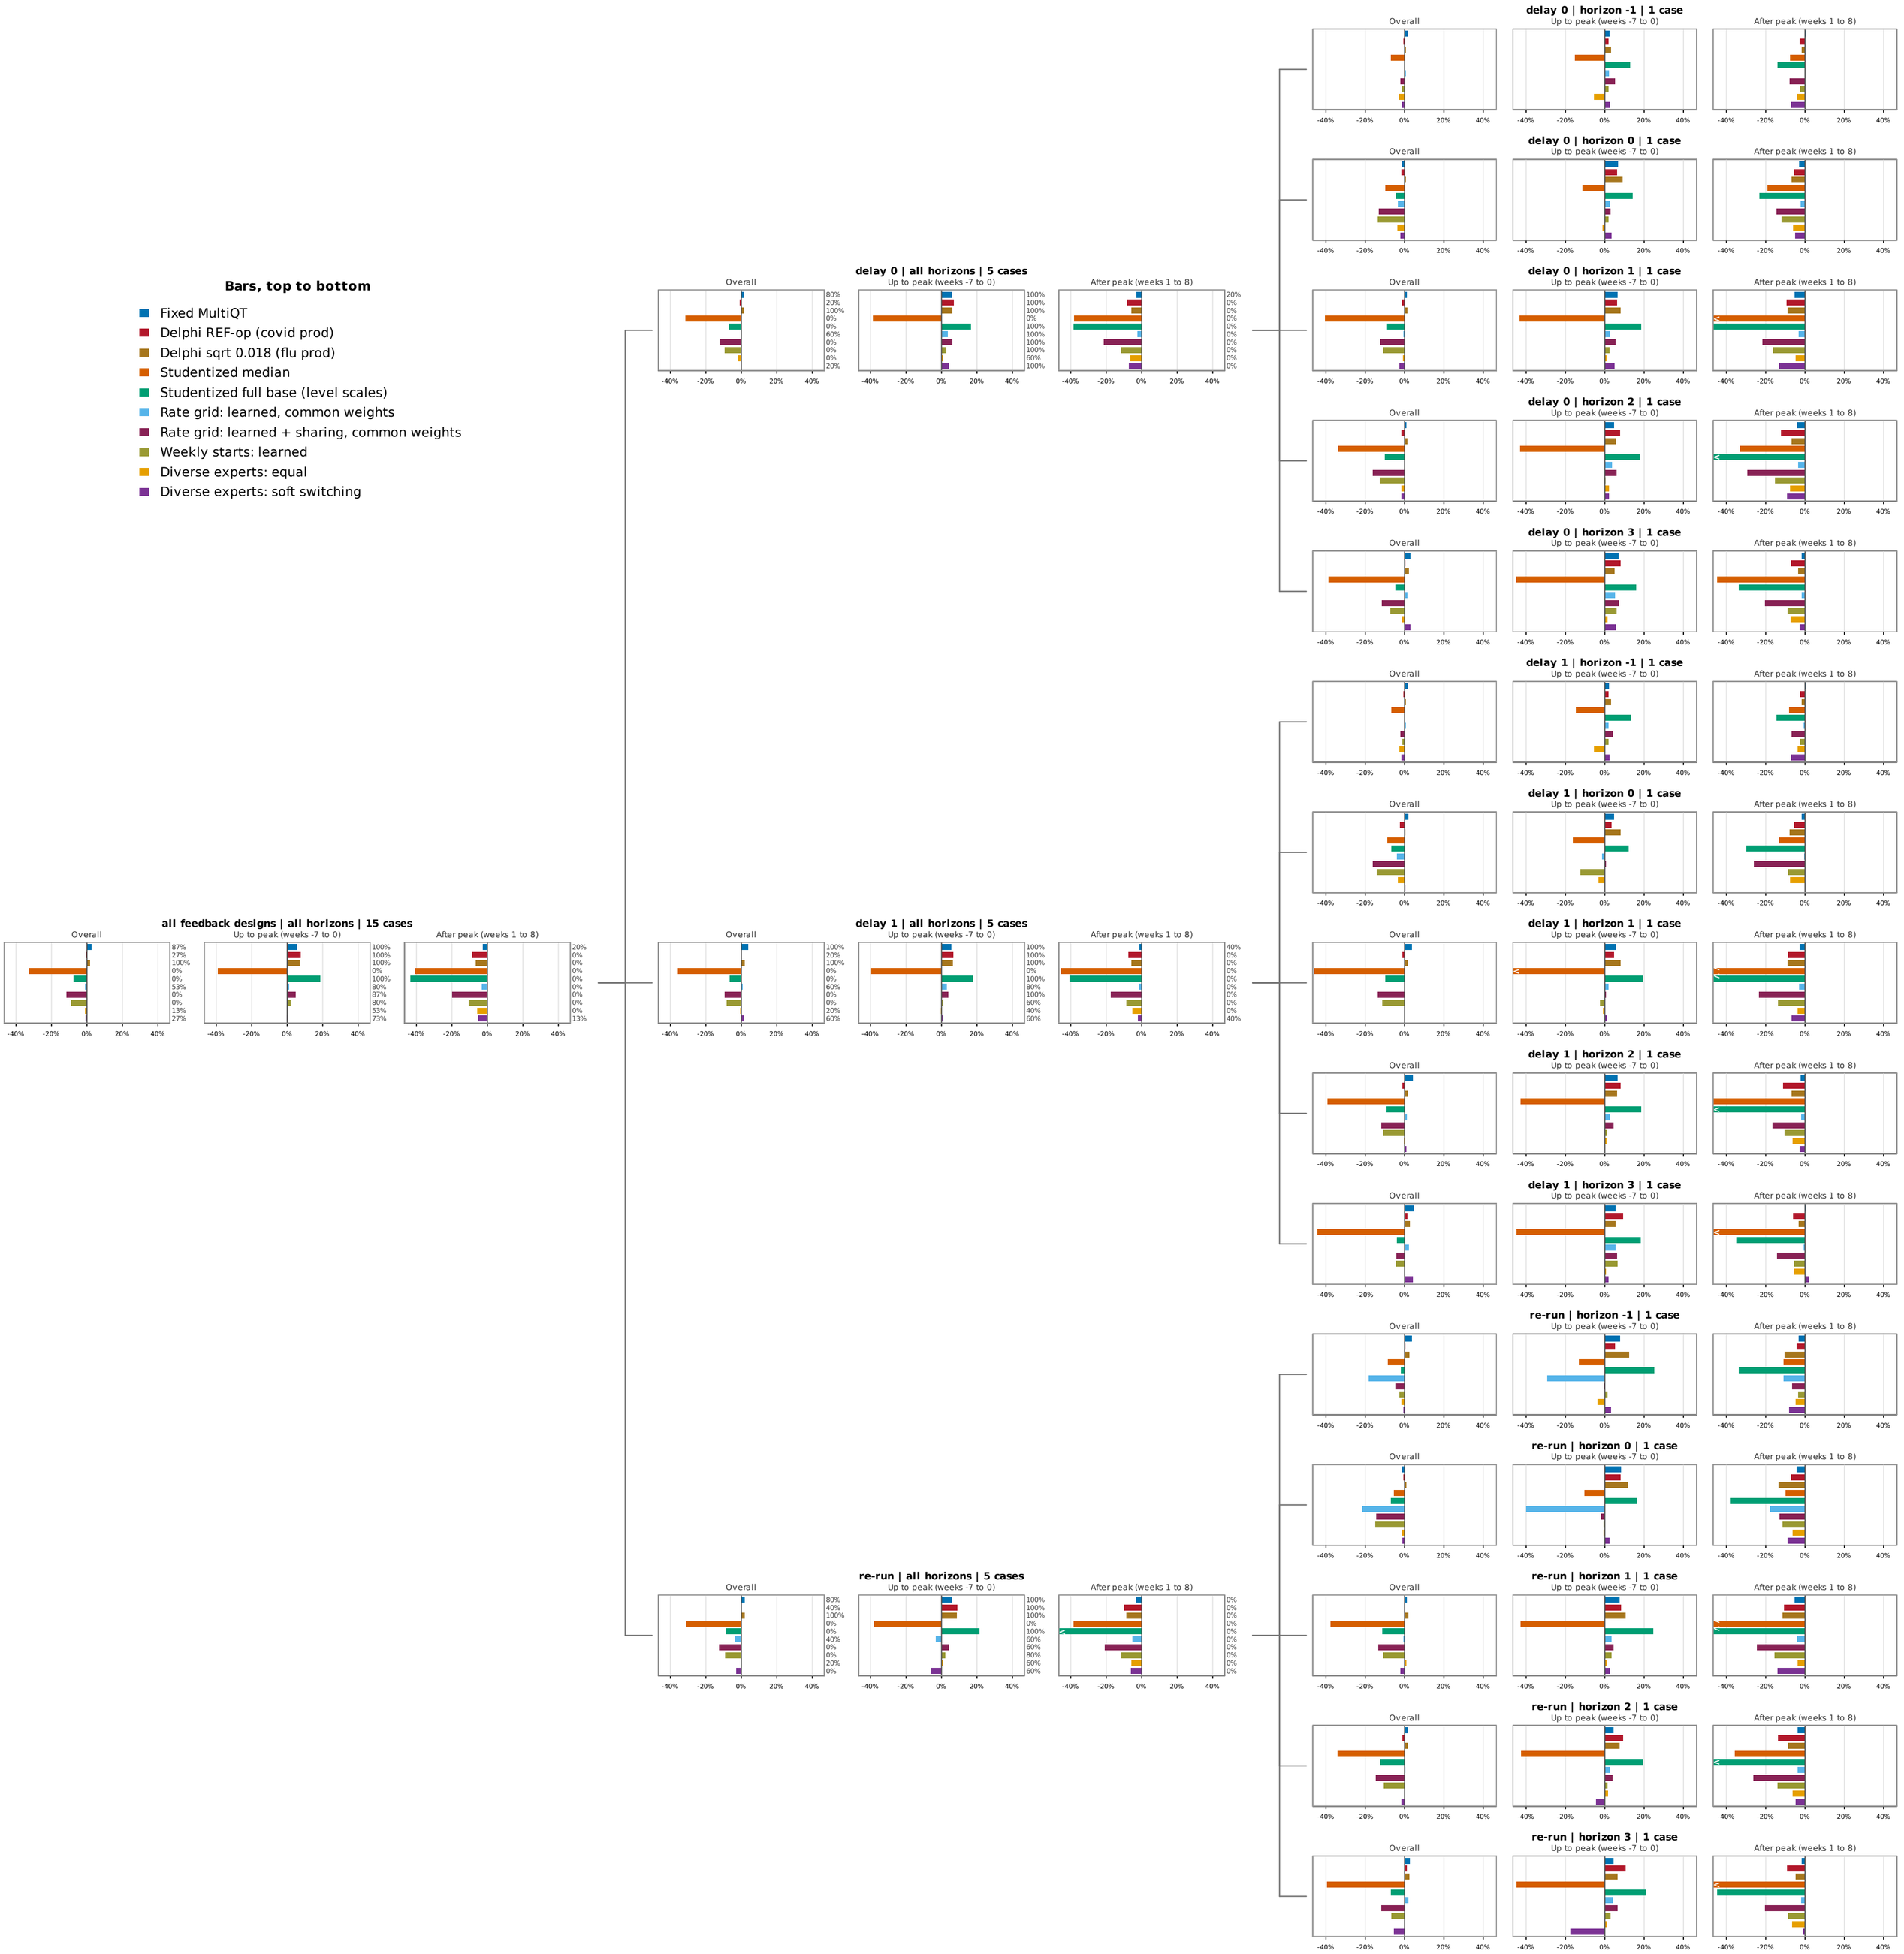

Bar: 100 * (1 - pooled loss / pooled loss of the original), pooled over the node's cases (location x horizon x feedback design), each case's mean loss weighted by its number of weeks; to the right: positive = smaller loss than the original.
Numbers right of each panel: share of the node's cases in which the method's loss is below the original's (nodes with at least 5 cases). Up to peak / after peak: the weeks around every local peak of the latest counts.
Each disease and feedback design uses the settings tuned with it (output/results/tuning); every method: output/results/peak_reasoning/evaluation_tree.csv.
Issue cutoffs: Wednesdays (actual generation dates where known). Every design is scored against the latest reports, version 2026-10-30 (not against the reports learned from).