

1. Learn what attributes are in HTML.

special keywords placed inside the **opening tag** of an HTML element to provide **additional information** and define its characteristics, appearance, or behavior.

Real time example ; For example, in `<a href="https://example.com">Link</a>`, href is the attribute name and "https://example.com" is the value.

Key Concepts

- Provides Extra Information
- Location
- Multiple Attributes
- Case-Insensitive
- Quoting Values
- Boolean Attributes

Some common attributes are as follows :

Href

Src


Height and width

Class

Id

Language

Title

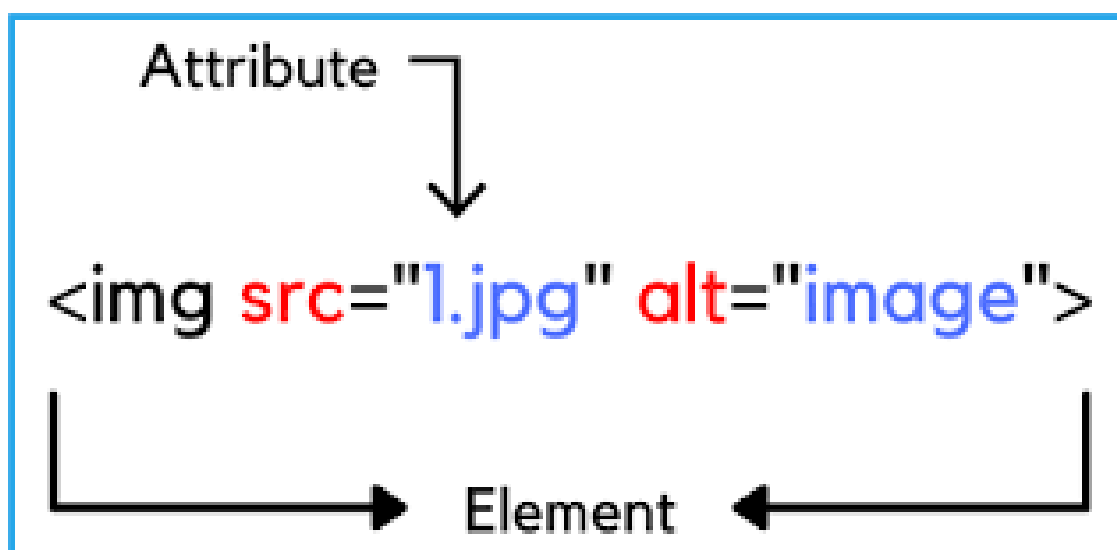

2.Explain "href" and give example

The href attribute is an attribute in HTML and also known as hypertext reference. It is primarily found within the <a> (anchor) tag and tells the web browser where to navigate when a user clicks on the link.


For example : About Us

3. Understand the uniqueness of id. Use it for styling. Practice assigning unique IDs.

The id attribute is used in HTML to assign a unique identifier to a single element. This identifier must be distinct within the entire document and allows you to reference that specific element for styling, manipulation with JavaScript, or as an anchor link

Real world example : each and every single person in a room having different and unique name for their identity

Real time example: <title>Unique ID Example</title>

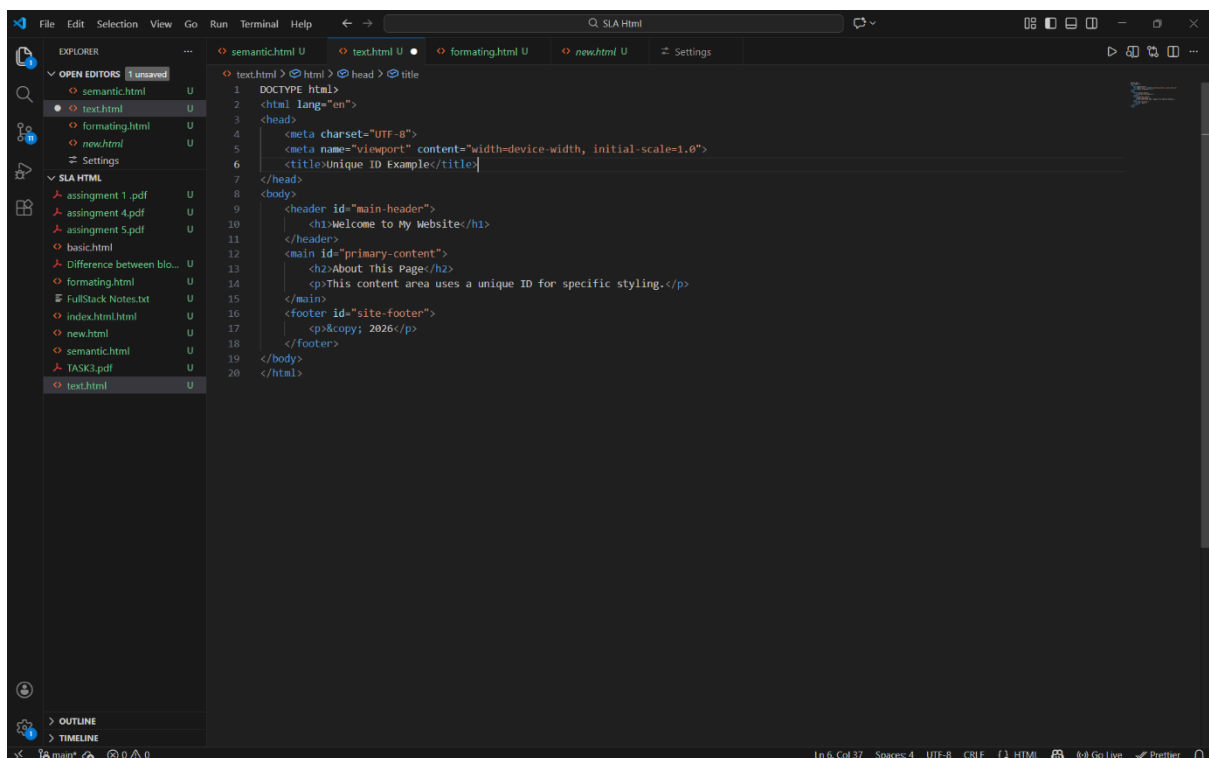

I will try to attach the github link asap

4. Example of HTML element with "id" attribute.

Lets approach this question with 5ws and 1h 

Who: Web developers use the id attribute.

What: It uniquely identifies an HTML element on a page.

When: Used whenever you need to target a single element (for CSS, JavaScript, or linking).

Where: Inside most HTML tags (like, **etc.**).

Why: To apply styles, manipulate with JavaScript, or create anchor links.

How: By adding `id="uniqueName"` inside the element's opening tag.

THE KEY USES FOR ID ATTRIBUTE:

Css styling

JS interaction

Page navigation

Uniqueness