

1.create all types of links<a>

Send Email

Make a Call

Go to Wikipedia

These are called as the hyper text reference links that is used to communicate to the html document to say that we have provided a reference or a command to open a web page within the origin page (redirection)

When this function is performed it first asks for a default mail, phone, or web browser to get it selected

2. Learn how to use class for styling multiple elements with CSS.

The class for styling is similar to the unique id that we used to map for <div> and the class is not related to css and its an attribute used to give priority to a particular element

Real time example: <p class="third-paragraph">this is a 3rd paragraph</p>

Likewise for id we use # instead for class we use .to denote the difference between the class and id

Real time example: }

```
.fourth-paragraph {  
    font-size: 30px;  
    color: green;  
}
```

3. Example and definition for Class, id, element selectors

Class: used to map and highlight and give priority to a particular element and it is denoted with : for example .fourth-paragraph {

```
    font-size: 30px;  
    color: green;  
}
```

ID : the id is a global attribute used in html to mainly for <div> and its unique case sensitive as well as linking

element selector: the element selector is nothing but what we give in the angled bracket such as <p>this is a paragraph</p>The element (or type) selector matches all HTML elements of a given tag name. It is the least specific of the three basic selectors and is typically used for applying broad, default styles across a webpage Uses the element's tag name directly (e.g., p, h1, div).

4. Examples for Inline, Internal, External styles.

The inline style is used to give style or colour to a particular inline element to give it the top most priority

Technical example: <h1 style="color: blue; text-align: center;">This is a Blue Heading</h1>

The internal style is used to provide the html content its style within the <style> to quote the height ,width, colour, bgcolor, margin, border etc

Technical example: <style>

```
body { background-color: lightgray; }
```

```
h1 { color: green; }
```

```
p { font-family: Arial, sans-serif; }
```

```
</style>
```

External style is used when there are multiple pages such as about, services, home etc where if we try to give css within the same it will be cluttered and not so easy to understand for the developers so instead we use the external css and link it to the main page

Technical example: <link rel="stylesheet" href="styles.css">


5. Example and definition for Comments in html.

The comments in html is used to focus on a particular code and work on it while viewing it through live server, when selected it will hide the specific code in the html document and in the code editor it appears in green text and it also appears the same in developer tools(inspect). snippets of code used to add notes or explanations within the source code that are completely ignored by the web browser and thus not displayed on the webpage. They are crucial for improving code readability, documenting sections, and collaborating with other developers.

Technical example: `<!-- <a href="#about">Go to About Section</a> -->`

I didn't use git hub for small codes to give examples.


Vs code POV

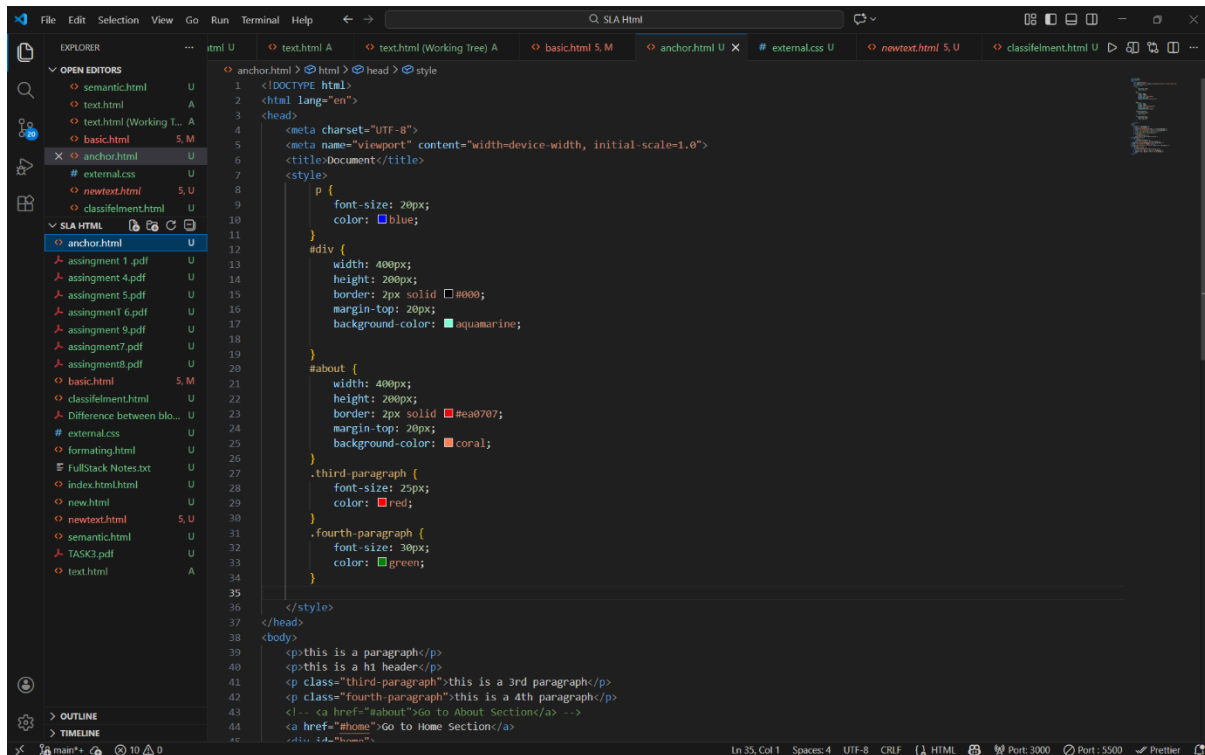


```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <meta charset="UTF-8">
5 </head>
6 <body>
7   <p class="third-paragraph">this is a 3rd paragraph</p>
8   <p class="fourth-paragraph">this is a 4th paragraph</p>
9   <!-- <a href="#about">Go to About Section</a> -->
10  <a href="#home">Go to Home Section</a>
11  <div id="home">
12    <h2>Home Section</h2>
13  </div>
14  <a href="#about">Go to About Section</a>
15  <div id="about"></div>
16  <div id="div">
17    <h2>Service Section</h2>
18    <a href="services">go to service section</a>
19    <a href="mailto:monish2005@gmail.com">Send Email</a>
20    <a href="tel:2343295797">Make a Call</a>
21    <a href="http://google.com" target="_blank">Go to wikipedia</a>
22  </div>
23  <div id="about"></div>
24  <h2>About Section</h2>
25  <link rel="stylesheet" href="external.css">
26  <p style="color: blue;">this is a paragraph</p>
27  <p style="color: green;">this is a paragraph</p>
28 </body>
29 </html>
```

```
1 P {
2   font-size: 20px;
3   color: blue;
4 }
5 #div {
6   width: 400px;
7   height: 200px;
8   border: 2px solid #000;
9   margin-top: 20px;
10  background-color: aquamarine;
11 }
12 #about {
13   width: 400px;
14   height: 200px;
15   border: 2px solid #a0707;
16   margin-top: 20px;
17   background-color: coral;
18 }
19 .third-paragraph {
20   font-size: 25px;
21   color: red;
22 }
23 .fourth-paragraph {
24   font-size: 30px;
25   color: green;
26 }
27
28
```

Output with internal css

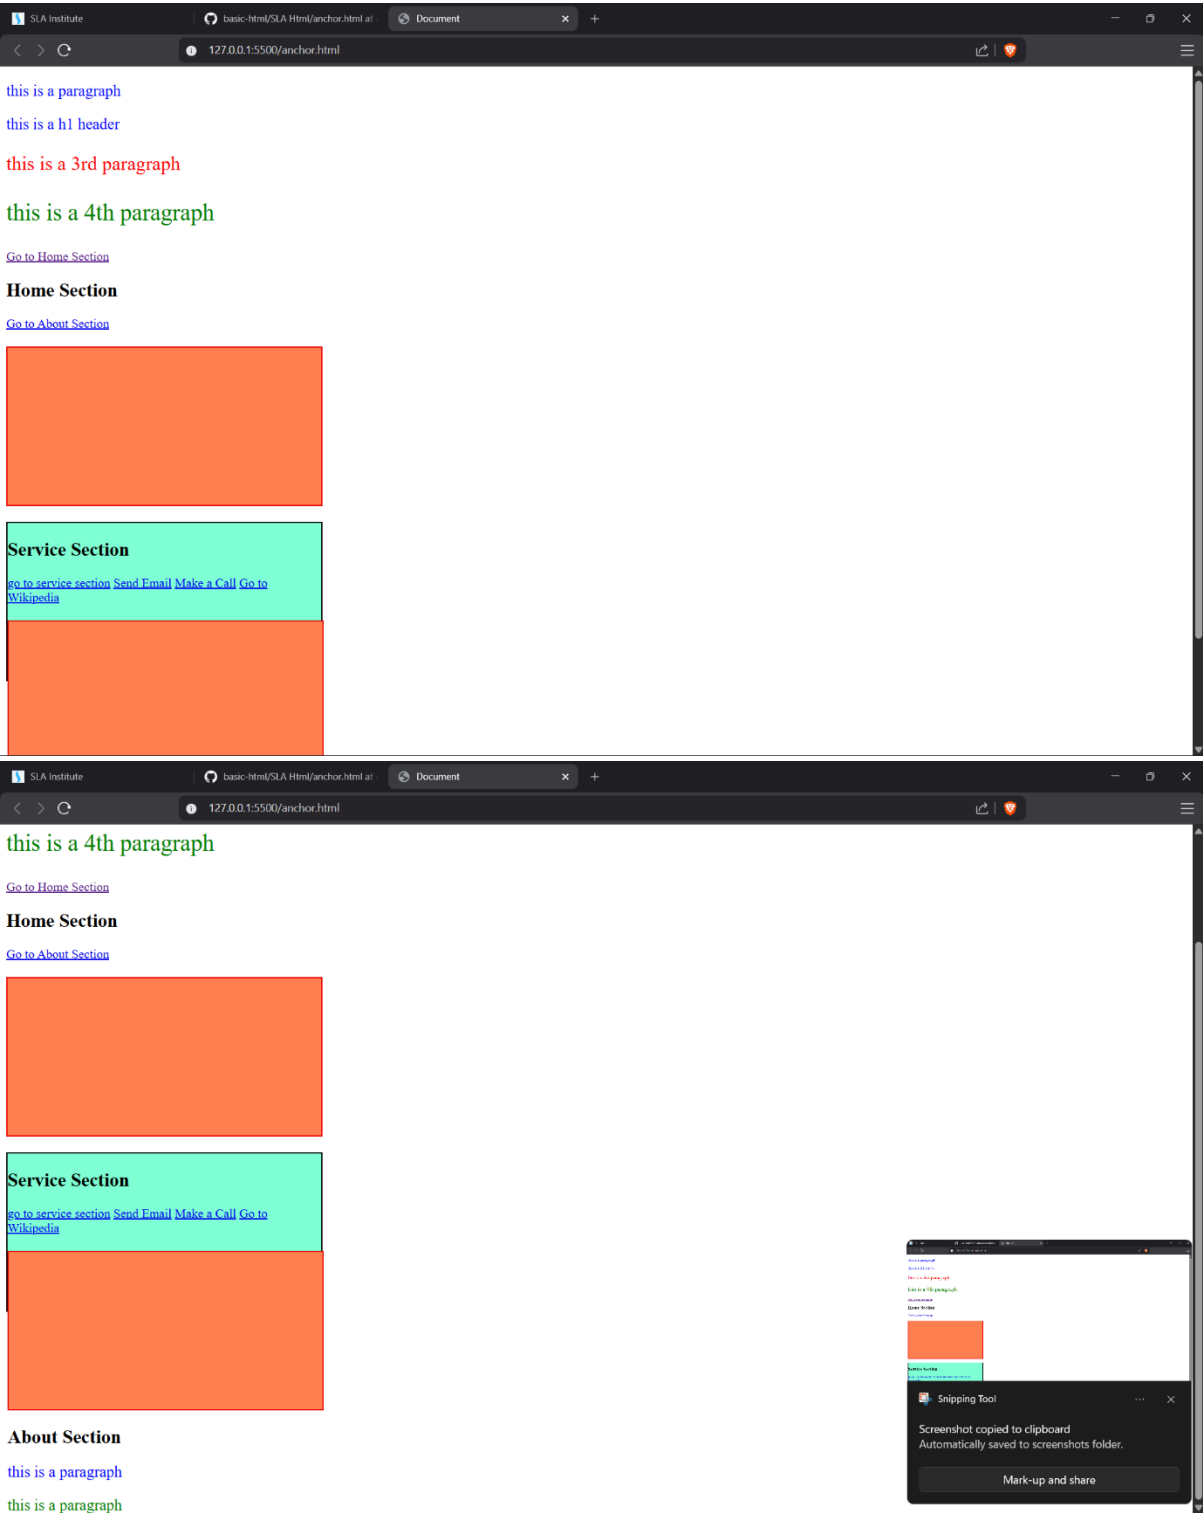


Output with external css

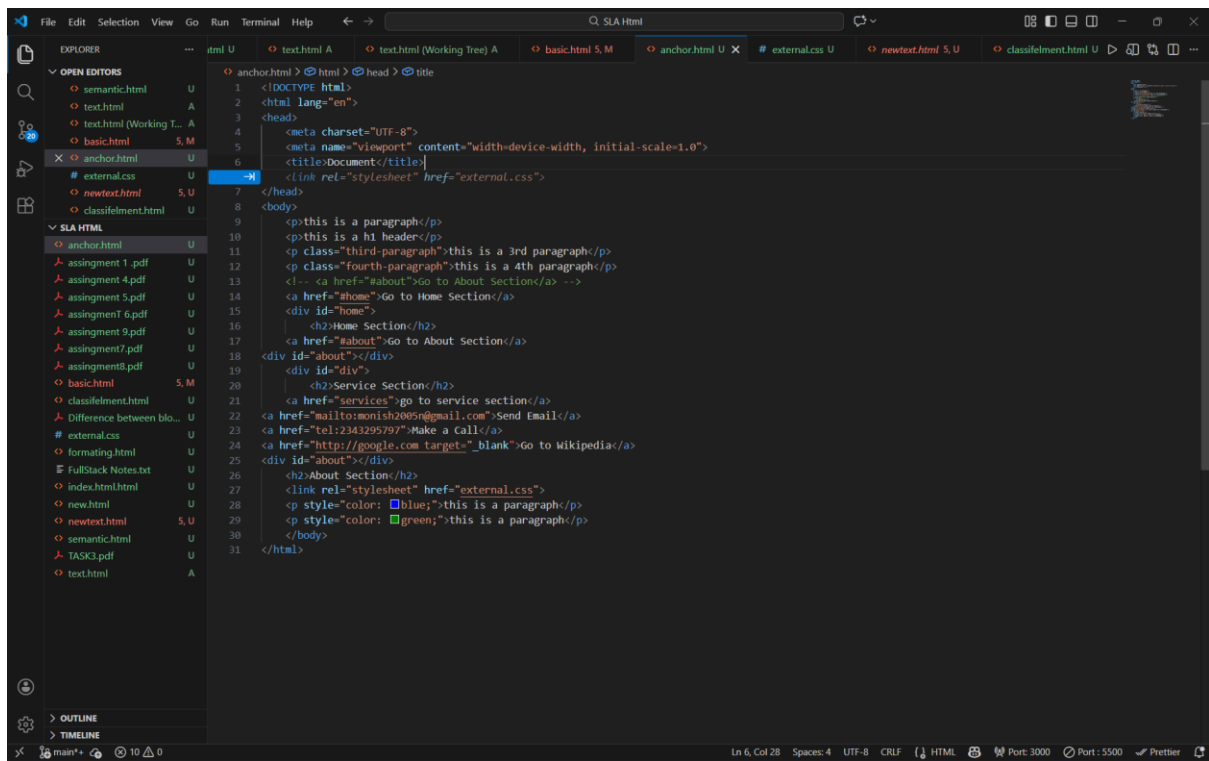

The screenshot shows the VS Code editor with the 'external.html' file open. The code is as follows:

```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <meta charset="UTF-8">
5   <meta name="viewport" content="width=device-width, initial-scale=1.0">
6   <title>Document</title>
7   <link rel="stylesheet" href="external.css">
8 </head>
9 <body>
10  <p>this is a paragraph</p>
11  <p>this is a h1 header</p>
12  <p class="third-paragraph">this is a 3rd paragraph</p>
13  <p class="fourth-paragraph">this is a 4th paragraph</p>
14  <!-- <a href="#about">Go to About Section</a> -->
15  <a href="#home">Go to Home Section</a>
16  <div id="home">
17    <h2>Home Section</h2>
18  <a href="#about">Go to About Section</a>
19  <div id="div">
20    <h2>Service Section</h2>
21    <a href="services">go to service section</a>
22    <a href="mailto:monish2005n@gmail.com">Send Email</a>
23    <a href="tel:2343295797">Make a Call</a>
24    <a href="http://google.com" target="_blank">Go to Wikipedia</a>
25  </div id="about"></div>
26  <h2>About Section</h2>
27  <link rel="stylesheet" href="external.css">
28  <p style="color: blue;">this is a paragraph</p>
29  <p style="color: green;">this is a paragraph</p>
30 </body>
31 </html>
```

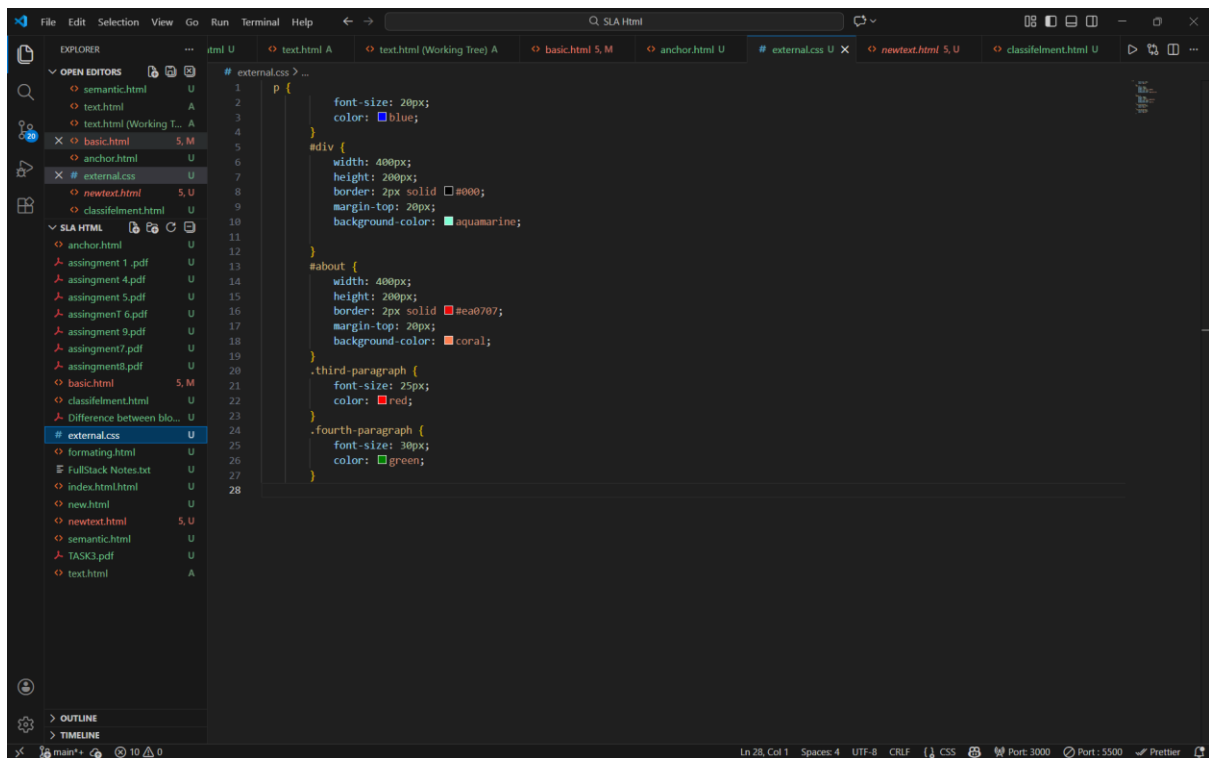

The screenshot shows the VS Code editor with the 'external.css' file open. The code is as follows:

```
1 P {
2   font-size: 20px;
3   color: blue;
4 }
5
6 #div {
7   width: 400px;
8   height: 200px;
9   border: 2px solid #000;
10  margin-top: 20px;
11  background-color: #a9a9a9;
12 }
13
14 #about {
15   width: 400px;
16   height: 200px;
17   border: 2px solid #ea0707;
18   margin-top: 20px;
19   background-color: #ff0000;
20 }
21
22 .third-paragraph {
23   font-size: 25px;
24   color: red;
25 }
26
27 .fourth-paragraph {
28   font-size: 30px;
29   color: green;
30 }
```

