


1. Question 1

Step 1. Create a table containing 3 columns and 3 rows.

Step 2. 1st column heading should be Item Name, 2nd column heading should be Quantity and 3rd should be Price


Step 3. Rest of the rows should contain the items and prices.

Step 4. Last row should contain Total.

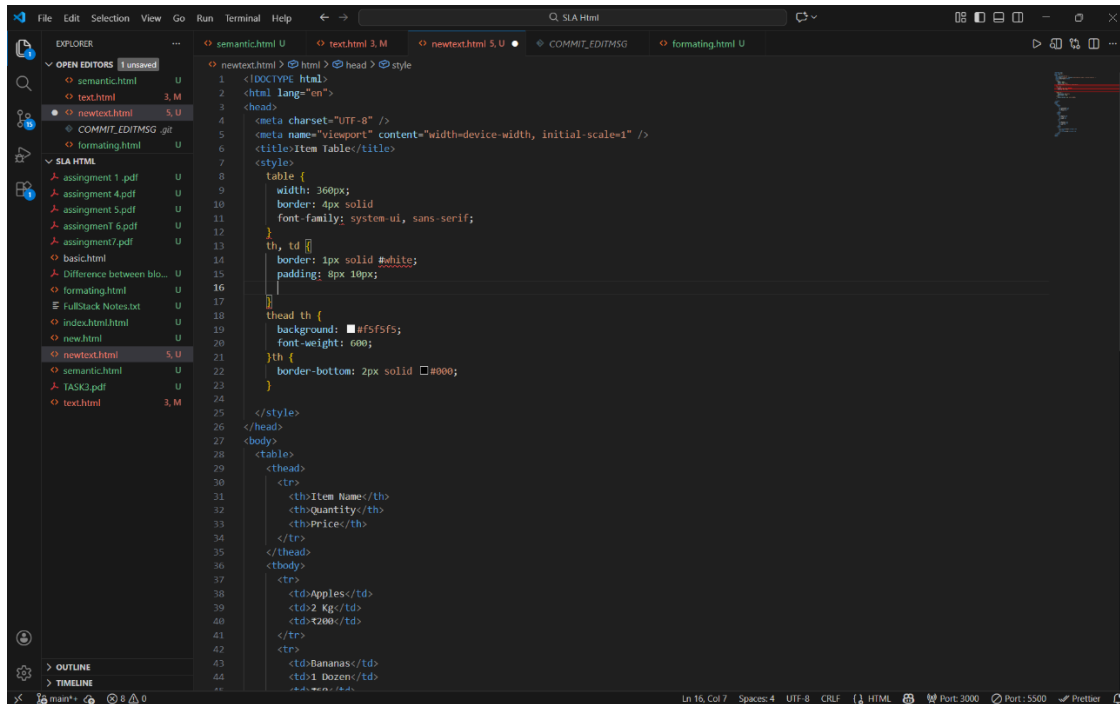

The screenshot shows the VS Code editor with a file explorer on the left and a code editor on the right. The code editor displays the following HTML code:

```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4 <meta charset="UTF-8" />
5 <meta name="viewport" content="width=device-width, initial-scale=1" />
6 <title>Item Table</title>
7 <style>
8   table {
9     width: 360px;
10    border: 4px solid
11    font-family: system-ui, sans-serif;
12  }
13  th, td {
14    border: 1px solid #fff;
15    padding: 8px 10px;
16  }
17  thead th {
18    background-color: #f5f5f5;
19    font-weight: bold;
20  }
21  }
22  }
23  }
24  }
25 </style>
26 </head>
27 <body>
28 <table>
29 <thead>
30 <tr>
31 <th>Item Name</th>
32 <th>Quantity</th>
33 <th>Price</th>
34 </tr>
35 </thead>
36 <tbody>
37 <tr>
38 <td>Apples</td>
39 <td>2 Kg</td>
40 <td>200</td>
41 </tr>
42 <tr>
43 <td>Bananas</td>
44 <td>1 Dozen</td>
45 <td>100</td>
46 </tr>
47 </tbody>
48 </table>
49 </body>
50 </html>
```

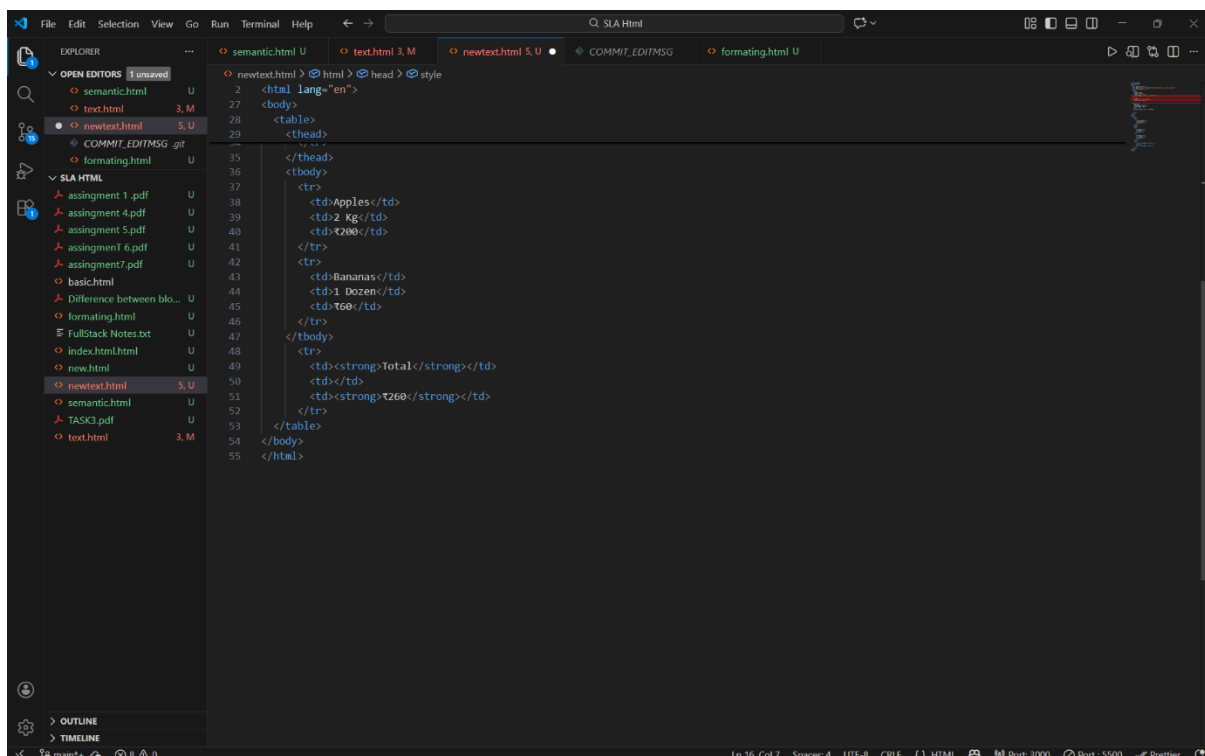

The screenshot shows the VS Code editor with a file explorer on the left and a code editor on the right. The code editor displays the following HTML code:

```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4 <meta charset="UTF-8" />
5 <meta name="viewport" content="width=device-width, initial-scale=1" />
6 <title>Item Table</title>
7 <style>
8   table {
9     width: 360px;
10    border: 4px solid
11    font-family: system-ui, sans-serif;
12  }
13  th, td {
14    border: 1px solid #fff;
15    padding: 8px 10px;
16  }
17  thead th {
18    background-color: #f5f5f5;
19    font-weight: bold;
20  }
21  }
22  }
23  }
24  }
25 </style>
26 </head>
27 <body>
28 <table>
29 <thead>
30 <tr>
31 <th>Item Name</th>
32 <th>Quantity</th>
33 <th>Price</th>
34 </tr>
35 </thead>
36 <tbody>
37 <tr>
38 <td>Apples</td>
39 <td>2 Kg</td>
40 <td>200</td>
41 </tr>
42 <tr>
43 <td>Bananas</td>
44 <td>1 Dozen</td>
45 <td>100</td>
46 </tr>
47 </tbody>
48 </table>
49 </body>
50 </html>
```

Item Name	Quantity	Price
Apples	2 Kg	₹200
Bananas	1 Dozen	₹60
Total		₹260

2. How to call a function while typing the value in the browser's textbox

The event name is called onclick ,onpress etc these are javascript codes that is used to make interactive and active dynamic webpages for the users to interact for example creating a to do task webpage where a user can press the add button after typing the text in the text box

