

# Unit 3 – Managing APIs

Developing with SAP Integration Suite

C\_CPI\_15


# Agenda

- SAP API Management
- Components of SAP API Management
- Creating an API Provider
- Creating an API (proxy)
- Using Policies
- Creating a Product
- Logging and Monitoring
- Key Summary Points

# SAP API Management


- Building APIs (proxies)
- Publishing APIs (Bundle APIs as Product)
- Analyzing APIs
- Consuming APIs
- Monetizing APIs
- Discover API Packages
- API (proxy) Designer

# Relevant Use Cases

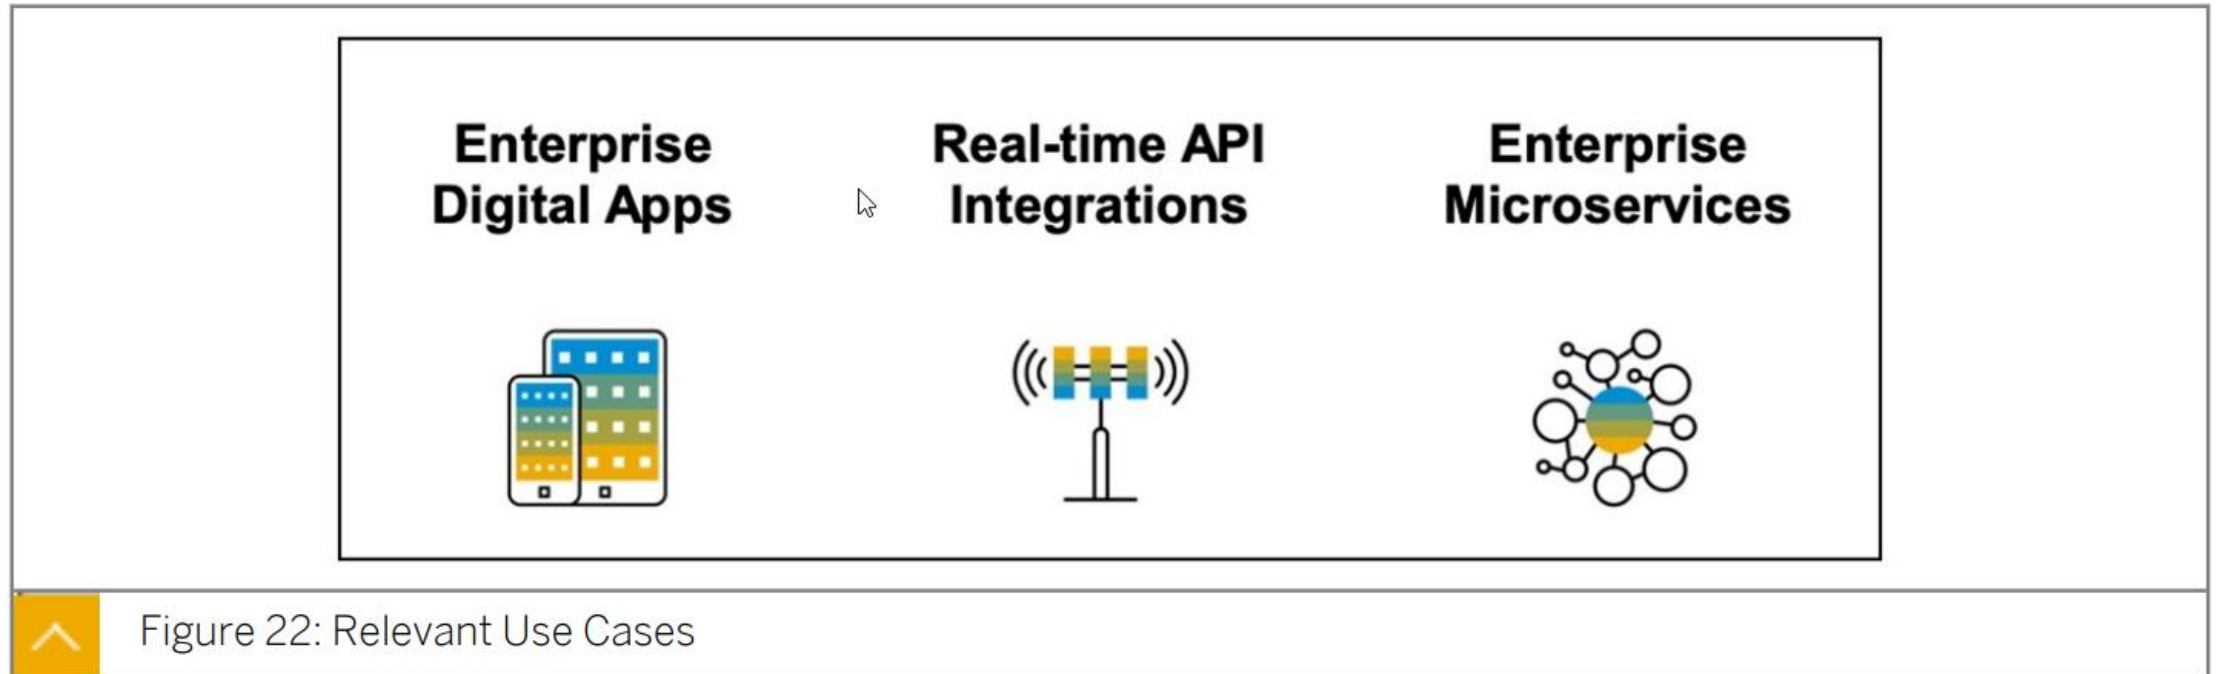


# Components of SAP API Management

- API Provider
  - Concept in API Management that defines connection details for existing services
- API (Proxy)
  - Managed facades for existing services (sits in front of the existing service)
  - Applications connect to API (proxy)
- Policies
  - Provides capabilities to define behavior of an API (proxy)
- Product
  - Bundle and publish API (proxies) as a Product for consumption
- Application
  - Consumes the Product (bundle of API proxies) using api key and secret

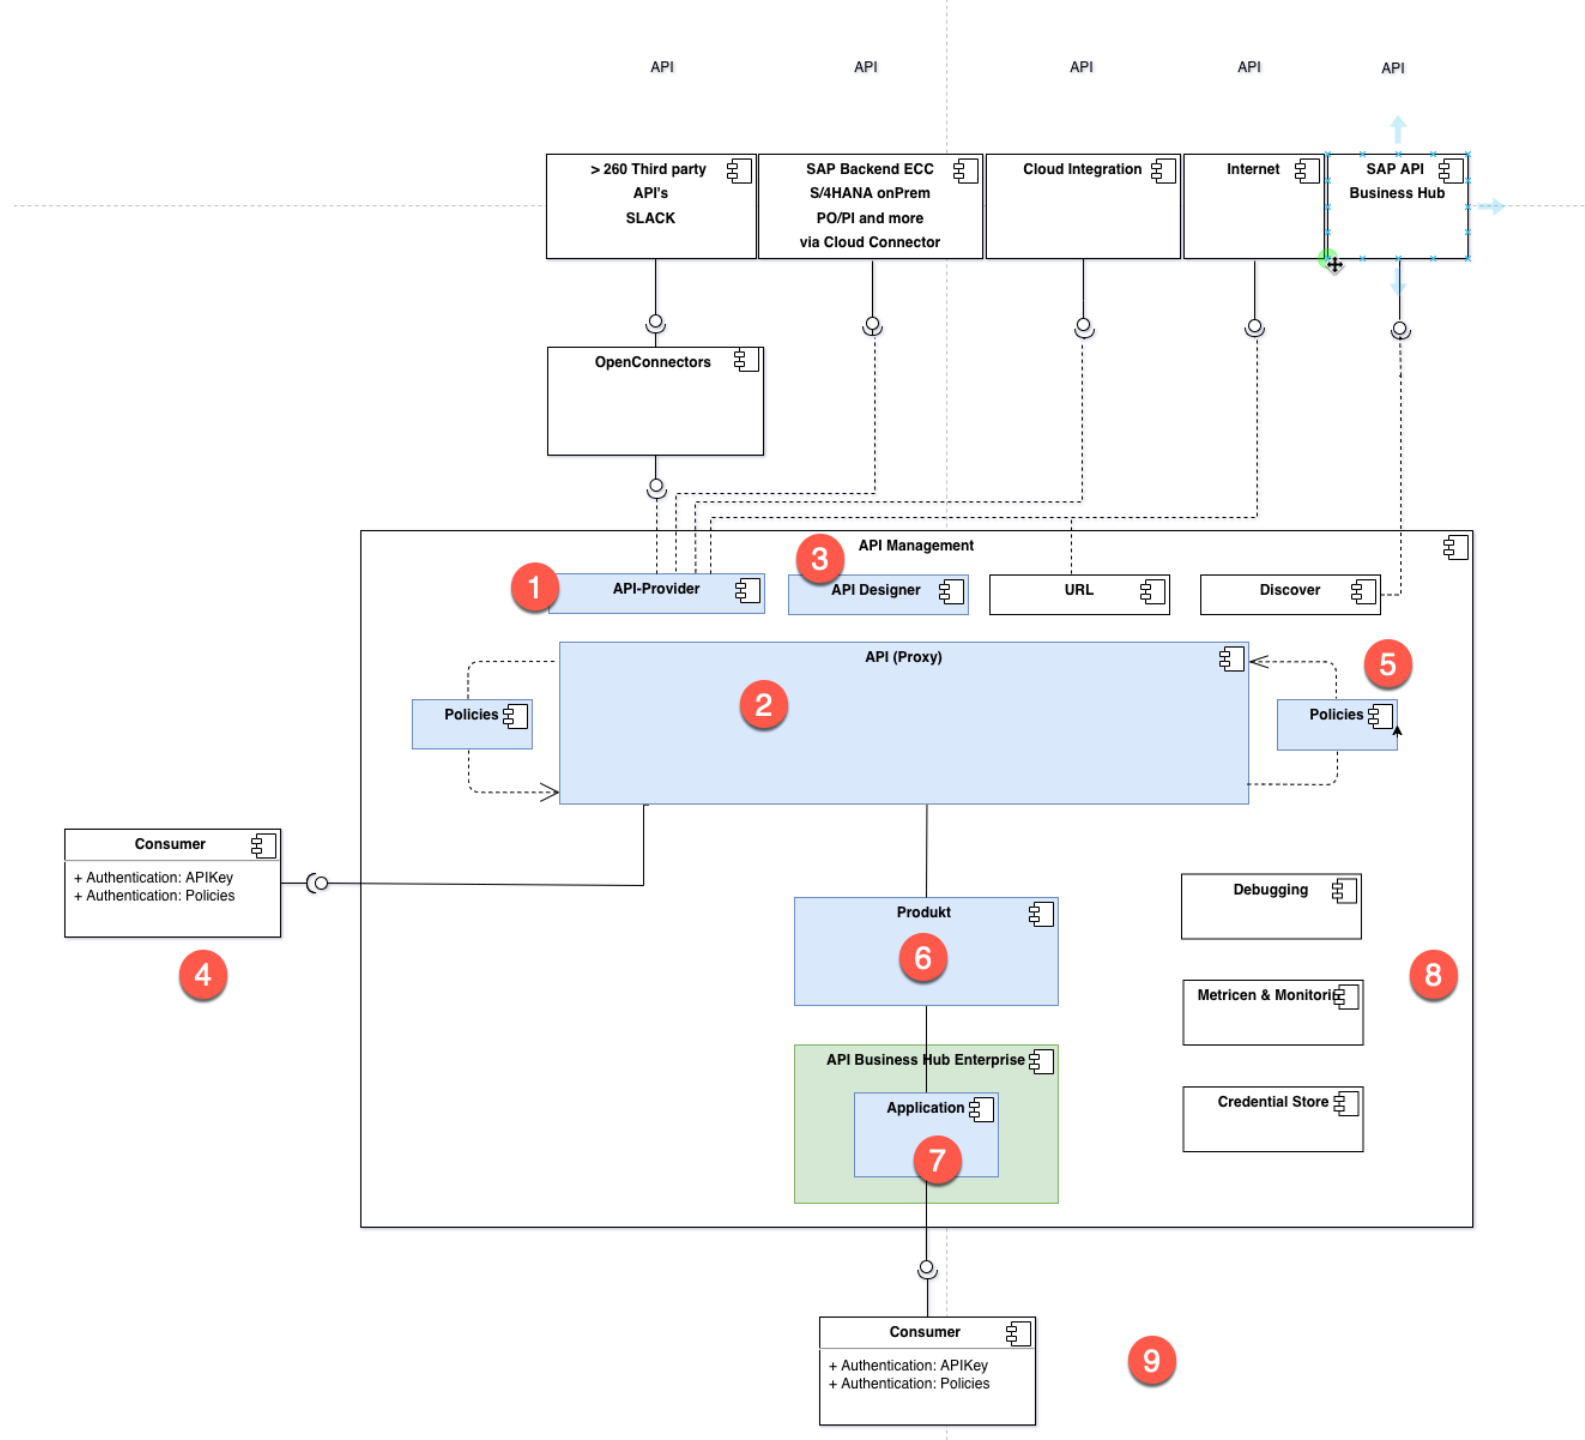

# Creating an API Provider

- Concept in SAP API Management
- Defines the connection details for services
  - Details of the host
  - Additional details to establish connection – for example, proxy settings

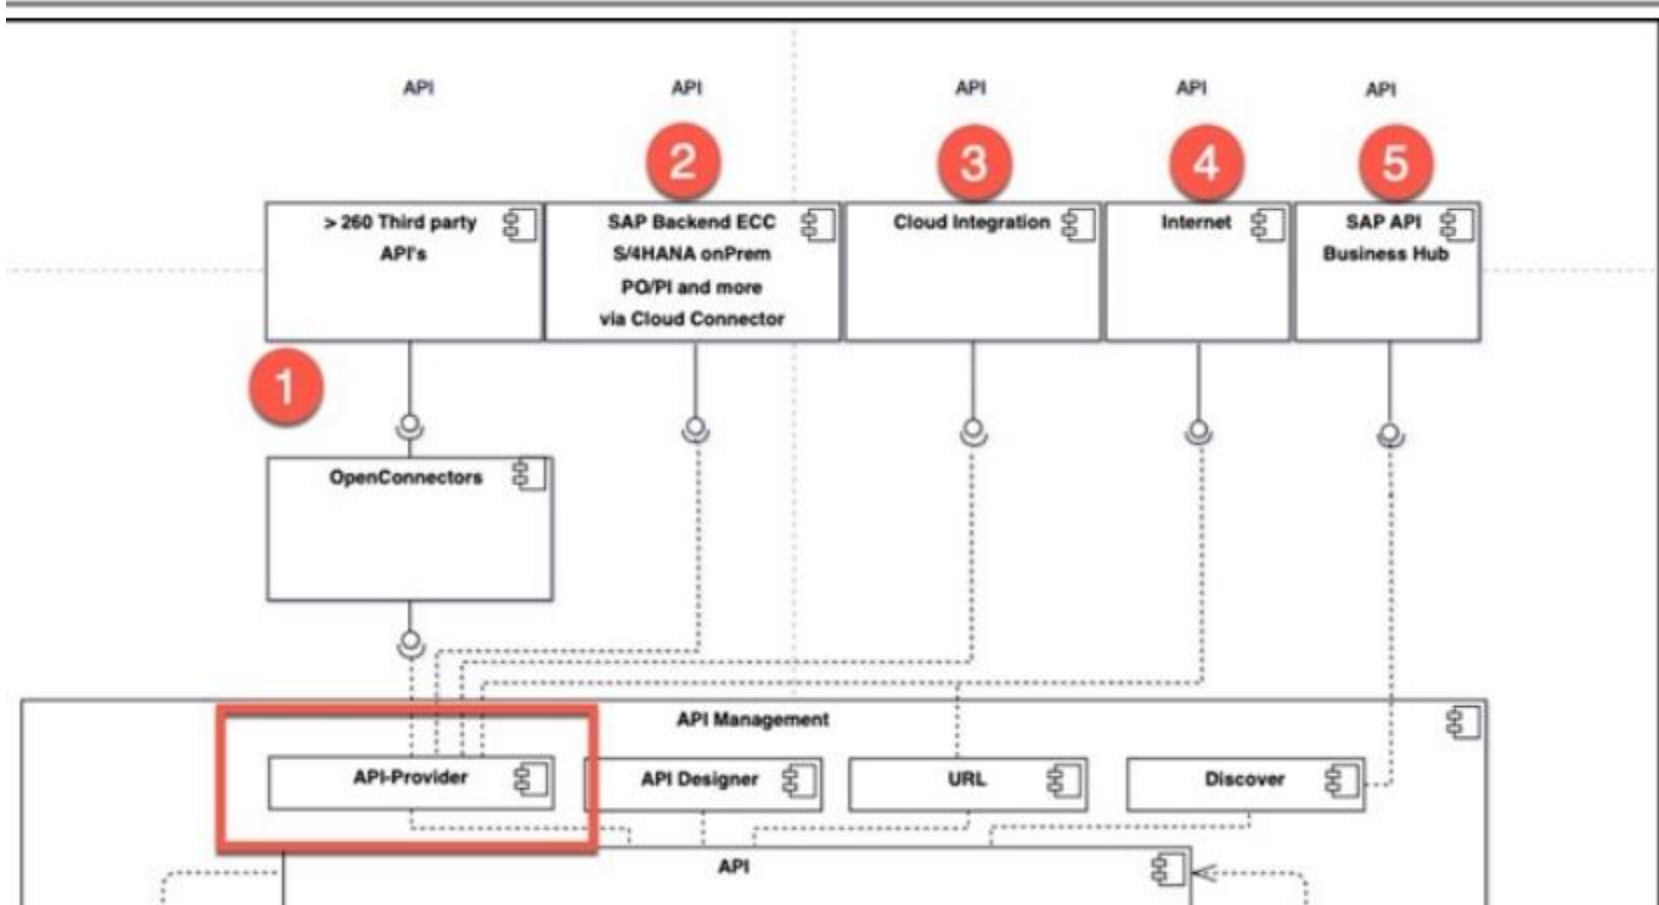



# Demo: API Provider (5 different sources)

- Open Connectors
- Through Cloud Connector to SAP On-Premise backends
- Cloud Integration
- APIs from internet
- SAP Business Accelerator Hub (API Business Hub)

Overview **Connection** Catalog Service Settings

Type: \* ⓘ

Internet

Internet

On Premise

Open Connectors

Cloud Integration

Use SSL: ☐

# Demo: API Provider

Field Name	Input
Type	Internet
Host	sapes5.sapdevcenter.com
Port	443
Use SSL	Checked
Path Prefix	/sap/opu/odata
Service Collection URL	/IWFND/CATALOGSERVICE/ServiceCollection
Authentication Type	Basic
Username	
Password	

# Catalog Service

The catalog service provides a list of all available services for your area. Exploration of OData services is crucial for several tools to identify a suitable service for the realization of a business use case. Therefore certain search capabilities are required.

Metadata exploration is available using standard OData mechanisms. It is built on top of OData Channel to have full OData feature support when accessing the local database. Exposure of metadata uses search capabilities (scanning the English version of a description of a service), for example, search for all service documents where SalesOrder is used in the description.

## Note

Exploration of the remote OData Channel's services and the registration of its services on SAP Gateway is also provided.

The **catalog service** retrieves a list of all available services on SAP Gateway. It is based on a catalog service pattern proposed by Microsoft™ and consists of an implementation approach of the catalog service pattern in the context of SAP Gateway.

## Note

There are two versions of the catalog service available in SAP Gateway, Version 1 and Version 2. Version 2 has EntitySet collection, Tag collection, Vocabulary collection and Annotations. The open search functionality is also enhanced in Version 2. You can choose the version based on your requirement.

# Creating an API (proxy)

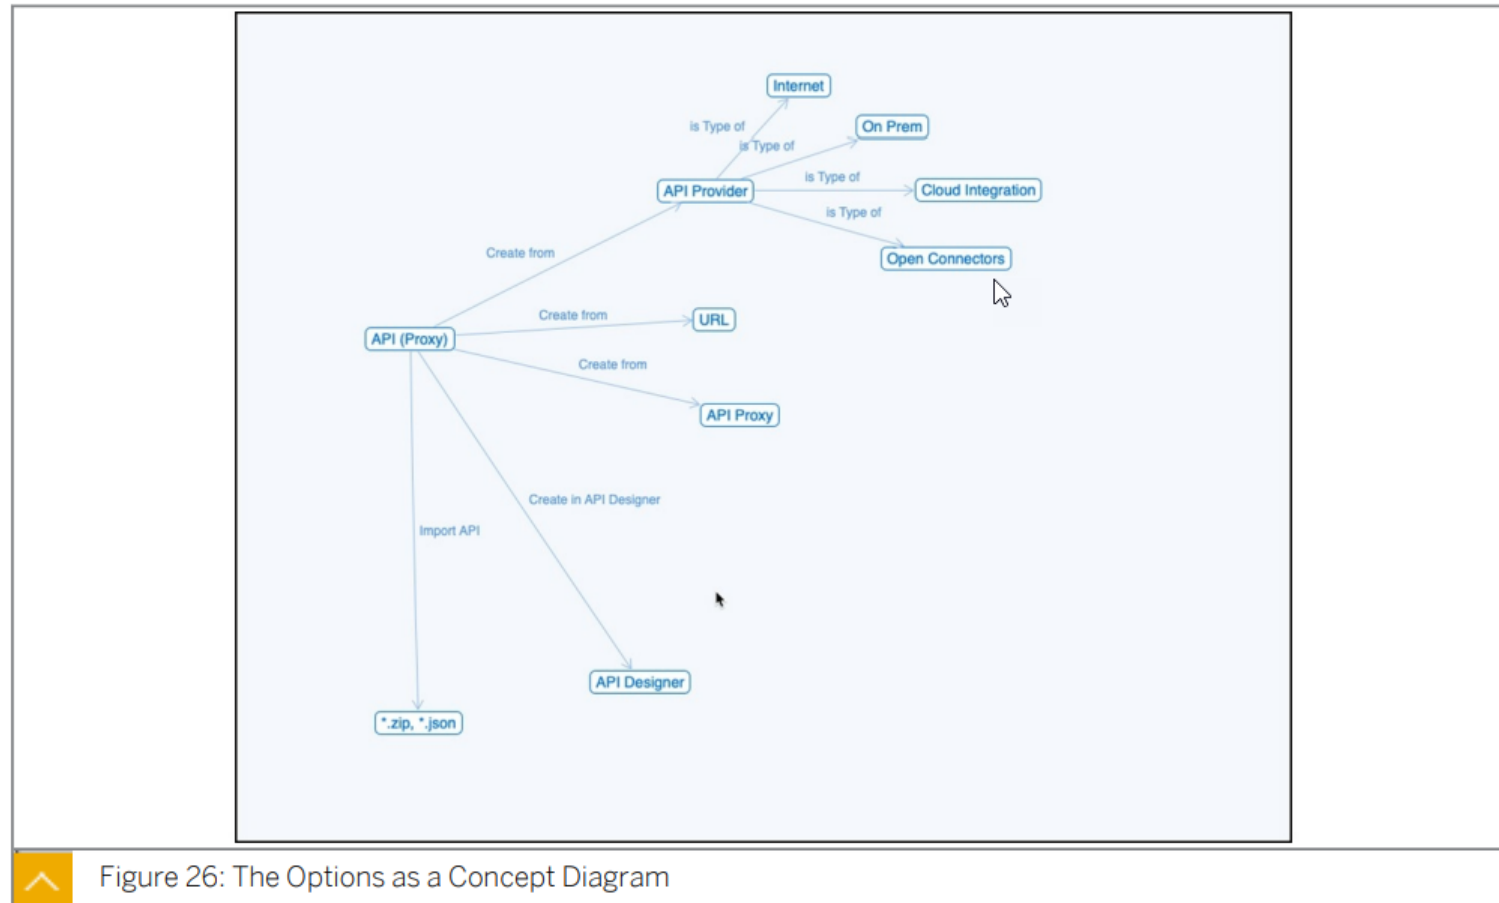


Figure 26: The Options as a Concept Diagram

# Demo: API Proxy

- Create Button
  - API Provider
  - API Proxy (copy an existing proxy)
  - URL
- Import API
- Create in API Designer

Create APIs, Products, import Policy Templates and view Applications here.

2 3 4

Create in API Designer

Filter

[illegible]

# Using Policies

- Policy is a program that executes a specific function at runtime
- Adds common functionality to API (proxy)
- Provides features to secure APIs, control API traffic etc.
- Also customize the behavior of API by adding scripts

# Prebuilt policies

- Access Control
- Basic Authentication
- Extract Variables
- JavaScript
- OAuth v2.0
- Quota
- Verify API Key
- And so on...



SAP

Business Accelerator Hub

ExploreResourcesDiscover IntegrationsPartner with Us

APIs

1

Find APIs to integrate and extend.

Sort by: A-Z ▾

🔍 performance3 x

📄 ⭐

Policy Template

Performance\_Traceability

This policy template assists in API Proxy Execution Performance assessment

4

Version 1


📄 ⭐

Policy Template

cacheMetadata

Improve performance of Odata API Proxies by caching metadata across invocations

Version 1

Overview 





This policy template assists in API Proxy Execution Performance assessment

Version: 1





Last Modified: 07 Apr 2022

Type: Policy Template


Policies

 proxy_request_recei... ProxyEndPoint	PreFlow
 proxy_processing_ti... ProxyEndPoint	PostFlow
 targetreceivinglatency TargetEndPoint	PreFlow
 target_processing_ti... TargetEndPoint	PreFlow

Scripts

 proxy_processing_time.js
 proxy_request_receiving_latency.js
 target_processing_time.js
 targetreceivinglatency.js


Flow Type:

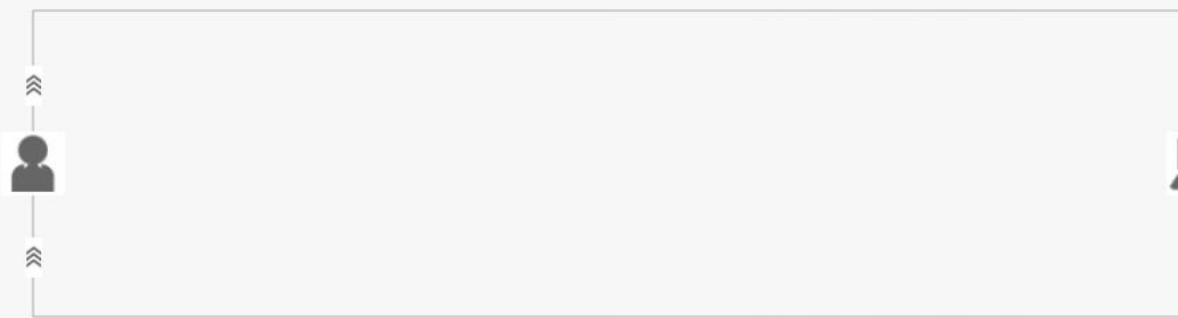


1

FEEDBACK


# Flows – Where should I apply my policies ?

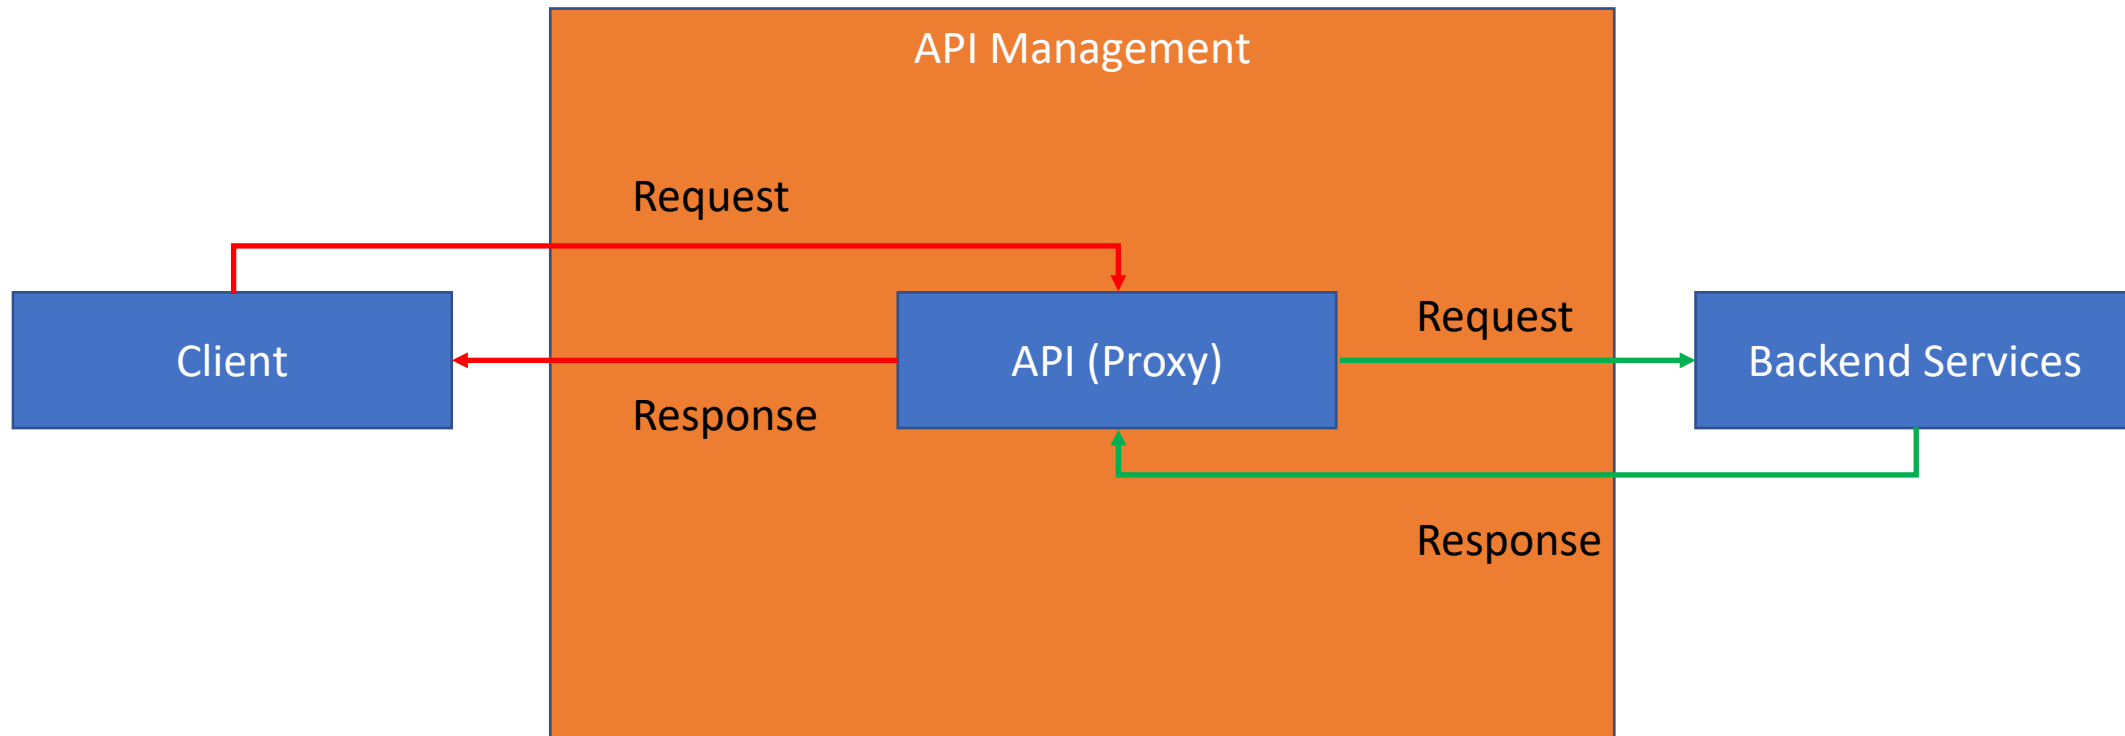


# Flows – Where should I apply my policies ?

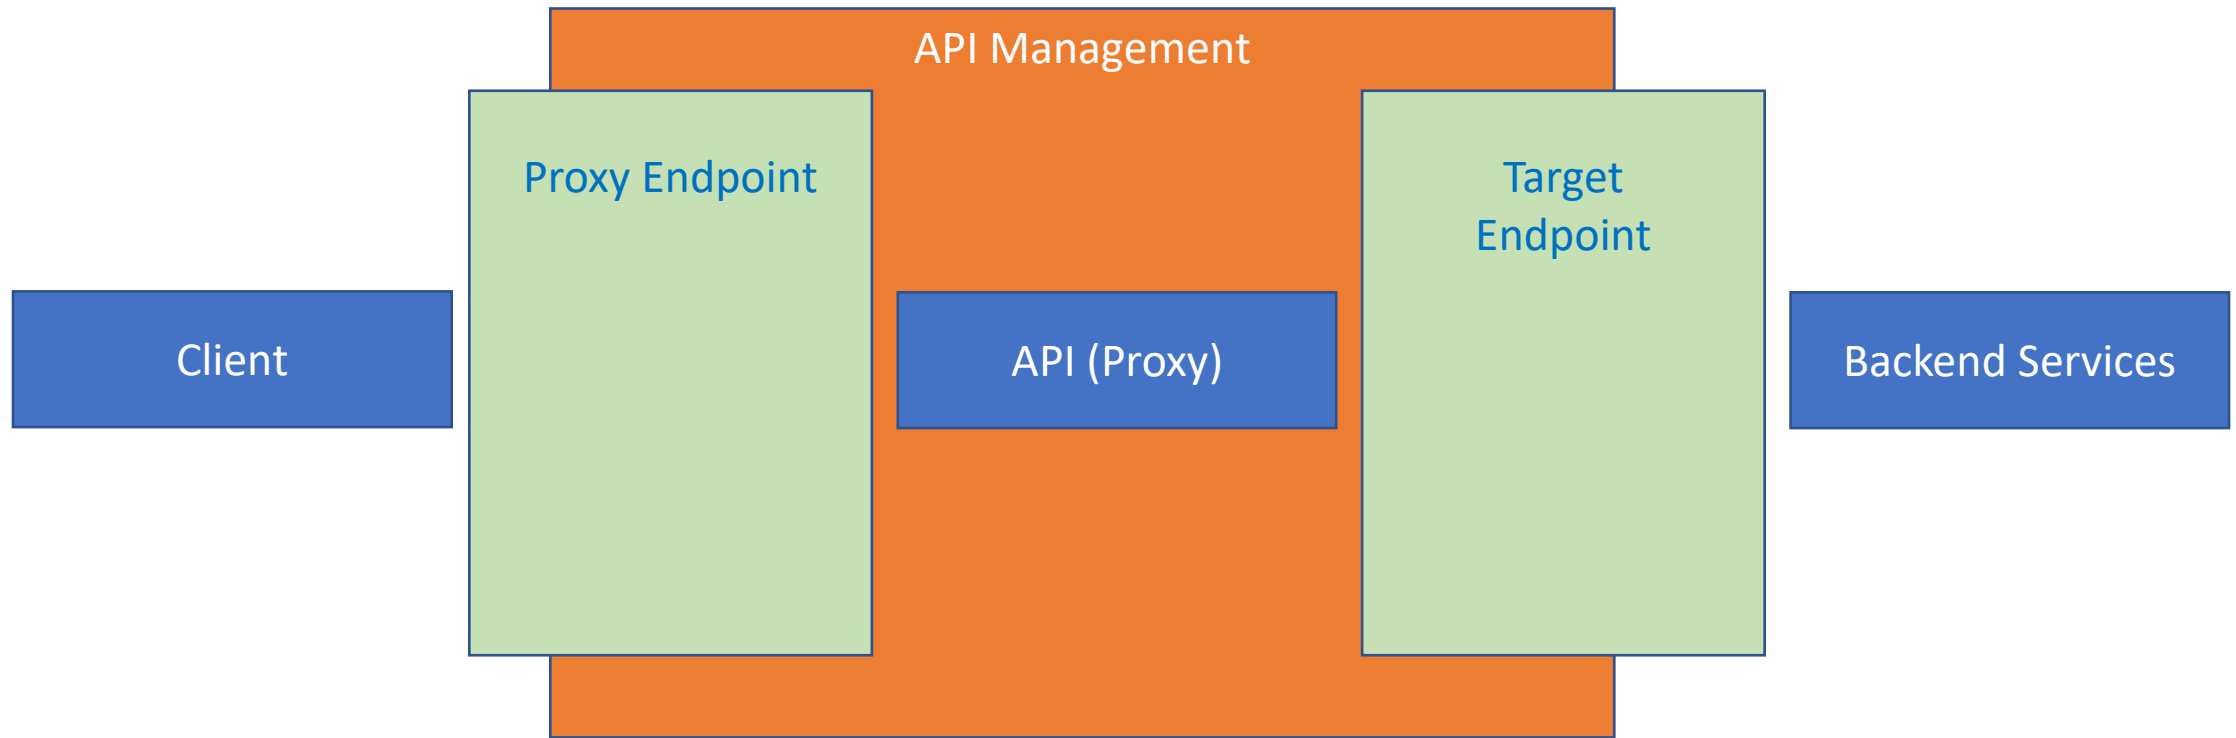

# Flows – Where should I apply my policies ?

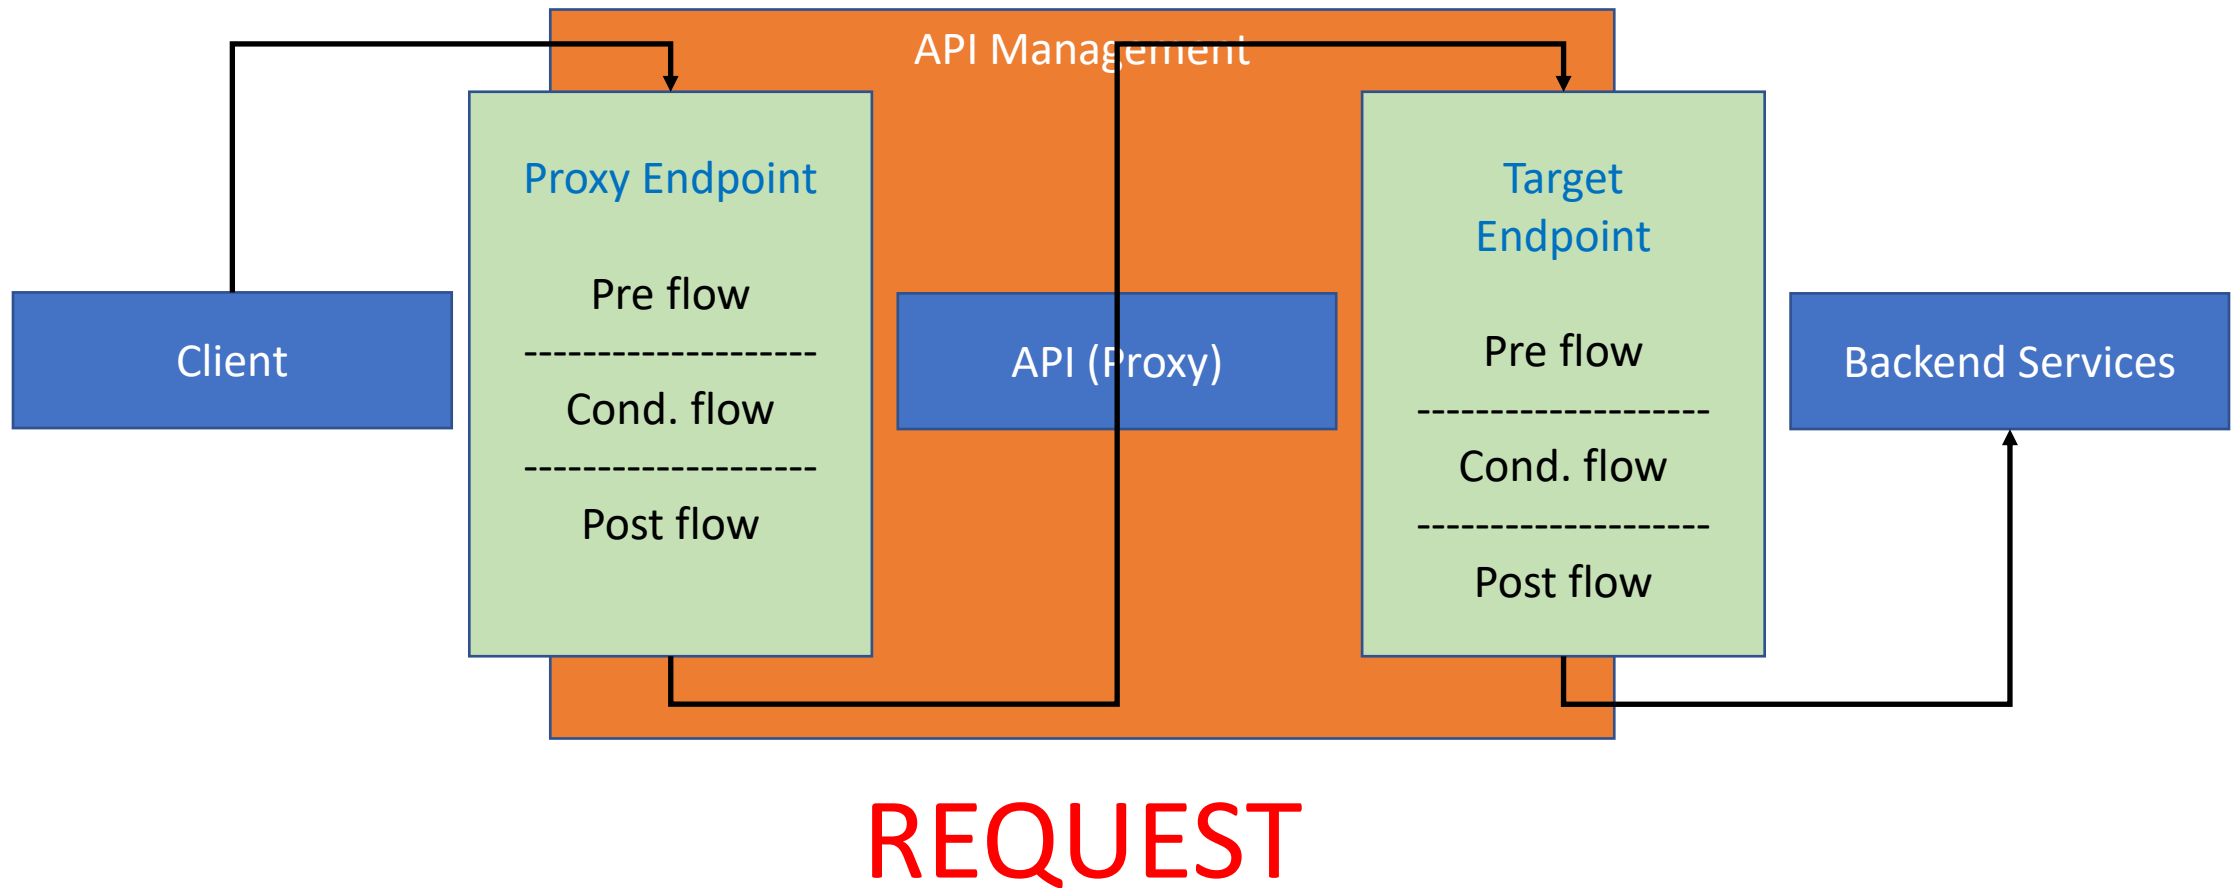

# Flows – Where should I apply my policies ?

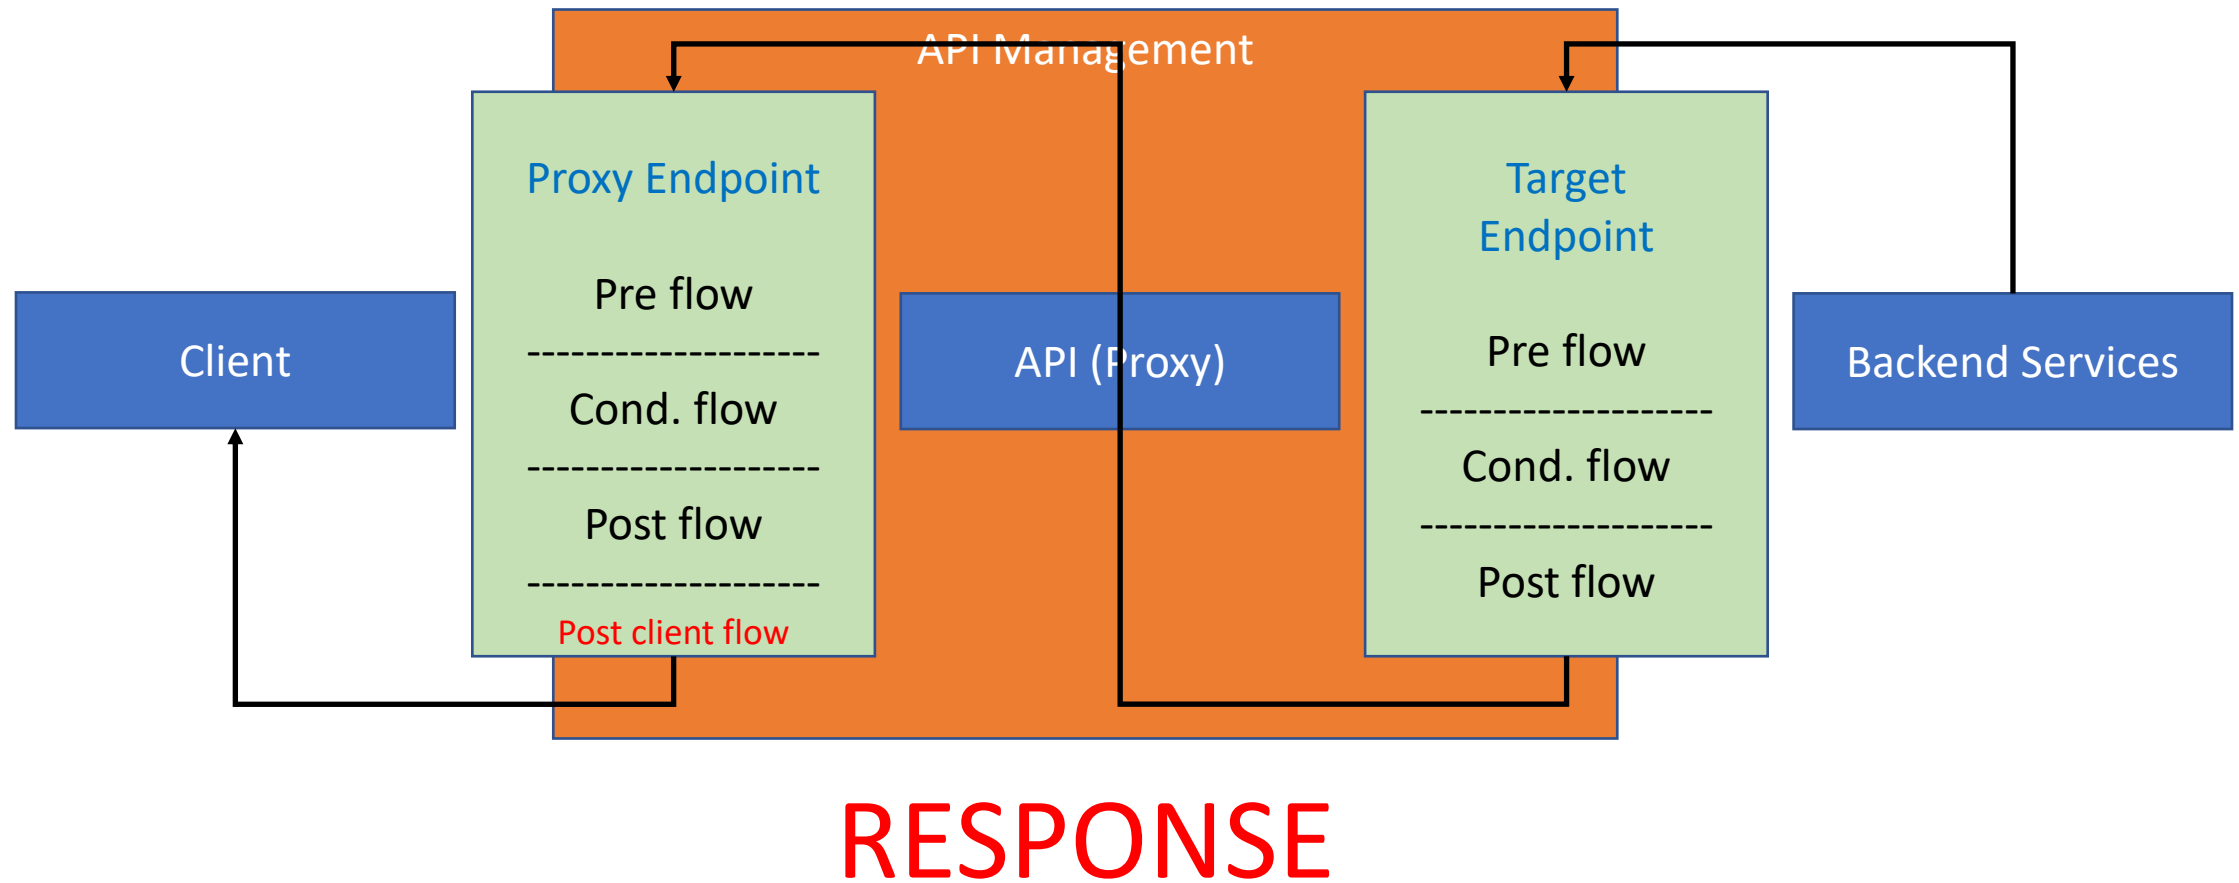

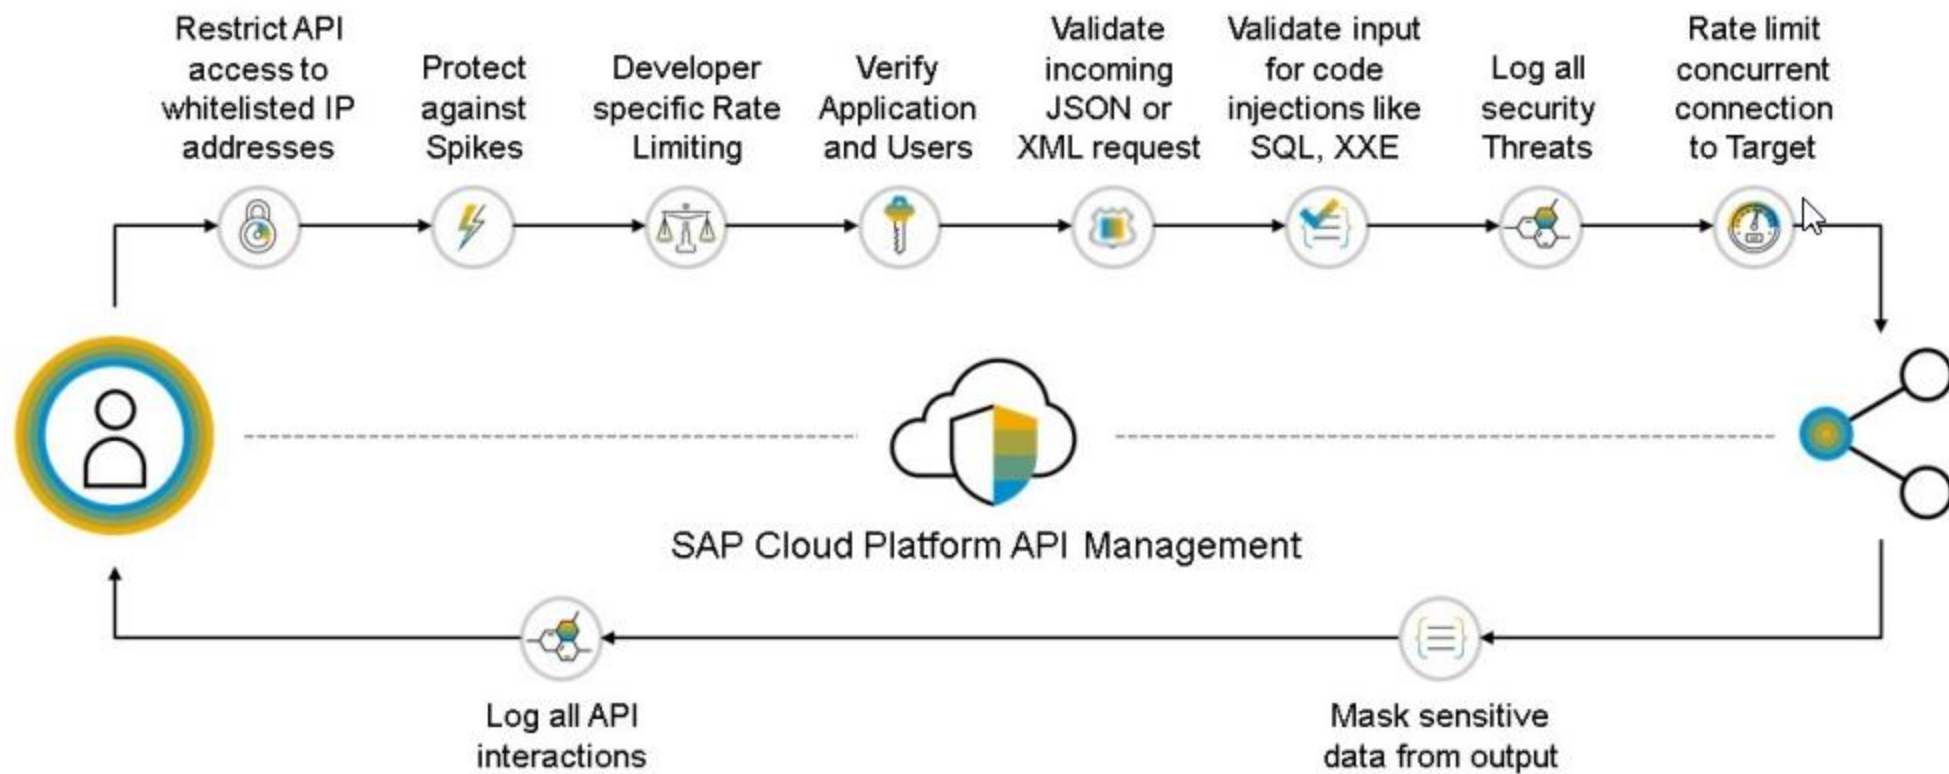


Figure 44: SAP Cloud Platform API Management

# Demo: Policies for basic authentication

The screenshot displays the SAP Integration Suite API Portal interface. The top navigation bar includes the SAP logo, 'Integration Suite', 'API Portal', and a user profile icon. The main header shows 'API Artifacts for GWSAMPLE\_BASIC\_v1'. The 'Policy Editor' section is active, showing a flow diagram with a 'setCredentials' operation and a 'setBasicAuth' operation. The left sidebar lists 'Flows' (ProxyEndpoint, TargetEndpoint), 'Created Policies', and 'Scripts'. The right sidebar shows a list of 'Security Policies' and 'Traffic Management Policies'. The 'Update' button is highlighted with a red box and a mouse cursor. The bottom panel displays the XML policy configuration for Basic Authentication.

**Policy Editor**

Flows

- ProxyEndpoint
- TargetEndpoint

PreFlow 0

PostFlow 2

Created Policies

Scripts

**Security Policies**

- Basic Authentication
- Decode.JWT
- Generate.JWT
- JSON Threat Protection
- OAuth v2.0
- OAuth v2.0 GET
- OAuth v2.0 SET
- Regular Expression Protection
- SAML Assertion Generation
- SAML Assertion Validation
- Verify API Key
- Verify.JWT
- XML Threat Protection

**Traffic Management Policies**

- Access Control
- Concurrent Rate Limit
- Invalidate Cache
- Lookup Cache
- Populate Cache

**XML Policy Configuration**


```
1 <BasicAuthentication async="true" continueOnError="false" enabled="true" xmlns="http://www.sap.com/ospinget">
2   <!-- Operation can be Encode or Decode -->
3   <Operation>Encode</Operation>
4   <IgnoreUnresolvedVariables>true</IgnoreUnresolvedVariables>
5   <!-- for Encode, User element can be used to dynamically populate the user value -->
6   <User ref="request.header.username"></User>
7   <!-- for Encode, Password element can be used to dynamically populate the password value -->
8   <Password ref="request.header.password"></Password>
9   <!-- Source is used to retrieve the encoded value of username and password. This should not be used if the operation is
10  Encode-->
11  <Source>request.header.Authorization</Source>
12  <!-- Assign to is used to assign the encoded value of username and password to a variable. This should not be used if the
13  operation is Decode -->
14  <AssignTo createNew="false">request.header.Authorization</AssignTo>
15 </BasicAuthentication>
```




# Demo: Policies for basic authentication

Field Name	Value
Policy Type	Assign Message
Policy Name	setCredentials
Endpoint Type	TargetEndpoint
Flow Type	Postflow
Stream	Incoming Request
Policy Type	Basic Authentication
Policy Name	setBasicAuthentication
Endpoint Type	TargetEndpoint
Flow Type	Postflow
Stream	Incoming Request

# Editing APIs

 View API

TransportPoliciesCopyEdit ▾⋮

 GWSAMPLE\_BASIC

Status: **Deployed**

API Proxy URL: [https://quovadis.test.apimanagement.eu10.hana.ondemand.com:443/GWSAMPLE\\_BASIC](https://quovadis.test.apimanagement.eu10.hana.ondemand.com:443/GWSAMPLE_BASIC)

1

2

3

4

OverviewProxy EndPointTarget EndPointResources

Title:  
GWSAMPLE\_BASIC

Host Alias:  
quovadis.test.apimanagement.eu10.hana.ondemand.com

API Base Path:  
/GWSAMPLE\_BASIC


API State:  
Active

Description:

Calls(05/01/2023 - 05/29/2023)

3.5k

API Health




34870

# Creating a Product

- Products are artifacts that appear in the SAP API Business Hub Enterprise Portal
- Role Collections
  - AuthGroup.API.Admin
  - AuthGroup.API.ApplicationDeveloper

Create APIs, Products, import Policy Templates and view Applications here.

APIs (4)   **Products (1)**   Applications (0)   Policy Templates (1)

Name	Title	Status	Changed By
 <a href="#">PRODUCT_GWSAMPLE_BASIC</a>	PRODUCT_GWSAMPLE_BASIC	Published	milton.chan

<>

API Business Hub  
Enterprise

The diagram illustrates the sequence of steps for SAP API Business Hub Enterprise. It consists of two rows of boxes. The top row contains three boxes: 'SAP API Business Hub' (with a logo of three circles), 'SAP BTP Cockpit' (with a blue square logo), and 'API Management Client SDK' (with a cube icon). A red circle with the number '4' is positioned to the right of these three boxes. The bottom row contains a single box labeled 'API Business Hub Enterprise' (with a code icon) and a red circle with the number '5' to its right. A dotted line connects the three boxes in the top row to the box in the bottom row, indicating a flow or dependency.

# API Business Hub Enterprise

Centralized API catalog to discover, consume and monitor APIs

Type here to search




## PRODUCT\_GWSAMPLE\_BASIC

API Based on the SAP Gateway Demo System (ES5). The authorization against the source interface is realized via policies. No...

Published on May 29 2023

1 API

# Logging and Monitoring

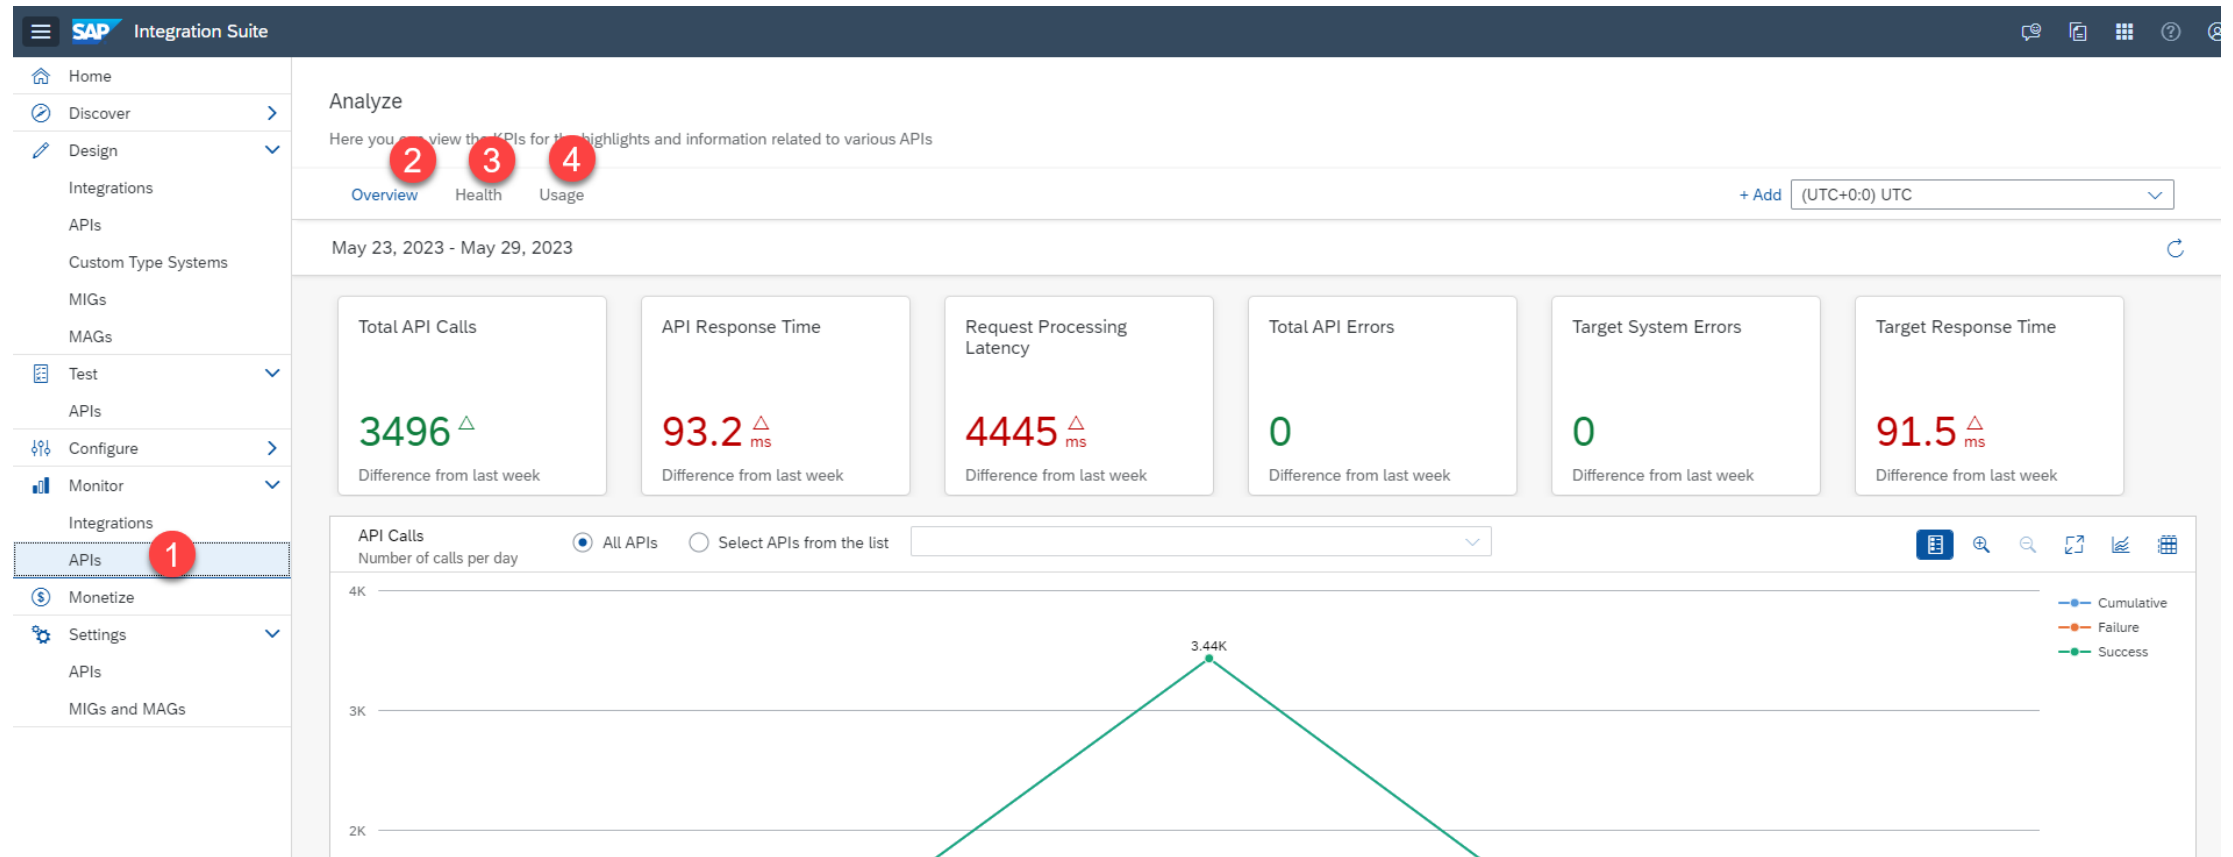

# Key Summary Points – Unit 3

**Q10.** What are the reasons for using policies in API management?

- ☒ Access Control
- ☐ B Identity Management
- ☐ C Data Management

☒ Correct

Correct. The reason for using policies in API management is Access Control.

# Key Summary Points – Unit 3

**Q8.** Where can you download standardized, reusable policy templates?

- ☐ A SAP API Business Hub Enterprise
- ☐ B Enterprise Hub for APIs
- ☒ C SAP Business Accelerator Hub

☒ Correct

Incorrect. You can you download standardized, reusable policy templates from the SAP Business Accelerator Hub.




# Key Summary Points – Unit 3


## Use predefined policies

There are predefined sets of policies for specific applications. These can be found in the SAP Business Accelerator Hub.


Navigate to <https://api.sap.com/> to Explore → APIs.

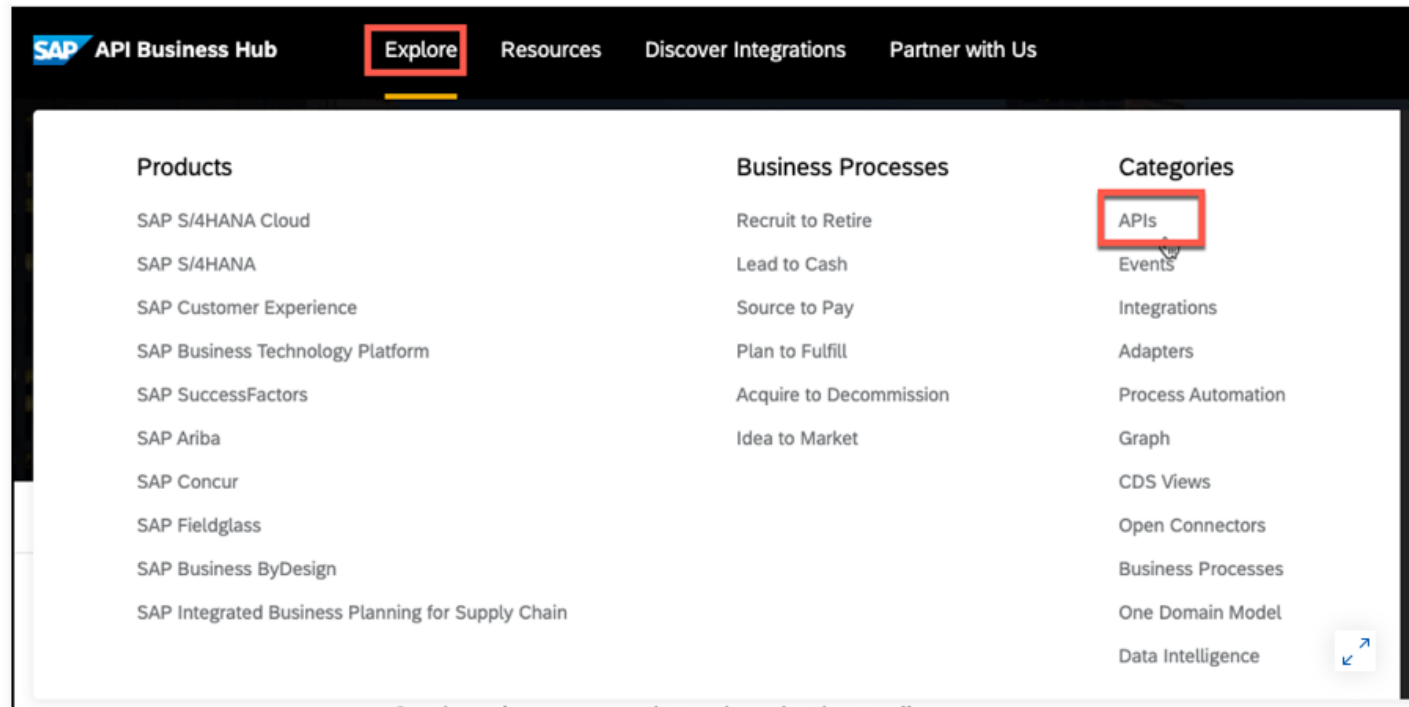

# Flows – Where should I apply my policies ?

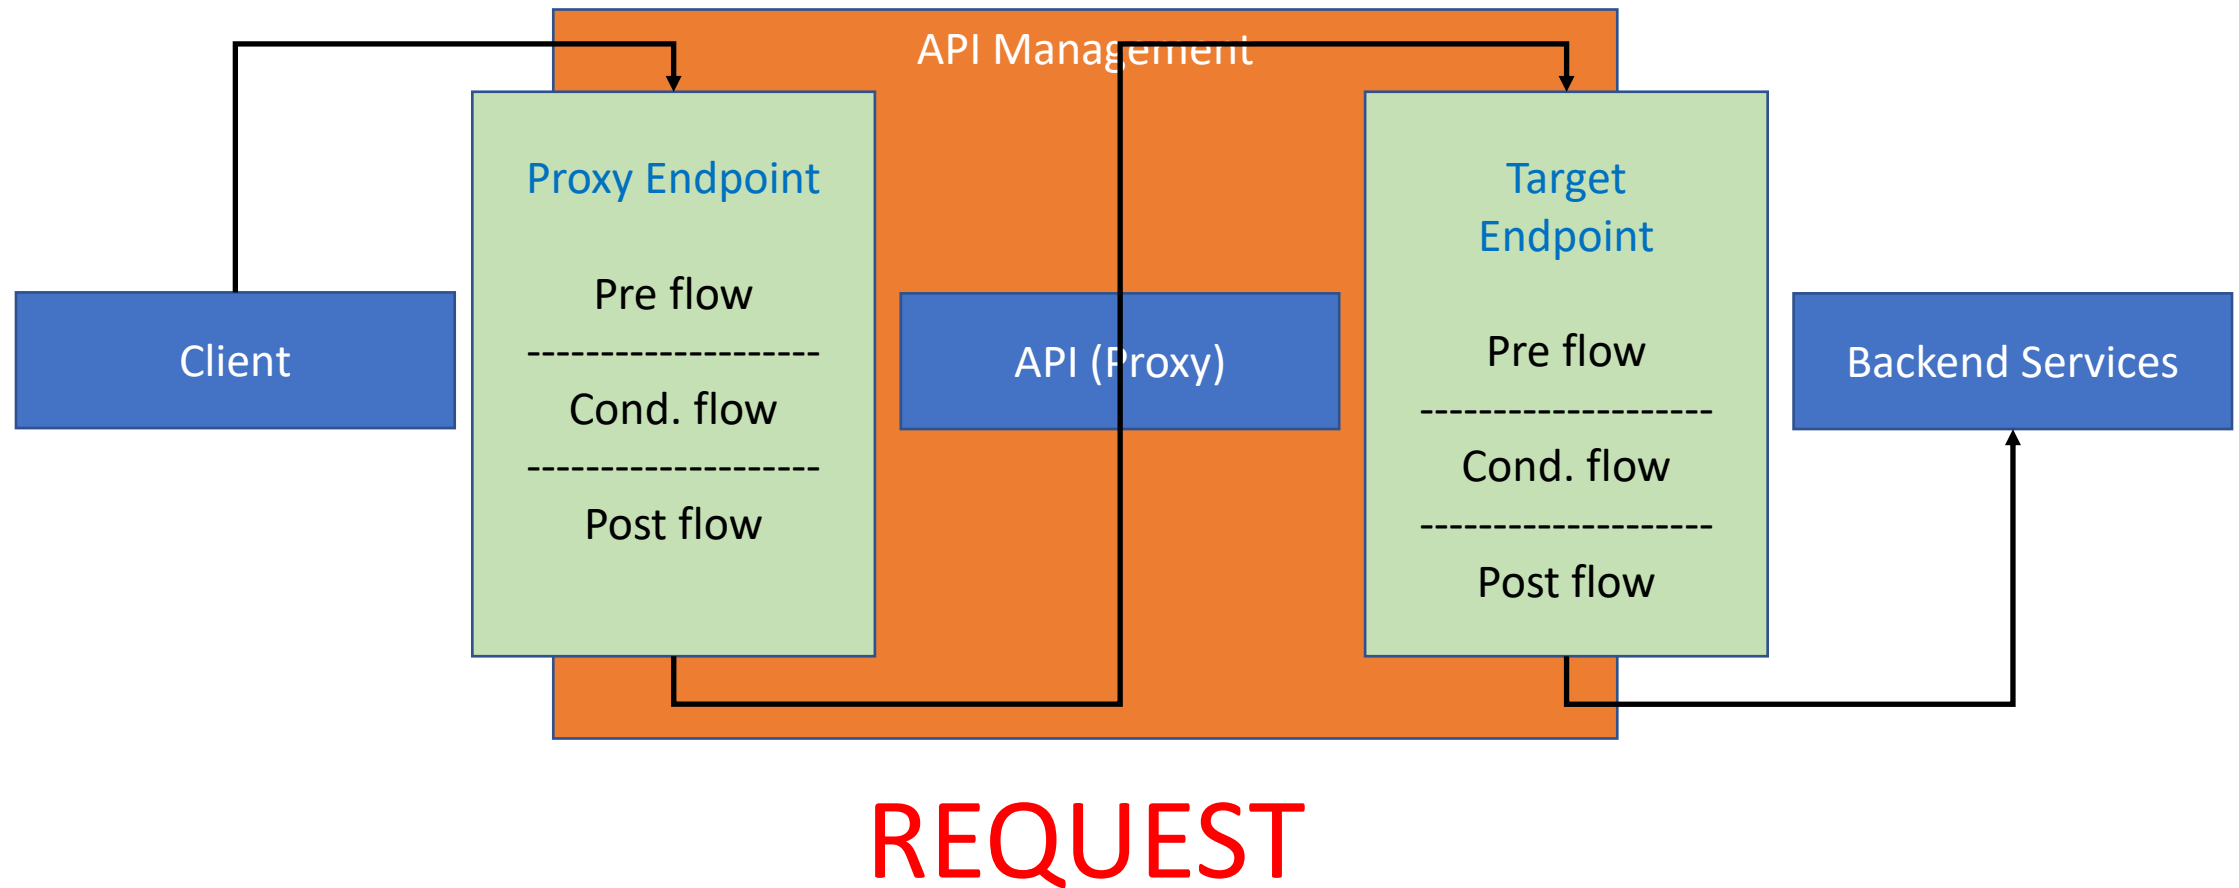

# Flows – Where should I apply my policies ?

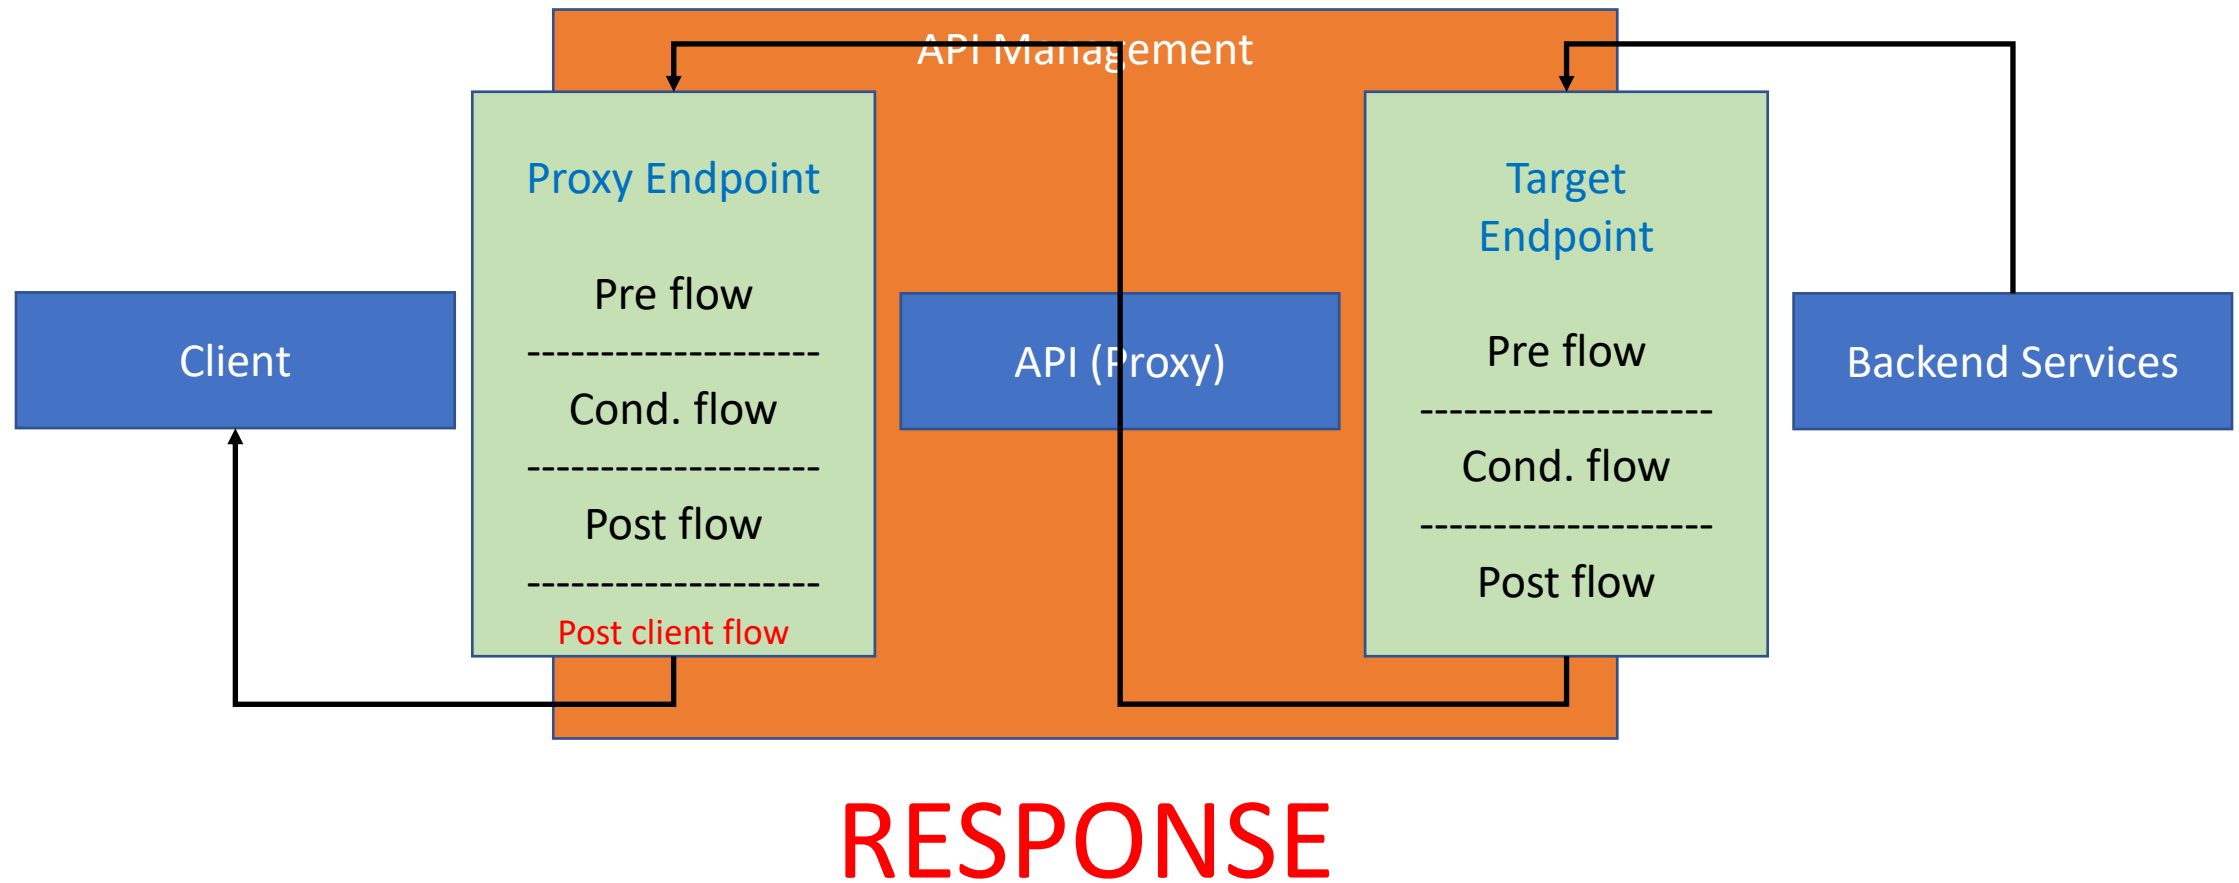

# Key Summary Points – Unit 3

**Q9.** Which Role Collections do you need to use the API Business Hub Enterprise?


- ☐ A AuthGroupAPIADMINDesigner,AuthGroupAdministrator
- ☒ B AuthGroup.API.Admin, AuthGroup.API.ApplicationDeveloper
- ☐ C AuthgroupHeadofManager,AuthgroupChildhoodCaseManager

☒ Correct

Correct. To use the API Business Hub Enterprise you need the Role Collections AuthGroup.API.Admin, and AuthGroup.API.ApplicationDeveloper.

# Components of SAP API Management

- API Provider
  - Concept in API Management that defines connection details for existing services
- API (Proxy)
  - Managed facades for existing services (sits in front of the existing service)
  - Applications connect to API (proxy)
- Policies
  - Provides capabilities to define behavior of an API (proxy)
- Product
  - Bundle and publish API (proxies) as a Product for consumption
- Application
  - Consumes the Product (bundle of API proxies) using api key and secret

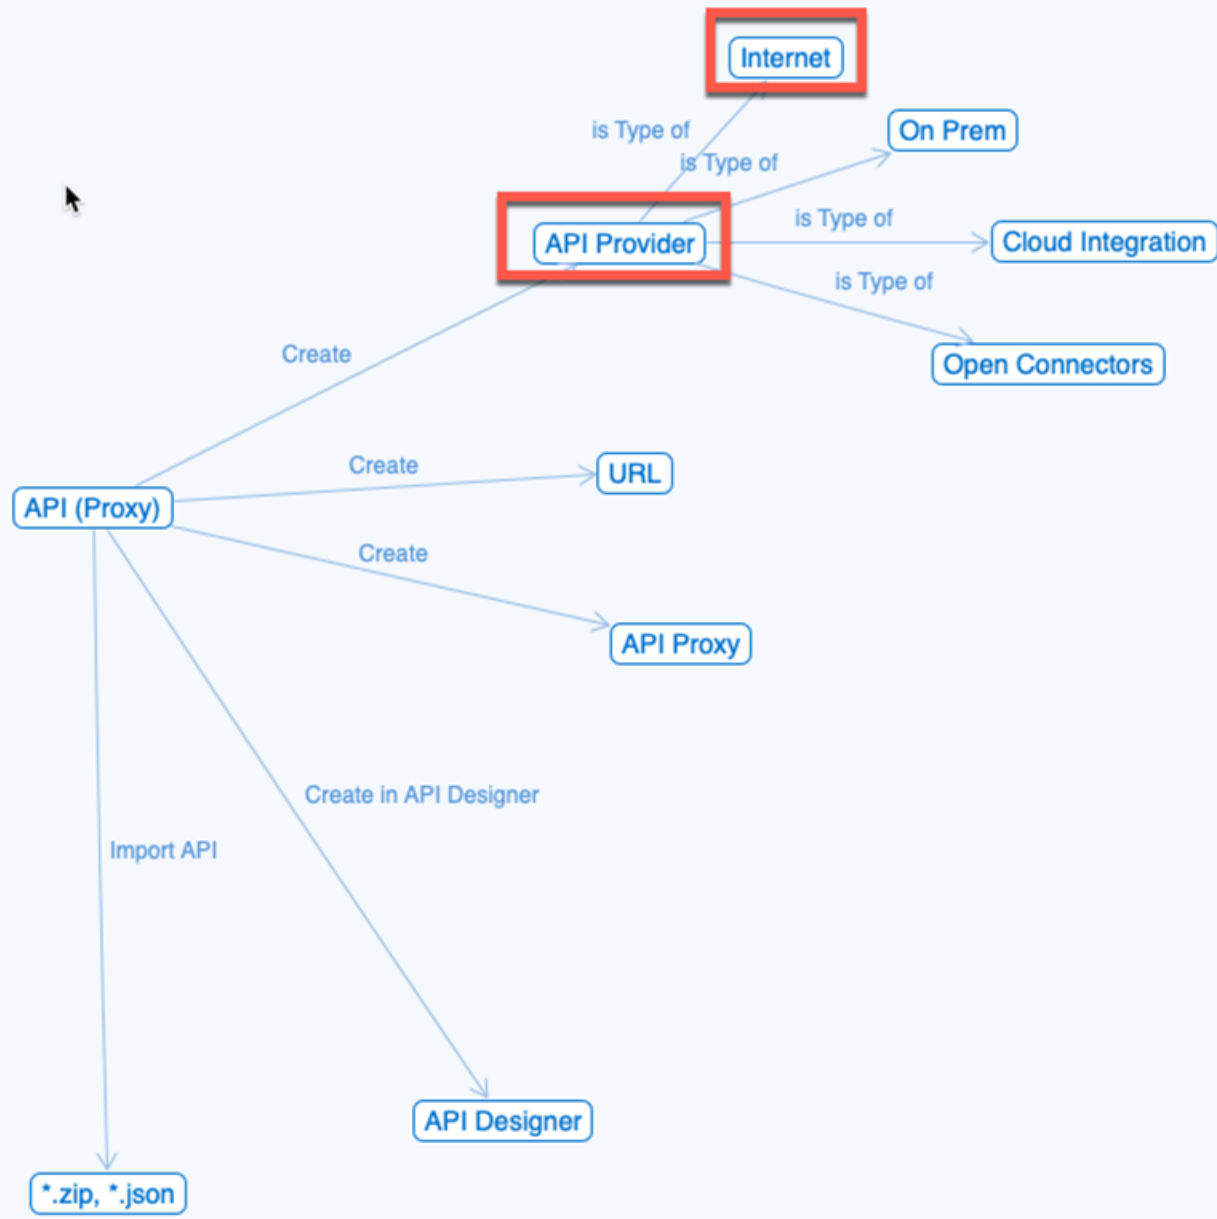

# Demo: API Provider (5 different sources)

- Open Connectors
- Through Cloud Connector to SAP On-Premise backends
- Cloud Integration
- APIs from internet
- SAP Business Accelerator Hub (API Business Hub)

Overview **Connection** Catalog Service Settings

Type: \* ⓘ

Internet

Internet

On Premise

Open Connectors

Cloud Integration

Use SSL: ☐

Overview **Connection** Catalog Service Settings

Type: \* ⓘ

On Premise

Host: \* ⓘ

Port: \* ⓘ

Location ID: ⓘ

Authentication: ⓘ

None

Additional Properties: ⓘ

None

# Demo: API Provider



Field Name	Input
Type	Internet
Host	sapes5.sapdevcenter.com
Port	443
Use SSL	Checked
Path Prefix	/sap/opu/odata
Service Collection URL	/IWFND/CATALOGSERVICE/ServiceCollection
Authentication Type	Basic
Username	<i>Credentials only used to create API Provider</i>
Password	<i>Not for the actual call of API</i>



# Key Summary Points – Unit 3

## Summary

An API provider encapsulates access to APIs from various sources. More than 260 third-party REST-based APIs are connected through the Open Connector. SAP backend systems such as SAP S/4HANA On-Prem or ECC/PI/PO can be connected through the Cloud Connector. SOAP APIs can also be made available through the Cloud Integration. Ultimately, almost all APIs can be connected. The procedure for connecting a foreign API is wizard-controlled.

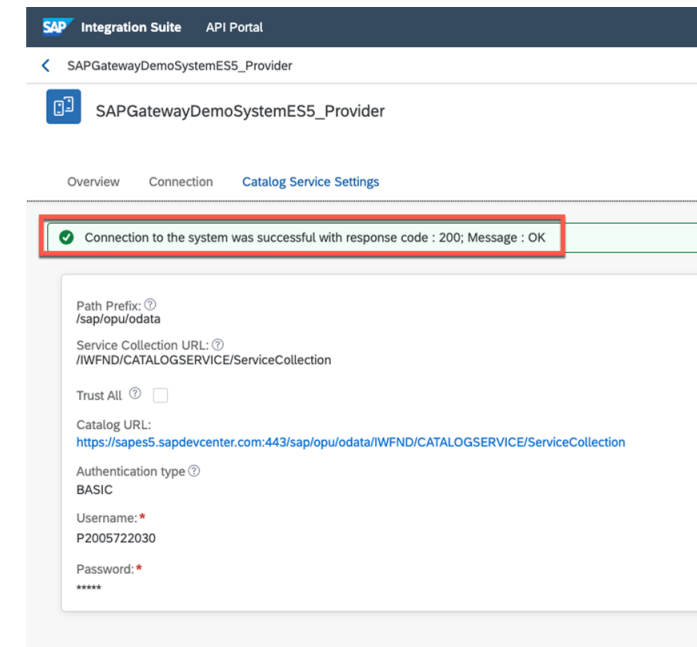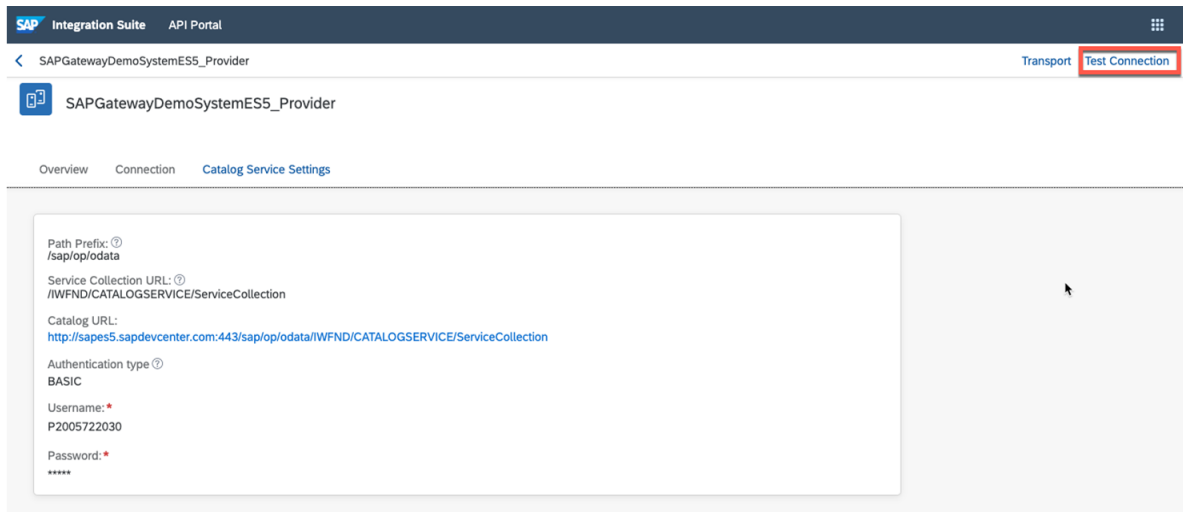

# Key Summary Points – Unit 3


## API URL - Proxy URL (No. 1)

At No. 1, you can see the new URL (proxy URL) with which you can now call the original source API. The URL consists of the following elements:

- API URL: [https://group-cld900-d052537.prod01.apimanagement.eu10.hana.ondemand.com:443/GWSAMPLE\\_BASIC](https://group-cld900-d052537.prod01.apimanagement.eu10.hana.ondemand.com:443/GWSAMPLE_BASIC) [🔗](#)
- Application protocol: https
- Virtual Host: group-cld900-d052537
- API Host: prod01.apimanagement.eu10.hana.ondemand.com
- API Port: 443
- API Name: GWSAMPLE\_BASIC

### Virtual Host

The virtual host was created during the provisioning of API management and can be changed at any time using *Settings* → *APIs*.

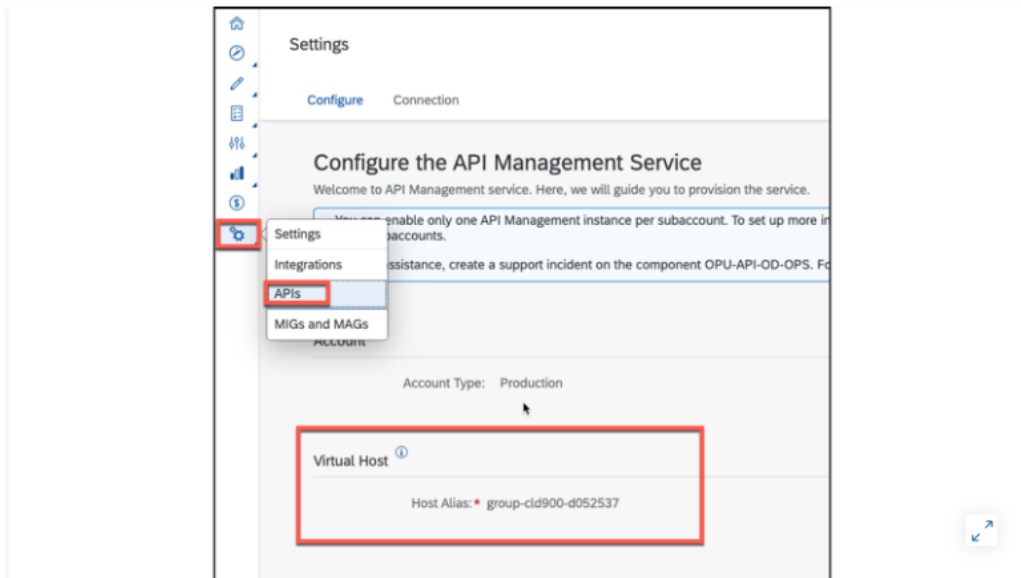

# Key Summary Points – Unit 3

Create API

Select: ☒ API Provider ☐ API Proxy ☐ URL

API Provider: \* SAPGatewayDemoSystemES5\_Provider Discover ☒ Link API Provider ?

URL \* ? /sap/opu/odata/iwbep/GWDEMO

API Details

Name: \* GWDEMO

Title: \* GWDEMO

API State: \* Active

Host Alias: \* ? group-cld900-d052537.prod01.apimanagement.eu10.hana.ondemand.com

API Base Pa... \* ? /GWDEMO

Version:


Service Type: ODATA Documentation ? YES

Create Cancel

When you finish creating this API (Proxy), it has to be deployed so that it can be used. After that, the API (proxy) is ready for testing. The *service type* is automatically defined. In this case, it is OData.

# Key Summary Points – Unit 3

In this case, you must enter the data manually (marked). The *Service Type* can only be *REST* or *SOAP*.

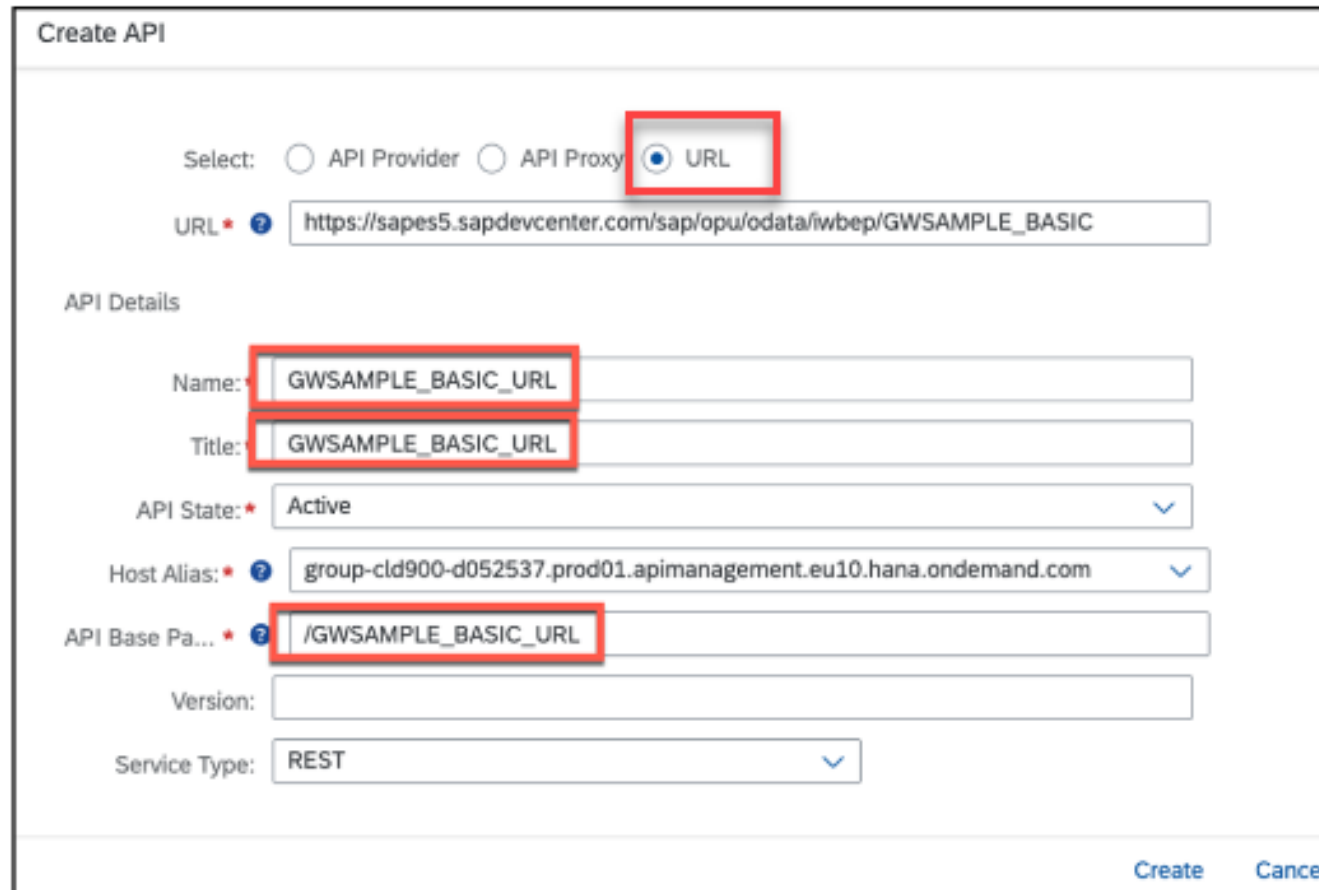


The screenshot shows the 'Create API' form with the following fields and values:


- Select:** ☒ API Provider ☐ API Proxy ☒ URL (highlighted with a red box)
- URL:**  (highlighted with a red box)
- API Details:**
  - Name:**  (highlighted with a red box)
  - Title:**  (highlighted with a red box)
  - API State:**  (highlighted with a red box)
  - Host Alias:**  (highlighted with a red box)
  - API Base Pa...:**  (highlighted with a red box)
  - Version:**
  - Service Type:**  (highlighted with a red box)

Buttons: [Create](#) [Cancel](#)

# Editing APIs

 View API

TransportPoliciesCopyEdit ▾⋮

 GWSAMPLE\_BASIC

Status: **Deployed**

API Proxy URL: [https://quovadis.test.apimanagement.eu10.hana.ondemand.com:443/GWSAMPLE\\_BASIC](https://quovadis.test.apimanagement.eu10.hana.ondemand.com:443/GWSAMPLE_BASIC)

1

2

3

4

OverviewProxy EndPointTarget EndPointResources

Title:  
GWSAMPLE\_BASIC

Host Alias:  
quovadis.test.apimanagement.eu10.hana.ondemand.com

API Base Path:  
/GWSAMPLE\_BASIC


API State:  
Active

Description:

Calls(05/01/2023 - 05/29/2023)

3.5k

API Health






3487 0

# Creating a Product

- Products are artifacts that appear in the SAP API Business Hub Enterprise Portal
- Bundle and publish one or more API (proxies) as a Product for consumption
- Role Collections
  - AuthGroup.API.Admin
  - AuthGroup.API.ApplicationDeveloper

# Key Summary Points – Unit 3

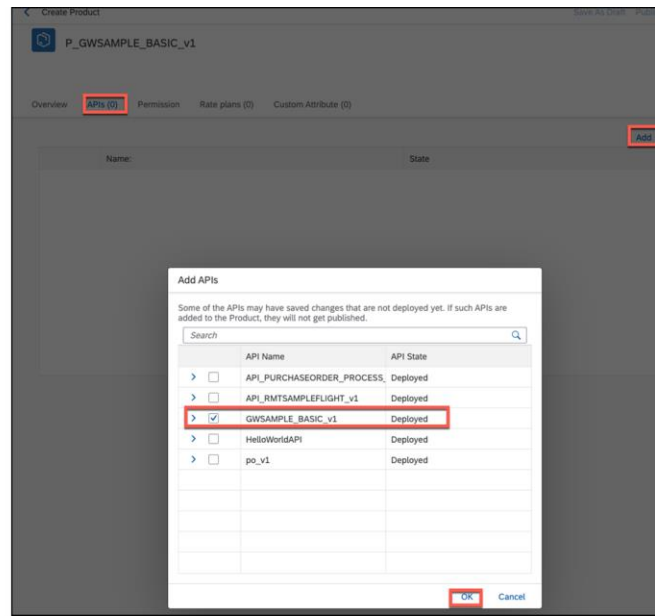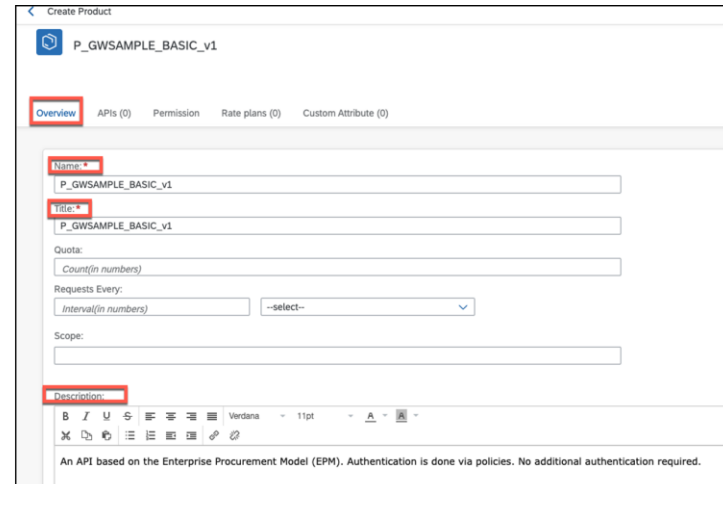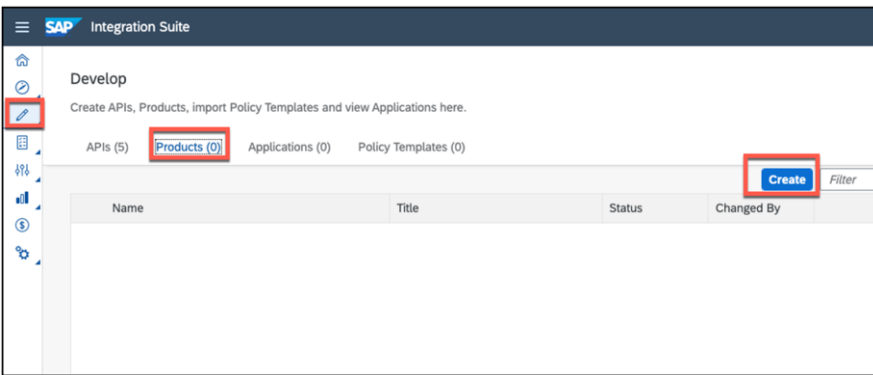

# Key Summary Points – Unit 3

- API Designer
  - Visualization of openAPI specification is done using swagger UI
  - Swagger UI is an open source JavaScript framework to make APIs tangible

