

Fie un tablou continand cheile:


3; 1; 7; 2


Sa se scrie configuratia tabloului dupa fiecare pas al si interschimbare (BubbleSort). Se considera ca parcurge comparatie si maxim o interschimbare.


pas 1: 3 1 7 2

pas 2: 3 7 1 2

pas 3: 3 7 2 1

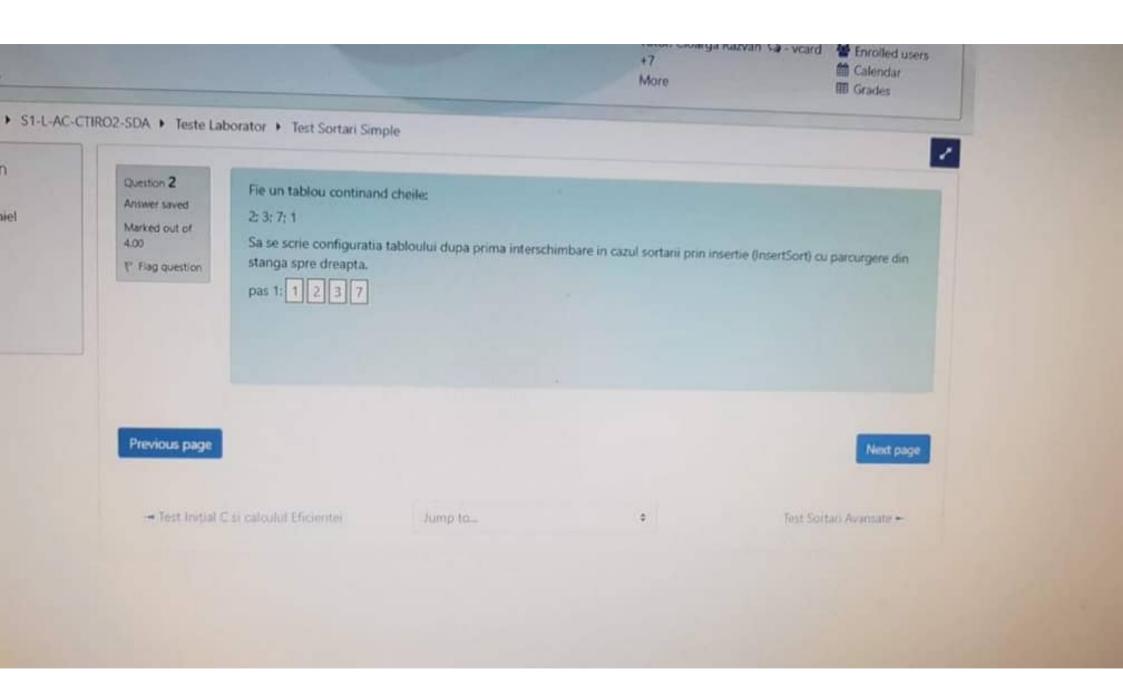

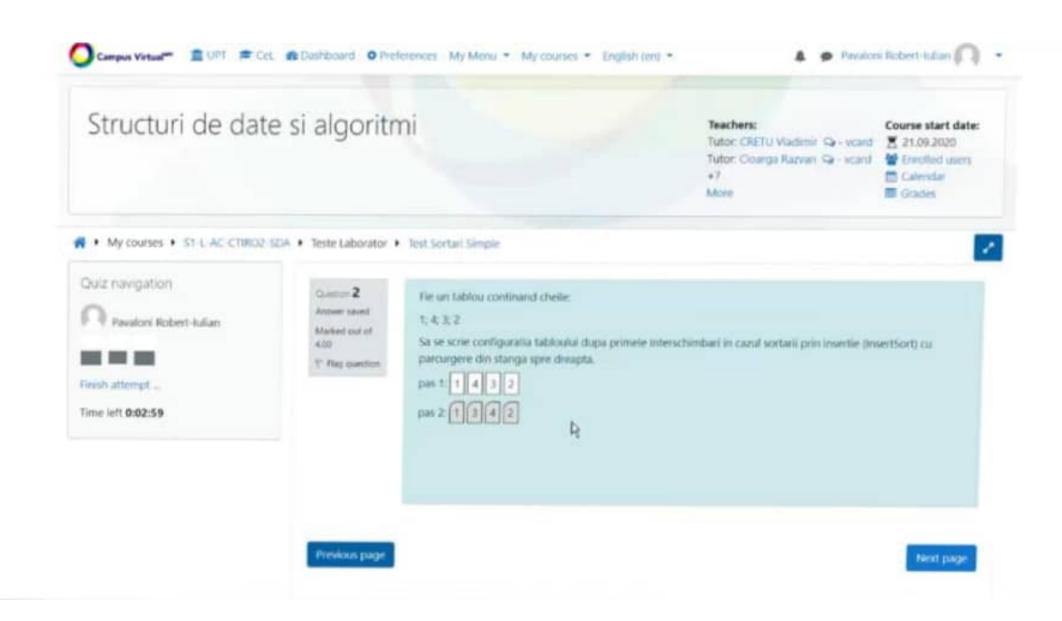



3; 1; 7; 2

Sa se scrie configuratia tabloului dupa fiecare pas al sortarii in mod **descrescator** folosind sortarea prin interschimbare (BubbleSort). Se considera ca parcurgerea se face de la stanga la dreapta si un pas contine o comparatie si maxim o interschimbare.



pas 2:

pas 3:

