


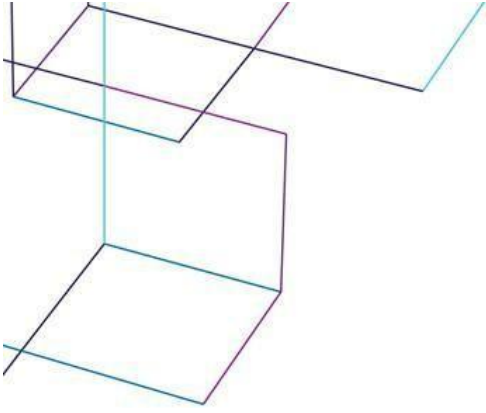

Vehicle Instemarah renewal Service

Integration Guide

Date : 13-08-2024

Version : 0.1

Document Privacy: Confidential

1 Introduction

1.1.1 Purpose

This document in detail about APIs for the renewal of vehicle's Istemarah, their resources and their request/response parameters. The details of each parameter field like its type is also described, so that the clients of the API are aware of the expected inputs and the response provided by the API with samples of request and response. The purpose of this document is to communicate to the client for the APIs use.

1.1.1 Scope

The document mainly focuses on the APIs available for plate replacement of vehicle and the parameters required invoking these web services.

1.1.2 Definitions, acronyms, and abbreviations

Acronym or Abbreviation	Definition
NIC	National Information Center
NIN	National Identification Number
OTP	One Time Password
URL	Uniform Resource Locator
HTTP	Hyper Text Transfer Protocol

2. Service definition.

Vehicle Istemarah renewal service is designed to renew the vehicle registration for the next three years if its registration is going to expire within six months from current date under the Tamm system. This API allows the user to raise request for registration renewal of vehicles belong to clients. The API is in two forms verify and submit.

3. Request detail for vehicle Istemarah renewal

3.1 Generate Access Token

The client application makes a request to the following token endpoint API to get the access token.

URL	https://{authorization-server}/auth/realms/{realm-name}/protocol/openid-connect/token
HTTP Method	POST
Content-Type	application/x-www-form-urlencoded

Service Input:

NAME	Type	Required	DESCRIPTION
authorization-server	Path variable	Yes	Check environment section in the appendix
realm-name	Path variable	Yes	Check environment section in the appendix
client_id	Request parameter	Yes	Check environment section in the appendix
client_secret	Request parameter	Yes	Check environment section in the appendix
grant_type	Request parameter	Yes	Use "client_credentials"

Request Example.

```
curl --location 'https://idp.apps.devocp4.elm.sa/auth/realms/Tamm-QA/protocol/openid-connect/token' \
--header 'Content-Type: application/x-www-form-urlencoded' \
--data-urlencode 'client_id=70e8c31b' \
--data-urlencode 'client_secret=0f9009b67ec345be121f8d745a73be76' \
--data-urlencode 'grant_type=client_credentials'
```

HTTP Response:

Response Code: 200

NAME	DESCRIPTION	TYPE	REQUIRED
accessToken	The access token issued by the identity provider	String	YES

Response Code: 400

```
{
  "error": "invalid_client",
  "error_description": "Invalid client credentials"
}
```

Note: Please refer to the Profile Management Integration Guide or the Integrator Integration Guide in case you are an integrator.

3.2 Request to verify vehicle plate using plate number

The main function of this API is to validate vehicle by passing plate information

URL

URL	{{baseUrl}}/api/v1/istemarah/renewal/verify
HTTP Method	POST
Content-Type	application/json

Service Input:

Name	Type	Example	Required
plateDto	Request body in JSON string	Yes	<pre>{ "text1": "ر", "text2": "ل", "text3": "ص", "number": 8173, "type": { "code": 1 } }</pre>

Service Output:

Name	Description	Type
id	Conversation Id – user in next step to be added in the header	44ba977bda6ddf617
	"conversationId":"a87416181a6a40fa"	

vehicleDtoView		<pre>{ "sequenceNumber":462781810, "plate":{ "text1": "ر", "text2": "ل", "text3": "ص", "number": 8173, "type": { "code": 1, "nameAr": "خاص", "nameEn": "خاص" } }, "weight":1500, "makerAndModel":{ "maker": "هوندا", "model": "اكورد", "year":2020 }, "color":{ "major": "ابيض", "minor":null }, "chassisNumber": "JE4LZ22W2LZ703817", "capacity":5, "bodyType": 5 }</pre>
ownerIdNumber	Owner Number	7001462725
ownerName	Vehicle owner name	"بله"

Internal

6

<code>actualDriverIdNumber</code>	Actual driver number	
<code>price</code>		<code>"35.0"</code>

Request	<pre> { "plateDto": { "text1": "ر", "text2": "ل", "text3": "ص", "number": 8173, "type": { "code": 1, "nameAr": "خاص", "nameEn": "Private Car" } } } </pre>
Response	<pre> { "id": "44ba977bda6df617", "vehicleDtoView": { "sequenceNumber": 462781810, "plate": { "text1": "ر", "text2": "ل", "text3": "ص", "number": 8173, "type": { "code": 1, "nameAr": "خاص", "nameEn": "خاص" } }, "weight": 1500, "makerAndModel": { "maker": "هوندا", "model": "اكورد", "year": 2020 }, "color": { "major": "ابيض", "minor": null }, "chassisNumber": "JE4LZ22W2LZ703817", "capacity": 5, "bodyType": 5 }, "ownerIdNumber": 7001462725, "ownerName": "بله", "actualDriverIdNumber": null, "actualDriverName": null, "price": "35.0" } </pre>

3.3 Request to submit istemarah renewal

This API allow the user to submit request for registration renew .

URL

URL	{{baseUrl}}/api/v1/istemarah/renewal/
HTTP Method	POST
Content-Type	application/json

Input

Name	Description	Type	Required
X-Conversation-Id	The id from the 1st step, need to be used in the request header.	String Request Header	yes
X-Integrator-User-Id	need to be used in the request header.	Ineger Request Header	Yes
ownerMobileNumber	Owner registered mobile number long	Yes	558526036

Output

Name	Description	Example
status	Receive 200 status code as response after success	200

3.4 Request to view renewed istemarah.

This API allow the user to submit request for search renewed Istemarah .

URL

URL	{{baseUrl}}/api/v1/istemarah/renewal/client-search?page=0&size=10
HTTP Method	POST
Content-Type	application/json

Input

Name	Description	Type	Required
X-Integrator-User-Id	need to be used in the request header.	Ineger Request Header	Yes
page	Number of page	Request Parameter	0
size	Record number per page(default 10)	Request Parameter	10
plateInfo	Plate info	Request Body	{"\$and":[{"plateInfo": "ببأ_7562_1"}]}

Output

Name	Description	Example
content	response	[{ "sequenceNumber": 810702400, "plateInfo": "ببأ_7562_1", "plateType": { "code": 1, "nameAr": "خاص", "nameEn": "Private Car" }, "maker": "كيا", "model": "كرنفال", "majorColor": "اسود", "modelYear": 2024, "createdDate": "2025-04-16T13:50:06.743", "renewalExpiryDate": "2027-11-05", "actualDriverIdNumber": null, }]

		<pre> "actualDriverName": null, "ownerIdNumber": 7001715155, "ownerName": "شركة جي إف إس", "traceId": "6b302152e16397cb", "operatorIdNumber": 1077147443, "branchName": { "ar": "الفرع الرئيسي", "en": "hq branch" }, "plateTypeCode": 1 }], </pre>
pageable		<pre> { "sort": { "empty": false, "unsorted": false, "sorted": true }, "offset": 0, "pageNumber": 0, "pageSize": 10, "paged": true, "unpaged": false }, </pre>
		<pre> "last": true, "totalPages": 1, "totalElements": 1, "size": 10, "number": 0, "sort": { "empty": false, "unsorted": false, "sorted": true }, "numberOfElements": 1, "first": true, "empty": false </pre>

Example of Request

4.1.1 Error codes

Code	Type	Message
400	Business error	Business error message translated in Arabic and English
500	System error	“Generic error occurred” or “حدث خطأ أثناء تنفيذ طلبك”

Plate Type

Plate type code	Naming Arabic	Naming English
1	خصوصي	Private Car
2	نقل عام	Public Transport
3	نقل خاص	Private Transport
10	دراجة نارية	Motorcycle