



网站部署

添加站点

- 1、打开phpstudy控制面板，点击其他选项菜单。

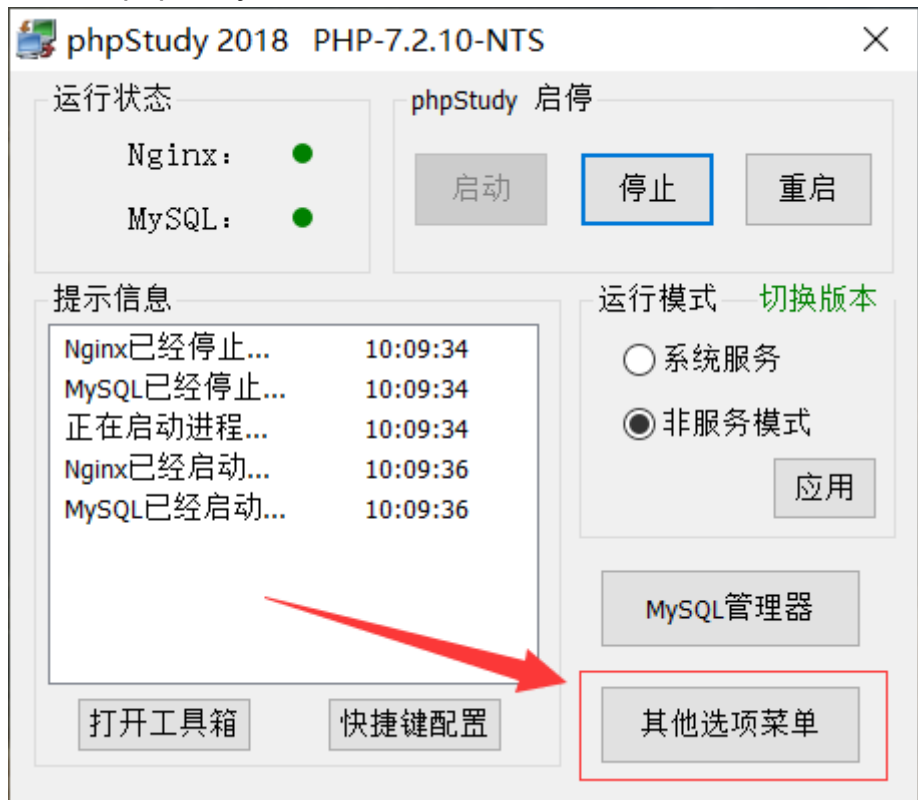


- 2、找到 站点域名管理 选项。
- 3、设置站点域名。

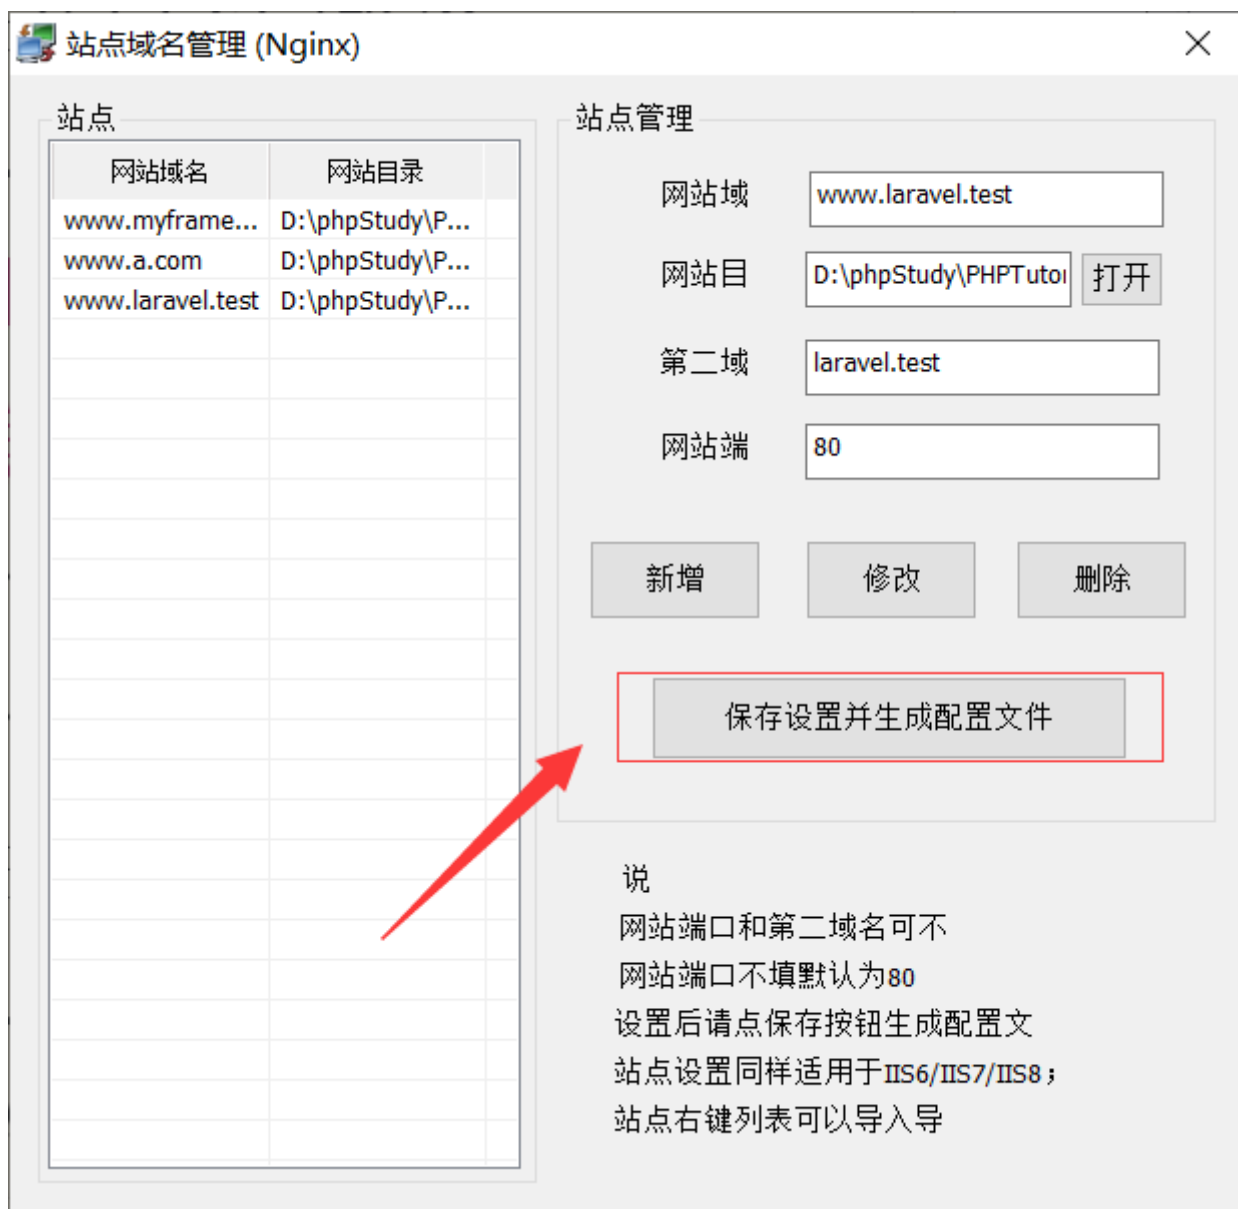

- 5、域名设置完成之后，就需要改配置文件了。


在host文件中添加域名。

- 1、打开phpstudy控制面板，点击其他选项菜单，找到 打开host 选项，点击便会以记事本的方式打开一个文件，如图：

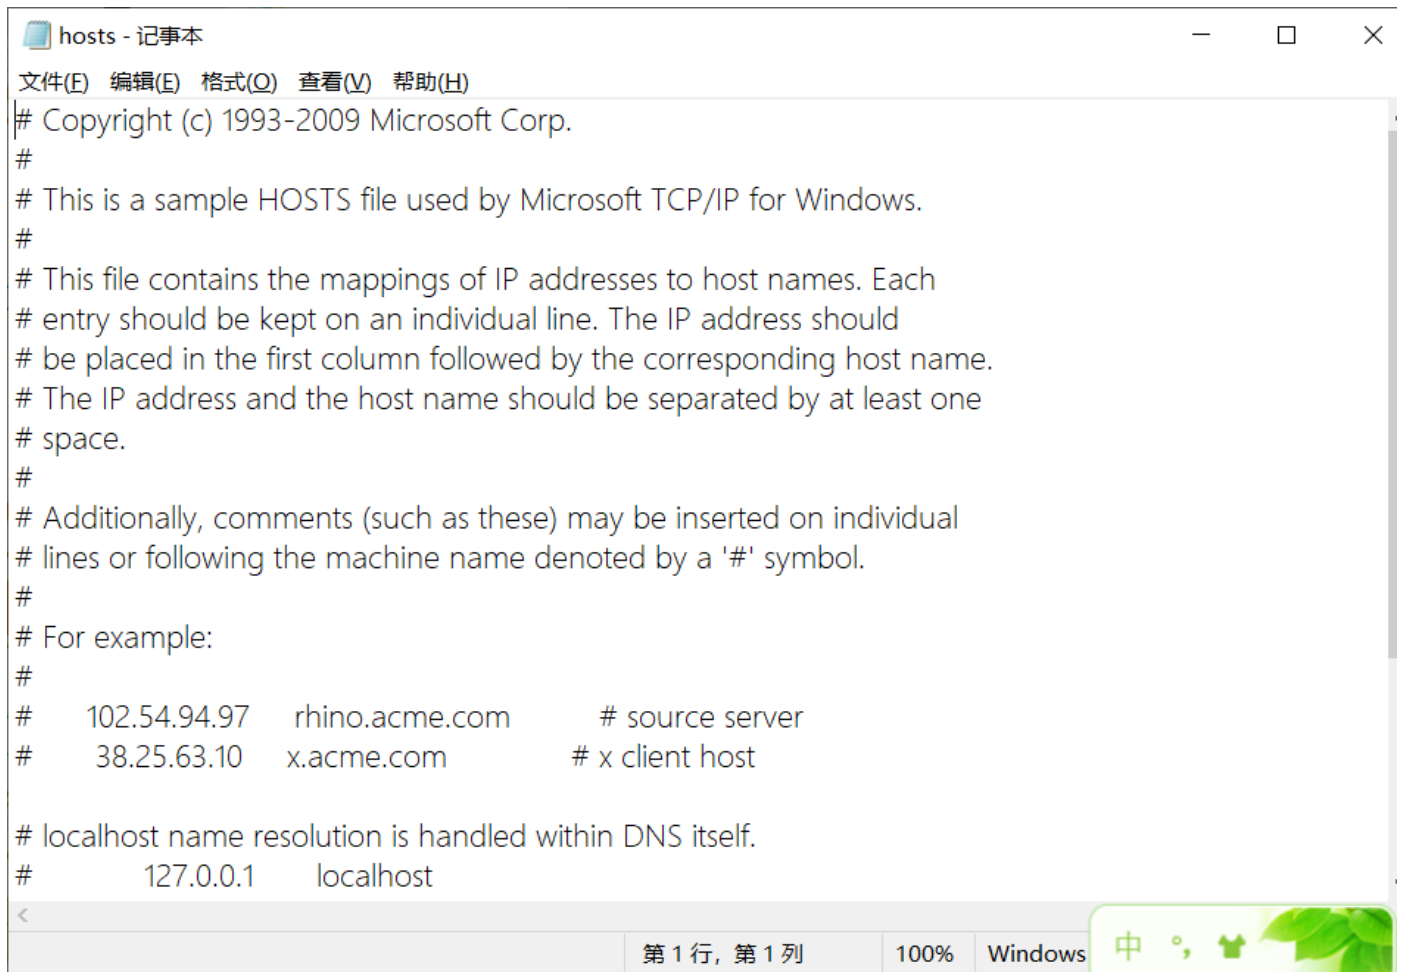

```
# Copyright (c) 1993-2009 Microsoft Corp.
#
# This is a sample HOSTS file used by Microsoft TCP/IP for Windows.
#
# This file contains the mappings of IP addresses to host names. Each
# entry should be kept on an individual line. The IP address should
# be placed in the first column followed by the corresponding host name.
# The IP address and the host name should be separated by at least one
# space.
#
# Additionally, comments (such as these) may be inserted on individual
# lines or following the machine name denoted by a '#' symbol.
#
# For example:
#
# 102.54.94.97 rhino.acme.com # source server
# 38.25.63.10 x.acme.com # x client host
#
# localhost name resolution is handled within DNS itself.
# 127.0.0.1 localhost
```


- 2、把文件拖到最后，添加目标域名即可，格式如下图：

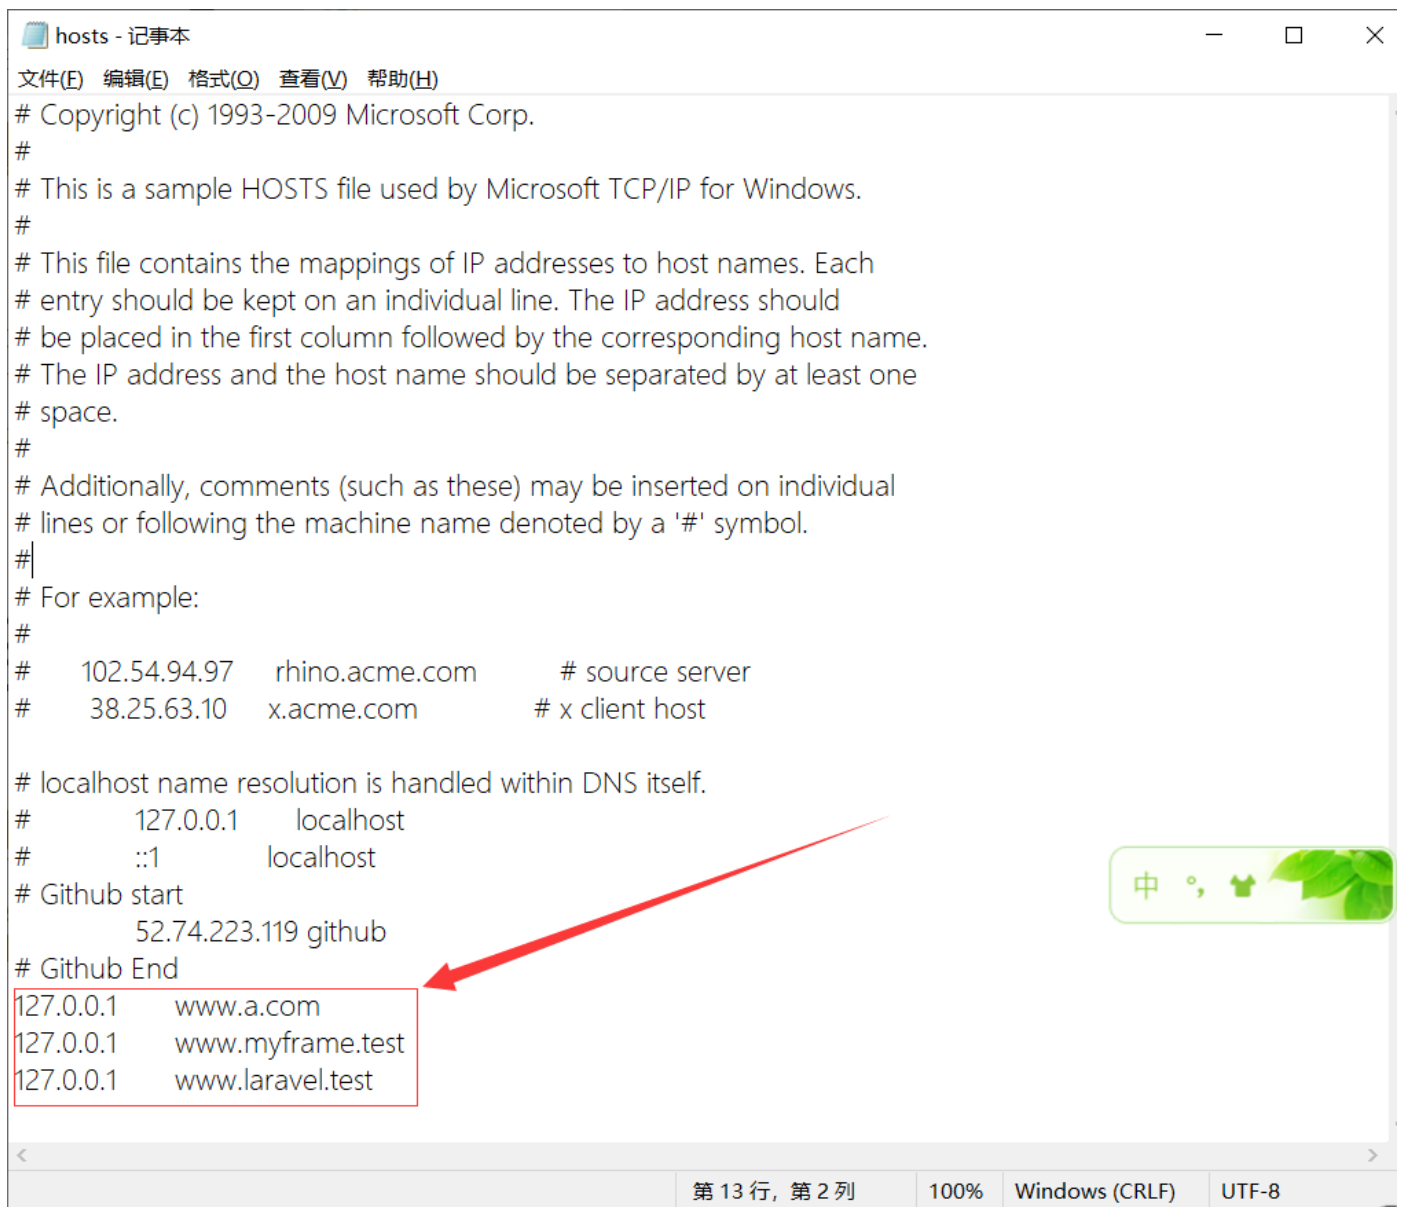

```
hosts - 记事本
文件(E) 编辑(E) 格式(O) 查看(V) 帮助(H)
# Copyright (c) 1993-2009 Microsoft Corp.
#
# This is a sample HOSTS file used by Microsoft TCP/IP for Windows.
#
# This file contains the mappings of IP addresses to host names. Each
# entry should be kept on an individual line. The IP address should
# be placed in the first column followed by the corresponding host name.
# The IP address and the host name should be separated by at least one
# space.
#
# Additionally, comments (such as these) may be inserted on individual
# lines or following the machine name denoted by a '#' symbol.
#
# For example:
#
# 102.54.94.97 rhino.acme.com      # source server
# 38.25.63.10  x.acme.com         # x client host
#
# localhost name resolution is handled within DNS itself.
# 127.0.0.1 localhost
# ::1 localhost
# Github start
# 52.74.223.119 github
# Github End
127.0.0.1 www.a.com
127.0.0.1 www.myframe.test
127.0.0.1 www.laravel.test
```

域名的测试


- 1、基本信息：
 - 本次设置的域名为：www.laravel.test
 - 对应的文件为：D:\phpStudy\PHPTutorial\WWW\index\laravel
- 2、在laravel文件夹下新建 index.php ， 如图：

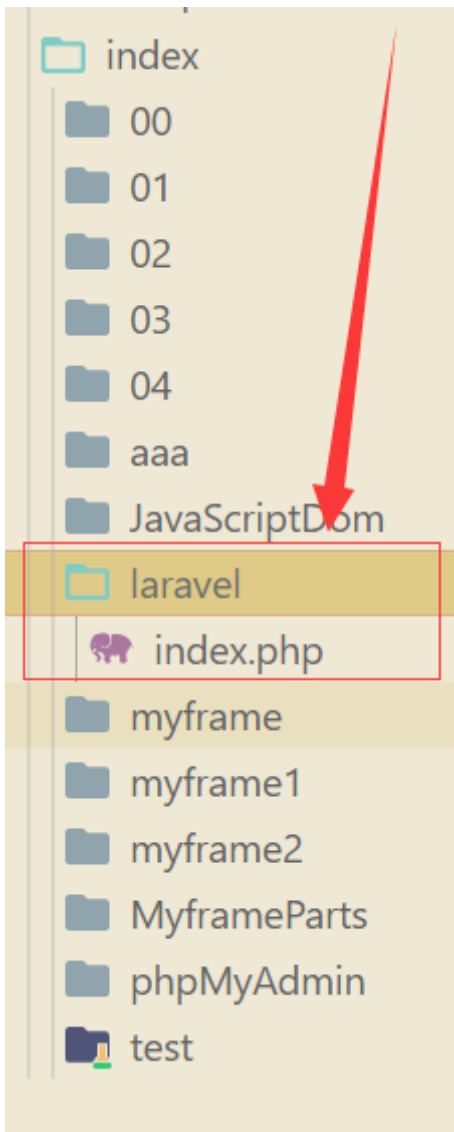

- 3、index.php 文件的内容如下：

```
index.html  problem.md  index.php ...\laravel  note.md ...\网站部署  index.php ...\public
WWW > index > laravel > index.php
1  <?php
2  echo 'hello world!';
3
```

- 4、访问文件：在谷歌浏览器中输入 `www.laravel.test` 就能正常的访问到index.php文件里面的内容了。

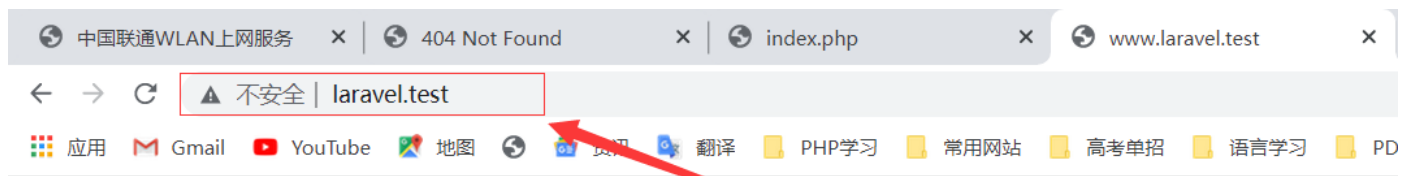

hello world!

note路径

D:\phpStudy\PHPTutorial\WWW\index\aaa\网站部署