

Tutorials ▼

References ▼

Exercises •

Menu **▼**



Paid Courses





HTML

CSS JAVASCRIPT

SQL

PYTHON







jQuery Properties




Next >

jQuery Properties

Property	Description
context	Removed in version 3.0. Contains the original context passed to jQuery()
<u>jquery</u>	Contains the jQuery version number
jQuery.fx.interval	Change the animation firing rate in milliseconds
jQuery.fx.off	Globally disable/enable all animations
jQuery.support	A collection of properties representing different browser features or bugs (Intended for jQuery's internal use)



Next >

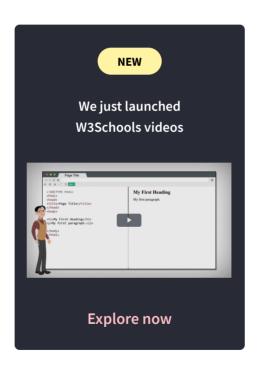

COLOR PICKER











CODE GAME



Report Error Forum About Shop

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors

Java Tutorial C++ Tutorial jQuery Tutorial

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Java Reference Angular Reference jQuery Reference

Web Courses

HTML Course
CSS Course
JavaScript Course
Front End Course
SQL Course
Python Course
PHP Course
jQuery Course
Java Course
C++ Course
C# Course
XML Course

Get Certified »

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookie and privacy policy.

Copyright 1999-2022 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

