Table of content

In this section, you will find the list of all the elements available in the library. They will be accompanied by a brief description and a link to their respective documentation page.

They are divided into three categories:

- Passive: the default elements, which do not require any specific action from the user.
- Interactive: like a menu or prompt, these elements require user input and interaction.
- Animated: elements that are animated, like a progress bar.

> **NOTE**
> An article is available to help you create your own elements. You can find it here.

Have a question, give a feedback or found a bug? Feel free to open an issue or start a discussion on the GitHub repository.

Passive

Classic elements

Visual	Description	Documentation
	The `Text` is a simple text element that can be used to display information to the user.	Read more
	The `EmbedText` is a text element that has been embed. Nothing more.	Read more
	The `Title` is a text element that can be used to display a title at the top of the console. (You may change the font)	Read more
	The `Banner` is a text element that can be used to display a banner.	Read more
	The `Header` is a banner placed at the top of the console.	Read more
	The `Footer` is a banner placed at the bottom of the console	Read more

Visual	Description	Documentation
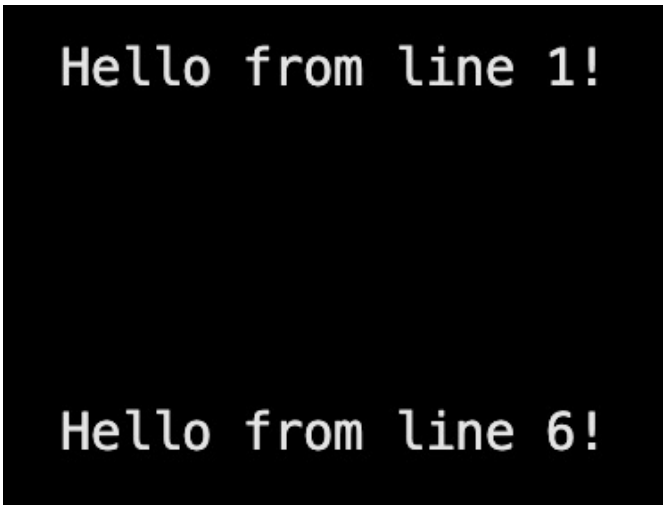	The `HeightSpacer` is a passive element that can be used to add a vertical space.	Read more
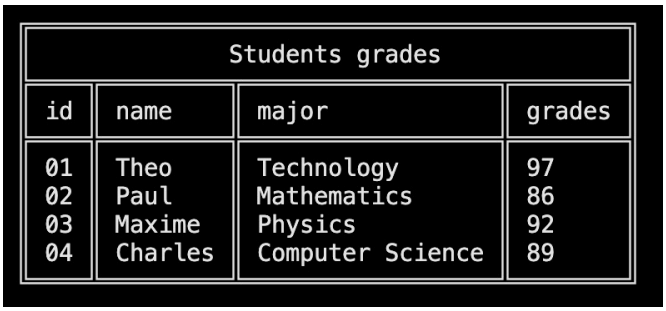	The `TableView` is a passive element that can be used to display a table. (You may change the style fo the borders)	Read more
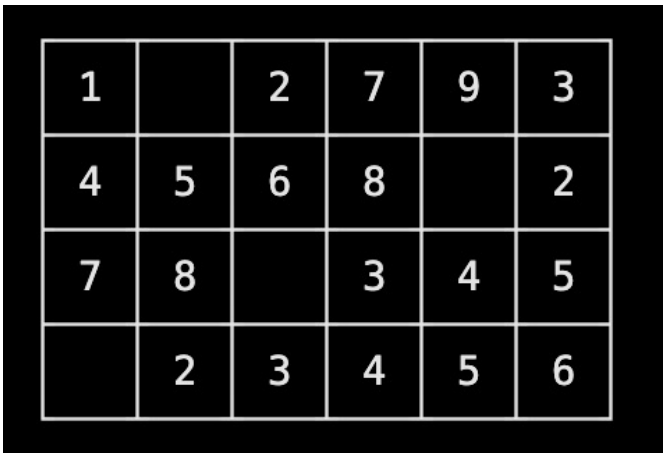	The `Matrix` is a passive element that can be used to display a matrix. (You may also change its style)	Read more
	The `ASCIIArt` is a passive element that can be used to display an ASCII artwork composed of multiple string lines.	Read more

"Inspectors" elements

These are debugging elements and should not be used in a production environment. They are not very customizable and are intended to be used for debugging purposes only.

Visual	Description	Documentation
 Window Elements Dashboard Id | Type | Visibility | Height | Width | Line | Placement | Type 0 | Title | True | 8 | 125 | 0 | TopCenterFullWidth | Passive 1 | Header | True | 2 | 125 | 0 | TopCenterFullWidth | Passive 2 | Footer | True | 1 | 125 | 45 | BottomCenterFullWidth | Passive 3 | FakeLoadingBar | False | 3 | 14 | 10 | TopCenter | Animated 4 | ScrollingMenu | False | 14 | 31 | 10 | TopCenter | Interactive 5 | ElementsDashboard | True | 11 | 98 | 10 | TopCenter | Passive	The `ElementsDashboard` is a passive element that can be used to display the list of elements currently stored in the `Window`.	Read more
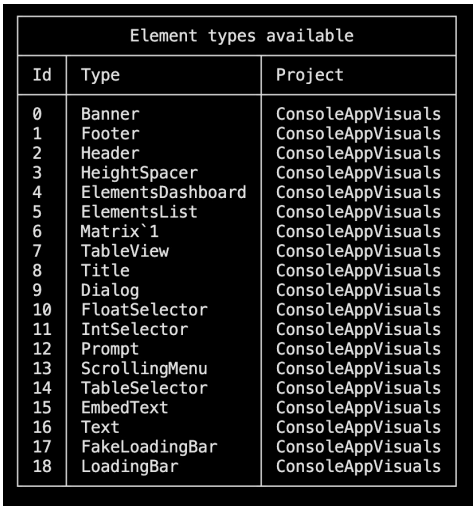 Element types available Id | Type | Project 0 | Banner | ConsoleAppVisuals 1 | Footer | ConsoleAppVisuals 2 | Header | ConsoleAppVisuals 3 | HeightSpacer | ConsoleAppVisuals 4 | ElementsDashboard | ConsoleAppVisuals 5 | ElementsList | ConsoleAppVisuals 6 | Matrix`1 | ConsoleAppVisuals 7 | TableView | ConsoleAppVisuals 8 | Title | ConsoleAppVisuals 9 | Dialog | ConsoleAppVisuals 10 | FloatSelector | ConsoleAppVisuals 11 | IntSelector | ConsoleAppVisuals 12 | Prompt | ConsoleAppVisuals 13 | ScrollingMenu | ConsoleAppVisuals 14 | TableSelector | ConsoleAppVisuals 15 | EmbedText | ConsoleAppVisuals 16 | Text | ConsoleAppVisuals 17 | FakeLoadingBar | ConsoleAppVisuals 18 | LoadingBar | ConsoleAppVisuals	The `ElementsList` is a passive element that can be used to display the list of elements currently available (from the library or the local project). You may select the type expected (Default, Passive, Interactive or Animated).	Read more

Have a question, give a feedback or found a bug? Feel free to open an issue or start a discussion on the GitHub repository.

Interactive

Visual	Description	Documentation
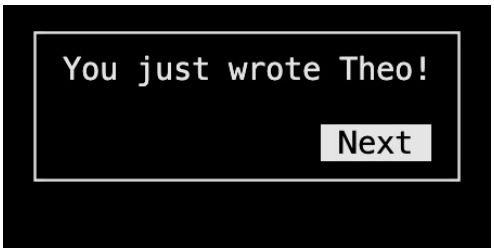	The `Dialog` is interaction box providing 0, 1 or 2 options to the user.	Read more
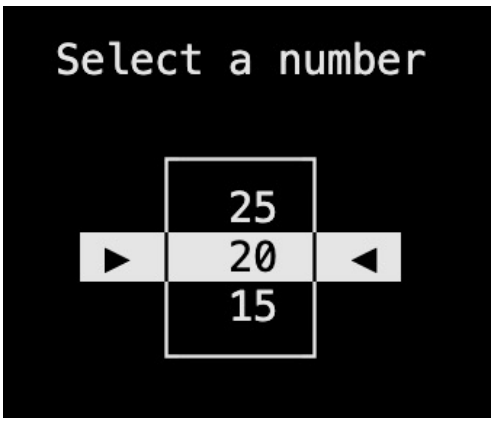	The `FloatSelector` display a roulette letting you choose a number given a range and a step.	Read more
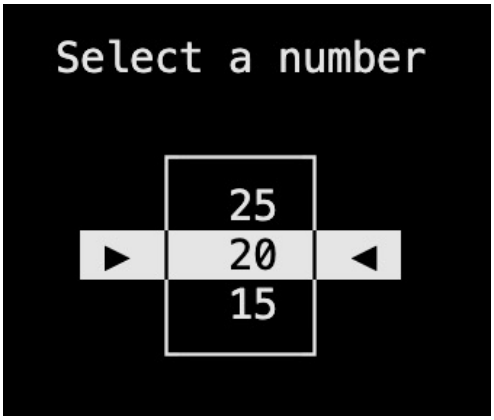	Very similar to the `FloatSelector`, the `IntSelector` is used to select an integer.	Read more
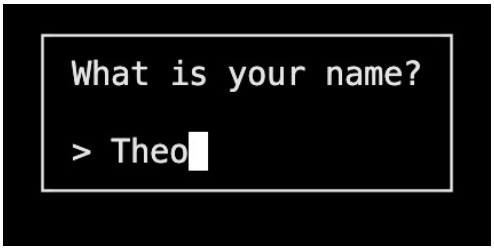	The `Prompt` is a simple input box that allows the user to enter a string (Different input types available for secrecy for example).	Read more

Visual	Description	Documentation
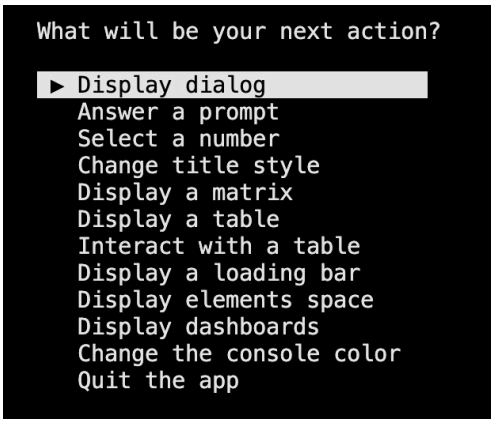	The `ScrollingMenu` is a menu that allows the user to scroll through a list of choices.	Read more
	The `TableSelector` is a table that allows the user to select a row.	Read more

---

Have a question, give a feedback or found a bug? Feel free to open an issue or start a discussion on the GitHub repository.

Animated

Visual	Description	Documentation
	The `FakeLoadingBar` is used to create a static loading bar with a defined duration.	Read more
	The `LoadingBar` class is used to create a dynamic loading bar. It is a simple animated element that you may use to show the progress of a task.	Read more

---

Have a question, give a feedback or found a bug? Feel free to open an issue or start a discussion on the GitHub repository.