

# Table of content

In this section, you will find the list of all the elements available in the library. They will be accompanied by a brief description and a link to their respective documentation page.

They are divided into three categories:

- [Passive](#): the default elements, which do not require any specific action from the user.
- [Interactive](#): like a menu or prompt, these elements require user input and interaction.
- [Animated](#): elements that are animated, like a progress bar.

## **NOTE**





An article is available to help you create your own elements. You can find it [here](#).

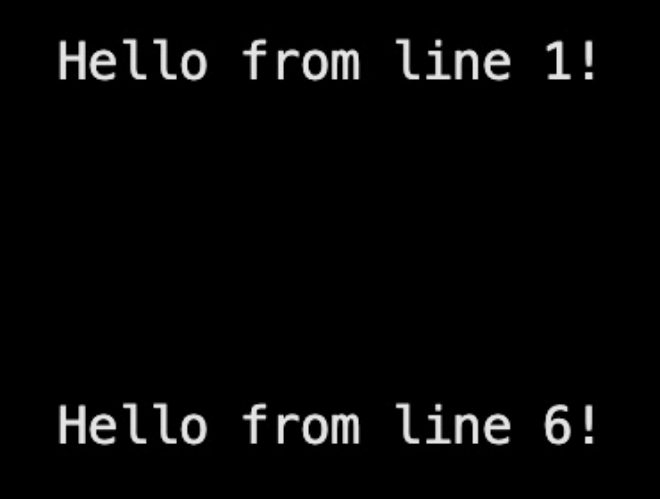
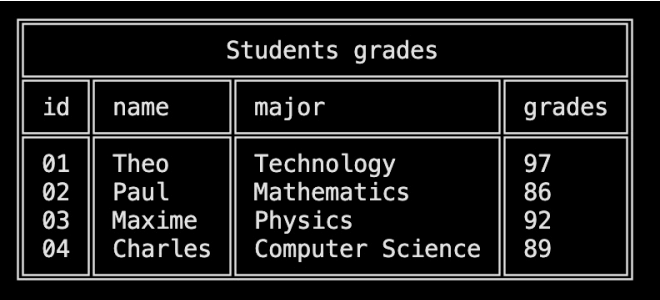
---

Have a question, give a feedback or found a bug? Feel free to [open an issue](#) or [start a discussion](#) on the GitHub repository.

# Passive

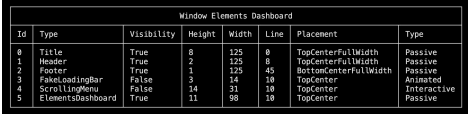
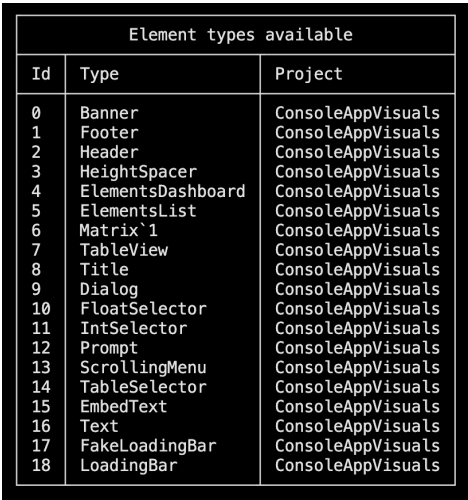
## Classic elements

| Visual                                                                             | Description                                                                                                                 | Documentation                                                                                                   |
|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|
|    | The <b>Text</b> is a simple text element that can be used to display information to the user.                               | <a href="#">Read more</a>    |
|    | The <b>EmbedText</b> is a text element that has been embed. Nothing more.                                                   | <a href="#">Read more</a>    |
|    | The <b>Title</b> is a text element that can be used to display a title at the top of the console. (You may change the font) | <a href="#">Read more</a>    |
|  | The <b>Banner</b> is a text element that can be used to display a banner.                                                   | <a href="#">Read more</a>  |
|  | The <b>Header</b> is a banner placed at the top of the console.                                                             | <a href="#">Read more</a>  |
|  | The <b>Footer</b> is a banner placed at the bottom of the console                                                           | <a href="#">Read more</a>  |

| Visual                                                                             | Description                                                                                                                      | Documentation             |
|------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|---------------------------|
|    | <p>The <b>HeightSpacer</b> is a passive element that can be used to add a vertical space.</p>                                    | <a href="#">Read more</a> |
|   | <p>The <b>TableView</b> is a passive element that can be used to display a table. (You may change the style for the borders)</p> | <a href="#">Read more</a> |
|  | <p>The <b>Matrix</b> is a passive element that can be used to display a matrix. (You may also change its style)</p>              | <a href="#">Read more</a> |
|  | <p>The <b>ASCII Art</b> is a passive element that can be used to display an ASCII artwork composed of multiple string lines.</p> | <a href="#">Read more</a> |

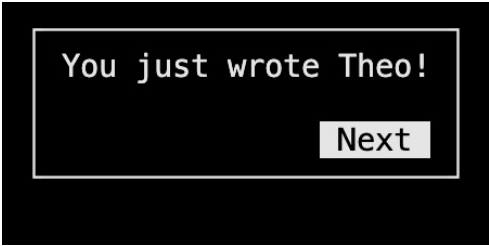
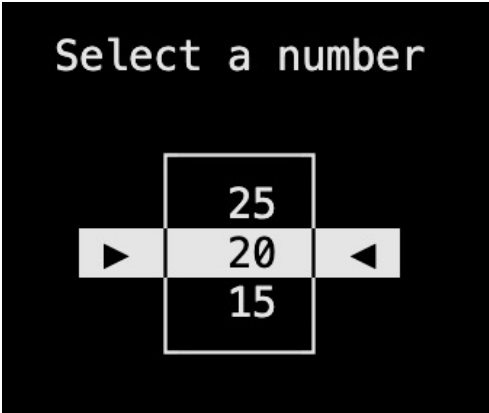
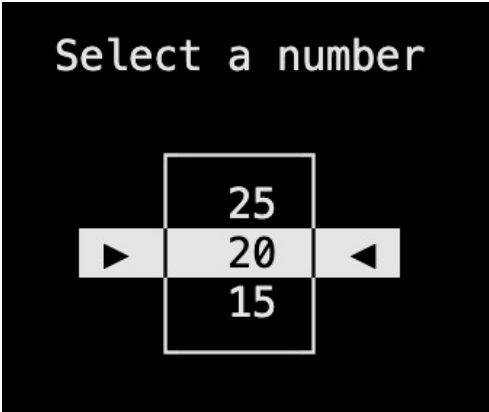
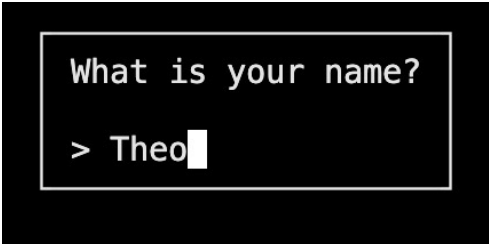
# "Inspectors" elements

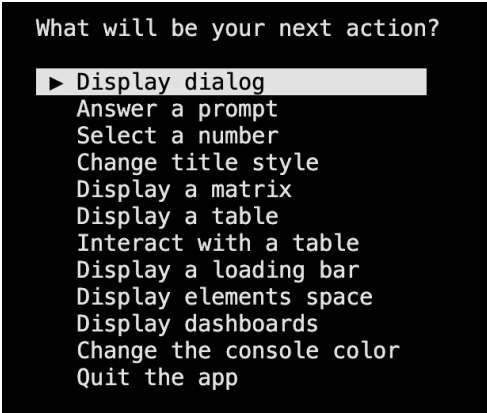
These are debugging elements and should not be used in a production environment. They are not very customizable and are intended to be used for debugging purposes only.

| Visual                                                                            | Description                                                                                                                                                                                                                                           | Documentation             |
|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|
|   | <p>The <code>ElementsDashboard</code> is a passive element that can be used to display the list of elements currently stored in the <code>window</code>.</p>                                                                                          | <a href="#">Read more</a> |
|  | <p>The <code>ElementsList</code> is a passive element that can be used to display the list of elements currently available (from the library or the local project). You may select the type expected (Default, Passive, Interactive or Animated).</p> | <a href="#">Read more</a> |

Have a question, give a feedback or found a bug? Feel free to [open an issue](#) or [start a discussion](#) on the GitHub repository.



# Interactive

| Visual                                                                             | Description                                                                                                                               | Documentation                                                                                                   |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|
|    | The <b>Dialog</b> is interaction box providing 0, 1 or 2 options to the user.                                                             | <a href="#">Read more</a>    |
|    | The <b>FloatSelector</b> display a roulette letting you choose a number given a range and a step.                                         | <a href="#">Read more</a>    |
|   | Very similar to the <b>FloatSelector</b> , the <b>IntSelector</b> is used to select an integer.                                           | <a href="#">Read more</a>   |
|  | The <b>Prompt</b> is a simple input box that allows the user to enter a string (Different input types available for secrecy for example). | <a href="#">Read more</a>  |

| Visual                                                                           | Description                                                                                        | Documentation             |
|----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|---------------------------|
|  | The <code>ScrollingMenu</code> is a menu that allows the user to scroll through a list of choices. | <a href="#">Read more</a> |
|  | The <code>TableSelector</code> is a table that allows the user to select a row.                    | <a href="#">Read more</a> |

Have a question, give a feedback or found a bug? Feel free to [open an issue](#) or [start a discussion](#) on the GitHub repository.

# Animated

| Visual                                                                           | Description                                                                                                                                                 | Documentation                                                                                                 |
|----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|
|  | The <code>FakeLoadingBar</code> is used to create a static loading bar with a defined duration.                                                             | <a href="#">Read more</a>  |
|  | The <code>LoadingBar</code> class is used to create a dynamic loading bar. It is a simple animated element that you may use to show the progress of a task. | <a href="#">Read more</a>  |

---

Have a question, give a feedback or found a bug? Feel free to [open an issue](#)  or [start a discussion](#)  on the GitHub repository.