

Práctica de git con todos sus puntos:

```
francisco@francisco: ~/git/java_utn
francisco@francisco:~$ cd git/
francisco@francisco:~/git$ mkdir java_utn
francisco@francisco:~/git$ cd java_utn/
francisco@francisco:~/git/java_utn$ echo "Mi proyecto: Ortiz Ceballos Francisco" > README.md
francisco@francisco:~/git/java_utn$ git status
fatal: not a git repository (or any parent up to mount point /)
Stopping at filesystem boundary (GIT_DISCOVERY_ACROSS_FILESYSTEM not set).
francisco@francisco:~/git/java_utn$ git init
Initialized empty Git repository in /home/francisco/git/java_utn/.git/
francisco@francisco:~/git/java_utn$ ls
README.md
francisco@francisco:~/git/java_utn$ git status
On branch main

No commits yet

Untracked files:
  (use "git add <file>..." to include in what will be committed)
  README.md

nothing added to commit but untracked files present (use "git add" to track)
francisco@francisco:~/git/java_utn$ git add .
francisco@francisco:~/git/java_utn$ git commit -m"Agregar archivo README.md"
[main (root-commit) 5341a3f] Agregar archivo README.md
 1 file changed, 1 insertion(+)
 create mode 100644 README.md
francisco@francisco:~/git/java_utn$ nano README.md
francisco@francisco:~/git/java_utn$ git status
On branch main
Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
    modified:   README.md

no changes added to commit (use "git add" and/or "git commit -a")
francisco@francisco:~/git/java_utn$ git add .
francisco@francisco:~/git/java_utn$ git commit -m"Actualizar README.md con más info"
[main 43f0ba5] Actualizar README.md con más info
 1 file changed, 1 insertion(+)
francisco@francisco:~/git/java_utn$ git log
commit 43f0ba56d6a12619bcea04c9934f83aa75bdc250 (HEAD -> main)
Author: fran <ortizceballosf@gmail.com>
Date:   Sun Sep 1 22:08:36 2024 -0300

    Actualizar README.md con más info

commit 5341a3f7e30b1c6cfdc325f10ed3020c7f50696e
Author: fran <ortizceballosf@gmail.com>
Date:   Sun Sep 1 22:00:38 2024 -0300

    Agregar archivo README.md
francisco@francisco:~/git/java_utn$
```

```
francisco@francisco:~/git/java_utn$ echo "Soy el archivo 1">archivo1.txt && echo "Soy el archivo 2"
>archivo2.txt
francisco@francisco:~/git/java_utn$ git add .
francisco@francisco:~/git/java_utn$ git commit -m"Se agregaron archivo1.txt arcivo2.txt"
[main 29fc409] Se agregaron archivo1.txt arcivo2.txt
 2 files changed, 2 insertions(+)
 create mode 100644 archivo1.txt
 create mode 100644 archivo2.txt
francisco@francisco:~/git/java_utn$ git log
commit 29fc40923166cdf5d44c236941a414bf3d562e03 (HEAD -> main)
Author: fran <ortizceballosf@gmail.com>
Date:   Sun Sep 1 23:48:14 2024 -0300

    Se agregaron archivo1.txt arcivo2.txt


commit 43f0ba56d6a12619bcea04c9934f83aa75bdc250
Author: fran <ortizceballosf@gmail.com>
Date:   Sun Sep 1 22:08:36 2024 -0300

    Actualizar README.md con más info

commit 5341a3f7e30b1c6cfdc325f10ed3020c7f50696e
Author: fran <ortizceballosf@gmail.com>
Date:   Sun Sep 1 22:00:38 2024 -0300

    Agregar archivo README.md
francisco@francisco:~/git/java_utn$
```

Práctica de GitHub con todos sus puntos:

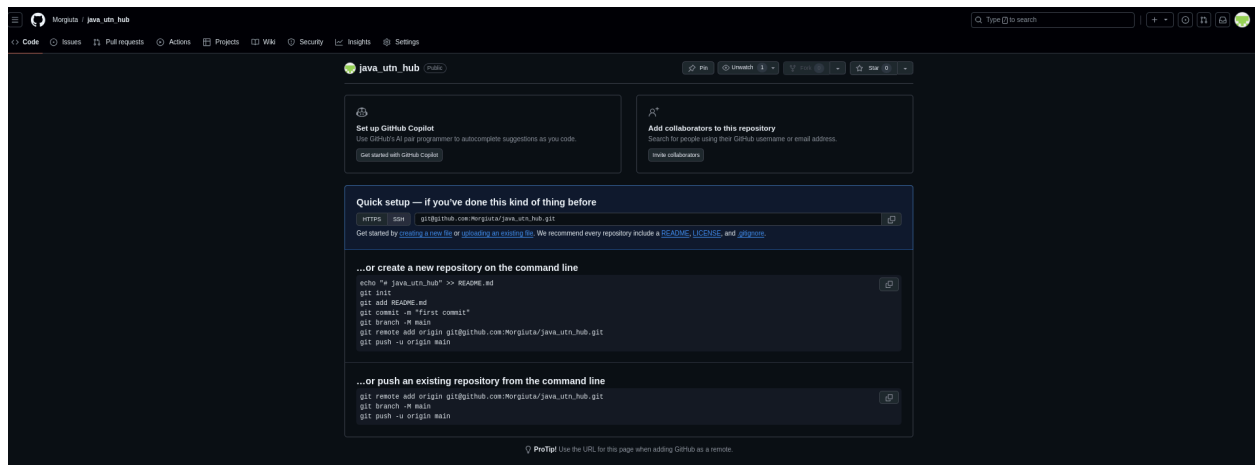

```
francisco@francisco:~/git$ git clone git@github.com:Morgiuta/java_utn_hub.git
Cloning into 'java_utn_hub'...
warning: You appear to have cloned an empty repository.
francisco@francisco:~/git$ cd java_utn_hub/
francisco@francisco:~/git/java_utn_hub$ echo "#Mi primer repositorio">README.md
francisco@francisco:~/git/java_utn_hub$ echo "print('Hola, Gitub!')">hola.txt
bash: !': event not found
francisco@francisco:~/git/java_utn_hub$ ls
README.md
francisco@francisco:~/git/java_utn_hub$ echo "print('Hola, GitHub!')">hola.txt
bash: !': event not found
francisco@francisco:~/git/java_utn_hub$ echo "print('Hola, GitHub!')" > hola.txt
bash: !': event not found
francisco@francisco:~/git/java_utn_hub$ nano hola.txt
francisco@francisco:~/git/java_utn_hub$ git add hola.txt README.md
francisco@francisco:~/git/java_utn_hub$ git commit -m"Agregar archivo README.md y hola.txt"
[main (root-commit) abc07fb] Agregar archivo README.md y hola.txt
 2 files changed, 2 insertions(+)
 create mode 100644 README.md
 create mode 100644 hola.txt
francisco@francisco:~/git/java_utn_hub$ git push origin main
Enumerating objects: 4, done.
Counting objects: 100% (4/4), done.
Delta compression using up to 8 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (4/4), 322 bytes | 80.00 KiB/s, done.
Total 4 (delta 0), reused 0 (delta 0), pack-reused 0
To github.com:Morgiuta/java_utn_hub.git
 * [new branch]      main -> main
francisco@francisco:~/git/java_utn_hub$ git pull
remote: Enumerating objects: 4, done.
remote: Counting objects: 100% (4/4), done.
remote: Compressing objects: 100% (2/2), done.
remote: Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
Unpacking objects: 100% (3/3), 1.00 KiB | 1.00 MiB/s, done.
From github.com:Morgiuta/java_utn_hub
 abc07fb..60f878f  main      -> origin/main
Updating abc07fb..60f878f
Fast-forward
 archivo1.txt | 1 +
 1 file changed, 1 insertion(+)
 create mode 100644 archivo1.txt
francisco@francisco:~/git/java_utn_hub$
```