Setup Guide With Screenshots

Last updated: April 29, 2026.

This guide describes the current PSScript setup: Netlify for the app/API edge and hosted Supabase for all production database state.

PSScript

⌘K

- Dashboard
- Scripts
- Search
- Categories
- Documentation
- Chat
- Agentic
- Analytics
- Settings

AI OPS STUDIO

Review, catalog, and harden PowerShell scripts with enterprise-grade AI analysis, voice workflows, and deployment-safe recommendations.

Total Scripts 0%	Categories	Avg. Security Score 0%	AI Analyses 0%
0	0	0.0 /10	0

Recent Scripts

View All

All

No scripts found. Create your first script!

Create with AI

Script Categories

No category data available

Security Metrics

Overall Score
0/10

Score 8
Score 5
Score 2
0
1

Recent Activity

View All

Voice

No recent activity

Script Activity Trends

Week Month Year

Uploads Executions Analyses

14 12 10 8 6 4 2 0

Wed Thu Fri Sat Sun Mon Tue

Quick Actions

- **Chat with AI** — Get help with PowerShell scripts
- **Manage Scripts** — Browse and organize your scripts
- **Documentation** — PowerShell reference and guides
- **Settings** — Configure your account

‹ collapse

Current Architecture

Layer	Current role	Production
Frontend	React/Vite UI, OAuth callback, responsive shell	Netlify static site
API	same-origin app API	Netlify Functions under `/api/*`
Database	Auth, profiles, scripts, analyses, vectors, backups	hosted Supabase Postgres
AI	chat, script analysis, embeddings, voice	Netlify Functions calling configured providers
Local services	developer-only iteration	optional, not production

There is no active local database path. Use a hosted Supabase `DATABASE_URL`.

1. Production URL

- App: `https://pstest.morloksmaze.com`
- Health: `https://pstest.morloksmaze.com/api/health`
- Auth callback: `https://pstest.morloksmaze.com/auth/callback`

2. Supabase

Apply migrations in filename order from `supabase/migrations/`.

Required Supabase capabilities:

- Auth
- Postgres
- Row Level Security
- `pgvector`

Recommended checks:

```
select extname from pg_extension where extname = 'vector';
select table_name from information_schema.tables where table_schema = 'pub
```

3. Google OAuth

1. In Google Cloud, create an OAuth web client.
2. Add the Supabase Auth callback as the Google authorized redirect URI:
3. `https://YOUR_PROJECT_REF.supabase.co/auth/v1/callback`
4. In Supabase Auth, enable Google.
5. In Supabase redirect URLs, include:
6. `https://pstest.morloksmaze.com/auth/callback`
7. Confirm the app calls Supabase with the app callback as `redirectTo`.

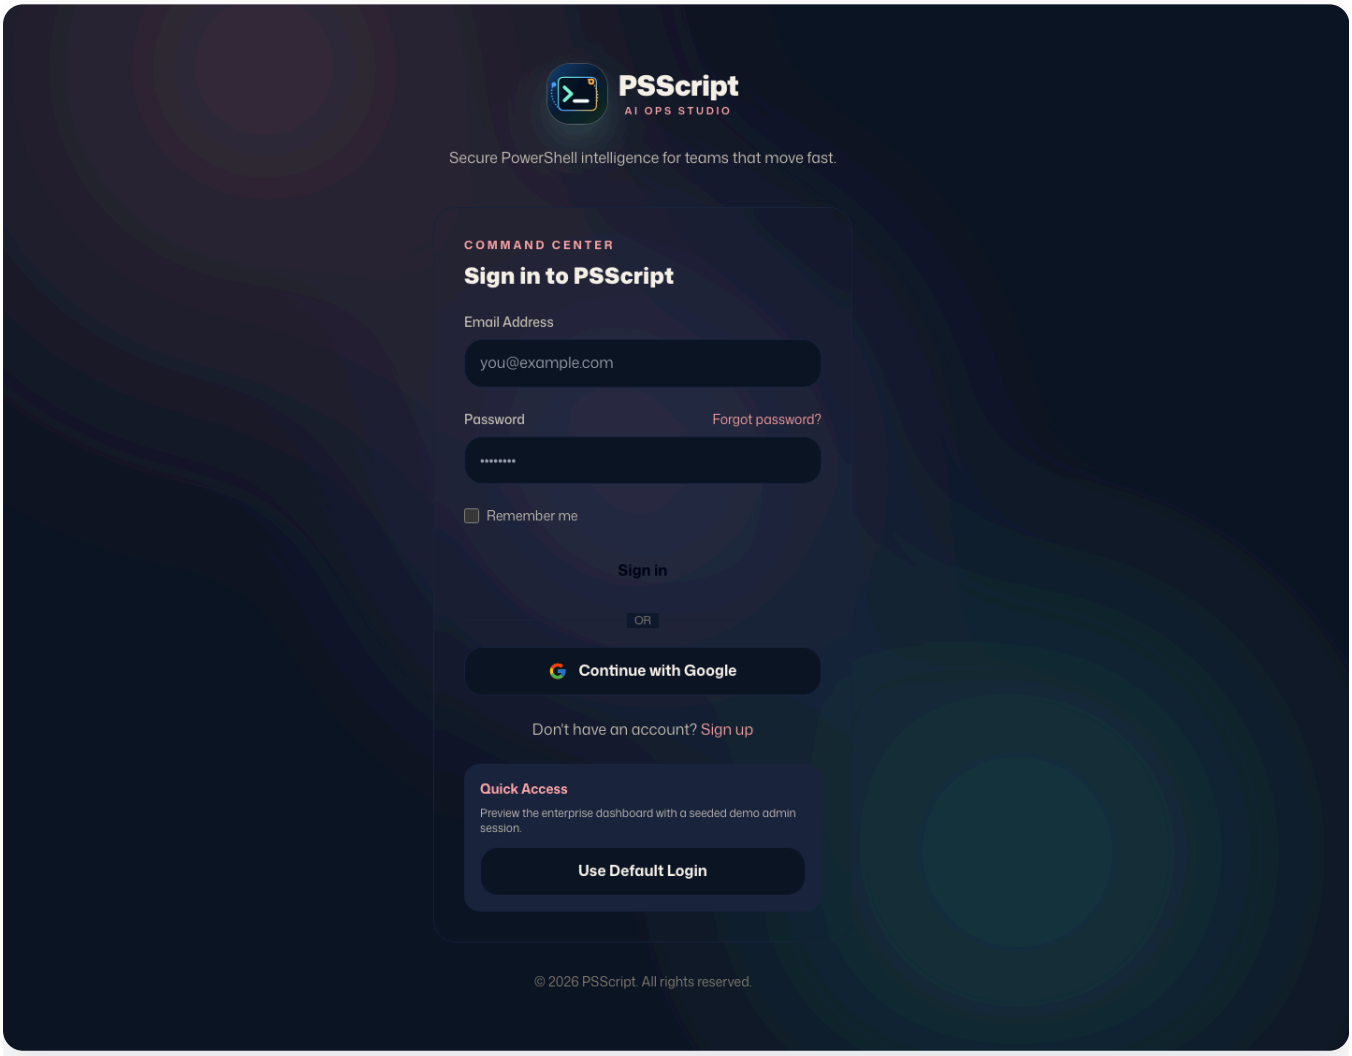

4. Approval Gate

- Users sign in through Supabase Auth.
- `/api/auth/me` maps the Auth identity to `app_profiles`.
- New users default to disabled.
- Admins enable users from Settings -> User Management.
- Disabled users remain on pending approval and receive `403` `account_pending_approval` from protected APIs.
- RLS policies continue to protect direct table access.

5. Netlify Environment

Set these in Netlify:

```
DATABASE_URL=postgresql://...supabase pooler URL...
DB_SSL=true
DB_SSL_REJECT_UNAUTHORIZED=true
SUPABASE_URL=https://your-project.supabase.co
SUPABASE_ANON_KEY=...
SUPABASE_SERVICE_ROLE_KEY=...
DEFAULT_ADMIN_EMAIL=admin@example.com
DEFAULT_ADMIN_PASSWORD=...
DEFAULT_ADMIN_BOOTSTRAP_TOKEN=...
OPENAI_API_KEY=...
OPENAI_MODEL=gpt-5.5
OPENAI_ANALYSIS_MODEL=gpt-5.4-mini
OPENAI_EMBEDDING_MODEL=text-embedding-3-small
ANTHROPIC_API_KEY=...
ANTHROPIC_MODEL=claude-sonnet-4-6
VITE_SUPABASE_URL=https://your-project.supabase.co
VITE_SUPABASE_ANON_KEY=...
VITE_HOSTED_STATIC_ANALYSIS_ONLY=true
```

Server-only secrets must not be prefixed with `VITE_`.

6. Local UI Setup

Use local UI mode for layout work and screenshot capture. This mode uses mock data and avoids mutating hosted Supabase.

```
cd src/frontend
VITE_DISABLE_AUTH=true VITE_USE_MOCKS=true npm run dev -- --host 127.0.0.1
```

Use hosted-auth local mode only when you need to test Supabase login:

```
cd src/frontend
VITE_DISABLE_AUTH=false \
VITE_SUPABASE_URL=https://your-project.supabase.co \
VITE_SUPABASE_ANON_KEY=... \
npm run dev -- --host 127.0.0.1 --port 5173
```

7. Main Screens

Screen	Screenshot
Dashboard desktop	`docs/screenshots/current-2026-04-28/dashboard-desktop.png`
Dashboard mobile	`docs/screenshots/current-2026-04-28/dashboard-mobile.png`
Mobile navigation	`docs/screenshots/current-2026-04-28/mobile-navigation.png`
Scripts desktop	`docs/screenshots/current-2026-04-28/scripts-desktop.png`
Upload desktop	`docs/screenshots/current-2026-04-28/upload-desktop.png`
Agentic assistant alias	`docs/screenshots/current-2026-04-28/agentic-ai-desktop.png`
Data maintenance	`docs/screenshots/current-2026-04-28/settings-data-desktop.png`
Script editor and VS Code export	`docs/screenshots/current-2026-04-29/script-edit-vscode.png`
Runtime requirements	`docs/screenshots/current-2026-04-29/analysis-runtime-requirements.png`
Appearance settings	`docs/screenshots/current-2026-04-29/settings-appearance.png`

PSScript

⌘K

AI OPS STUDIO

Review, catalog, and harden PowerShell scripts with enterprise-grade AI analysis, voice workflows, and deployment-safe recommendations.

Total Scripts

0%

0

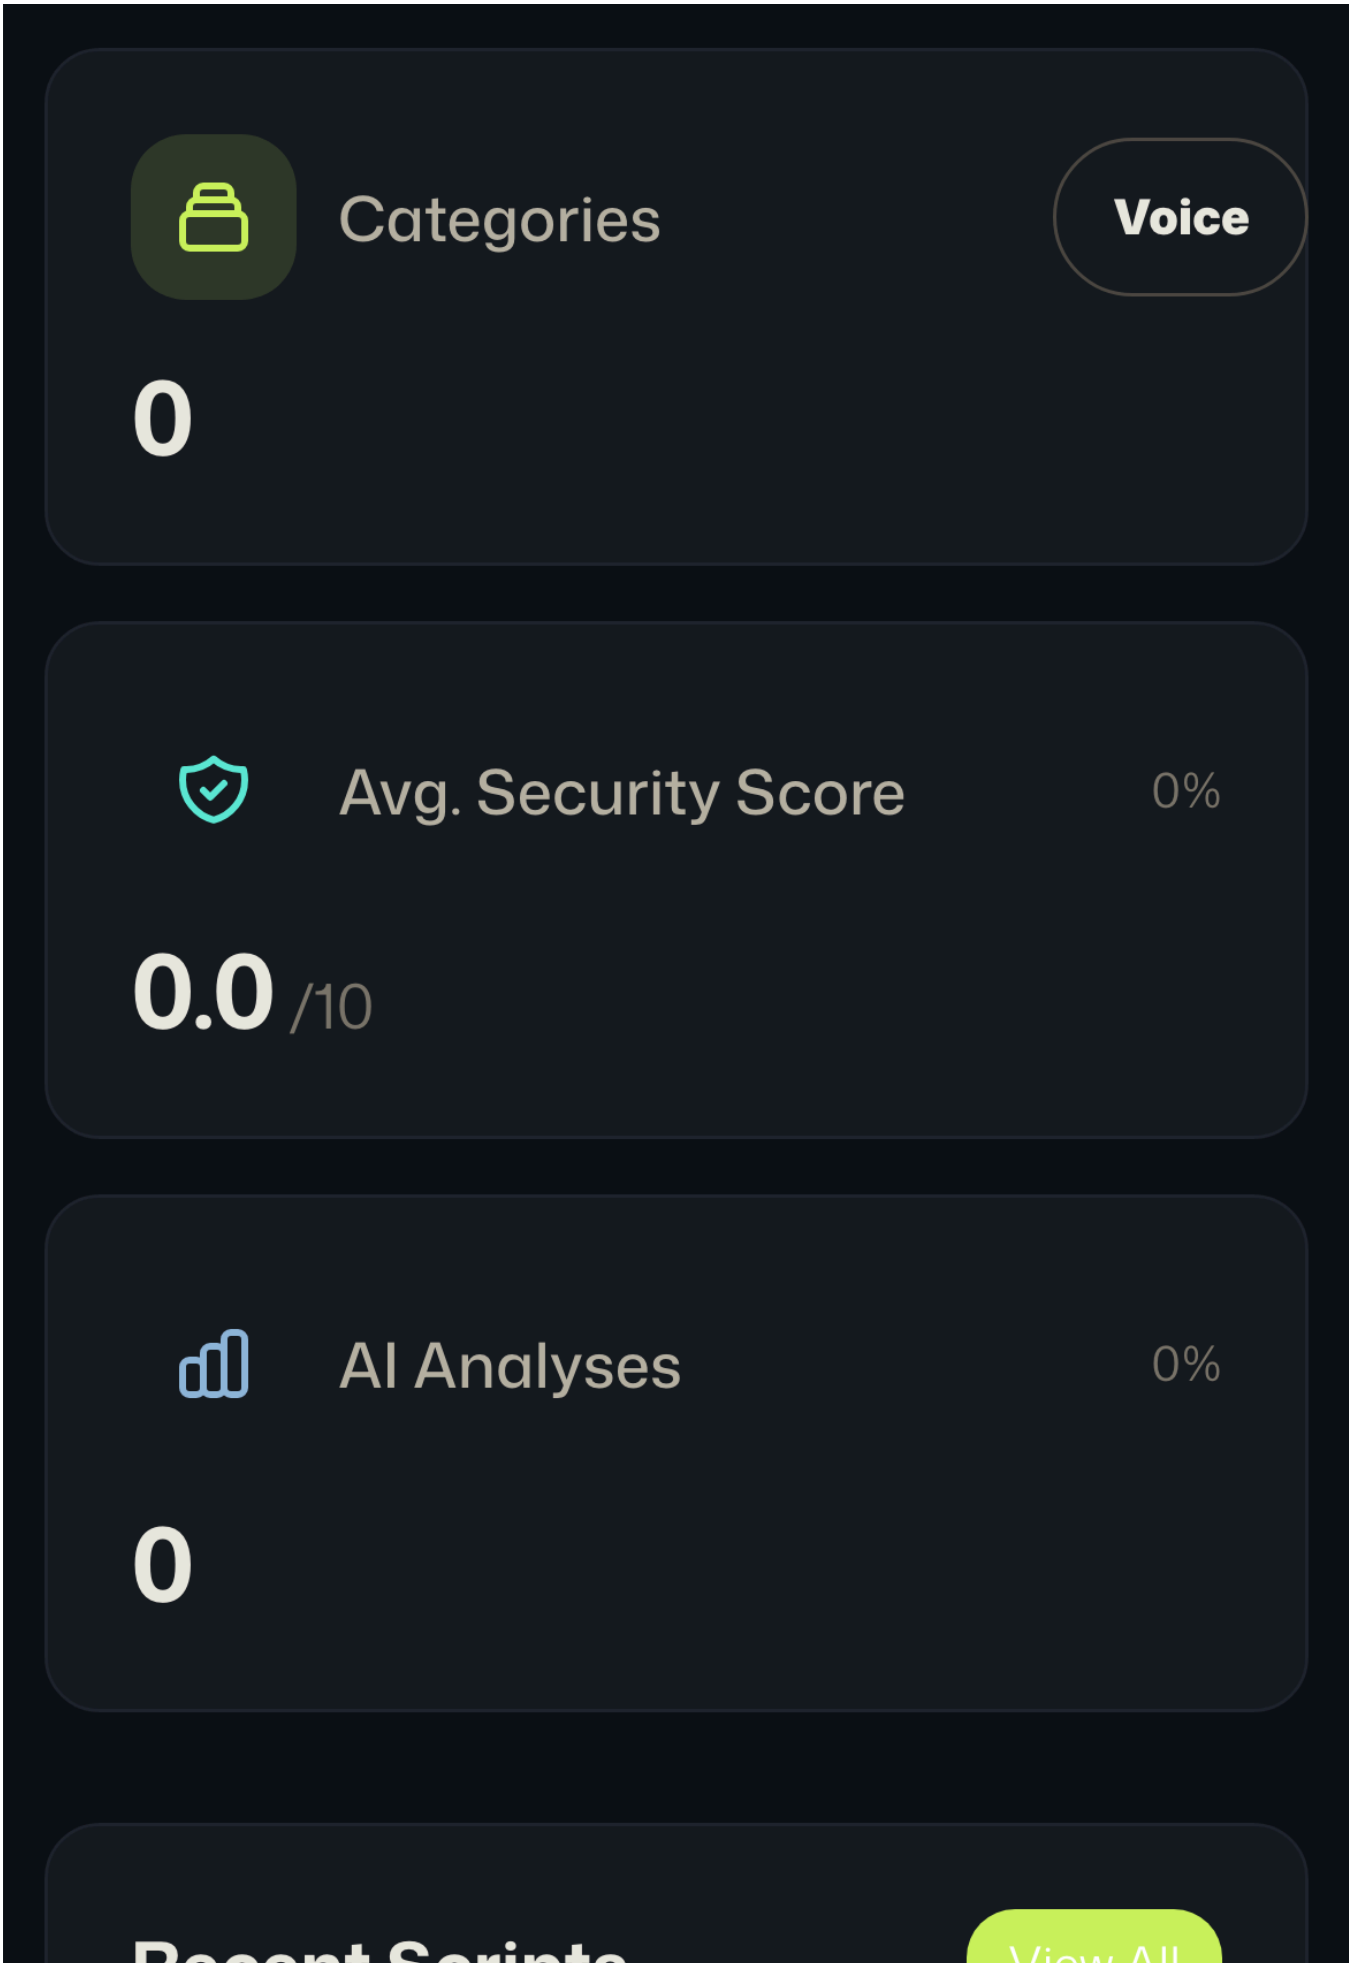
Categories
Voice
0
Avg. Security Score
0%
0.0 /10
AI Analyses
0%
0

Recent Scripts

View All

All

No scripts found. Create your first script!

Create with AI

Security Metrics

Overall Score

0/10

Score 8

Score 5

Score 2

0 1

Script Activity Trends

Week Month Year

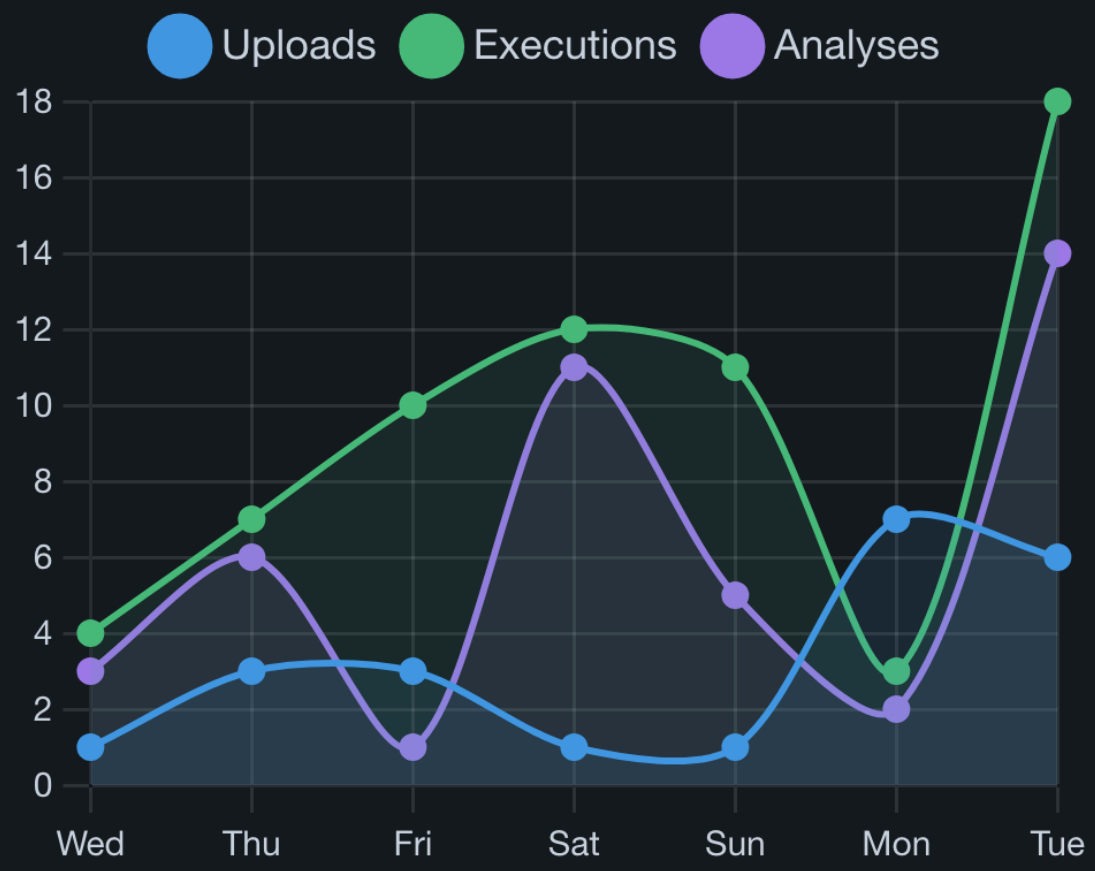

Script Categories

No category data available

Recent Activity

View All

No recent activity

Quick Actions

Chat with AI

Get help with PowerShell scripts

Manage Scripts

Browse and organize your scripts

Documentation

PowerShell reference and guides

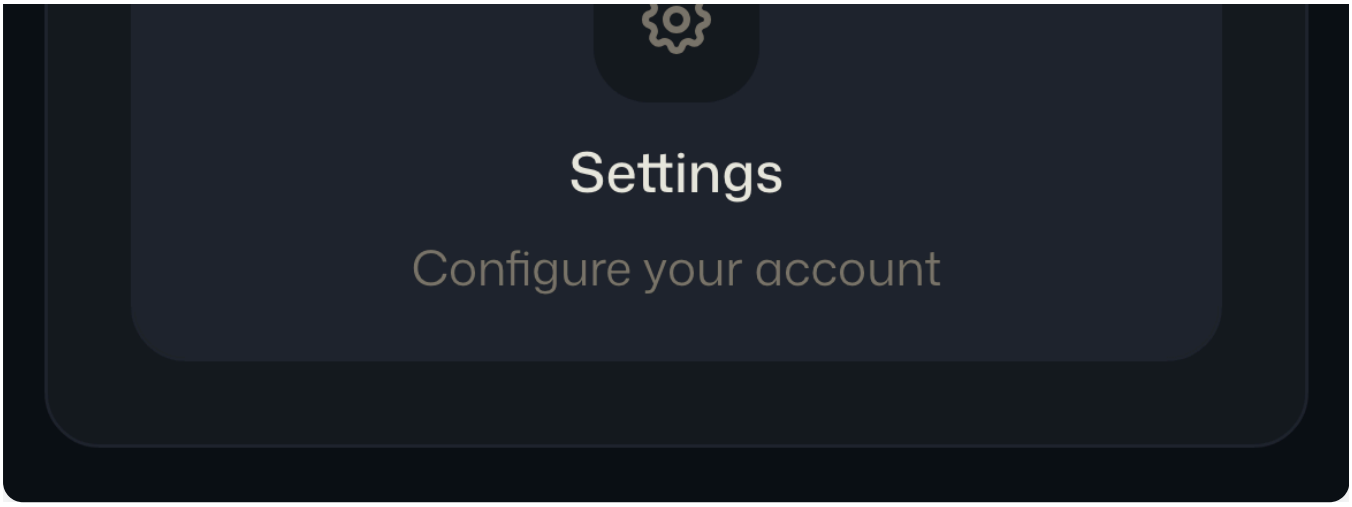
Settings
Configure your account

PSScript

⌘K

Dashboard

Scripts

Search

Categories

Documentation

Chat

Agentic

Analytics

Settings

0%

Voice

0

Avg. Security Score 0%

0.0 /10

AI Analyses 0%

0

Recent Scripts View All

Recent Scripts

View All

All

No scripts found. Create your first script!

Create with AI

Security Metrics

Overall Score

0/10

Score 8

Score 5

Score 2

0 1

Script Activity Trends

Week Month Year

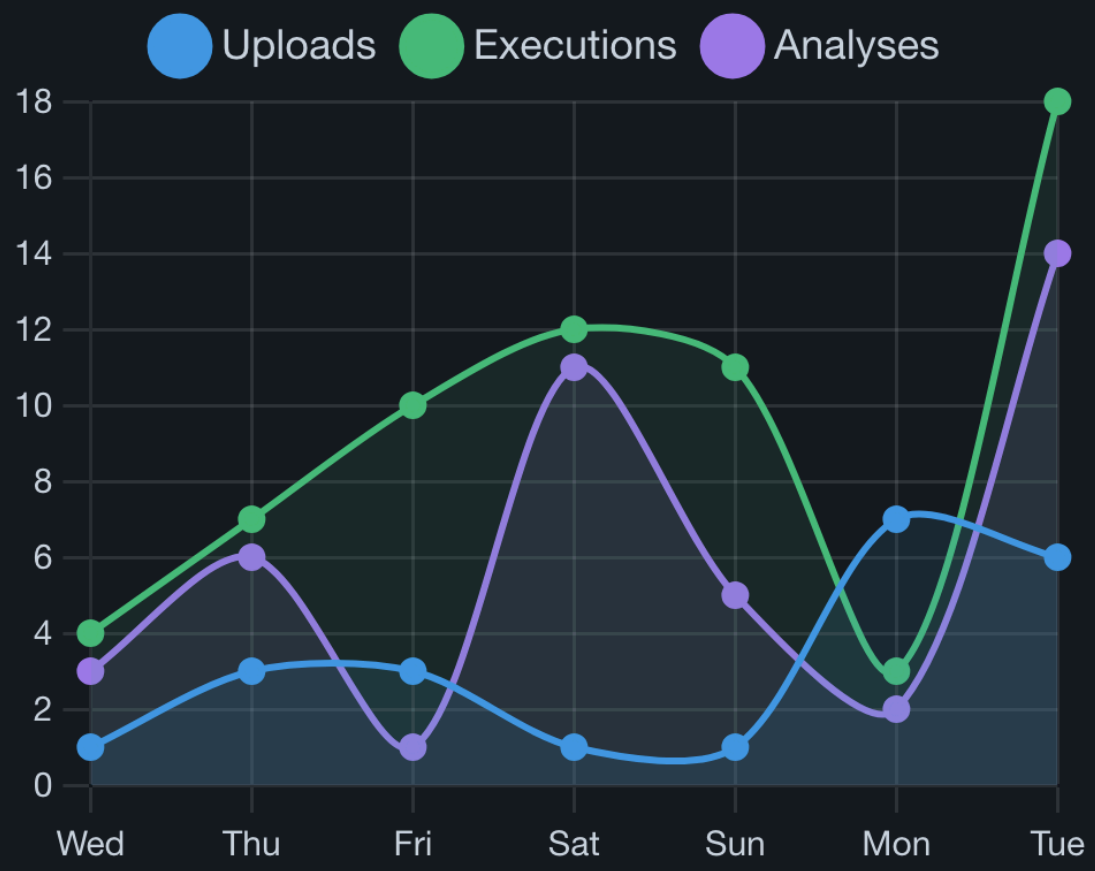

Script Categories

No category data available

Recent Activity

View All

No recent activity

Quick Actions

Chat with AI

Get help with PowerShell scripts

Manage Scripts

Browse and organize your scripts

Documentation

PowerShell reference and guides

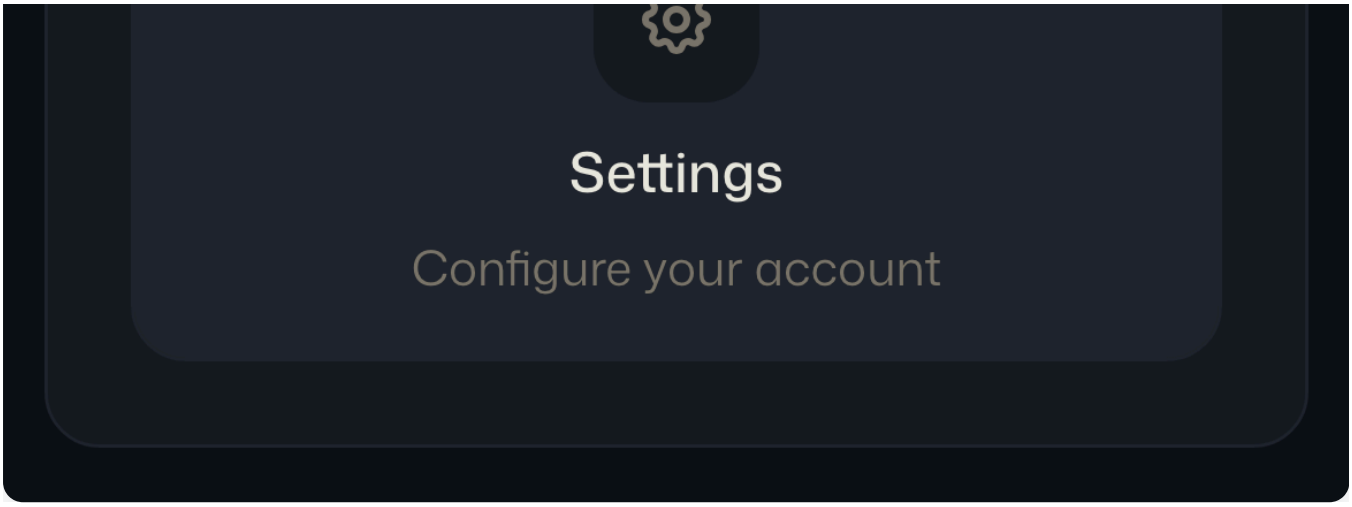

8. Script Workflows

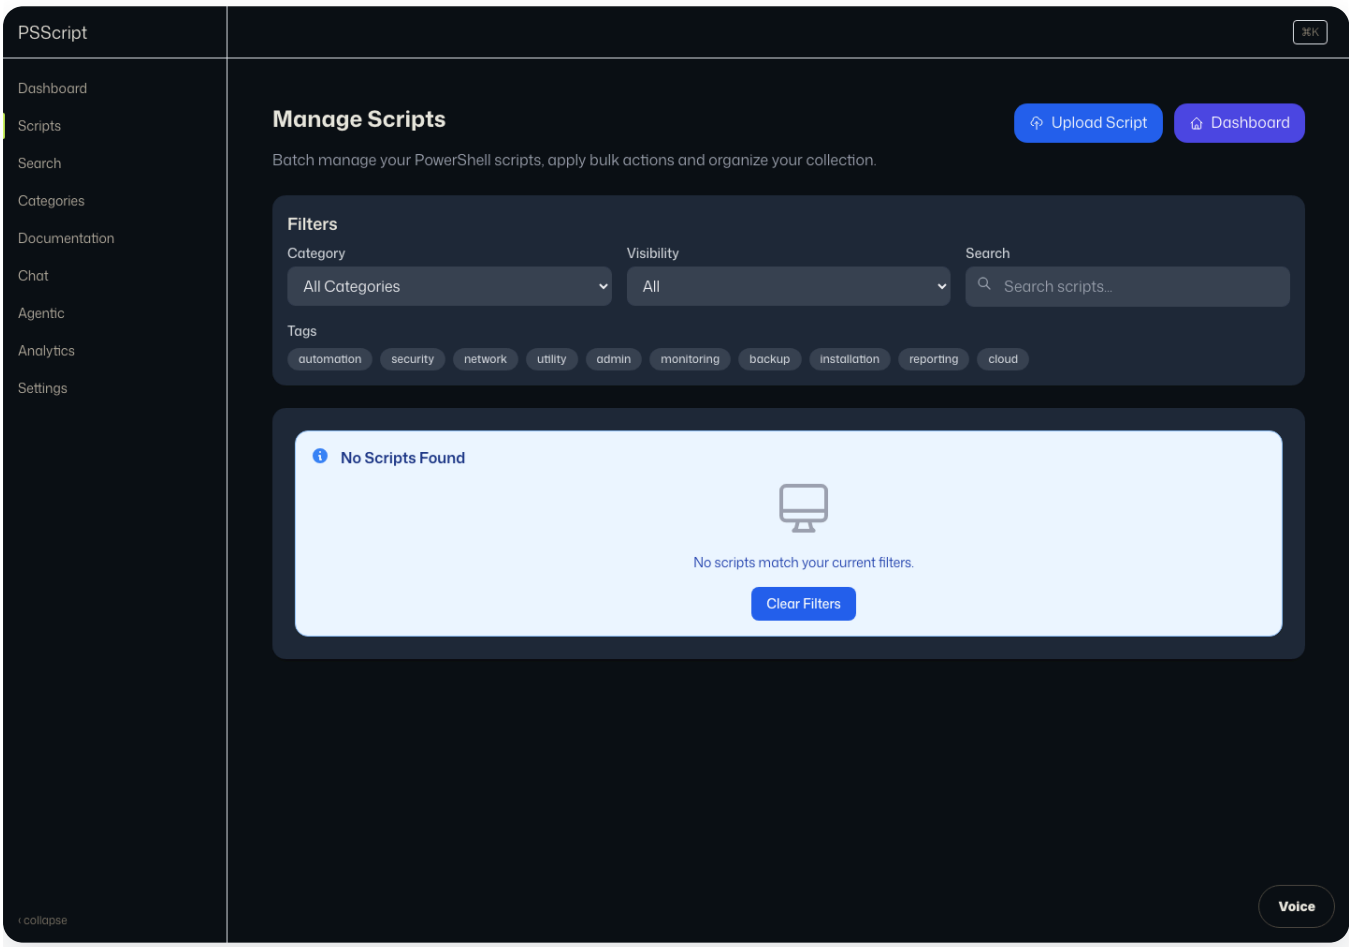

Current behavior:

- upload and list scripts
- edit hosted title, description, and script content
- export the current edit buffer as a `.ps1` file for VS Code
- analyze scripts with the criteria payload

- view runtime requirements for PowerShell version, modules, and assemblies before production execution
- search by text and embeddings
- delete single scripts
- bulk delete selected scripts
- export analysis as PDF from `/api/scripts/:id/export-analysis`

The export route should download a PDF. It should not return a JSON file as the user-facing report.

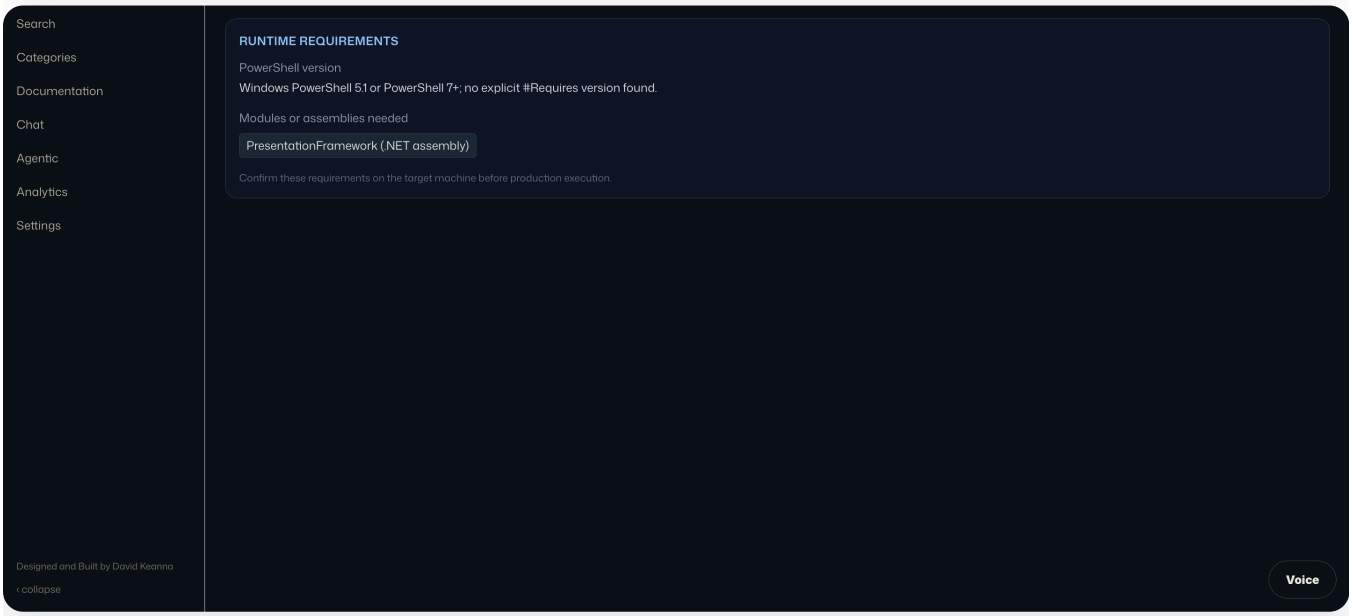

8a. Appearance Settings

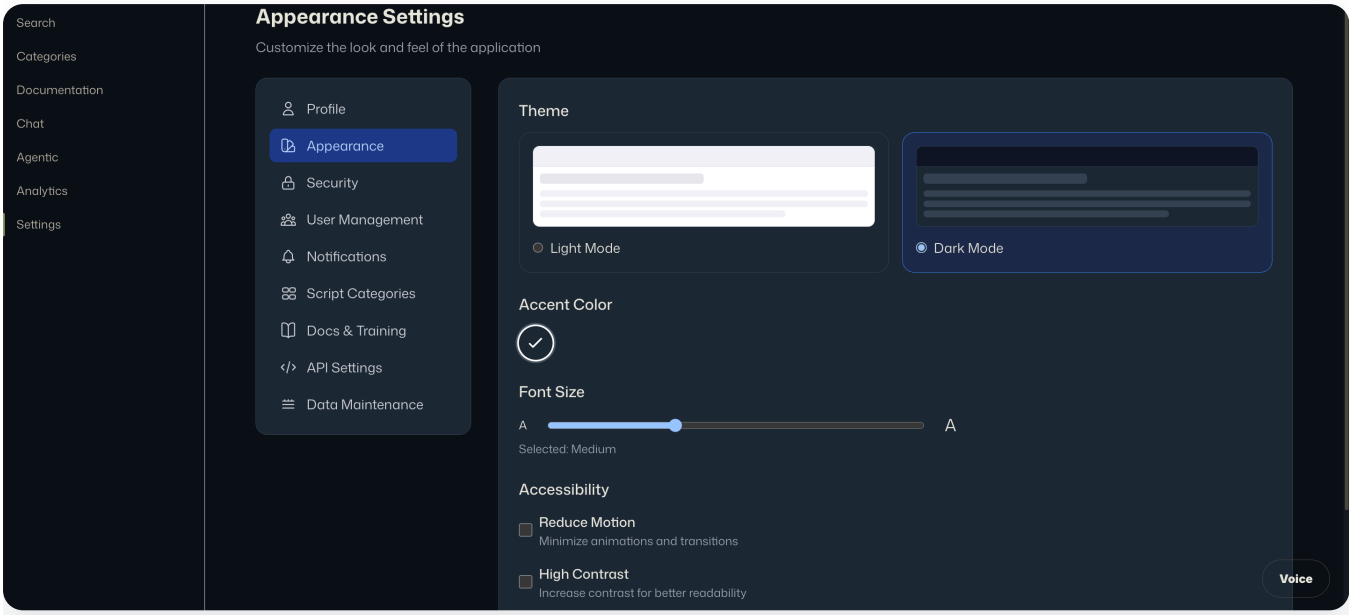

Settings -> Appearance owns the current user-facing display controls:

- light and dark mode selection
- muted operator accent color
- font-size slider
- reduce motion and high-contrast accessibility toggles

9. Data Maintenance

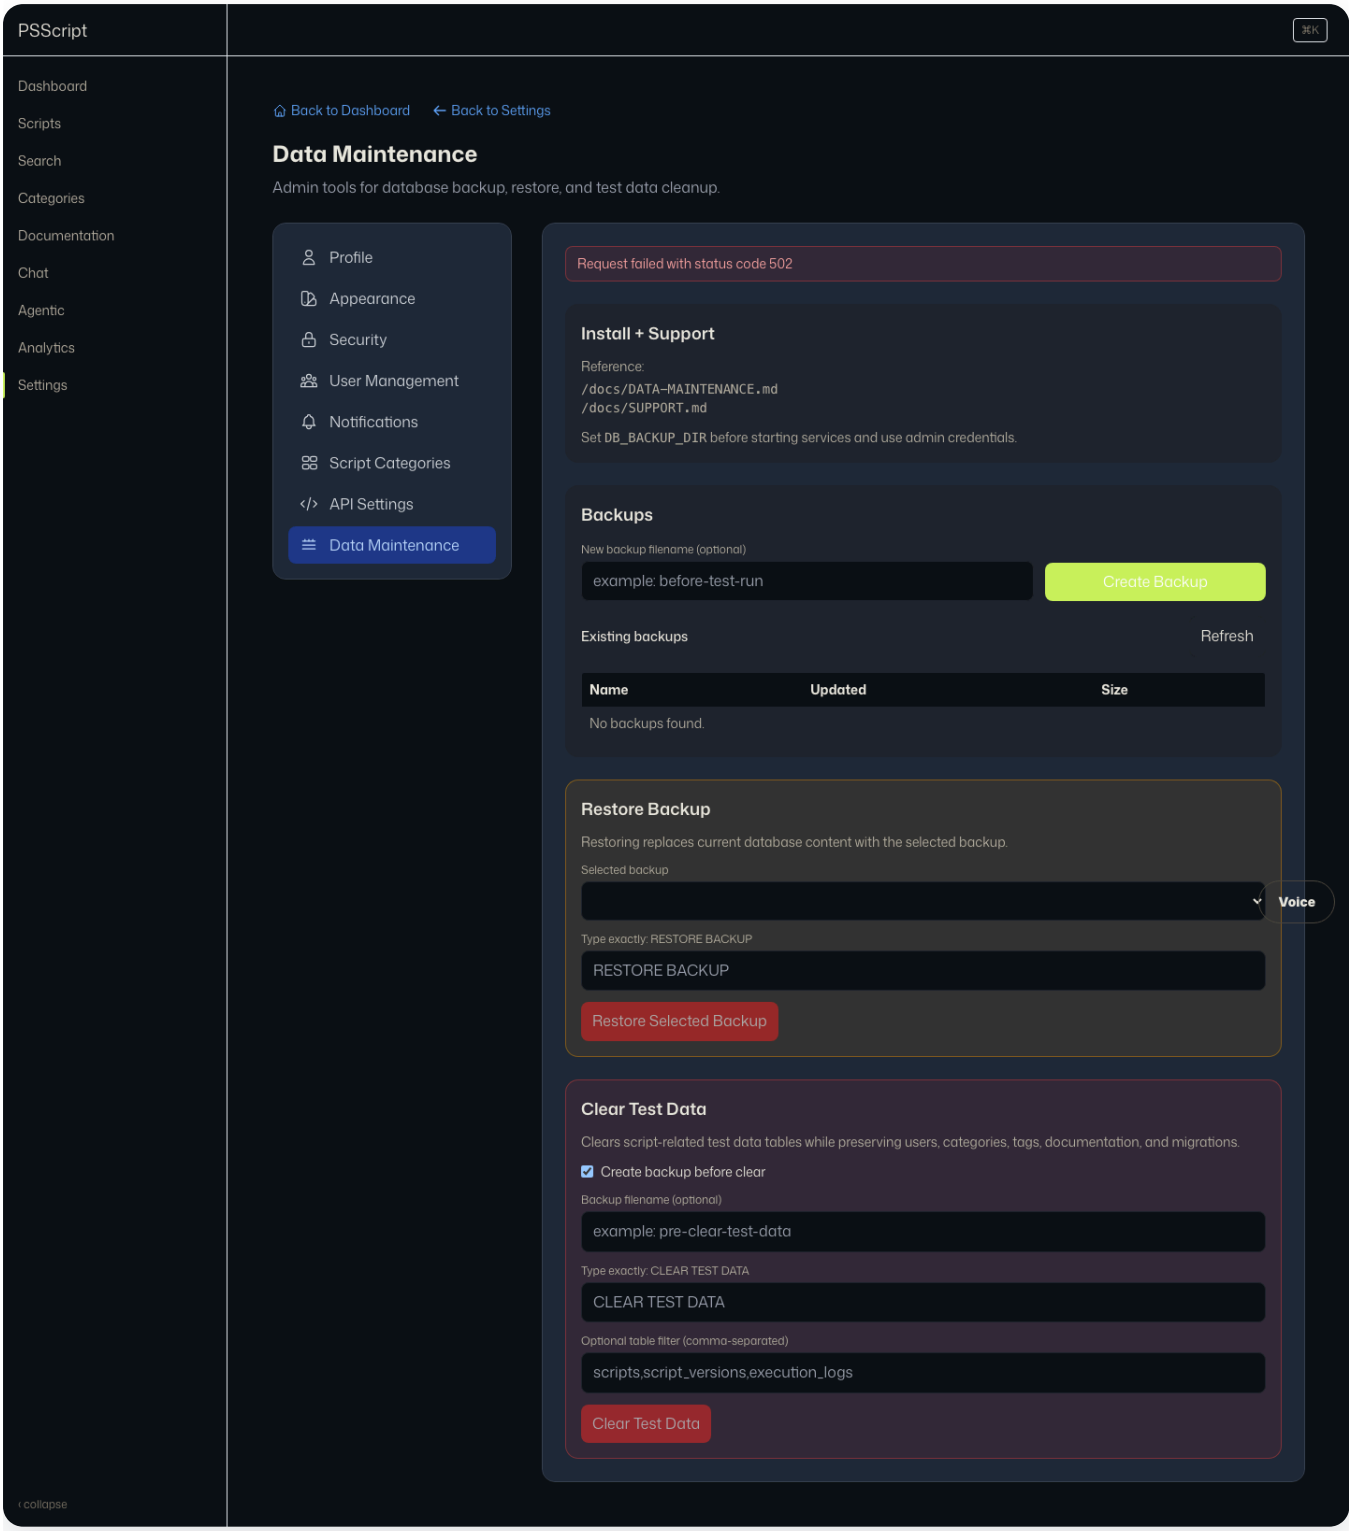

Settings -> Data Maintenance uses hosted admin routes:

- `GET /api/admin/db/backups`
- `POST /api/admin/db/backup`
- `POST /api/admin/db/restore`

- `POST /api/admin/db/clear-test-data`

Run backup before destructive operations. Do not run restore or clear-test-data on production as a casual smoke test.

10. Agentic Route Behavior

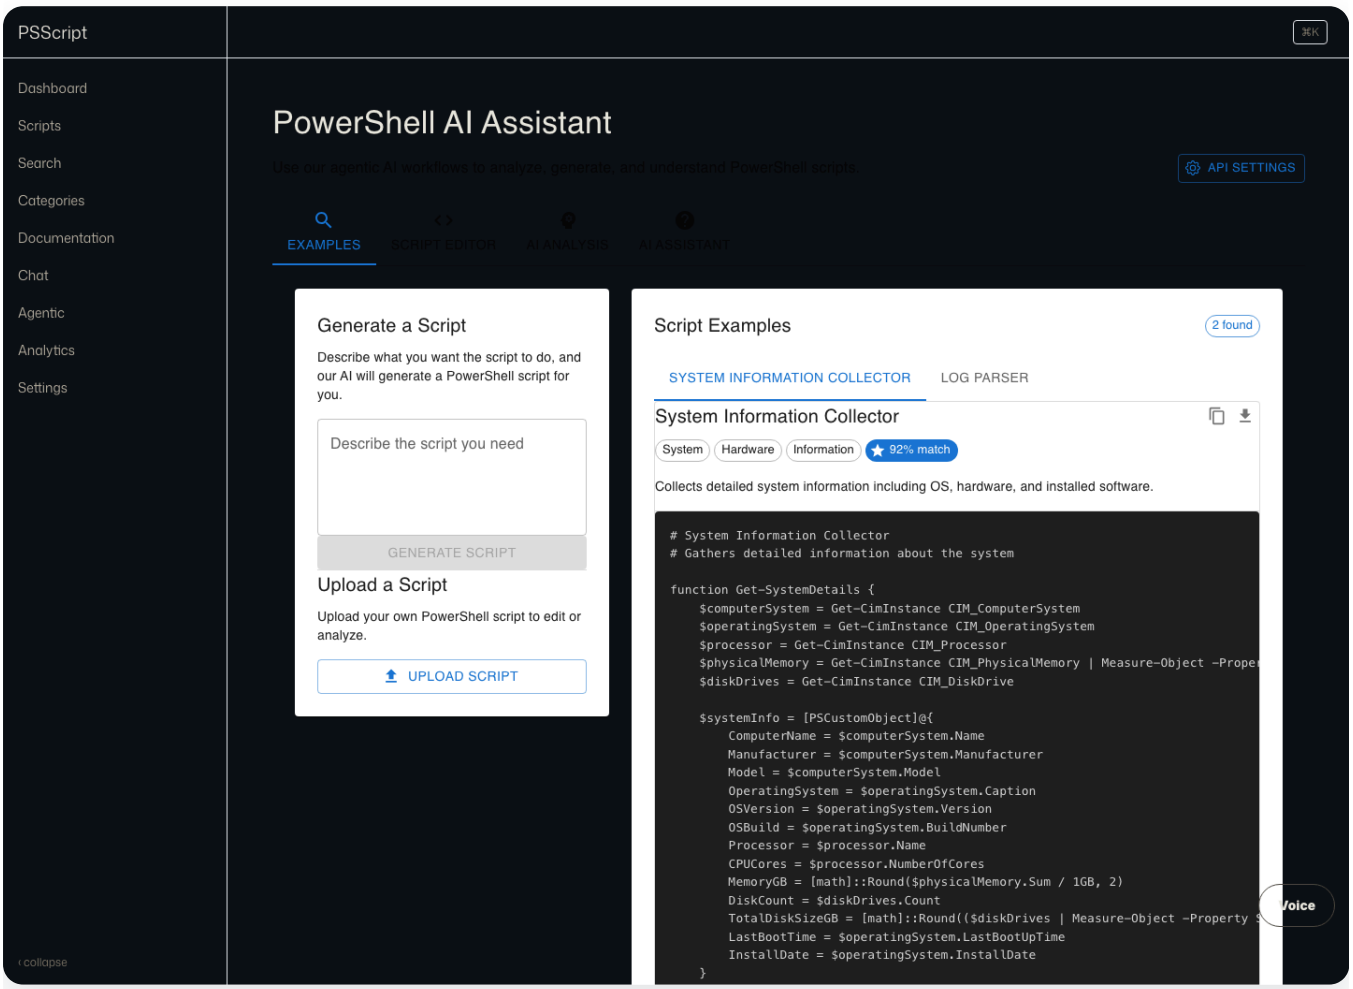

The current deploy keeps old agentic URLs alive:

- `/agentic`
- `/agentic-ai`
- `/ai/agentic`

Each route lands on the assistant experience instead of returning 404.

11. Validation

```
cd src/frontend
npm test -- --run --maxWorkers=1
npm run build
```

```
npm run build:netlify
curl -fsS https://pstest.morloksmaze.com/api/health
```

Latest documented validation:

- 31 focused shell/token tests passed after the edit/runtime update.
- 109 frontend tests passed.
- frontend build passed.
- Netlify production deploy succeeded.
- production Lighthouse after edit/runtime redeploy: Performance 37, Accessibility 100, Best Practices 100, SEO 81, PWA 30.

12. Screenshot Refresh

Current captures are in `docs/screenshots/current-2026-04-28/` and `docs/screenshots/current-2026-04-29/`. README frames are regenerated with:

```
npm run screenshots:readme
```

References Reviewed April 28-29, 2026

- Netlify Functions: https://docs.netlify.com/build/functions/overview/
- Netlify redirects: https://docs.netlify.com/routing/redirects/
- Supabase Auth: https://supabase.com/docs/guides/auth
- Supabase Google OAuth: https://supabase.com/docs/guides/auth/social-login/auth-google
- Supabase RLS: https://supabase.com/docs/guides/database/postgres/row-level-security

- Diataxis documentation framework: https://diataxis.fr/
- Google image documentation guidance: https://developers.google.com/style/images

---

Generated 2026-04-29 14:08 UTC