PSSCRIPT

Support and Operations

Triage, escalation, and operational checks

PSScript Manager Docs

PSScript Support and Operations

Last updated: April 29, 2026.

This guide reflects the active hosted app at `https://pstest.morloksmaze.com`.

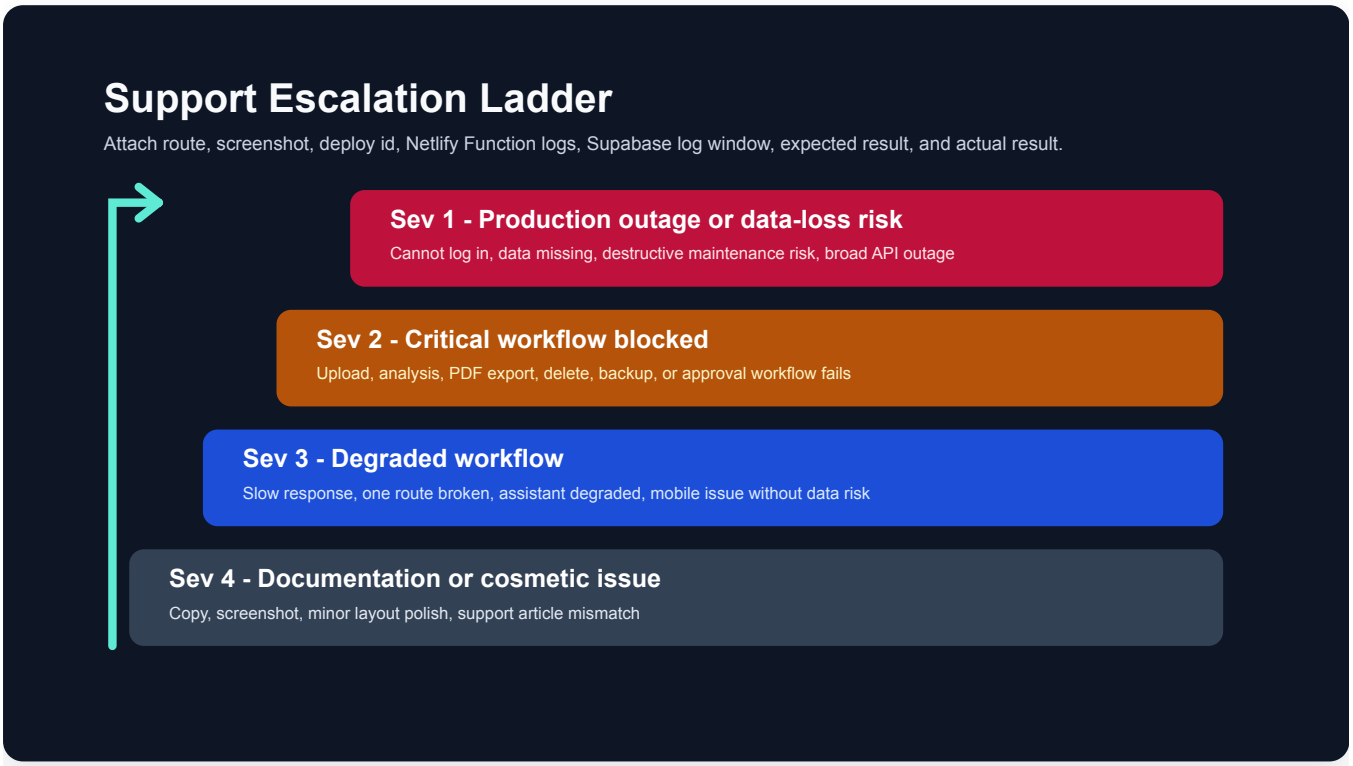

Before Opening An Issue

- Reproduce the issue and write exact steps.
- Capture the expected behavior and actual behavior.
- Include screenshots for UI problems.
- Include the production URL or preview deploy URL.
- Include Netlify Function logs and Supabase logs for the failure window when the issue involves data, auth, or API behavior.
- Confirm whether the record is disposable test data or production data before attempting delete, bulk delete, restore, or cleanup actions.

Operational Checks

Area	Check
Production app	Open `https://pstest.morloksmaze.com`
Hosted API	`curl -fsS https://pstest.morloksmaze.com/api/health`
Auth	Sign in through Supabase Auth and confirm enabled profile access
Database	Confirm Supabase connection from the health payload and Supabase dashboard logs
Deploy	Review the latest Netlify production deploy and Function logs
Mobile	Check dashboard, navigation drawer, scripts, and settings at phone width
Upload	Confirm file size is below the hosted 4 MB limit
Export	Confirm analysis export returns a PDF content type

Local Express and FastAPI services can still be used by developers, but they are not the production support path.

Common Escalations

Symptom	First check	Evidence to attach
Login loop or pending approval	Supabase redirect allow-list and `app_profiles.is_enabled`	user email, callback URL, API response
`/agentic` returns 404	Netlify redirects and current deploy id	URL, deploy id, browser screenshot
Analysis export downloads wrong type	`/api/scripts/:id/export-analysis` response headers	script id, headers, downloaded filename
Script delete or bulk delete fails	enabled profile, ownership/admin role, route response	script ids, request id, route payload
Data maintenance fails	admin role and Supabase backup record	backup id, route response, Netlify logs
Mobile layout overlaps	viewport width and route	screenshot, device/browser

Intake Template

```
Summary:
Severity:
Environment URL:
Netlify deploy id:
User email/role:
Route:
Timestamp and timezone:
Expected behavior:
Actual behavior:
Steps to reproduce:
Screenshots:
API response/status:
Netlify Function log window:
Supabase Auth/database log window:
Data involved:
Cleanup or rollback needed:
```

Data Maintenance Escalation

For Settings -> Data Maintenance issues, collect:

1. Admin user email.
2. Exact action: list backups, backup, restore, or clear test data.
3. Route response payload.
4. Netlify Function log lines for `/api/admin/db/*`.
5. Supabase logs and backup row status.
6. Confirmation text and `backupFirst` value for destructive actions.

Do not run a production restore or cleanup as a diagnostic step without explicit approval.

Upload, Export, And Delete Escalation

For script lifecycle failures, collect:

Workflow	Evidence
Upload	file size, filename, route, response status, Function logs
AI analysis	script id, criteria version, provider/fallback state, Function logs
PDF export	script id, response headers, downloaded filename, screenshot
Single delete	script id, title, owner, user role, response status
Bulk delete	selected ids, confirmation, response payload, remaining records

Delete and cleanup diagnostics must use disposable test records unless the user explicitly approves work against production records.

Voice And AI Escalation

Collect:

- route or UI surface used
- model/provider configured in Netlify env
- Netlify Function logs

- provider error payload, if present
- whether deterministic fallback rendered a structured analysis

Severity Guide

Severity	Description	Example
Sev 1	Production down or data-loss risk	Cannot log in; data missing after maintenance
Sev 2	Critical workflow blocked	Upload, analysis, export, or delete is failing
Sev 3	Degraded experience	Slow responses, partial UI, one route broken
Sev 4	Cosmetic or documentation issue	Copy, screenshot, or minor layout polish

Training And Screenshot References

- `training-suite/SCRIPT-LIFECYCLE-SUITE-2026-04-29.md`
- `training-suite/SCREENSHOT-ATLAS.md`
- `training-suite/TRAINING-GUIDE.md`

Developer-Only Appendix

The production support path is Netlify plus hosted Supabase. The older local Express/FastAPI services are still useful for developer diagnostics, but they are not the database or API path for hosted training.

Local Health Checks

```
Backend: http://localhost:4000/health
Backend API: http://localhost:4000/api/health
AI service: http://localhost:8000/health
```

Local Log And Recovery Notes

```
# Restart all local services
./restart-all.sh

# Restart local backend only
./restart-backend.sh
```

Developer logs may exist under `src/backend/logs/` and `src/ai/logs/` depending on local configuration.

Historical Maintenance Stress Artifacts

When debugging local maintenance scripts or CI-only diagnostics, keep generated reports attached to the issue:

- `DB_STRESS_REPORT_FILE`
- `/tmp/data-maintenance-stress.json`
- `/tmp/voice-tests-1-8-latest.json`
- `docs/VOICE-TESTS-1-8-LATEST.md`

These artifacts do not replace hosted Netlify Function logs or Supabase logs for production incidents.

References

- `GETTING-STARTED.md`
- `NETLIFY-SUPABASE-DEPLOYMENT.md`
- `DATA-MAINTENANCE.md`
- `training-suite/README.md`

Generated 2026-04-29 14:08 UTC