
Stellar Cyber 6.6.0s is now live! Discover all the updates in the release notes!

ATH Example: No Data From Sensor

Create an Automated Threat Hunting (ATH) playbook that notifies you when the Data Processor (DP) has not received any data from a sensor for 15 minutes. This condition might indicate a network disruption, sensor misconfiguration, or sensor failure. Use the alert to initiate an investigation—such as checking sensor connectivity, verifying its configuration, or escalating to network infrastructure support.

Configure the Alert

Create an alert that runs a query every 5 minutes on the **Monitoring** index.

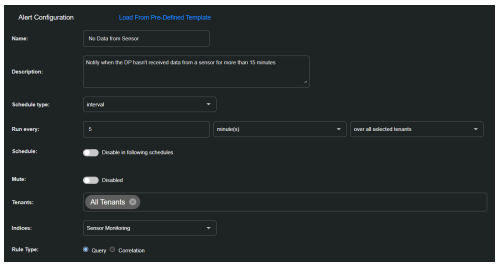

1. Navigate to **Automation | Automation** and select the **Create** button to add a playbook.
2. Enter the following in the **Alert Configuration** section:

   Name: **No Data from Sensor**

   Description: **Notify when the DP hasn't received data from a sensor for more than 15 minutes**

   Schedule type: **interval**

   Run every: **5 minute(s) over all selected tenants**

   Schedule: Toggle off (default setting)

   Mute: Toggle off (default setting)


   Tenants: **All Tenants**

   Indices: **Sensor Monitoring**

   Rule Type: **Query**

Build a Query

Create a query that looks for no change in bytes transmitted from a specific sensor.

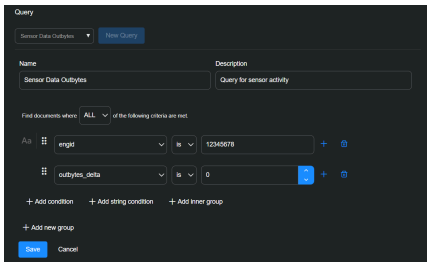

1. Select **New Query**.
2. Enter the following:

   Query Name: **Sensor Data Outbytes**

   Description: **Query for sensor activity**


   Find documents where **ALL** of the following criteria are met.

   Select **+ Add condition** and enter **engid**, **is**, <sensor_id>.

   Select **+ Add condition** and enter **outbytes_delta**, **is**, **0**.
3. Select **Save** to save the query.

Configure a Condition

In the **Condition Configuration** section, configure a condition that triggers one or more actions if there are 3 consecutive hits, indicating no change in data from the sensor for 15 minutes.

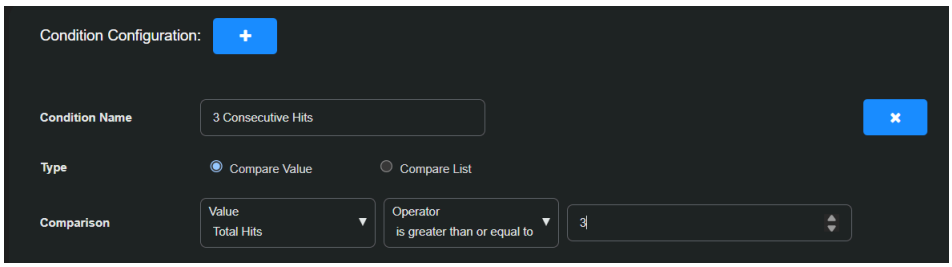


Condition Name: **3 Consecutive Hits**

Type: **Compare Value**

Comparison: **Total Hits**, **is greater than or equal to**, **3**

Configure an Email Message as the Action

You can configure any number of actions to take place if your playbook gets the specified number of hits. In this example, the action is to send an email notification.

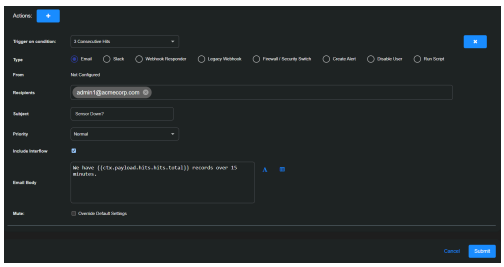

1. Set the **Trigger on condition** to **Three Consecutive Hits**.
2. Enter the following to stop email messages:

   Type: **Email**

   Recipients: Either type in an email address to use or choose a previously configured recipient from the drop-down list.

   Refer to Adding a Recipient for information on managing recipients globally.

   Subject: **Sensor Down?**

   Priority: **Normal**

   Include Interflow: (select to attach Interflow records to the email)

   Email Body: Enter the following:

   ```
   We have {{ctx.payload.hits.hits.total}} records over 15 minutes.
   ```

   Mute: (disable)

See Configure Actions for details on configuring each type of action.

Save & Run the Playbook

Select **Submit** to save and immediately run the playbook.

The new playbook appears in the Automated Threat Hunting Playbooks list.

© 2026 Stellar Cyber . All rights reserved.