Stellar Cyber 6.6.0s is now live! Discover all the updates in the release notes!

ATH Example: Notifications for Case Scores

Configure an Automated Threat Hunting (ATH) playbook to send email or Slack notifications when a case exceeds a specified score threshold, enabling timely response to high-risk threats.

Background: What Your Playbook Searches For


Before you create the playbook to notify on case scores over a threshold, it's important to understand what you're searching for. The first time a case score passes the threshold of 50, Stellar Cyber creates a special document in the **aella-syslog** index with a **msg_class** of **incident_score_change**. This is the document your playbook searches for so that it can send an email or Slack message with information on the case and a link to its detail page in Stellar Cyber.

Keep in mind the following important points:

- The threshold of 50 is hard-coded and cannot be changed.
- The document is only created **once** for a given case. New documents are not created if a case score falls below 50 and then increases above it again.
- The document is created for a case that enters the system with a score over 50. This is considered as a score change from 0 to a score greater than 50.

Configure the Alert

Create an alert that runs a query every 5 minutes on the **Syslog** index.

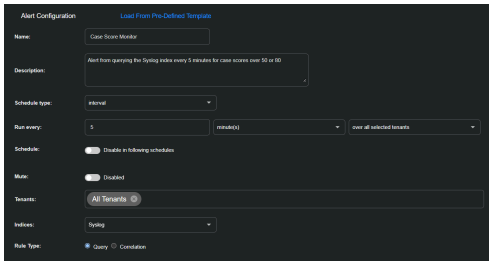

1. Navigate to **Automation | Automation** and select the **Create**button to add a playbook.
2. Enter the following in the **Alert Configuration** section:

   Name: **Case Score Monitor**

Description: **Alert from querying the Syslog index every 5 minutes for case scores over 50 or 80**

Schedule type: **interval**

Run every: **5 minute(s) over all selected tenants**

Schedule: Toggle off (default setting)

Mute: Toggle off (default setting)


Tenants: **All Tenants**

Indices: **Syslog**

Rule Type: **Query**

Build a Query

Create a query that looks for new documents with a **msg_class** of **incident_score_change** when the score is greater than **80**.

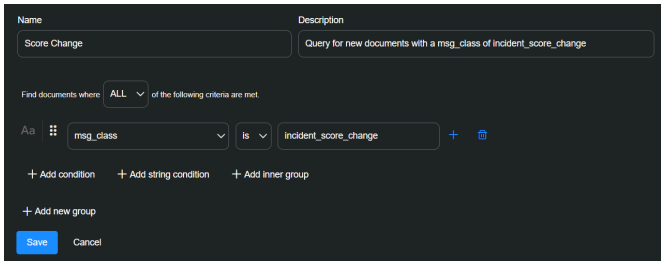

1. Select **New Query**.
2. Enter the following:

   Query Name: **Score Change**

   Description: **Query for new documents with a msg_class of incident_score_change**

   Find documents where **ALL** of the following criteria are met.

   Select **+ Add condition** and enter **msg_class**, **is**, **incident_score_change**.

   So far, the query just checks for any new documents with a **msg_class** of **incident_score_change**. However, you now add a second query condition so that it only matches cases over a specified threshold greater than 80 using the following logic:

   - Stellar Cyber only creates a document with a **msg_class** of **incident_score_change** for a case when its score crosses the hard-coded threshold of 50.
   - You next add a second query condition that matches cases over a score of 80.

     Keep in mind that because a document with a **msg_class** of **incident_score_change** is only created **once** for a given case, this query only matches cases that are either initially created with a score over 80 or increased from below 50 to over 80.


3. Select **+ Add condition** and enter **metadata.score**, **greater than**, **80**.

The **metadata.score** you specify must be greater than 50 because this is the threshold where t[illegible]ocument with a **msg_class** of **incident_score_change** is created.

4. Select **Save** to save your query.

Configure a Condition

In the **Condition Configuration** section, configure a condition that triggers an action if there are any hits.

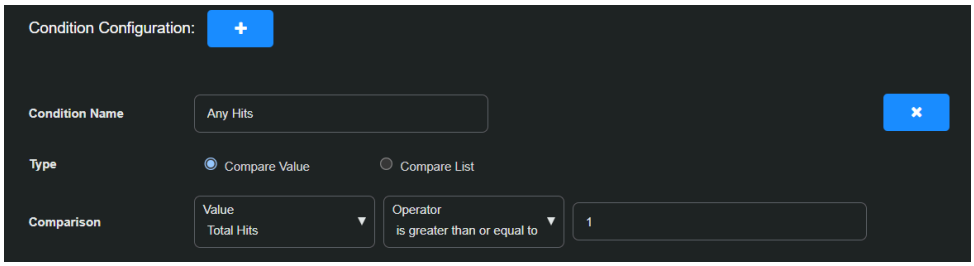

Condition Name: **Any Hits**

Type: **Compare Value**

Comparison: **Total Hits**, **is greater than or equal to**, **1**


Configure Actions

Configure Stellar Cyber to send an email or Slack message when a case score change is detected. The configuration for both types of message is shown below.

Refer to Configure Actions for details on configuring each type of action.

Configure an Email Message as the Action

Configure Stellar Cyber to send an email when a case score change is detected.

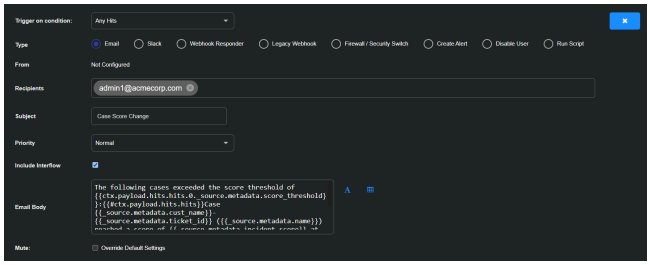

1. Set **Trigger on condition** to **Any Hits**.
2. Enter the following to set up email messages:

   Type: **Email**

   Recipients: Either type in an email address to use or choose a previously configured recipient from the drop-down list.

   Refer to Adding a Recipient for information on managing recipients globally.

   Subject: **Case Score Change**

Priority: **Normal**

Include Interflow: (cle

Email Body: Enter the following:

```
The following cases exceeded the score threshold of
{{ctx.payload.hits.hits.0._source.metadata.score_threshold}}:
{{#ctx.payload.hits.hits}}
Case {{_source.metadata.cust_name}}-{{_source.metadata.ticket_id}}
({{_source.metadata.name}}) reached a score of
{{_source.metadata.incident_score}} at
{{_source.metadata.timestamp_readable}}
https://<dp-hostname-or-ip>/cases/case-detail/{{_source.metadata.id}}?
cust_id={{_source.metadata.cust_id}}&view=graph
{{/ctx.payload.hits.hits}}
```




The sample text provides a link to the case. You must edit the text highlighted in red to use the hostname or IP address of your Stellar Cyber Data Processor (DP) for this to work

Mute: (disable)

3. Select **Submit** to save and immediately run the playbook.


   Your new playbook appears in the playbook list. You can use the **Last Status** option in the context menu at the far right of its entry to check how the rules are executing.

   Here is a sample email sent by our ATH playbook, complete with a link to the case with the changed score:

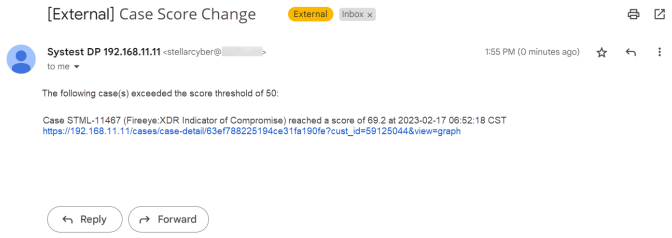

Configure a Slack Message as the Action

Configure Stellar Cyber to send a Slack message when a case score change is detected.

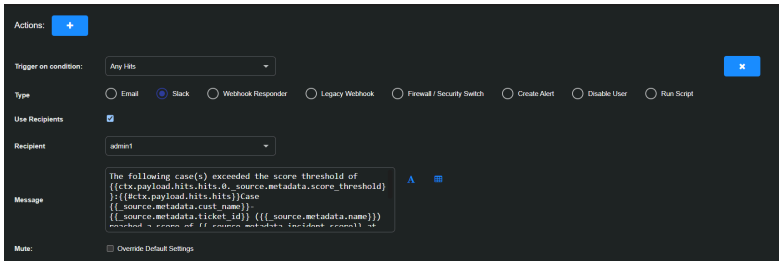

1. Set **Trigger on condition** to **Any Hits**.
2. Enter the following to set up email messages:

   Type: **Slack**

Use Recipients: (select, and choose one or more Slack recipients from the list)

Refer to Adding a Recipient for information on adding recipients. You need a Slack Web URL from your Slack administrator to add a Slack repicient. Refer to the instructions on webhooks in the Slack documentation for details.

Message: Enter the following:

The following case(s) exceeded the score threshold of `{{ctx.payload.hits.hits.0._source.metadata.score_threshold}}:`

`{{#ctx.payload.hits.hits}}`

Case `{{_source.metadata.cust_name}}-{{_source.metadata.ticket_id}} ({{_source.metadata.name}})` **reached a score of** `{{_source.metadata.incident_score}}` **at** `{{_source.metadata.timestamp_readable}}` **https://<dp-hostname-or-ip>/cases/case-detail/**`{{_source.metadata.id}}?`**cust_id=** `{{_source.metadata.cust_id}}`**&view=graph**

`{{/ctx.payload.hits.hits}}`

The sample text provides a link to the case and is formatted to make it easy to see the plain text and the code. Note that you need to edit the text highlighted in red to use the hostname or IP address of your Stellar Cyber Data Processor (DP) for this to work.

Mute: (disable)

3. Select **Submit** to save and immediately run the playbook.

   The new playbook appears in the Automated Threat Hunting Playbooks list. You can use the **Last Status** option in the context menu at the far right of its entry to check how the rules are executing.

© 2026 Stellar Cyber . All rights reserved.