Stellar Cyber 6.6.0s is now live! Discover all the updates in the release notes!

Configuring AWS CloudTrail Connectors

This connector allows Stellar Cyber to collect data from external sources and add the records to the data lake. The incoming information is included in Interflow records in the **AWS Events** index.

Integration with AWS and S3 enables organizations to securely store and manage their data while providing real-time threat detection and response capabilities through Stellar Cyber's advanced security analytics and machine learning algorithms.

You can have any number of AWS connectors active in the system. You will typically have one or two connectors for each account being used by anyone in the network.

However, if you have AWS Control Tower set up, you can use an asterisk as a wildcard character instead of a specific Account ID in the **Prefix** field. You can also use wildcards in **Advanced Prefix**.

Stellar Cyber connectors with the Collect function (collectors) may skip collecting some data when the ingestion volume is large, which potentially can lead to data loss. This can happen when the processing capacity of the collector is exceeded.

Connector Overview: AWS CloudTrail

Capabilities

- Collect: **Yes**
- Respond: **No**
- Native Alerts Mapped: **No**
- Runs on: **DP**
- Interval: **5 minutes**

Collected Data

Content Type	Index	Locating Records
cloudtrail	AWS Events (non-traffic)	msg_cla

Content Type	Index	Locating Records

vpcflow
waf
	Traffic (VPC flow)	ss:
		`cloudtrail`
		`vpcflow`
		`aws_waf`
		
		msg_origin.source:
		`cloudtrail`
		`aws_waf` (for aws_waf)
		
		msg_origin.vendor:
		`aws`
		
		msg_origin.category:
		`paas`
		`waf` (for aws_waf)

Domain

https://s3.amazonaws.com

https://s3-<Region>.amazonaws.com

https://<Bucket>.s3.amazonaws.com

Response Actions

N/A

Third Party Native Alert Integration Details

N/A

Required Credentials and Configurations

- For Access Key / Secret Key Auth Method: Access Key, Secret Key, Sub Type, Bucket, plus Prefix type (Prefix or Advanced Prefix), and File Type
- For IAM Role Auth Method: Source Account Access Key, Source Account Secret Key, IAM Role ARN, Sub Type, Bucket, plus Prefix type (Prefix or Advanced Prefix), and File Type

Adding an AWS CloudTrail Connector

To add an AWS CloudTrail connector:


1. Create an AWS CloudTrail trail
2. Add a user with the appropriate permissions
3. Create an access key
4. (Optional) Create an IAM role in same AWS account
5. (Optional) Create an IAM role across AWS accounts
6. Get the required information
7. (Optional) Set up AWS Control Tower
8. Add the connector in Stellar Cyber
9. Test the connector
10. Verify ingestion

Creating the AWS CloudTrail Trail


To create an AWS CloudTrail trail:

Use our example as a guideline, as you might be using a different software version.


1. Log in to your **AWS Management Console** at https://aws.amazon.com .




2. In **Find Services**, start entering **cloudtrail**. As you type, suggestions appear. Click on **CloudTrail**.

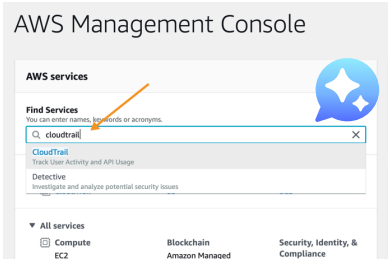

The **CloudTrail Dashboard** appears.

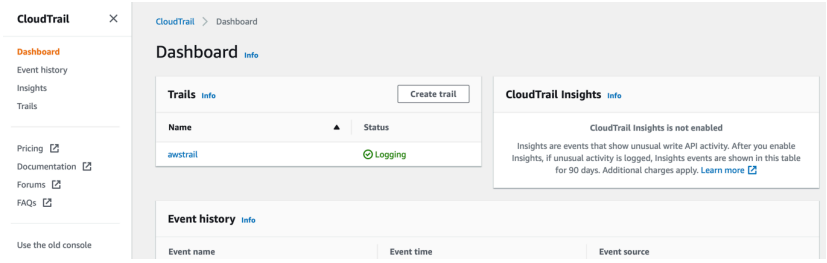


3. Click **Create trail**. The **Choose trail attributes** page appears.



4. Enter a **Trail name**.
5. Leave the default configurations for the various event information settings.
6. Under **Storage location**, choose **Yes** for **Create a new S3 bucket**.
7. Enter the name.

   Make note of this, as you need the bucket name when configuring the connector in Stellar Cyber.

8. Enter the **AWS KMS alias**.
9. Leave the remaining options at the default settings.
10. Click **Next**. The **Choose log events** page appears.




11. Choose the events you want to send to Stellar Cyber. We recommend choosing all of them.
12. Click **Next**. The **Review and create** page appears.
13. Click **Create trail**. The trail is added, and displayed on the **Trails** page.


Adding a User with the Appropriate Permissions

To add a user with the appropriate permissions:


1. Log in to your **AWS Management Console** at https://aws.amazon.com/console. View the services in the Console Home or choose **View all services**.



2. Choose **IAM**. The **IAM Dashboard** appears.
3. Choose **Policies** and then choose **Create Policy**.

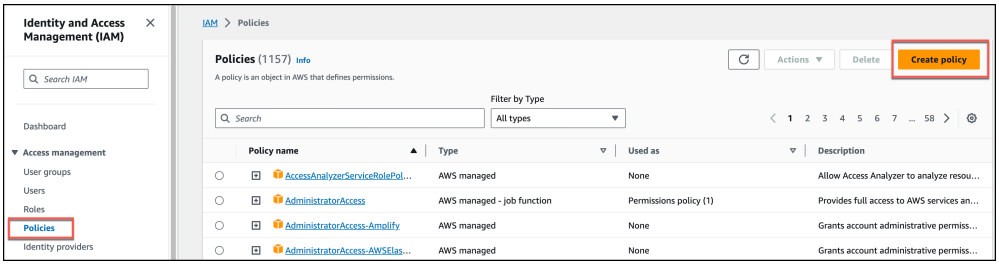

4. In the **Create policy** pane, choose the **JSON** tab.

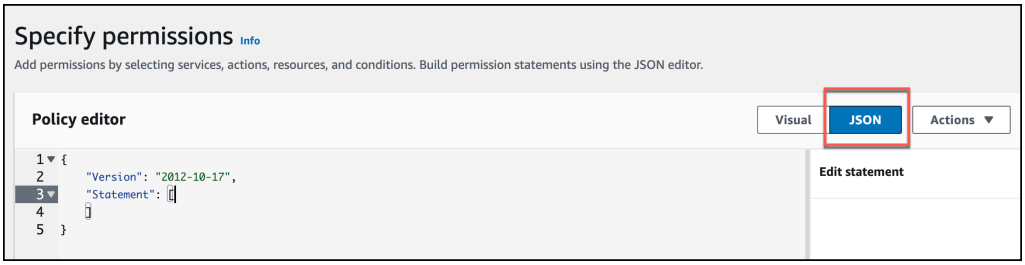


5. Using the example below as a guide, edit the JSON policy document.

> The following is just an EXAMPLE. You must modify this JSON to match the resources in your own environment.

CloudTrail policy


```
{
    "Version": "2012-10-17",
    "Statement": [
        {
            "Sid": "VisualEditor0",
            "Effect": "Allow",
            "Action": [
                "s3:GetObject",
                "s3:ListBucket"
            ],
            "Resource": [
                "arn:aws:s3:::stellarcybercloudtrail",
                "arn:aws:s3:::stellarcybercloudtrail/*"
            ]
        }
    ]
}
```

6. Choose **Next**.
7. Give your policy a name to associate it with Stellar Cyber, then choose **Create policy**.

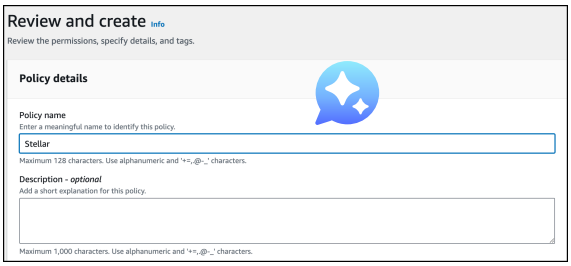


The policy can now be attached to a user.

8. From the IAM navigation pane, choose **Users** and then choose **Create user**.

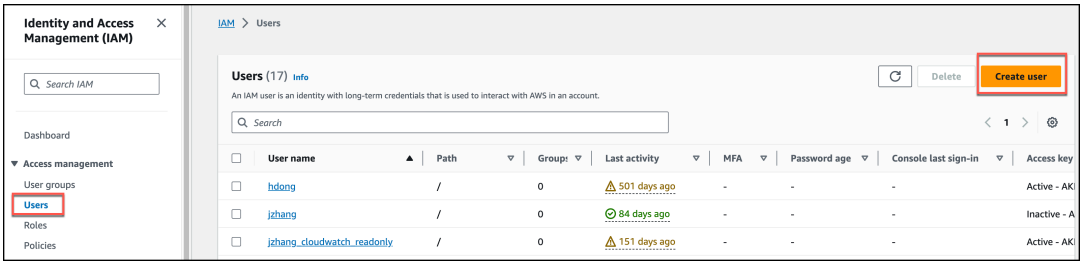

9. On the **Specify user details** page for **User details**, enter a **User name** for the new user.
10. Choose **Provide user access to the – AWS Management Console** *optional* to produce login credentials for the new user, such as a password.
11. Choose how you want to create the Console password and then choose **Next**.
12. On the **Set permissions** page, choose **Attach policies directly**. Then search for the policy you created above.

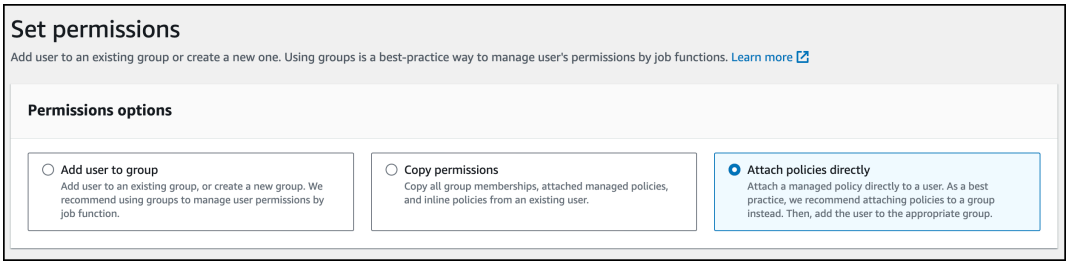


13. Select the checkbox to the left of the policy name, then choose **Next**.
14. On the **Review and create** page, verify the information and then choose **Create user**.

Creating an Access Key

The procedures in this section are for the Access Key / Secret Key Auth Method in Stellar Cyber.


1. Log in to the IAM Console with your AWS account ID, your IAM user name, and password. You must have the permissions required to create access keys for a user.
2. Choose **Users**, then click the user name, and click **Security credentials**.

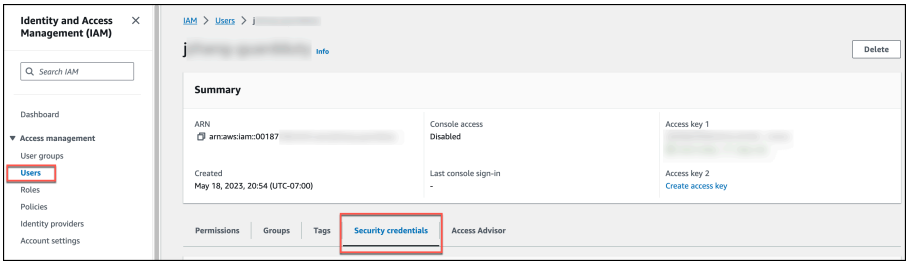


3. In the **Access keys** section, choose **Create access key**. Access keys have two parts: an access key and a secret access key. Click **Create access key**.



4. On the **Access key best practices & alternatives** page, choose **Other** and then choose **Next**.



5. (Optional) On the **Set description tag** page, enter a description.
6. Click **Create access key**.
7. On the **Retrieve access keys** page, choose **Show** to reveal the value of the user's secret access key. Save the access key and secret access key in a secure location. You will need them when configuring the connector in Stellar Cyber.

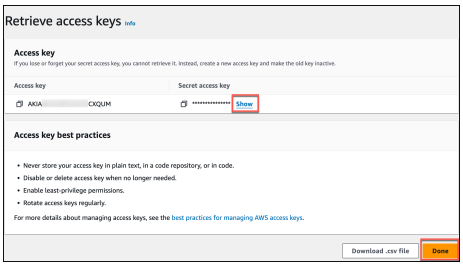


8. Click **Done**.

(Optional) Creating an IAM Role in Same AWS Account


The procedures in this section are required for users who want to use the IAM Role Auth Method for the AWS resources, for an IAM role that is created in the same AWS account.

Create an IAM User Without Permissions and Create IAM Policy


1. Log in to your **AWS Management Console** at https://aws.amazon.com/console. View the services in the Console Home or choose **View all services**.




2. Choose **IAM**. The **IAM Dashboard** appears.
3. From the IAM navigation pane, choose **Users** and then click **Create user**.

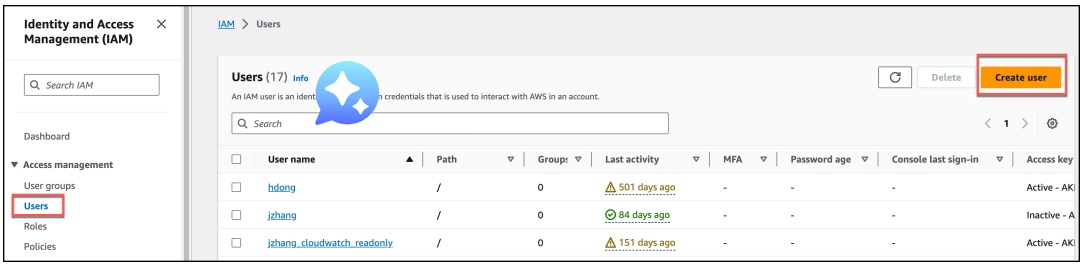

4. On the **Specify user details** page for **User details**, enter a **User name** for the new user.
5. Choose **Provide user access to the – AWS Management Console** *optional* to produce login credentials for the new user, such as a password.
6. Choose how you want to create the Console password and then choose **Next**.
7. On the **Set permissions** page, choose **Attach policies directly** and click **Create policy**.

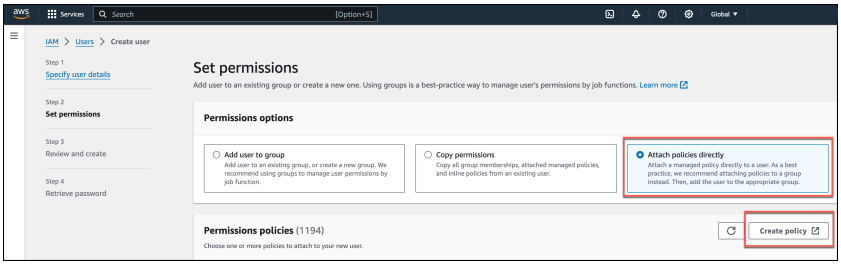

8. On the **Specify permissions** page, choose the **JSON** tab.

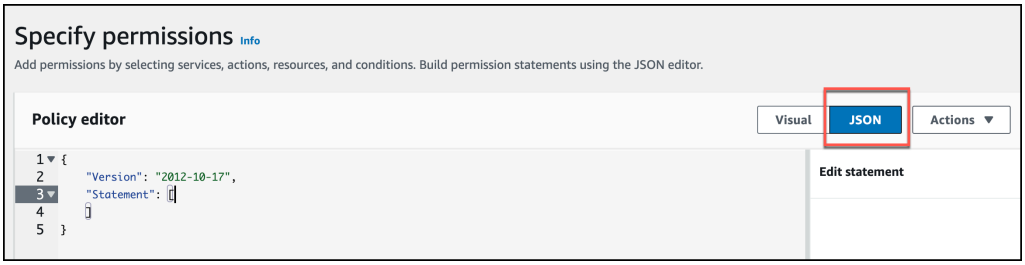

9. Using the example below as a guide, edit the JSON policy document.

> The following is just an EXAMPLE. You must modify this JSON to match the resources in your own environment.

In the following example, `aws-cloudtrail-logs-001xxxxxx433-f361378d` is the S3 bucket to store the AWS CloudTrail data.

CloudTrail policy - IAM Role - same AWS account


```
{
    "Version": "2012-10-17",
    "Statement": [
        {
            "Sid": "VisualEditor0",
            "Effect": "Allow",
            "Action": [
                "s3:GetObject",
                "s3:ListBucket"
            ],
            "Resource": [
                "arn:aws:s3:::aws-cloudtrail-logs-001xxxxxx433-
f361378d",
                "arn:aws:s3:::aws-cloudtrail-logs-001xxxxxx433-
f361378d/*"
            ]
        }
```

```
        ]
}
```


10. Click **Next**.
11. Give your policy a name to associate it with Stellar Cyber, for example, Stellar-cloudtrail-policy.
12. Click **Create policy**.

Create an IAM Role with Trusted Entities

1. From the IAM navigation pane, choose **Roles** and then click **Create Role**.

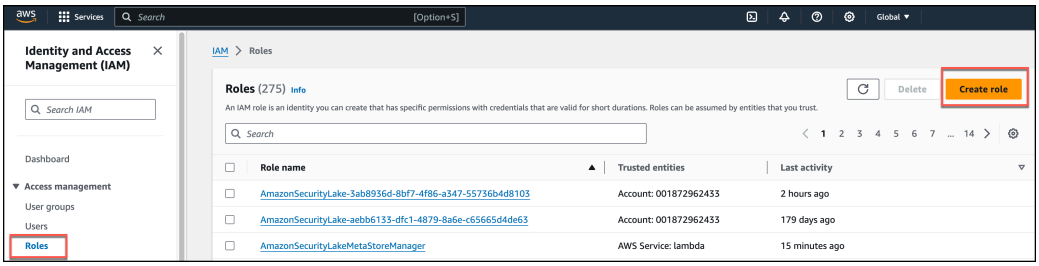

2. Choose **Custom trust policy**.

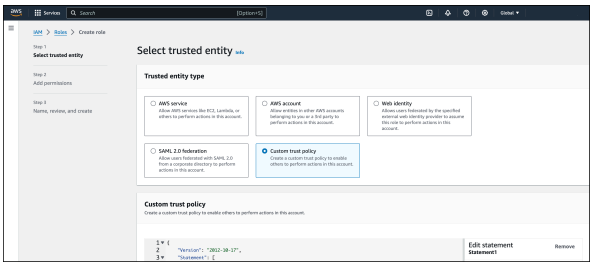


3. Using the example below as a guide, edit the custom trust policy document.

> The following is just an EXAMPLE. You must modify this JSON to match the resources in your own environment.


Trusted entities - same AWS account

```
{
    "Version": "2012-10-17",
    "Statement": [
        {
            "Sid": "Statement1",
            "Effect": "Allow",
            "Principal": {
                "AWS": "<User ARN>"
            },
            "Action": "sts:AssumeRole"
        }
    ]
}
```


4. Click **Next**.
5. On the **Add permissions** page, select the permissions policy created earlier.

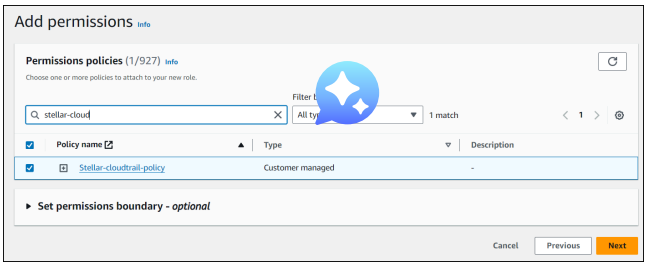

6. Click **Next**.
7. On the **Name, review, and create** page, enter a **Role name**.



8. Review the trusted entities and permissions, then click **Create Role**.

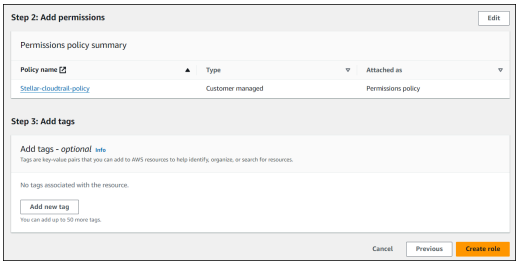

9. On the **Roles** page, use the Search box to find your role name.
10. Click your role name.
11. Copy your ARN, which you will need when configuring the connector in Stellar Cyber.

(Optional) Creating an IAM Role Across AWS Accounts


The procedures in this section are required for users who want to use the IAM Role Auth Method for the AWS resources, for an IAM role that is created across AWS accounts.

Create an IAM User for Source AWS Account and Create IAM Policy


Create this IAM user if you have a source AWS account like an MSSP AWS account.

When configuring the connector in Stellar Cyber, you will need the source AWS account (MSSP account) and the access key and secret key.


1. Log in to your **AWS Management Console** at https://aws.amazon.com/console. View the services in the Console Home or choose **View all services**.




2. Choose **IAM**. The **IAM Dashboard** appears.
3. From the IAM navigati ane, choose **Users** and then click **Create user**.

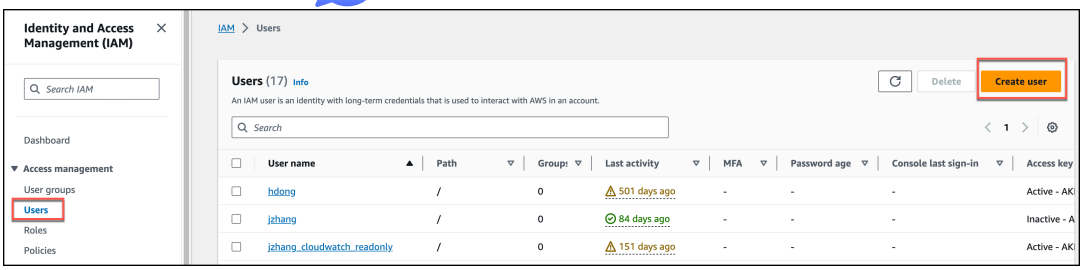

4. On the **Specify user details** page, enter a **User name** for the new user.
5. Choose **Provide user access to the – AWS Management Console** *optional* to produce login credentials for the new user, such as a password.
6. Choose how you want to create the Console password and then choose **Next**.
7. Choose **Attach policies directly** and click **Create policy**.

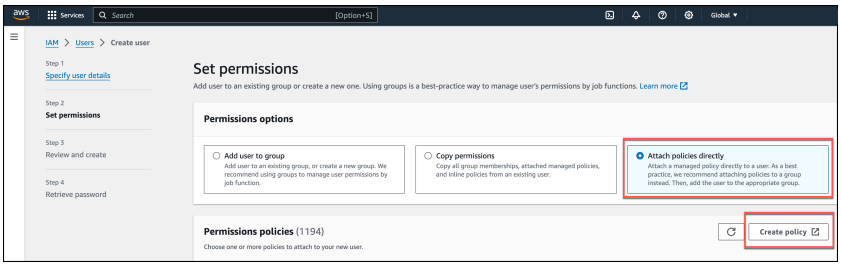

8. On the **Specify permissions** page, choose the **JSON** tab.

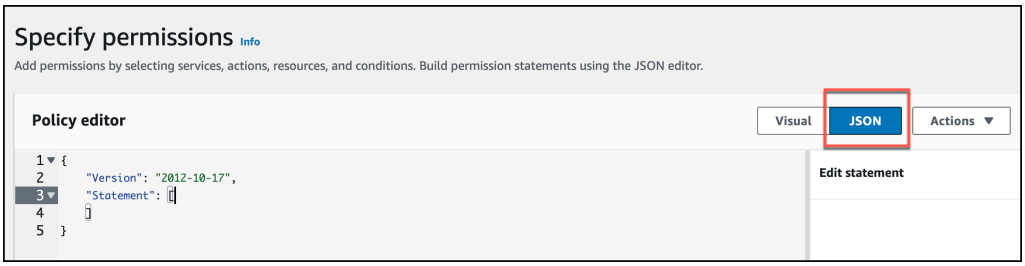

9. Using the example below as a guide, edit the JSON policy document.

> The following is just an EXAMPLE. You must modify this JSON to match the resources in your own environment.

CloudTrail policy - IAM Role - across AWS accounts

```
{
    "Version": "2012-10-17",
    "Statement": [
        {
            "Effect": "Allow",
            "Action": [
                "sts:AssumeRole"
            ],
            "Resource": [
                "*"
            ]
        }
    ]
}
```

10. (Optional) To only allow the particular destination AWS account IAM role, using the example below as a guide, edit the JSON policy document.

The following is just an EXAMPLE. You must modify this JSON to match the resources in your environment.

CloudTrail policy - IAM Role - allow destination AWS account

```
{
    "Version": "2012-10-17",
    "Statement": [
        {
            "Effect": "Allow",
            "Action": [
                "sts:AssumeRole"
            ],
            "Resource": [
                "arn:aws:iam::001xxxxxx433:role/Stellar-cloudtrail-role"
            ]
        }
    ]
}
```


11. Click **Next**.
12. Give your policy a name to associate it with Stellar Cyber, then choose **Create policy**.

(Optional) Create an IAM User for Destination AWS Account and Create IAM Policy


Create this IAM user if you have a destination AWS account like an MSSP's tenant AWS account.

When configuring the connector in Stellar Cyber, you will need the destination AWS account (MSSP's tenant account) and the IAM role ARN.

1. Log in to your **AWS Management Console** at https://aws.amazon.com/console. View the services in the Console Home or choose **View all services**.




2. Choose **IAM**. The **IAM Dashboard** appears.
3. From the IAM navigation pane, choose **Users** and then click **Create user**.

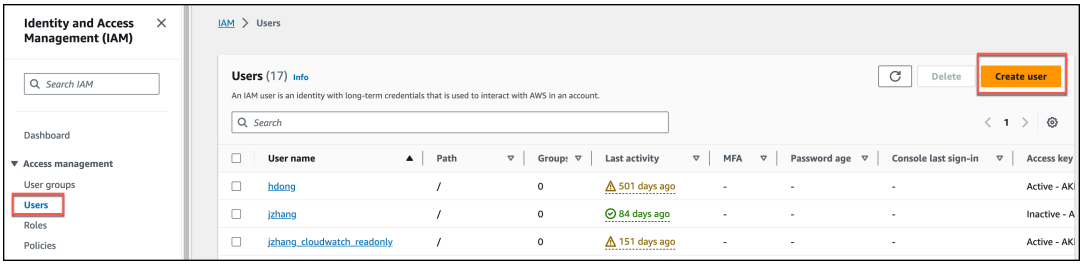


4. On the **Specify user details** page, enter a **User name** for the new user.
5. Choose **Provide user access to the – AWS Management Console** *optional* to produce login credentials for the new user, such as a password.
6. Choose how you want to create the Console password and then choose **Next**.

7. Choose **Attach policies directly** and click **Create policy**.

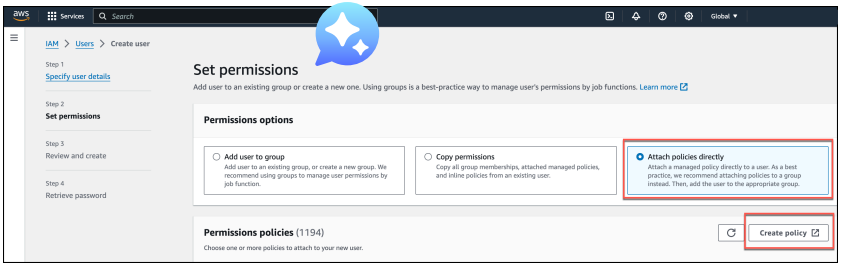

8. On the **Specify permissions** page, choose the **JSON** tab.

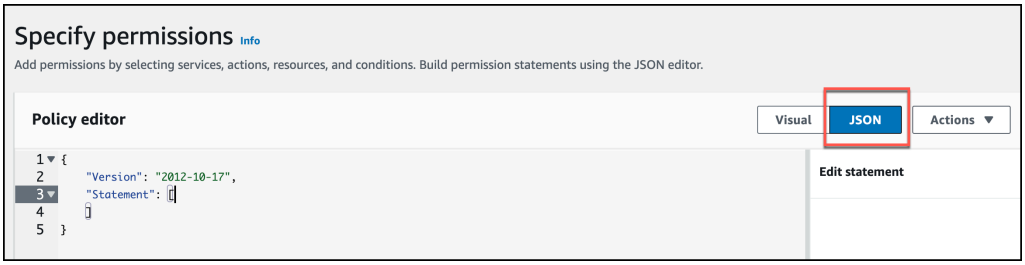

9. Using the example below as a guide, edit the JSON policy document.

> The following is just an EXAMPLE. You must modify this JSON to match the resources in your own environment.

In the following example, `aws-cloudtrail-logs-001xxxxxx433-f361378d` is the S3 bucket to store the AWS CloudTrail data.


CloudTrail policy - Stellar-cloudtrail-policy

```
{
    "Version": "2012-10-17",
    "Statement": [
        {
            "Sid": "VisualEditor0",
            "Effect": "Allow",
            "Action": [
                "s3:GetObject",
                "s3:ListBucket"
            ],
            "Resource": [
                "arn:aws:s3:::aws-cloudtrail-logs-001xxxxxx433-
f361378d",
                "arn:aws:s3:::aws-cloudtrail-logs-001xxxxxx433-
f361378d/*"
            ]
        }
    ]
}
```


10. Click **Next**.
11. Give your policy a name to associate it with Stellar Cyber, then choose **Create policy**.

Create an IAM Role with Trusted Entities

1. From the IAM navigation pane, choose **Roles** and then click **Create Role**.

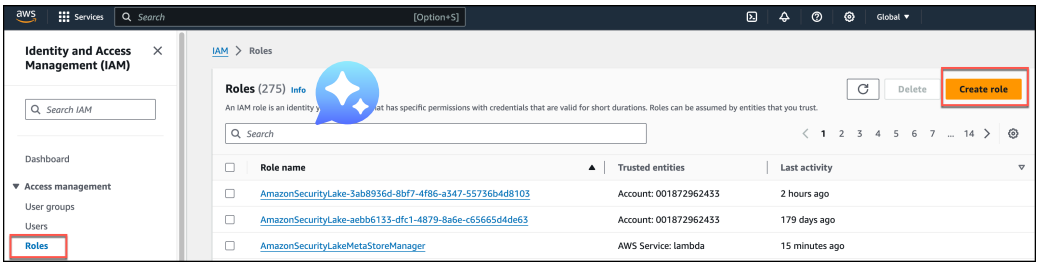

2. Choose **Custom trust policy**.

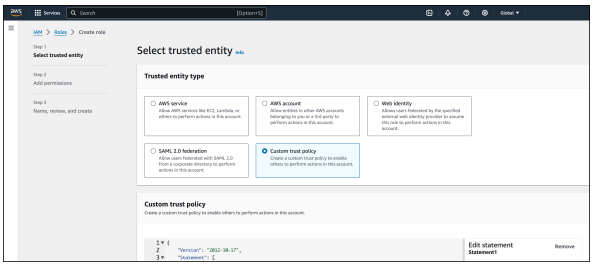

3. Using the example below as a guide, edit the custom trust policy document.


> The following is just an EXAMPLE. You must modify this JSON to match the resources in your own environment.

Trusted entities - across AWS accounts

```
{
    "Version": "2012-10-17",
    "Statement": [
        {
            "Sid": "Statement1",
            "Effect": "Allow",
            "Principal": {
                "AWS": "<User ARN>"
            },
            "Action": "sts:AssumeRole"
        }
    ]
}
```


4. Click **Next**.

5. On the **Add permissions** page, select the permissions policy created earlier.

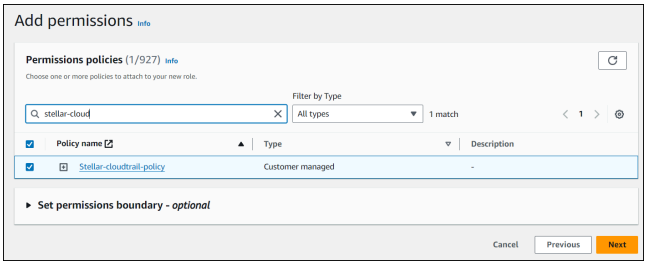


6. Click **Next**.

7. On the **Name, review, and create** page, enter a **Role name**.



8. Review the trusted entities and permissions, then click **Create Role**.

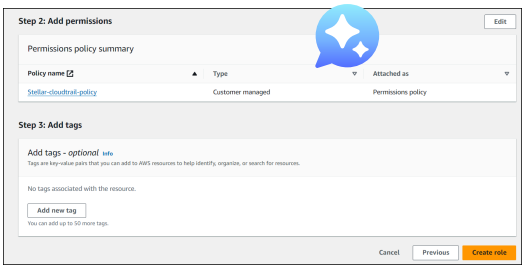

9. On the **Roles** page, use the Search box to find your role name.
10. Click your role name.
11. Copy your ARN, which you will need when configuring the connector in Stellar Cyber.

Getting the Required Information

To add the connector in Stellar Cyber you need the following for the Access Key / Secret Key Auth Method:

- Access key and Secret Access key—See Creating an Access Key
- Bucket—See Creating the AWS CloudTrail Trail
- Prefix—See Getting the Prefix


To add the connector in Stellar Cyber you need the following for the IAM Role Auth Method:

- Source Account Access Key, Source Account Secret Key, and Bucket—See (Optional) Create an IAM role in same AWS account or (Optional) Create an IAM role across AWS accounts
- Prefix—See Getting the Prefix


Getting the Prefix

To get the prefix:

1. In the **CloudTrail Dashboard**, click **Trails**. The existing trails appear.
2. For the trail you are using, the **Bucket** is the name in the **S3 bucket** column.

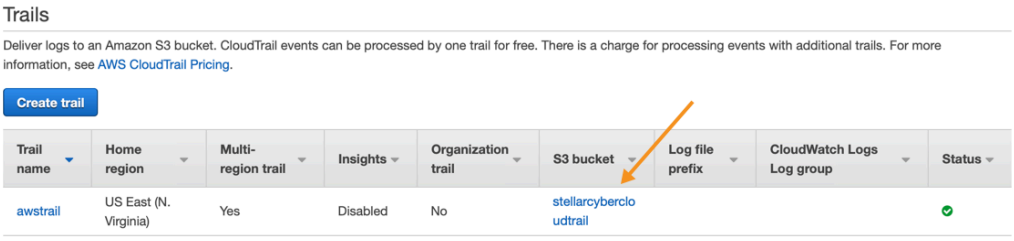


3. Click the bucket name. The bucket info appears.
4. Click the **CloudTrail** object.

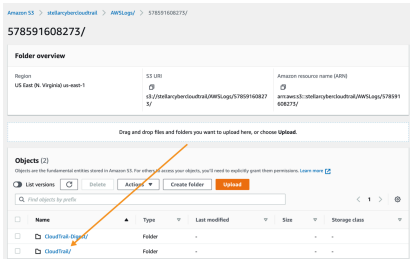

The regional objects appear.

5. Click your region.
6. Click **Copy S3 URI**. The **Prefix** is the path starting with **AWSLogs** (the default) and ending with the region.

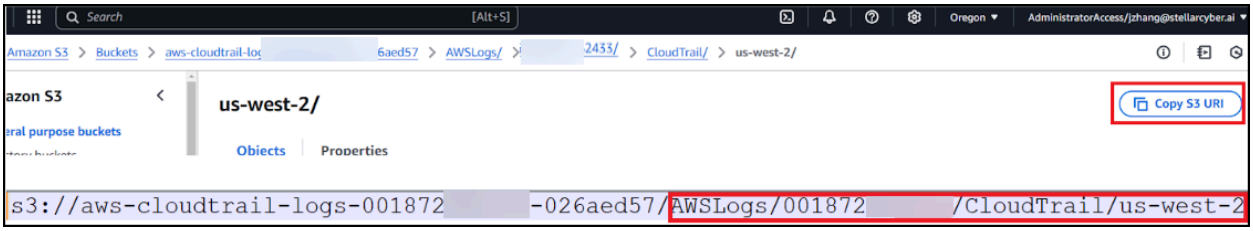

Do not copy the trailing "/" symbol.

If you're configuring an AWS WAF connector and you have a custom prefix, use your custom prefix. If you are using a date in your custom prefix, you must replace static numbers with variables, converting the prefix to a pattern that Stellar Cyber can recognize. Following are the variables.

Variable	Definition
//YYYY//	4 digit year
//m//	1 or 2 digit month
//mm//	2 digit month
//d//	1 or 2 digit day
//dd//	2 digit day
//H//	1 or 2 digit hour
//HH//	2 digit hour
//M//	1 or 2 digit minute
//MM//	2 digit minute

For example, **CustomPrefix/year=/2020/month=/10/day=/27/** becomes **CustomPrefix/year=///YYYY///month=///mm///day=///dd//**.

For the CloudTrail connector, the supported prefix syntax may also include Organization ID, as shown here:

- Without Organization ID:
  - `optional_prefix_name/AWSLogs/Account ID/<CloudTrail>/region`
  - `optional_prefix_name/AWSLogs/Account ID/<vpcflowlogs>/region`
- With Organization ID:
  - `optional_prefix_name/AWSLogs/OU-ID/Account ID/<CloudTrail>/region`
  - `optional_prefix_name/AWSLogs/OU-ID/Account ID/<vpcflowlogs>/region`

(Optional) Setting up AWS Control Tower

There are two types of AWS Control Tower: SSE-S3 encryption (default) and SSE-KMS encryption.

To set up the default AWS Control Tower (SSE-S3 encryption), refer to the AWS Control Tower documentation.

To set up the AWS Control Tower with SSE-KMS encryption, follow these procedures:

- Create symmetric encryption KMS keys
- Set up the AWS Control Tower on your management account
- Create an IAM User

Creating Symmetric Encryption KMS Keys

To create symmetric encryption KMS keys:

1. Log in to your management account (YOUR-MANAGEMENT-ACCOUNT).
2. Follow the guidance in the AWS documentation to create your KMS key (YOUR-KMS-KEY-ID).
3. Using the example below as a guide, edit the JSON policy document.

> The following is just an EXAMPLE. You must modify this JSON to match the resources in your own environment.

Policy

```
{
    "Version": "2012-10-17",
    "Id": "CustomKMSPolicy",
    "Statement": [
        {
        ... YOUR-EXISTING-POLICIES ...
        },
        {
            "Sid": "Allow Config to use KMS for encryption",
            "Effect": "Allow",
            "Principal": {
                "Service": "config.amazonaws.com"
            },
            "Action": [
                "kms:Decrypt",
                "kms:GenerateDataKey"
            ],
            "Resource": "arn:aws:kms:YOUR-HOME-REGION:YOUR-MANAGEMENT-
ACCOUNT-ID:key/YOUR-KMS-KEY-ID"
        },
        {
            "Sid": "Allow CloudTrail to use KMS for encryption",
            "Effect": "Allow",
            "Principal": {
                "Service": "cloudtrail.amazonaws.com"
            },
            "Action": [
                "kms:GenerateDataKey*",
                "kms:Decrypt"
              ],
            "Resource": "arn:aws:kms:YOUR-HOME-REGION:YOUR-MANAGEMENT-
ACCOUNT-ID:key/YOUR-KMS-KEY-ID",
            "Condition": {
                "StringEquals": {
                    "aws:SourceArn": "arn:aws:cloudtrail:YOUR-HOME-
REGION:YOUR-MANAGEMENT-ACCOUNT-ID:trail/aws-controltower-BaselineCloudTrail"
                },
                "StringLike": {
                    "kms:EncryptionContext:aws:cloudtrail:arn":
"arn:aws:cloudtrail:*:YOUR-MANAGEMENT-ACCOUNT-ID:trail/*"
                }
            }
```


```
        },
        {
            "Sid": "Allow user to use KMS for encryption",
            "Effect": "Allow",
            "Principal": {
                "AWS": "<user ARN>"
            },
            "Action": "kms:Decrypt",
            "Resource": "arn:aws:kms:YOUR-HOME-REGION:YOUR-MANAGEMENT-
ACCOUNT-ID:key/YOUR-KMS-KEY-ID"
        }
    ]
}
```

4. In various places in the JSON policy document, provide the following:
    - YOUR-HOME-REGION
    - YOUR-MANAGEMENT-ACCOUNT-ID
    - YOUR-KMS-KEY-ID
    - <user ARN> (the user that will be used for the connector)

Setting up the AWS Control Tower on your Management Account

You can now set up the AWS Control Tower on your management account with the KMS key you created earlier.

1. Log in to AWS CloudTrail with your AWS account (YOUR-MANAGEMENT-ACCOUNT).
2. Follow the guidance in the following documentation to deploy a landing zone with AWS Control Tower.
3. In the following graphic, YOUR-MANAGEMENT-ACCOUNT ends in 4429. The CloudTrail S3 bucket is in the 9809 AWS account (the Log-archive account).

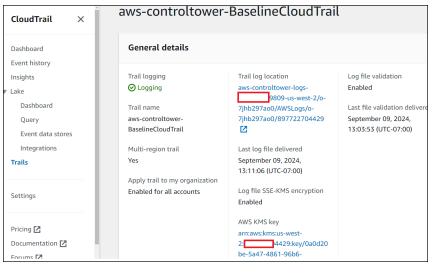

Creating an IAM User

Next, create an IAM user. You can refer to Adding a User with the Appropriate Permissions.

1. Log into the Log-archive account (9809).
2. Using the example below as a guide, edit the JSON policy document.

> The following is just an EXAMPLE. You must modify this JSON to match the resources in your own environment.

Policy for the user

```
{
    "Version": "2012-10-17",
    "Statement": [
        {
            "Sid": "VisualEditor0",
            "Effect": "Allow",
            "Action": [
                "s3:GetObject",
                "s3:ListBucket",
```


```
            ],
            "Resource": [
                "<S3 bucket ARN>",
                "<S3 bucket ARN>/*"
            ]
        },
        {
            "Sid": "KMSDecryptionPermission",
            "Effect": "Allow",
            "Action": [
                "kms:Decrypt"
            ],
            "Resource": [
                "arn:aws:kms:YOUR-HOME-REGION:YOUR-MANAGEMENT-ACCOUNT-
ID:key/YOUR-KMS-KEY-ID"
            ]
        }
    ]
}
```

3. In the JSON policy document, provide the following:
    - YOUR-HOME-REGION
    - YOUR-MANAGEMENT-ACCOUNT-ID
    - YOUR-KMS-KEY-ID
    - <S3 bucket ARN>
4. Generate the access key and security key for this user. You can refer to Creating an Access Key.


Adding the Connector in Stellar Cyber

With the required information handy, you can add the AWS CloudTrail connector in Stellar Cyber:

1. Log in to Stellar Cyber.
2. Click **System | INTEGRATIONS | Connectors**. The **Connector Overview** appears.

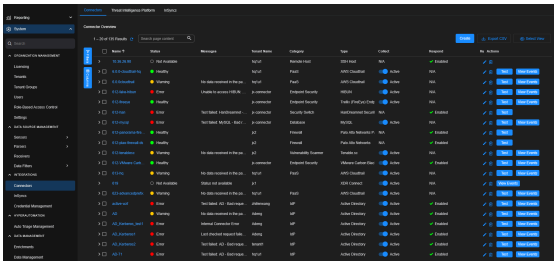


3. Click **Create** and select **Connector**.



The **General** tab of the **Add Connector** screen appears. The information on this tab cannot be changed after you add the connector.

4. Choose **PaaS** from the **Category** dropdown.
5. Choose **AWS Cloudtrail** from the **Type** dropdown.

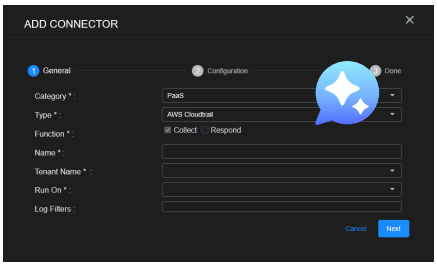


The asterisk (*) indicates a required field.

6. For this connector, the supported **Function** is **Collect**, which is enabled already.
7. Enter a **Name**.

   Notes:
   - This field does not accept multibyte characters.
   - It is recommended that you follow a naming convention such as tenantname-connectortype.

8. Choose a **Tenant Name**. The Interflow records created by this connector include this tenant name.
9. Choose the device on which to run the connector.
10. (Optional) When the **Function** is **Collect**, you can apply **Log Filters**. For information, see Managing Log Filters.
11. Click **Next**. The **Configuration** tab appears.

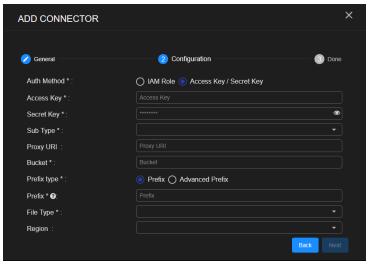

The asterisk (*) indicates a required field.


12. Choose the **Auth Method** to use **Access Key / Secret Key** or **IAM Role**.

    For **Access Key / Secret Key** Auth Method:

    a. Enter the **Access Key** from IAM.

    b. Enter the **Secret Key** from IAM.

    For **IAM Role** Auth Method:

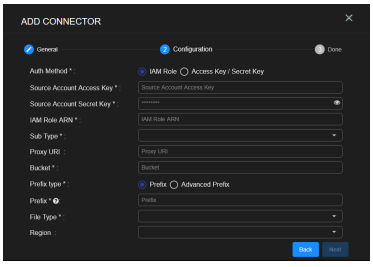

The asterisk (*) indicates a required field.

    a. Enter the **Source Account Access Key**.

b. Enter the **Source Account Secret Key**.



The IAM role can be across multiple AWS accounts:

- For the source account, provide the trusted IAM user's access key and secret key. Refer to Creating an Access Key.
- For the destination account, provide the AWS IAM role, in which this role is trusting the source account IAM user. Refer to (Optional) Creating an IAM Role Across AWS Accounts.

c. Enter the **IAM Role ARN**.

13. Choose a **Sub Type**.
    - **cloudtrail**—feeds account activity information, including actions taken through the AWS Management Console and various AWS SDKs and command line tools. See the AWS CloudTrail documentation for details.
    - **vpcflow**—provides network-level information. See the AWS VPC documentation for details.
    - **waf**—provides Web Application Firewall information. See the AWS WAF documentation for details.
14. (Optional) Enter the **Proxy URI**, if you have one.
15. Enter the **Bucket** you noted above.
16. Choose a **Prefix type** (Prefix or Advanced Prefix).

    For **Prefix**, ensure the Prefix does not include a trailing "/" symbol.

    The supported prefix syntax is as follows:

    - Without Organization ID: `optional_prefix_name/AWSLogs/Account ID/<CloudTrail or vpcflowlogs>/region`
    - With Organization ID: `optional_prefix_name/AWSLogs/OU-ID/Account ID/<CloudTrail or vpcflowlogs>/region`
    - With AWS Control Tower: `optional_prefix_name/OU-ID/AWSLogs/OU-ID/*/<CloudTrail or vpcflowlogs>/region`

    The **Sub Type** must be cloudtrail or vpcflow.


    For **Advanced Prefix**, wildcard characters are supported in any prefix format. But use caution as this may cause performance issues. If the wildcard expression matches too many files, this will cause the collector to examine too many files. It is better to have the format expression as specific as possible in order to limit the number of files examined.

    Examples of advanced prefixes are:

    - `AWSLogs/Account ID/vpcflowlogs/us-west-2/2025/05/11/*.gz`
    - `AWSLogs/Account ID/CloudTrail/us-west-2/2025/06/*1/*`
    - `AWSLogs/Account ID/WAFLogs/us-west-2/*`

The Advanced Prefix format must be fully matching. For example, `AWSLogs/Account ID/WAFLogs/us-west-2/` is a partial match and no files will be retrieved.

17. Enter the **File Type**. The **cloudtrail** and **vpcflow** sub types should always be **gzip**. The **waf** sub type can be **gzip** or **text**.
18. (Optional) Choose a **Region** from the available regions in the dropdown.
19. Click **Next**. The final confirmation tab appears.

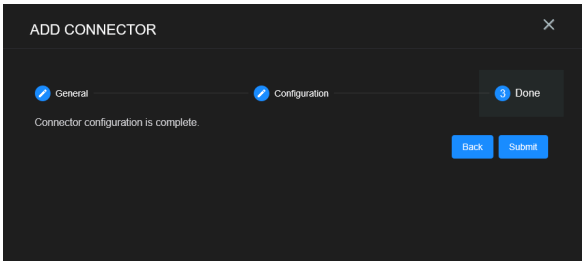

20. Click **Submit**.

The new connector is immediately active and starts collecting logs.


Testing the Connector

If you have AWS Control Tower, the **Test** button tests all account IDs.

When you add (or edit) a connector, we recommend that you run a test to validate the connectivity parameters you entered. The test validates authentication and connectivity.

For connectors running on a sensor, Stellar Cyber recommends that you allow 30-60 seconds for new or modified configuration details to be propagated to the sensor before performing a test.

1. Click **System | INTEGRATIONS | Connectors**. The **Connector Overview** appears.

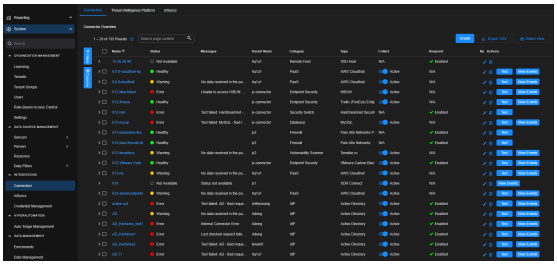

2. Locate the connector by name that you added, or modified, or that you want to test.
3. Click **Test** at the right side of that row. The test runs immediately.

Note that you may run only one test at a time.

Stellar Cyber conducts a basic connectivity test for the connector and reports a success or failure result. A successful test indicates that you entered all of the connector information correctly.

To aid troubleshooting your connector, the dialog remains open until you explicitly close it by using the **X** button. If the test fails, you can select the button from the same row to review and correct issues.

The connector status is updated every five (5) minutes. A successful test clears the connector status, but if issues persist, the status reverts to failed after a minute.


Repeat the test as needed.

Display sample messages...


Success !



Failure with summary of issue:



Show More example detail:



If the test fails, the common HTTP status error codes are as follows:

HTTP Error Code	HTTP Standard Error Name	Explanation	Recommendation
400	Bad Request	This error occurs when there is an error in the connector configuration.	Did you configure the connector correctly?
401	Unauthorized	This error occurs when an authentication credential is invalid or when a user does not have sufficient privileges to access a specific API.	Did you enter your credentials correctly? Are your credentials expired? Are your credentials entitled or licensed for that specific resource?
403	Forbidden	This error occurs when the permission or scope is not correct in a valid credential.	Did you enter your credentials correctly? Do you have the required role or permissions for that credential?
404	Not Found	This error occurs when a URL path does not resolve to an entity.	Did you enter your API URL correctly?
429	Too Many Requests	This error occurs when the API server receives too much traffic or if a user's license or entitlement quota is exceeded.	The server or user license/quota will eventually recover. The connector will periodically retry the query. If this occurs unexpectedly or too often, work with your API provider to investigate the server limits, user licensing, or quotas.

For a full list of codes, refer to HTTP response status codes.

Verifying Ingestion

To verify ingestion:

1. Select **Threat Hunting**.

   The **Interflow Search**  appears.

2. Change the **Indices** to include either or both of **AWS Events** or **Traffic**.

   The table immediately updates to show ingested Interflow records.

© 2026 Stellar Cyber . All rights reserved.