Stellar Cyber 6.6.0s is now live! Discover all the updates in the release notes!

Configuring Acronis Cyber Protect Cloud Connectors 6.2.0

This connector allows Stellar Cyber to ingest logs from Acronis Cyber Protect Cloud and add the records to the data lake. This connector integrates with the Acronis API to query alerts, agents, and incidents.

In addition, you can use Acronis responders to configure Webhook actions that can be triggered manually or that can enhance Automated Threat Hunting (ATH) actions.

Acronis responders use Webhook templates that support actions. Each action is one responder, there are three actions, and hence there are three Acronis responders: Acronis Workload Isolate, Acronis Workload Restart, and Acronis Workload Shutdown.

This document describes how to configure an Acronis responder using the Universal Webhook Responder, how to add the respond function to an Acronis connector and how to manually trigger an action and perform ATH actions with an Acronis responder.

Stellar Cyber connectors with the Collect function (collectors) may skip collecting some data when the ingestion volume is large, which potentially can lead to data loss. This can happen when the processing capacity of the collector is exceeded.

Connector Overview: Acronis Cyber Protect Cloud

Capabilities

- Collect: **Yes**
- Respond: **Webhook actions**
- Native Alerts Mapped: **Yes**
- Runs on: **DP**
- Interval: **Configurable**

Collected Data

Content Type	Index	Locating Records

Alerts 
Agents (automatically set)
Incidents 6.2.0
	Syslog
	Assets (for Agents)
		msg_class:
		`acronis_cyber_protect_alert`
		`acronis_cyber_protect_agent`
		`acronis_cyber_protect_incidents` 6.2.0
		
		msg_origin.source:
		`acronis_cyber_protect`
		
		msg_origin.vendor:
		`acronis`
		
		msg_origin.category:
		`endpoint`

Domain

<Host URL>

where <Host URL> is a variable from the configuration of this connector

Response Actions 6.2.0

Webhook action templates:

- Acronis Workload Isolate
- Acronis Workload Restart
- Acronis Workload Shutdown

Third Party Native Alert Integration Details

This connector ingests logs from Acronis Cyber Protect Cloud to get the raw alerts that are stored in the Syslog index. Select the Alerts content type.

Stellar Cyber maps Acronis Cyber Protect Cloud alerts. The alerts are read from the Syslog index, enriched with Stellar Cyber fields, and mapped (with deduplication) to the Alerts index.

The following four alert types are supported: Email security, EDR, Antimalware protection, and URL filtering. Tactic and Technique are based on alert type.

Deduplication is by `tenantid`, `event.threat.name`, `host.name`, `user.name`, `url`, `process.pid`, `file.hash.sha1`, `email.from.address`, and `acronis_cyber_protect.details.edrAlertId`.

For details, see Integration of Third Party Native Alerts.

Required Credentials and Configurations

- Host URL (data center URL), Client ID, Client Secret

Locating Records

To search the alerts in the Alerts index, use the query: `msg_class: acronis_cyber_protect_alert AND event.category: ('URL filtering' OR 'EDR' OR 'Antimalware protection' OR 'Email security')`

To search the Original Records in the Syslog index, use the query: `msg_class: acronis_cyber_protect_alert`

Adding an Acronis Cyber Protect Cloud Connector

To add an Acronis Cyber Protect Cloud connector:

1. Obtain credentials
2. Adding the connector in Stellar Cyber (Collect)
3. Add the connector in Stellar Cyber (Respond)
4. Test the connector
5. Verify ingestion

For a limitation on filtering APIs, see Filtering APIs on Acronis Connectors.

Obtaining Acronis Cyber Protect Cloud Credentials

Before you configure the connector in Stellar Cyber, you must obtain the following Acronis Cyber Protect Cloud credentials:

- Client ID
- Client Secret
- Host URL (data center URL), for example, https://eu2-cloud.acronis.com or https://eu8-cloud.acronis.com.

Getting the Client ID and Client Secret

Follow the guidance in Acronis Cyber Protect Cloud documentation for Creating an API client.

1. Using an administrator account role, log in to the management portal.
2. Click **Settings | API clients | Create API client**.
3. Enter a name for the API client.
4. Click **Next**.
5. Copy and save the ID and secret value of the client and the data center URL.


   Store the ID and secret value in a safe location. The secret value cannot be retrieved later although it can be reset.

6. Click **Done**.


Adding the Connector in Stellar Cyber (Collect)

To add an Acronis Cyber Protect Cloud connector in Stellar Cyber:

1. Log in to Stellar Cyber.
2. Click **System | INTEGRATIONS | Connectors**. The **Connector Overview** appears.

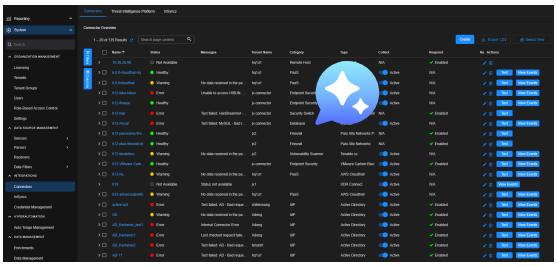


3. Click **Create** and select **Connector**.



The **General** tab of the **Add Connector** screen appears. The information on this tab cannot be changed after you add the connector.

4. Choose **Endpoint Security** from the **Category** dropdown.
5. Choose **Acronis Cyber Protect Cloud** from the **Type** dropdown.

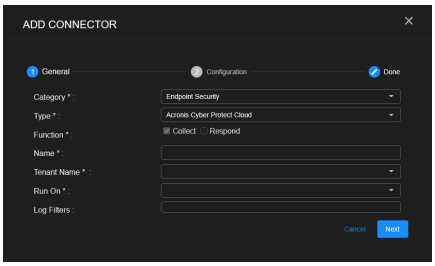


The asterisk (*) indicates a required field.

6. For this connector, the supported **Function** is **Collect**, which is enabled already.
7. Enter a **Name**.

Notes:

- This field does not accept multibyte characters.
- It is recommended that you follow a naming convention such as tenantname-connectortype.

8. Choose a **Tenant Name**. The Interflow records created by this connector include this tenant name.
9. Choose the device on which to run the connector.
10. (Optional) When the **Function** is **Collect**, you can apply **Log Filters**. For information, see Managing Log Filters.
11. Click **Next**. The **Configuration** tab appears.

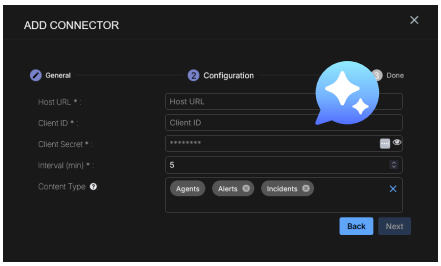


The asterisk (*) indicates a required field.

12. Enter the **Host URL** you noted above in Obtaining Acronis Cyber Protect Cloud Credentials, for example, https://eu2-cloud.acronis.com.
13. Enter the **Client ID** you noted above.
14. Enter the **Client Secret** you noted above.
15. Choose the **Interval (min)**. This is how often the logs are collected.
16. Choose the **Content Type** you would like to collect. The logs for **Agents**, **Alerts**, and **Incidents** are supported.

> The **Agents** content type is always selected and cannot be removed from the configuration as it is required for host information. The logs for **Agents** are set automatically.

17. Click **Next**. The final confirmation tab appears.

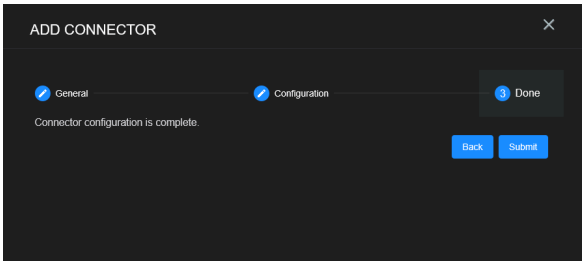


18. Click **Submit**.

The new connector is immediately active.


Adding the Connector in Stellar Cyber (Respond) 6.2.0

To add the respond function for an Acronis connector in Stellar Cyber:

1. Log in to Stellar Cyber.
2. Click **System** | **INTEGRATIONS** | **Connectors**. The **Connector Overview** appears.

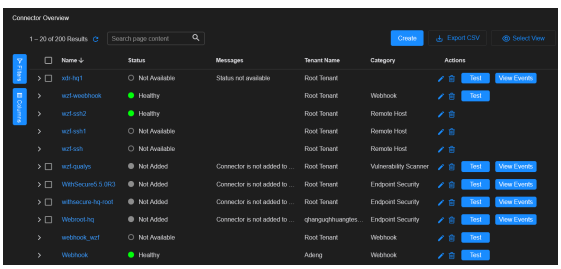


3. Click **Create** and select **Connector**.



The **General** tab of the **Add Connector** screen appears. The information on this tab cannot be changed after you add the connector.

4. Choose **Webhook** from the **Category** dropdown.
5. Choose one of the predefined templates from the **Type** dropdown: **Acronis Workload Isolate**, **Acronis Workload Restart**, or **Acronis Workload Shutdown**.

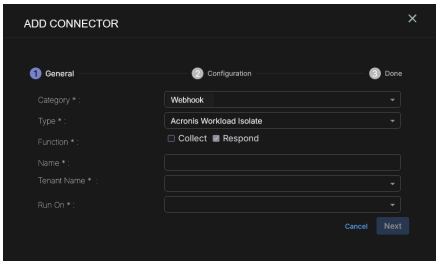

The asterisk (*) indicates a required field.

6. For this connector, the supported **Function** is **Respond**, which is enabled already.
7. Enter a **Name**.


Notes:

- This field does not accept multibyte characters.
- It is recommended that you follow a naming convention such as tenantname-connectortype.

8. Choose a **Tenant Name**. This identifies which tenant is allowed to use the connector. In addition to specific tenants, this connector supports **All Tenants**, which means that an Acronis responder can be used across tenants.
9. Choose the device on which to run the connector.


- Certain connectors can be run on either a Sensor or a Data Processor. The available devices are displayed in the **Run On** menu. If you want to associate your collector with a sensor, you must have configured that sensor prior to configuring the connector or you will not be able to select it during initial configuration.
- If the device you're connecting to is on premises, we recommend you run on the local sensor. If you're connecting to a cloud service, we recommend you run on the DP.

10. Click **Next**. The **Configuration** tab appears.

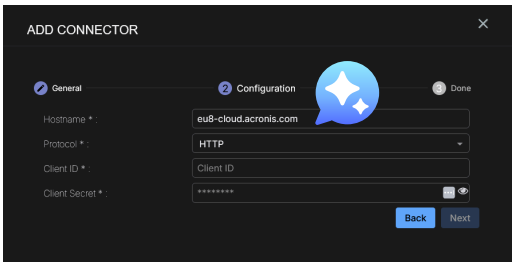

The asterisk (*) indicates a required field.

11. Enter the **Hostname** you noted above in Obtaining Acronis Cyber Protect Cloud Credentials.
12. Select the **Protocol**, either **HTTP** or **HTTPS**. If you select **HTTPS**, another field is available: **Disable SSL Certificate Verification**.
13. (Optional) Click **Disable SSL Certificate Verification** if you want to disable SSL certificate verification. Only disable SSL certificates if you have a necessary reason to, otherwise, it is not a good security practice and may expose the connection to security risks.
14. Enter the **Client ID** and **Client Secret** you noted above.
15. Click **Next**. The final confirmation tab, **Done**, appears.

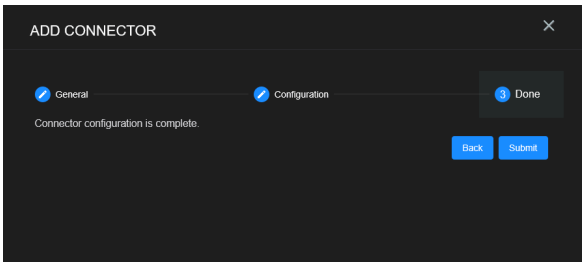

16. Click **Submit**.


Testing the Connector

The **Test** button for Acronis shows success with a valid credential.

When you add (or edit) a connector, we recommend that you run a test to validate the connectivity parameters you entered. The test validates authentication and connectivity.

For connectors running on a sensor, Stellar Cyber recommends that you allow 30-60 seconds for new or modified configuration details to be propagated to the sensor before performing a test.

1. Click **System | INTEGRATIONS | Connectors**. The **Connector Overview** appears.

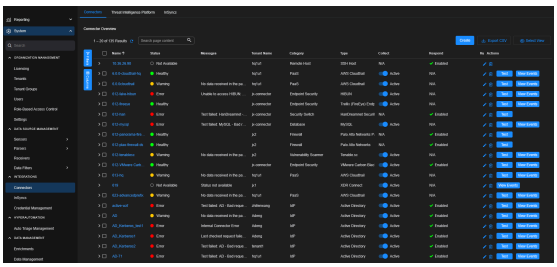

2. Locate the connector by name that you added, or modified, or that you want to test.

3. Click **Test** at the right side of that row. The test runs immediately.

Note that you ma[illegible]n only one test at a time.

Stellar Cyber conducts a basic connectivity test for the connector and reports a success or failure result. A successful test indicates that you entered all of the connector information correctly.

To aid troubleshooting your connector, the dialog remains open until you explicitly close it by using the **X** button. If the test fails, you can select the button from the same row to review and correct issues.

The connector status is updated every five (5) minutes. A successful test clears the connector status, but if issues persist, the status reverts to failed after a minute.


Repeat the test as needed.

Display sample messages...


Success !



Failure with summary of issue:



Show More example detail:

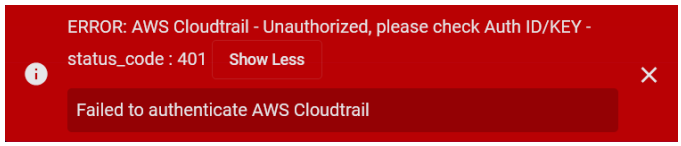

If the test fails, the common HTTP status error codes are as follows:

HTTP Error Code	HTTP Standard Error Name	Explanation	Recommendation
400	Bad Request	This error occurs when there is an error in the connector configuration.	Did you configure the connector correctly?
401	Unauthorized	This error occurs when an authentication credential is invalid or when a user does not have sufficient privileges to access a specific API.	Did you enter your credentials correctly? Are your credentials expired? Are your credentials entitled or licensed for that specific resource?
403	Forbidden	This error occurs when the permission or scope is not correct in a valid credential.	Did you enter your credentials correctly? Do you have the required role or permissions for that credential?
404	Not Found	This error occurs when a URL path does not resolve to an entity.	Did you enter your API URL correctly?
429	Too Many Requests	This error occurs when the API server receives too much traffic or if a user's license or entitlement quota	The server or user license/quota will eventually recover. The connector will periodically retry the

HTTP Error Code	HTTP Standard Error Name	Explanation	Recommendation
		is exceeded.	query. If this occurs unexpectedly or too often, work with your API provider to investigate the server limits, user licensing, or quotas.

For a full list of codes, refer to HTTP response status codes.

Verifying Ingestion

To verify ingestion:

1. Select **Threat Hunting**.

   The **Interflow Search** tab appears.

2. Change the **Indices** for the type of content you collected:
   - For **Alerts** and **Agents**, change the **Indices** to **Syslog**.
   - For **Agents** only, change the **Indices** to **Assets**.

   The table immediately updates to show ingested Interflow records.

Filtering APIs on Acronis Connectors

Some vendor APIs integrated through Stellar Cyber connectors do not support time-bounded querying (for example, using start_time, end_time, or equivalent filters), and may lack time-series metadata on records. As a result, Stellar Cyber is required to pull the entire dataset during each polling cycle, regardless of whether the data has changed.

Potential Impact

- Performance Overhead: The absence of time-based filtering may lead to increased load on the Stellar Cyber ingestion pipeline and degrade collection performance over time.
- Inefficient Polling: The connector must fetch and process all available records each cycle, leading to longer collection durations and higher resource usage.
- Scalability Limitations: For large or growing datasets (for example, alerts, logs, or assets), this limitation may result in delayed data availability or collection timeouts.
- Data Inconsistency: Data may be duplicated or missed due to the quantity of data.

When working with connectors that have this limitation, consider the potential impact on performance and collection efficiency.

Recommendation

Where possible, we recommend working with your vendor to improve or add time range filtering capabilities to their APIs.

Acronis Connector Content Types

The Acronis connector content types impacted by this limitation are as follows:

- Agents
- Alerts
- Incidents (filter by date)

For the Incidents content type, an internal filter is implemented that filters the response by a date field (datetime or timestamp). The Acronis internal filter supports a second level filter.

Using Actions 6.2.0

With an Acronis responder, you can:

- Manually trigger an action
- View action status
- Perform an ATH action


Manually Triggering an Action

To manually trigger an action with an Acronis responder:

1. Select **Threat Hunting**.


   The **Interflow Search** tab appears.

2. Change the **Indices** for the record type, for example, **Syslog**.
3. Scroll down the page and click the icon for **More Info** in the **Actions** column.
4. Click the **Actions** tab. Webhook actions appear under **External Actions**.

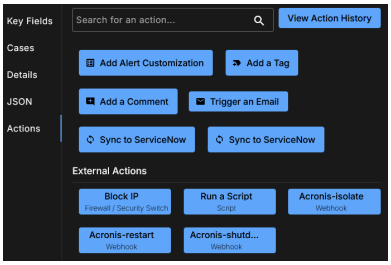

5. Click an Acronis Webhook action.

   The template populates the fields in the **Path and Query** and the **JSON Body**.



6. Verify the **Path and Query**. Enter your Acronis Cyber Protect Incident ID in the {{acronis_cyber_protect.incident_id}} parameter and your Acronis Cyber Protect Customer ID in the {{acronis_cyber_protect.customer_id}} parameter in the path, for example: /api/mdr/v1/incidents/f32a6e51-7c84-4a39-9b76-

3a52b6c1942d/response_action?action=WORKLOAD_ISOLATE&customer_id=9c47a6f2-84d5-4e33-9f11-52f70a6e9b28


Refer to the Acronis documentation for Performing and monitoring response actions.

7. The **JSON Body** does not need to be modified.
8. To perform the action, click **Submit**.

Viewing Action Status

To view action status:

1. Click **Automation | Action History**.
2. Click **Webhook Actions**.

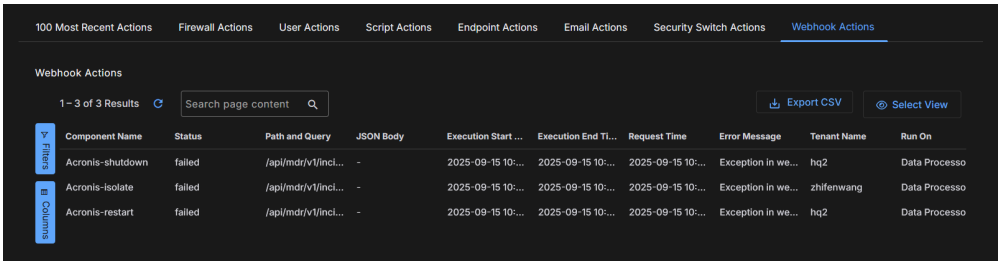


You can view the action status or error message in the table.

Performing an ATH Action

To perform an ATH action with an Acronis responder:

1. Click **Automation | Automation**.
2. Click **Create**.
3. Scroll down to **Actions**.

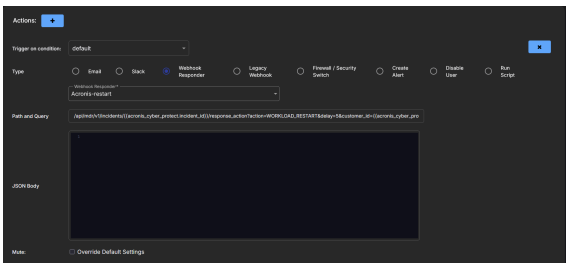

4. Click the ✚ button to add an action. Another action appears below the existing action.
5. Select the **Trigger on condition**.
6. Select **Webhook Responder** for the **Type**.
7. Select a previously configured Acronis responder from the dropdown menu for the **Webhook Responder**.

   The template populates the fields in the **Path and Query** and **JSON Body**.
8. The **Path and Query** do not need to be modified.
9. The **JSON Body** does not need to be modified.
10. (Optional) Click **Override Default Settings** to override the playbook's mute settings and mute just this action.

11. Click **Submit**.



© 2026 Stellar Cyber . All rights reserved.