Stellar Cyber 6.6.0s is now live! Discover all the updates in the release notes!

Configuring Box Connectors

Connectors allow Stellar Cyber to collect data from external sources and add it to the data lake. There can be any number of Box connectors active.

Stellar Cyber connectors with the Collect function (collectors) may skip collecting some data when the ingestion volume is large, which potentially can lead to data loss. This can happen when the processing capacity of the collector is exceeded.

Connector Overview: Box

Capabilities

- Collect: **Yes**
- Respond: **No**
- Native Alerts Mapped: **No**
- Runs on: **DP**
- Interval: **Configurable**

Collected Data

Content Type	Index	Locating Records

Events	Syslog	msg_class:
		N/A
		
		msg_origin.source:
		`box_content_cloud`
		
		msg_origin.vendor:
		`box`
		
		msg_origin.category:
		`saas`

Domain

https://api.box.com

Response Actions

N/A

Third Party Native Alert Integration Details

N/A

Required Credentials and Configurations

- Client ID, Client Secret, and Enterprise ID

Adding a Box Connector

To add a Box connector:


1. Use the **Box Developer Console** to set up a new **Custom App** for Stellar Cyber
2. Use the **Box Admin Console** to authorize the new app
3. Use the **Box Admin Console** to obtain the Enterprise ID
4. Add the connector in Stellar Cyber
5. Test the connector
6. Verify ingestion

> Use our example as a guideline, as you might be using a different software version.

Setting up New App in Box and Obtaining Client ID / Secret


Stellar Cyber must be added as a custom app in your Enterprise Box account. During this process you will need to make note of your **Client ID** and **Client Secret**.

1. Log in to the **Box Developer Console** with administrative privileges (http://app.box.com/developers/console). If you logged in to **box.com** instead, select **Dev Console** from the navigation pane.
2. Select the **My Apps** pane, and then click **Create New App**. Note that these instructions are based on creating a **Custom App**, not an Enterprise App.

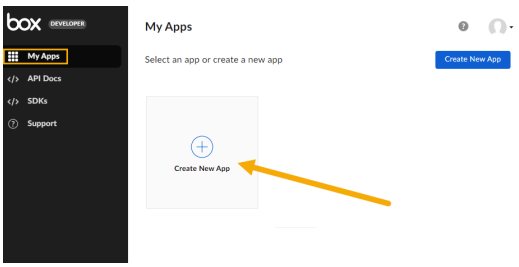


The Custom App dialog opens.


3. Select the **Server Authentication (Client Credentials Grant)** option, supply an **App Name**, and click **Create App**.




4. The new Box application appears in the **My Apps** pane. Open it.
5. From the **Configuration** tab, copy the **Client ID** and save it to a temporary location for later use in the setup process (refer to the image in the next step).
6. Click the **Fetch Client Secret** button to retrieve the client secret. Save it to the same temporary location where you copied the Client ID.

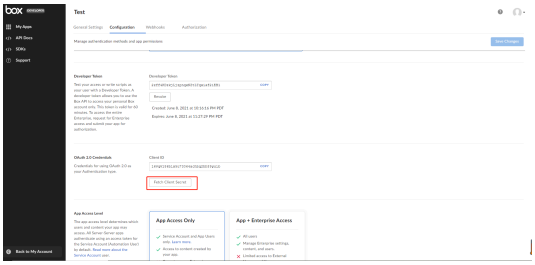


Note that **2-Step Verification** must be enabled for your account before you can use the **Fetch Client Secret** button. If it is not already enabled, you can turn it on on the **Account Settings | Account** tab, as illustrated below:

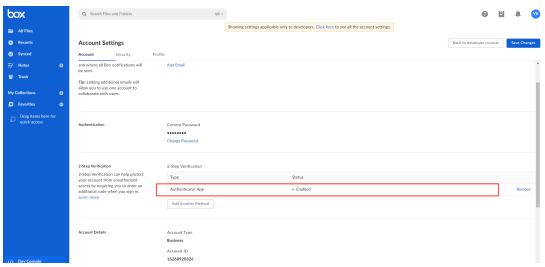


7. Ensure that **App Access Level** is set to **App + Enterprise Access**.

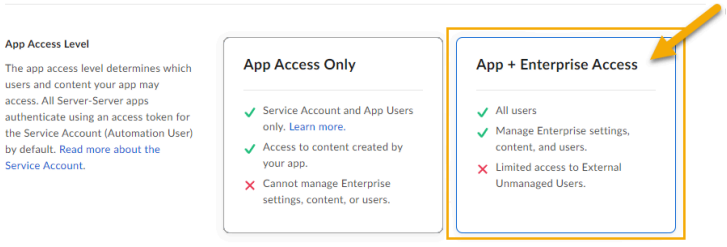


8. Click on the **General Settings** tab for your app and copy the **Enterprise ID** shown there to the same location where you stored the **Client ID** and **Client Secret**.

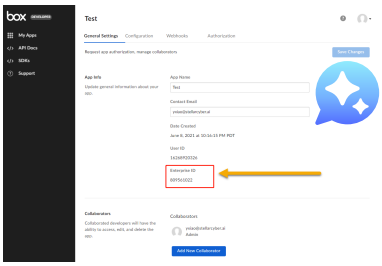

9. Click on the **Configuration** tab, scroll down to **Application Scopes**, and enable each of the options found there:

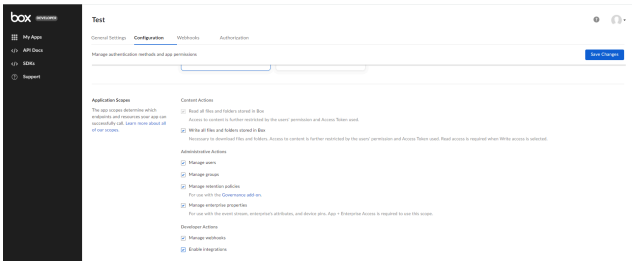

10. Navigate to the **Authorization** tab and click the **Review and Submit** button to send your request for application authorization to an Admin user.

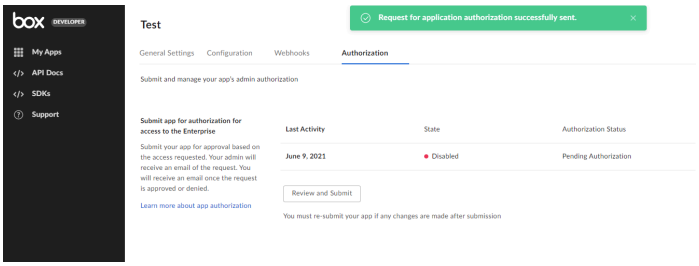


11. Exit the **Box Developer Console**.

Authorizing Stellar Cyber to Access the Box Account


Stellar Cyber must be authorized using the **Client ID** you obtained above.

Use the **Box Admin Console** to access your Box account.


1. Log in to your **Box Admin Portal** as an administrative user.
2. Select the menu option for **Admin Console**.



3. Select the **Apps** entry in the left navigation panel and click on the **Custom Apps Manager** tab.

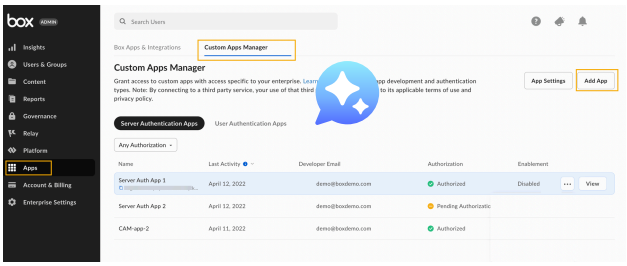

4. Click the **Add App** button, enter the **Client ID** you created for Stellar Cyber application, and click **Next**.
5. Review the information in the dialog that appears and click **Authorize**.



6. Review the list of applications in the **Custom Apps Manager** and ensure your new application is displayed.

Obtaining the Box Enterprise ID


At this point, you have a **Client Secret** and **Client ID**. If you have not already noted the **Enterprise ID** for your Box account, use this procedure to obtain it.

1. Still logged into your **Box Admin Portal** as an administrative user with Enterprise access rights, select **Account & Billing** on the navigation menu.
2. Make note of the **Enterprise ID** listed in the displayed Account Information section.


Adding the Connector in Stellar Cyber

Now you are ready to add and configure the Box connector in Stellar Cyber:

1. Log in to Stellar Cyber.
2. Click **System** | **INTEGRATIONS** | **Connectors**. The **Connector Overview** appears.

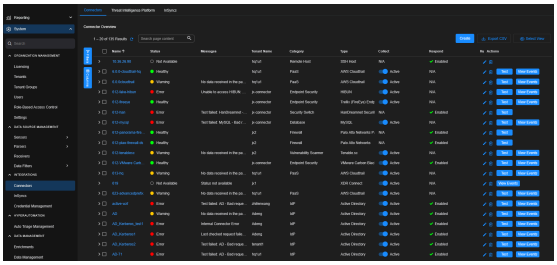


3. Click **Create** and select **Connector**.



The **General** tab of the **Add Connector** screen appears. The information on this tab cannot be changed after you add the connector.

4. Choose **SaaS** from the **Category** dropdown.
5. Choose **Box** from the **Type** dropdown.

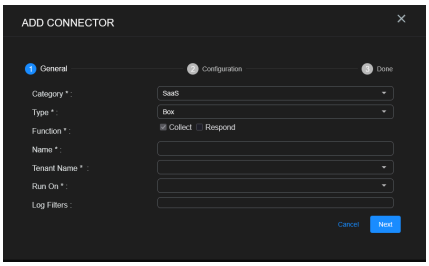


The asterisk (*) indicates a required field.

6. For this connector, the supported **Function** is **Collect**, which is enabled already.
7. Enter a **Name**.

Notes:

- This field does not accept multibyte characters.
- It is recommended that you follow a naming convention such as tenantname-connectortype.


8. Choose a **Tenant Name**. The Interflow records created by this connector include this tenant name.
9. Choose the device on which to run the connector.
10. (Optional) When the **Function** is **Collect**, you can apply **Log Filters**. For information, see Managing Log Filters.
11. Click **Next**. The **Configuration** tab appears.

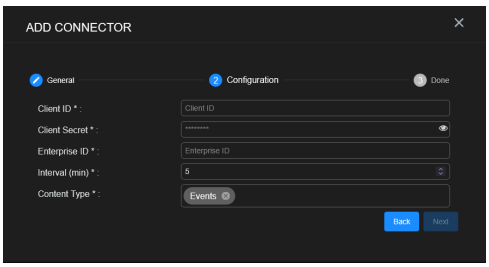

The asterisk (*) indicates a required field.

12. Enter the **Client ID** you noted above.
13. Enter the **Client Secret** you noted above.
14. Enter the **Enterprise ID** you noted above.

15. Choose the **Interval (min)**. This is how often the logs are collected.
16. Choose the **Content T** you would like to collect. The logs for **Events** are supported.
17. Click **Next**. The final confirmation tab appears.

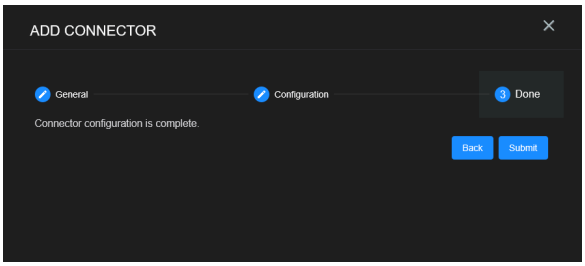


18. Click **Submit**.

Testing the Connector

When you add (or edit) a connector, we recommend that you run a test to validate the connectivity parameters you entered. The test validates authentication and connectivity.

For connectors running on a sensor, Stellar Cyber recommends that you allow 30-60 seconds for new or modified configuration details to be propagated to the sensor before performing a test.

1. Click **System | INTEGRATIONS | Connectors**. The **Connector Overview** appears.

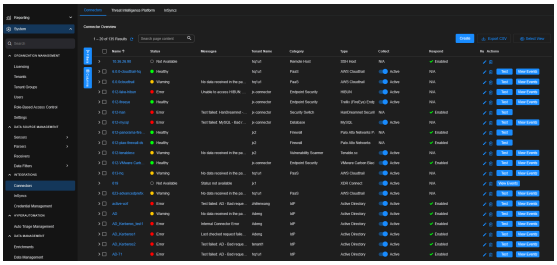

2. Locate the connector by name that you added, or modified, or that you want to test.
3. Click **Test** at the right side of that row. The test runs immediately.

Note that you may run only one test at a time.

Stellar Cyber conducts a basic connectivity test for the connector and reports a success or failure result. A successful test indicates that you entered all of the connector information correctly.

To aid troubleshooting your connector, the dialog remains open until you explicitly close it by using the **X** button. If the test fails, you can select the button from the same row to review and correct issues.

The connector status is updated every five (5) minutes. A successful test clears the connector status, but if issues persist, the status reverts to failed after a minute.


Repeat the test as needed.

Display sample messages...


Success !

Failure with summary of issue:





Show More example detail:



If the test fails, the common HTTP status error codes are as follows:

HTTP Error Code	HTTP Standard Error Name	Explanation	Recommendation
400	Bad Request	This error occurs when there is an error in the connector configuration.	Did you configure the connector correctly?
401	Unauthorized	This error occurs when an authentication credential is invalid or when a user does not have sufficient privileges to access a specific API.	Did you enter your credentials correctly? Are your credentials expired? Are your credentials entitled or licensed for that specific resource?
403	Forbidden	This error occurs when the permission or scope is not correct in a valid credential.	Did you enter your credentials correctly? Do you have the required role or permissions for that credential?
404	Not Found	This error occurs when a URL path does not resolve to an entity.	Did you enter your API URL correctly?
429	Too Many Requests	This error occurs when the API server receives too much traffic or if a user's license or entitlement quota is exceeded.	The server or user license/quota will eventually recover. The connector will periodically retry the query. If this occurs unexpectedly or too often, work with your API provider to investigate the server limits, user licensing, or quotas.

For a full list of codes, refer to HTTP response status codes.

Verifying Ingestion

To verify ingestion:

1. Select **Threat Hunting**.

   The **Interflow Search** tab appears.

2. Select the **Indices** for **Syslog**.

   The table immediately updates to show ingested Interflow records.

For more information on working with events, refer to Understanding the Event Display.



© 2026 Stellar Cyber . All rights reserved.