Stellar Cyber 6.6.0s is now live! Discover all the updates in the release notes!

Configuring Cato Networks Connectors

Connectors allow Stellar Cyber to collect data from external sources and add it to the data lake. You create one instance of this connector for each Cato Networks account you want to monitor.

Stellar Cyber connectors with the Collect function (collectors) may skip collecting some data when the ingestion volume is large, which potentially can lead to data loss. This can happen when the processing capacity of the collector is exceeded.

Connector Overview: Cato Networks

Capabilities

- Collect: **Yes**
- Respond: **No**
- Native Alerts Mapped: **Yes** 6.2.0
- Runs on: **DP**
- Interval: **Configurable**

Collected Data

Content Type	Index	Locating Records

Audit Log
Connectivity
Routing
Security
Sockets Management
Stories 6.1.0
System
	Traffic 6.1.0
	IDPS/Malware Sandbox Events (if `cato_networks.event_sub_type` has one of these values: IPS, Suspicious Activity, or Anti Malware)
		msg_class:
		`cato_audit`
		`cato_connectivity`
		`cato_routing`
		`cato_security`
		`cato_sockets_man`

Content Type	Index	Locating Records
		agement cato_stories 6.1.0 cato_system msg_origin.source: cato_networks msg_origin.vendor: cato_networks msg_origin.category: sase

Domain

https://api.catonetworks.com/

Response Actions

N/A

Third Party Native Alert Integration Details 6.2.0

This connector ingests logs from Cato Networks to get the raw alerts that are stored in the Syslog index. Select the Security content type.

Stellar Cyber maps Cato Networks events. The events are read from the Syslog index, enriched with Stellar Cyber fields, and mapped (with deduplication) to the Alerts index.

Deduplication is by `event_id`.

For details, see Integration of Third Party Native Alerts.

Required Credentials and Configurations

- Account ID and API Key
- The account must also be enabled to **Enable integration with Cato events**

Locating Records 6.2.0

To search the alerts in the Alerts index or the Original Records in the Syslog index, use the query: `msg_class: cato_security AND cato_networks.event_sub_type.keyword: (\"NG Anti Malware\" OR \"Anti Malware\") AND _exists_: file.name AND NOT cato_networks.threat_verdict: \"clean\"`

Adding a Cato Networks Connector

To add a Cato Networks connector:

1. Enable Cato API access
2. Add the connector in Stellar Cyber
3. Test the connector
4. Verify ingestion

Enabling Cato API Access

Before you configure the connector in Stellar Cyber, you must obtain a Cato Networks API key. Follow the guidance in the Cato API documentation.

Enable Event Integration


To send Cato events data to a third party application, follow the guidance in the note in the Cato API documentation:

> If you are using the eventsFeed API to ingest event data, make sure to select **Enable integration with Cato events** in the Resources > Event Integrations page.


Adding the Connector in Stellar Cyber

To add the Cato Networks connector in Stellar Cyber:

1. Log in to Stellar Cyber.
2. Click **System | INTEGRATIONS | Connectors**. The **Connector Overview** appears.

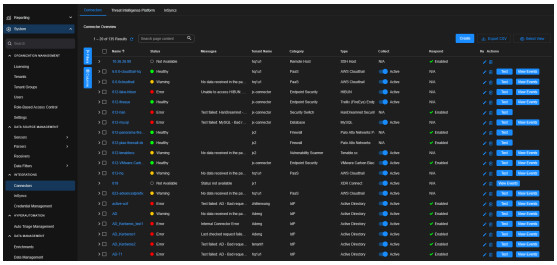


3. Click **Create** and select **Connector**.



   The **General** tab of the **Add Connector** screen appears. The information on this tab cannot be changed after you add the connector.

4. Choose **SASE** from the **Category** dropdown.
5. Choose **Cato Networks** from the **Type** dropdown.

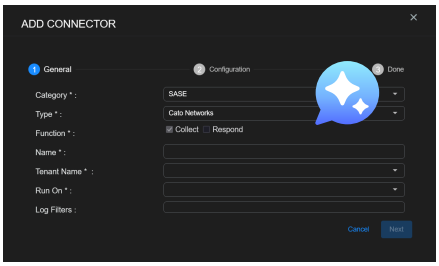


The asterisk (*) indicates a required field.

6. For this connector, the supported **Function** is **Collect**, which is enabled already.
7. Enter a **Name**.

> Notes:
> - This field does not accept multibyte characters.
> - It is recommended that you follow a naming convention such as tenantname-connectortype.

8. Choose a **Tenant Name** to specify which tenant is permitted to use this connector on Stellar Cyber.
9. Choose the device on which to run the connector.
10. (Optional) When the **Function** is **Collect**, you can apply **Log Filters**. For information, see Managing Log Filters.
11. Click **Next**. The **Configuration** tab appears.

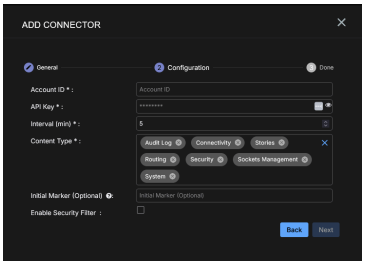


The asterisk (*) indicates a required field.

12. Enter the **Account ID** you obtained from the Cato Networks login.
13. In the **API Key** field, enter the value you noted above in Enabling Cato API Access.
14. Enter the **Interval (min)**. This is how often the logs are collected.
15. Select the **Content Type**:
    - Audit Log
    - Connectivity
    - Routing
    - Security
    - Sockets Management
    - Stories 6.1.0
    - System
16. (Optional) The **Initial Marker** field is used to adjust the ingestion start point in cases where the volume of Event data to retrieve is extremely large. (The default duration

Cato Network's API retrieves is 7 days of Event data.) The API supporting this field requires an encoded base64 string (combining topic, partition, and offset) that is unique to your active events queue. Stellar Cyber has provided this field for use only by advanced API users of Cato Networks who are already familiar with retrieving this marker value in their environment. (This marker does not apply to Audit Log data.)

17. (Optional) For the Security content type, you can select the **Enable Security Filter** checkbox to specify a customized security event filter.

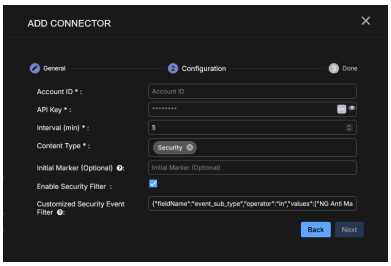

18. (Optional) Enter a customized security event filter in the **Customized Security Event Filter** field. This field allows you to specify a customized filter for the security events' event_sub_type. Define filters using the following format:

    ```
    {"fieldName":"event_sub_type","operator":"in","values":["NG Anti Malware","Anti Malware","SaaS Security API Anti Malware"]}
    ```


    For this filter:

    - `fieldName` should be **event_sub_type**
    - `operator` supports **in**, **not_in**, **is**, and **is_not**

    Use the following link for more information on the event_sub_type under the Security content type:

    Cato API - EventsFeed (Large Scale Event Monitoring)

19. Click **Next**. The final confirmation tab appears.

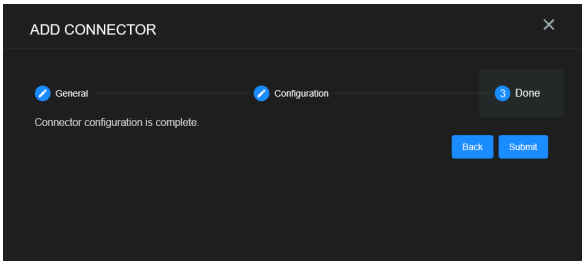

20. Click **Submit**.


The new connector is immediately active.

Testing the Connector

When you add (or edit) a connector, we recommend that you run a test to validate the connectivity parameters you entered. The test validates authentication and connectivity.

For connectors running on a sensor, Stellar Cyber recommends that you allow 30-60 seconds for new or modified configuration details to be propagated to the sensor before performing a test.

1. Click **System | INTEGRATIONS | Connectors**. The **Connector Overview** appears.

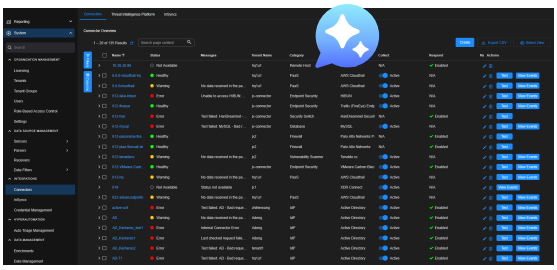

2. Locate the connector by name that you added, or modified, or that you want to test.
3. Click **Test** at the right side of that row. The test runs immediately.

Note that you may run only one test at a time.

Stellar Cyber conducts a basic connectivity test for the connector and reports a success or failure result. A successful test indicates that you entered all of the connector information correctly.

To aid troubleshooting your connector, the dialog remains open until you explicitly close it by using the **X** button. If the test fails, you can select the button from the same row to review and correct issues.

The connector status is updated every five (5) minutes. A successful test clears the connector status, but if issues persist, the status reverts to failed after a minute.


Repeat the test as needed.

Display sample messages...


Success !



Failure with summary of issue:



Show More example detail:

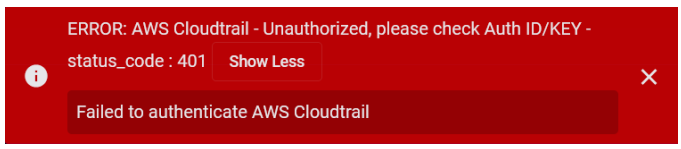

If the test fails, the common HTTP status error codes are as follows:

HTTP Error Code	HTTP Standard Error Name	Explanation	Recommendation
400	Bad Request	This error occurs when there is an error in the connector configuration.	Did you configure the connector correctly?
401	Unauthorized	This error occurs when an authentication credential is invalid or when a user does not have sufficient privileges to access a specific API.	Did you enter your credentials correctly? Are your credentials expired? Are your credentials entitled or licensed for that specific resource?

HTTP Error Code	HTTP Standard Error Name	Explanation	Recommendation
403	Forbidden	This error occurs when the permission or scope is not correct in a valid credential.	Did you enter your credentials correctly? Do you have the required role or permissions for that credential?
404	Not Found	This error occurs when a URL path does not resolve to an entity.	Did you enter your API URL correctly?
429	Too Many Requests	This error occurs when the API server receives too much traffic or if a user's license or entitlement quota is exceeded.	The server or user license/quota will eventually recover. The connector will periodically retry the query. If this occurs unexpectedly or too often, work with your API provider to investigate the server limits, user licensing, or quotas.

For a full list of codes, refer to HTTP response status codes.

Verifying Ingestion

To verify ingestion:

1. Select **Threat Hunting**.

   The **Interflow Search** tab appears.

2. Change the **Indices** to **Traffic**.

   or

   Change the **Indices** to **IDPS/Malware Sandbox Events**.

   The table immediately updates to show ingested Interflow records.

© 2026 Stellar Cyber . All rights reserved.