Stellar Cyber 6.6.0s is now live! Discover all the updates in the release notes!

Configuring Data Enrichment 6.0.0


Administrators for an individual tenant, tenant group, or the root tenant can use this feature if they have Security Admin, Platform Admin, or Super Admin privileges.

Stellar Cyber uses information from a variety of sources to enrich collected data. The options in the **Enrichment** page let you customize the following enrichment types:

- DNS Track
- Custom Geo
- Private IP


Using the Enrichments Table

When you select **System | DATA MANAGEMENT | Enrichments**, Stellar Cyber displays a table of the available enrichment options that have been configured for your organization. From this table, you can **Create**, **Edit**, or **Delete** the enrichments, as well as perform other standard table functions.

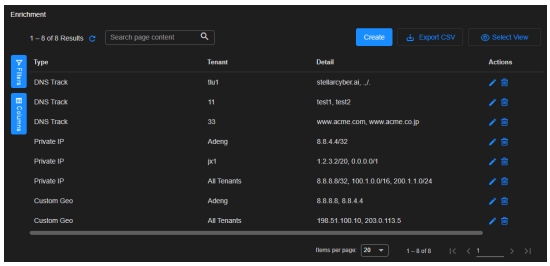

Configuring DNS Track Enrichments

You can use **DNS Track** to track DNS resolution changes for specified domains. If one of the tracked domains resolves to a new IP address, Stellar Cyber creates an entry in the **Changed Domains to IP Resolutions** table in the **Threat Hunting | Threat Hunting Library| DNS Analysis** page.

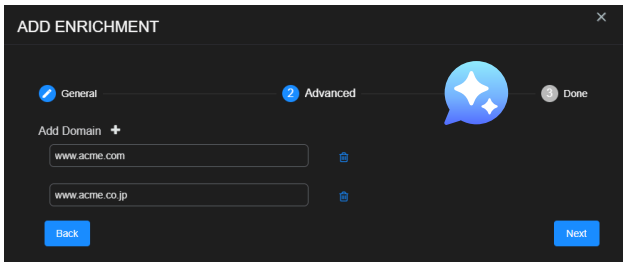


1. Select **System | DATA MANAGEMENT | Enrichments**.

   The enrichment table appears.

2. Select **Create**.
3. In the dialog box that appears, set **Type** to **DNS Track**.
4. Use the **Tenant** dropdown to select the tenant for whom this enrichment will apply.
5. Select **Next**.
6. Specify a domain; for example, `yourdomain.com`.
7. To add another domain, select the **Add** icon (**+**) and enter it in the new row that appears. Continue adding as many domains as you need. (Use the 🗑 icon to remove rows.)
8. Select **Next**.
9. Review the configuration and **Submit**.
10. To add more domains for DNS tracking later:
    a. Select the **Edit this row** icon on the far right.
    b. Select **Advanced** in the **Edit Enrichment** dialog that appears and **Add** more domains.
    c. When done, select **Done** and then **Submit**.

Configuring Custom (IP) Geo Enrichments

You can use the **IP Geo Enrichment** module to configure the geolocation associated with specified IP addresses manually, overriding the geolocation that Stellar Cyber obtains from geolocation databases. This is useful in situations where you are seeing false positives for **Impossible Travel** and **Location Anomaly** alerts based on an inaccurate geolocation. This lets you adjust information if you think that false positives have occurred.



1. Select **System | DATA MANAGEMENT | Enrichments**.

   The enrichment table appears.

2. Select **Create**.

3. In the dialog box that appears, set **Type** to **Custom Geo**.
4. Specify the **Tenant** that will be allowed to use this enrichment. You can select **All Tenants** or a specific individual tenant.
5. Select **Next**.
6. Set the following options:

   (Options with an asterisk are required; others appear in geolocation display information for the specified IP address.)


   - **IP*** – The IP address for which you want to specify a geolocation.
   - **Latitude*** – The latitude for the geolocation of this IP address in decimal degrees format, from -90 to 90.
   - **Longitude*** – The longitude for the geolocation of this IP address in decimal degrees format, from -180 to 180.
   - **Country Name** – Select the country for this IP address from the dropdown list.
   - **Country Code** (read only) – Set automatically based on the selected Country Name.
   - **City** – Specify the city for this IP address.
   - **Region** – Specify the region for this IP address
7. Select **Next**.
8. Review the configuration and **Submit**.
9. To add more geolocation configurations later:
   a. Select the **Edit this row** icon on the far right.
   b. Select **Advanced** in the **Edit Enrichment** dialog that appears and **Add** more geolocation configurations.
   c. When done, select **Done** and then **Submit**.

Configuring Private IP Enrichments

The **IP enrichment** option lets you specify subnets for which IP addresses should be considered private and marked accordingly in event record fields. All other addresses (except RFC-1918 addresses) are considered public.

IP addresses described by RFC-1918 as generally-accepted "private" IP addresses do not need to be configured. They are automatically designated as private.

Public IP addresses designated as private in the **IP enrichment** interface are [counted as assets for licensing purposes](). 5.4.0

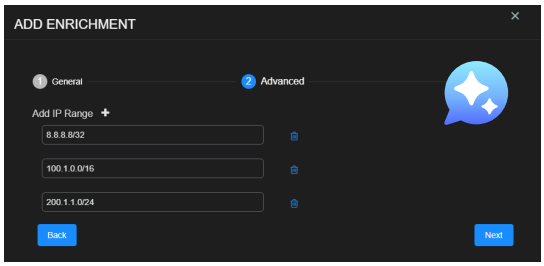

1. Select **System | DATA MANAGEMENT | Enrichments**.

   The enrichment table appears.

2. Select **Create**.
3. In the dialog box that appears, set **Type** to **Private IP**.
4. (Root tenant) Specify the **Tenant** that will be allowed to use this enrichment.

   You can select **All Tenants** or a specific individual tenant.

5. Select **Next**.
6. Enter a standard IPv4 address/subnet; for example, `10.1.1.0/24`.
7. To add another subnet, select the **Add** icon (**+**) and enter it in the new row that appears.

   Continue adding as many subnets as you need. (Use the 🗑 icon to remove rows.)

8. Select **Next**.
9. Review the configuration and **Submit**.
10. To add more private IP subnets later:
    a. Select the **Edit this row** icon on the far right.
    b. Select **Advanced** in the **Edit Enrichment** dialog that appears and **Add** more subnets.
    c. When done, select **Done** and then **Submit**.

Enrichment Details

The following table lists the metadata fields that Stellar Cyber uses for enrichment, a description of the field, the source of the information, and the enrichment it is used for.

Enrichment Field	Description	Source	Enrichment
access_mask	Permission required to access the object	-	Windows object access
access_subject	Process or system object that initiated access	-	Windows object access
aella_tuples	Unique session ID comprising source IP, destination IP and port, and app ID	-	-
appid_family	Application family	DP	App ID
appid_name	Application name	DP	App ID
appid_stdport	Whether or not the application is using the standard port	DP	App ID

Enrichment Field	Description	Source	Enrichment
attack_start_date	Timestamp of the start of the attack	-	-
command	Command that was run	-	Linux command
correlation_info	The metadata in individual events of a correlation result	-	-
detect_date	When the sensor detected an attack	-	-
detect_origin	Direction of the attack	-	-
detection_flag	Detection this record applies to	-	-
direction	Direction of the file transfer, either `forward` for source to destination, or `backward` for destination to source	Traffic data	File transfer direction
domain_reputation	Reputation of the domain	-	-
dscp_name	Readable DSCP value	Sensor	Network identifier
dstmac	Destination MAC address	-	-
dstip_aella_flag	How to process the IP address for detections	-	-
dstip_asn hostip_asn remote_ip_asn srcip_asn	Autonomous System Number (ASN) responsible for the IP address	MaxMind	ASN ID
dstip_asn_org hostip_asn_org remote_ip_asn_org srcip_asn_org	Organization name associated with the ASN for the IP address	MaxMind	ASN organization name
dstip_tag srcip_tag hostip_tag	Asset tag associated with the IP address	-	-
dstip_assetid srcip_assetid hostip_assetid	Asset ID associated with the IP address	-	-
dstip_host srcip_host hostip_host	Host name associated with the IP address	DNS/DHCP	Host/domain name correlation
dstip_geo srcip_geo remote_ip_geo hostip_geo	Geographic location (country, city, etc) associated with the IP address	MaxMind	Geographic location of the IP address
dstip_geo_point srcip_geo_point remote_ip_geo_point hostip_geo_point	Latitude and longitude associated with the IP address	MaxMind	Geographic coordinates of the IP address
dstip_reputation srcip_reputation	Reputation associated with the IP address	-	Reputation

Enrichment Field	Description	Source	Enrichment
remote_ip_reputation hostip_reputation			
dstip_reputation_source srcip_reputation_source remote_ip_reputation_source hostip_reputation_source	Source of the reputation associated with the IP address	-	Reputation
dstip_sig_id srcip_sig_id hostip_sig_id	Signature ID associated with the IP address	-	-
dstip_type srcip_type remote_ip_type hostip_type	Whether the IP address is public or private	-	IP type
dstip_username srcip_username remote_ip_username hostip_username dstip_usersid srcip_usersid remote_ip_usersid hostip_usersid	Username and user ID associated with the IP address	AD	Username correlation
dstip_domain_creation srcip_domain_creation hostip_domain_creation remote_ip_domain_creation	When the domain associated with the IP address was created	-	-
dstip_version srcip_version hostip_version	The version associated with the IP address, IPv4 or IPv6	-	-
engid_device_class	Sensor operating system, either Windows or Linux	Sensor	Sensor information correlation
engid_gateway	Sensor's gateway	Sensor	Sensor information correlation
exec_user	User that executed the command	-	Linux command
fidelity	Fidelity of an event	-	-
hostip	IP address of the host reporting the event	-	-

Enrichment Field	Description	Source	Enrichment
icmp_type	ICMP message type	DP	ICMP
inbytes_total	Total inbound bytes in the session so far	Sensor	Network traffic metric
is_dga	If a DNS request is DGA	DP	Suspicious domain identification
login_result	Result of the login attempt	Sensor	Login
login_type	Application logged in to	Sensor	Login
login_user	Username associated with the login attempt	Sensor	Login
mac	MAC addresses associated with the host	-	-
metadata.is_tunneling	If a DNS session is potentially tunneling	DP	DNS tunneling correlation
metadata.request.domain_creation	Creation of a domain in the DNS request	DP	DNS domain creation
metadata.request.effective_tld	Effective TLD of a domain name	DP	DNS domain name TLD extraction
metadata.response.domain_creation	Creation of a domain in the DNS request	DP	DNS domain creation
metadata.response.effective_tld	Effective TLD of a domain name	DP	DNS domain name TLD extraction
metadata._whitelist	Whether any metadata field is whitelisted	-	-
msg_class	Whether this record belongs to an endpoint class	-	-
msg_origin.source	Vendor'r product	-	-
netid_name	Name of a network ID	Sensor	Network identifier
new_dns_record	A DNS record that has not been seen before	DP	DNS records tracking
outbytes_total	Total outbound bytes in the session so far	Sensor	Network traffic metric
parent_child	Concatenation of the parent and child process names	DP	Process correlation
parent_proc_name	Name of the parent process	DP	Process correlation
process_name	Name of the process	DP	Process correlation
proto_name	Name of the protocol	-	-
remote_ip	IP address of the remote host involved in the event	Sensor	Windows PowerShell script
remote_port	Port of the remote host involved in the event	Sensor	Windows PowerShell script
smb_denied_count	Number of times access was denied in a single SMB session	DP	SMB
smb_username_count	Number of unique usernames used in a single SMB session	DP	SMB
smb_username_set	Set of unique usernames used in a single SMB session	DP	SMB
srcmac	MAC address of the source IP address	-	-
tenantid	ID of the tenant	Sensor and DP	Tenant information correlation

Enrichment Field	Description	Source	Enrichment
tenant_name	Name of the tenant	Sensor and DP	Tenant information correlation
totalbytes	Total bytes in the session so far	Sensor	Network traffic metric
totalpackets	Total packets since the last session update	Sensor	Network traffic metric
url_reputation	Reputation of the URL	-	-
username	Username associated with the application	-	-
vulnerabilities.cve	The CVE associated with a plugin or vulnerability	Database	Security scan vulnerability
vulnerabilities.description	Description of a Nessus vulnerability	Database	Security scan vulnerability

© 2026 Stellar Cyber . All rights reserved.