Stellar Cyber 6.6.0s is now live! Discover all the updates in the release notes!

Configuring Feeds in the Threat Intelligence Platform 5.2.0 6.4.0


You must have **Root** scope to use this feature.

Use the **Feeds** tab on the **Threat Intelligence Platform** page to configure and manage threat intelligence feeds.

To manage **IoCs**, see Managing IoCs in the Threat Intelligence Platform.

Using the Feeds Tab

The **Feeds** tab displays the threat intelligence feeds.

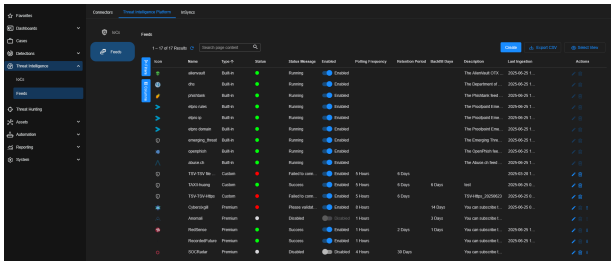

The Feeds table has the following columns:

- **Icon**—icon of the feed
- **Name**—name of the feed, such as PhishTank or etpro domain
- **Type**—type of feed:
    - Built-in feeds are provided by Stellar Cyber
    - Custom feeds (TAXII and TSV) are added using the **Create** button and then providing a collection URL and authentication credentials (see Adding Custom Feeds)
    - Premium feeds (Cybersixgill, Anomali ThreatStream, RedSense, Recorded Future, SOCRadar, CrowdStrike, and ESET) are provided by Stellar Cyber using credentials that you purchase (see Enabling Premium Feeds)

- **Status**—status of feed:
    - Success (green)—the feed successfully ran, when it periodically last ran
    - Error (red)—the feed failed when it last ran or the feed is in Stopped status
    - Disabled (white)—the feed is Disabled
- **Status Message**—status messages, such as:
    - Disabled—the feed is disabled
    - Success—the feed successfully produced IoCs in the latest running cycle (for Custom and Premium feeds only)
    - Initializing—the feed is initializing; this status is only displayed on the first run of the feed
    - Stopped—the feed has stopped working
    - Running—the feed is running (for Built-in feeds only)
    - Failed to connect to feed source—the feed failed to establish a connection to the data source (for Custom and Premium feeds only) (see Feed Error Messages for other status messages)
- **Enabled**—toggle of the feed, either Enabled or Disabled
    - All Built-in, Custom, and Premium feeds can be Enabled and Disabled; when Enabled, IoCs are fetched and then stored locally; when Disabled, IoC ingestion stops
- **Polling Frequency**—frequency with which the data is updated from the feed, in hours
    - The **Polling Frequency** can be set for Custom and Premium feeds; for Built-in feeds, the **Polling Frequency** is 24 hours
- **Retention Period**—retention period of the feed, in days, after which feed data is deleted
- **Backfill Days**—number of backfill days. Backfilled data is information in the threat database from the past few days, with an upper limit of 30 days.
    - Whenever a feed is re-enabled, TIP fetches all IOCs that it has not fetched since the last time it was disabled, limited to a backfill buffer size
- **Description**—description of feed
    - Descriptions of Custom feeds can be edited; Descriptions of Built-in and Premium feeds are provided by Stellar Cyber and cannot be edited
- **Last Ingestion**—timestamp of the last ingestion update from the feed
- **Actions**—actions available on a feed, such as **Delete this row**, **Edit this row**, or **Reset Premium Feed**:
    - Custom and Premium feeds can be edited; Built-in feeds cannot be edited
    - Custom feeds can be deleted; Built-in and Premium feeds cannot be deleted
    - Only Premium feeds can be reset

Using Search

Use the Search box to search for information about a feed.

Exporting CSV

Click **Export CSV** to export the table as a spreadsheet file. You can export **Selected Columns** or **All Columns**.


The spreadsheet is downloaded to your Downloads folder.

Selecting View

Click **Select View** to preserve a table layout. See Saved View Configurations for details.


Using Filters

Click **Filters** to use defined filters.




To use defined filters:

- For **Name**, select the name of a feed using the check boxes or **Select All**. The number of feeds of each name is displayed on the right.


  

  To see more **Name** fields, click **View More**.


- For **Type**, select a type of feed using the check boxes or **Select All**. The number of feeds of each type is displayed on the right.


- For **Status Message**, select a status using the check boxes. The number of feeds with each status is displayed on the right.




- For **Enabled**, select a state, either Enabled or Disabled, using the check boxes or **Select All**. The number of feeds with each state is displayed on the right.




- For **Polling Frequency**, select a frequency using the check boxes or **Select All**. The number of feeds with each frequency is displayed on the right.




- For **Retention Period**, select a retention period using the check boxes or **Select All**. The number of feeds with each retention period is displayed on the right.



- For **Backfill Days**, select a number of days using the check boxes or **Select All**. The number of feeds with each number of backfill days is displayed on the right.




- For **Description**, select the description of a feed using the check boxes or **Select All**. The number of feeds with each description is displayed on the right.




To see more **Description** fields, click **View More**.


- For **Last Ingestion**, enter **From** and **To** dates and times using the calendars.

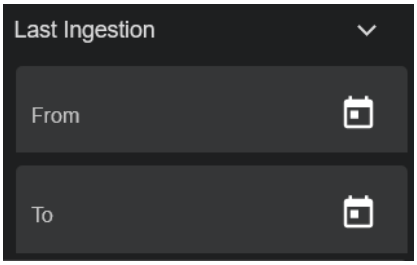


Select a date, select a time, then click the checkmark.



- If a defined filter is unselected, you can click the search box under **Add new filter** to select a filter from the dropdown.



To exit, click **Filters** again. The configured filters are displayed at the top of the table.

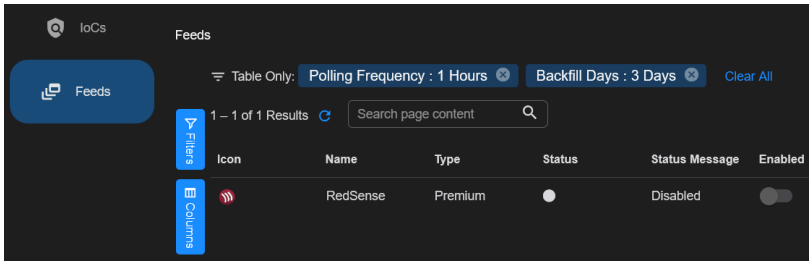


To clear an individual filter, click the icon to the right of the filter ().

To clear all filters, click **Clear All**.

Using Columns


Click **Columns** to add or remove columns using check boxes.



Click **Columns** again to exit.

Disabling Feeds

To disable a feed, click the toggle in the **Enabled** column from Enabled to Disabled. The following confirmation is displayed.

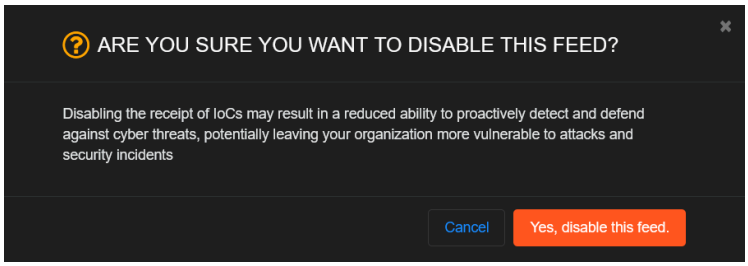

Click **Yes, disable this feed**.

Adding Custom Feeds

Custom feeds include TAXII and TSV. You configure custom feeds with credentials that you provide, for example, credentials for a TAXII server or credentials to access a TSV file. The TAXII version is 2.1.

You add Custom feeds by providing a Collection URL and entering basic HTTP authentication credentials such as Username and Password.

You can add up to 30 Custom feeds per organization.

Feeds may not work as expected if files are hosted on places where basic HTTP authentication is not allowed by default (for example, Amazon S3). Caution is advised.

The following details are for the TSV feed:


- The TSV source file should have a size less than 100 MB.
- Stellar Cyber ingests up to 25,000 IoCs per day.
- To poll data from the source, the HTTP request should complete within 30 seconds.

When you add a TSV feed, an **emerging_threat** tag is added to all the IoCs brought in by that feed. Tags are displayed in the **Tags** column of the IoCs table.


For the rules and format of the TSV file, see TSV File Data Schema.

To add a custom feed:

1. Click **Create** and select **Custom Feed**.

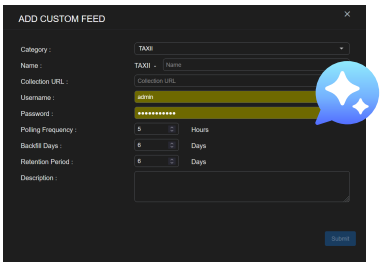

2. The default **Category** is displayed, which is TAXII. Or select TSV.

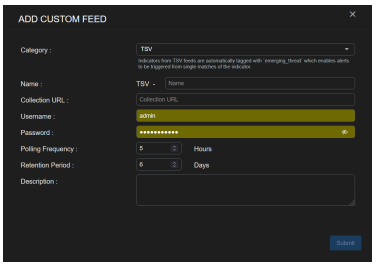

3. Enter a **Name**. This is the name of the feed, which will be prepended with the **Category**, either TAXII or TSV.
4. Enter a **Collection URL**.
    a. For TAXII, enter a Collection URL. For details on how to obtain the TAXII collection URL, see Obtaining the TAXII Collection URL.
    b. For TSV, enter a URL to a TSV file.
5. Enter a **Username** and **Password**.
6. Select a **Polling Frequency**, in hours. This is how often the data is updated from the feed.
7. Select the number of **Backfill Days**, in days.

    The **Backfill Days** field is only available for TAXII feeds.

8. Select the **Retention Period**, in days, after which feed data is deleted. For details, see Retention Policy.
9. Enter a **Description**.
10. Click **Submit**.

    When the Custom feed is configured and enabled, the IoCs are fetched from the remote feed and stored locally.

TSV File Data Schema

The rules for the TSV file are:

- **Delimiter**: Must be a **tab**
- **Fields, Field order, and Syntax**:

    Each row in the TSV file must have fields in the order and syntax shown below. Rows that do not meet this format are ignored.

The data schema of the TSV file is as follows:

FIELD	TYPE	VALUE	SOURCE	SCORE
Purpose	Specify the type of address that will be entered in the next column.	Specify the address of the threat. This value may be associated with multiple sources.	Supply a name to identify the threat.	Assign a severity score to the threat.
Syntax	url ip domain md5-hash sha1-hash sha256-hash	A url An IPv4 address A fully qualified domain name md5 hash value sha1 hash value sha256 hash value	A-Z a-z 0-9 _ - Alphanumeric, underscore, dash. No spaces, no other symbols.	Integer from 0-100 Use 90 if you prefer not to tune
Case Sensitive?	yes	no	no	no

Obtaining the TAXII Collection URL

Refer to the following definitions before using the procedure in this section to obtain the TAXII collection URL.

- TAXII Server: A server that implements the TAXII standards to share cyber threat intelligence (CTI) over HTTPS. It hosts API endpoints for clients to access and exchange CTI data.
- Discovery URL: A specific endpoint on a TAXII server that provides information about the server's capabilities, available API roots, and other metadata. It is the starting point for clients to interact with the server.

- API Root: A base URL that groups related TAXII resources (for example, collections) under a single namespace. Each API root represents a distinct set of data or services provided by the TAXII server.
- Collection ID: A unique identifier for a specific collection of data hosted on a TAXII server. Collections are logical groupings of threat intelligence objects (for example, STIX data).
- Collection URL: The endpoint URL for accessing a specific collection of data on a TAXII server. It is used to query objects from the collection.

The following example is for an AlienVault URL. The same format is used for other third-party providers that host TAXII servers.



The TAXII Collection URL does not support an alias for the TAXII collection name. Refer to the following procedure and use `<collection ID>`.

To set up a TAXII feed, obtain the TAXII collection URL as follows:

1. Do a cURL command from the AlienVault discovery URL:

   ```
   curl -k -X GET https://otx.alienvault.com/taxii/ -H "Accept:
   application/taxii+json; version=2.1" --user username:password
   ```

   This will produce something like the following:

   ```
   {"title": "Open Threat Exchange TAXII Server", "description":
   "Open Threat Exchange TAXII Server", "contact": "otx-
   support@alienvault.com", "default":
   "https://otx.alienvault.com/taxii/root", "api_roots":
   ["https://otx.alienvault.com/taxii/root"]}%
   ```

   The API root is `https://otx.alienvault.com/taxii/root`.

2. Add `/collections` to the API root, then do another cURL commands as follows:

   ```
   curl -k -X GET https://otx.alienvault.com/taxii/root/collections
   -H "Accept: application/taxii+json; version=2.1" --user
   username:password
   ```

   This will produce something like the following:

   ```
   {"collections": [{"id": "<collection ID>", "alias":
   "subscription", "title": "Your pulse subscription",
   "description": "Your pulse subscription", "can_read": true,
   "can_write": false, "media_types":
   ["application/stix+json;version=2.1"]}]}%
   ```

3. Add your `<collection ID>` to the previous URL, for example:

   ```
   https://otx.alienvault.com/taxii/root/collections/<collection
   ID>/
   ```

4. Use the collection URL to set up a TAXII feed in Adding Custom Feeds.


Retention Policy

When you configure a custom TAXII feed, you can select the **Retention Period**, in days, after which feed data is deleted. The retention period is displayed in the Retention Period column in the **Feeds** tab. If you then go to the **IoCs** tab and look at the Expiration Date column, you may notice a difference.

The retention policy for custom TAXII feeds is as follows. If the data source has all the valid_from and valid_until information, Stellar Cyber will use those dates. Otherwise, Stellar Cyber will do some calculations based on the retention period. Therefore, the expiration dates of custom TAXII feeds may not be based on the retention period.

Enabling Premium Feeds

Premium feeds are provided by Stellar Cyber and include Cybersixgill, Anomali ThreatStream, RedSense, Recorded Future, SOCRadar, CrowdStrike, and ESET. You configure them with credentials that you purchase.

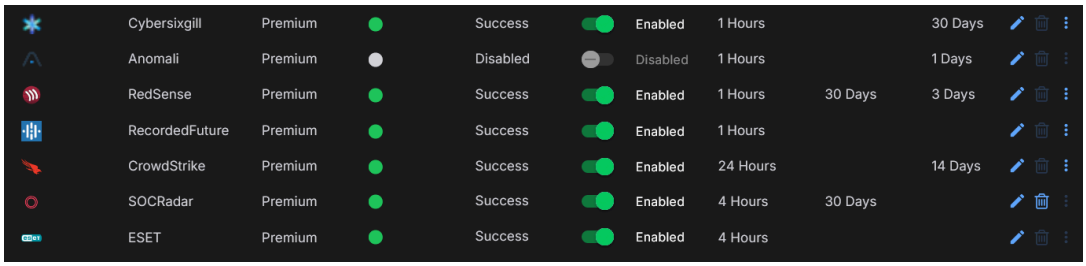

Premium feeds are disabled by default. You edit the Premium feed and provide authentication credentials such as Username and Password or API Key, then enable the feed. The configuration of each premium feed differs.

To enable premium feeds:


- Enabling Cybersixgill Premium Feed
- Enabling Anomali Premium Feed
- Enabling RedSense Premium Feed
- Enabling Recorded Future Premium Feed
- Enabling SOCRadar Premium Feed
- Enabling CrowdStrike Premium Feed
- Enabling ESET Premium Feed

Enabling Cybersixgill Premium Feed

To enable the Cybersixgill Premium feed:

You can subscribe to the Cybersixgill service by using TAXII 2.1 protocol.

1. Click the Edit icon ( ) on the row for the Cybersixgill Premium feed. The EDIT PREMIUM FEED dialog displays.

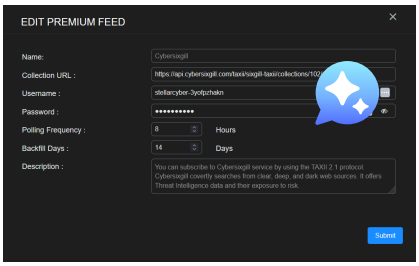

2. The **Name** cannot be changed.
3. Enter a **Collection URL**.
4. Enter a **Username** and **Password**.
5. Select a **Polling Frequency**, in hours. This is how often the data is updated from the feed. The minimum value is 1 hour and the maximum is 24 hours.
6. Select the number of **Backfill Days**, in days. The minimum value is 1 day and the maximum is 30 days.
7. The **Description** cannot be changed.
8. Click **Submit**.
9. Click **Enabled** on the row for the Cybersixgill Premium feed.


   When the Premium feed is configured and enabled, the IoCs are fetched from the remote feed and stored locally.

Enabling Anomali Premium Feed

You can subscribe to Anomali ThreatStream feed using your own username and API token.

To enable the Anomali Premium feed:

1. Click the Edit icon () on the row for the Anomali Premium feed. The EDIT PREMIUM FEED dialog displays.

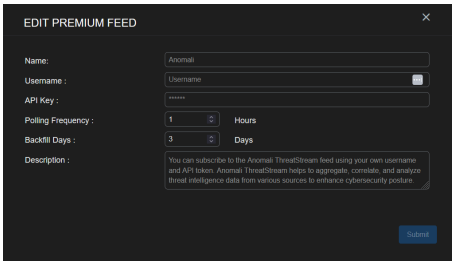

2. The **Name** cannot be changed.
3. Enter a **Username**.
4. Enter the **API Key**.
5. Select a **Polling Frequency**, in hours. This is how often the data is updated from the feed. The minimum value is 1 hour and the maximum is 24 hours.
6. Select the number of **Backfill Days**, in days. The minimum value is 1 day and the maximum is 30 days.
7. The **Description** cannot be changed.
8. Click **Submit**.

9. Click **Enabled** on the row for the Anomali Premium feed.


   When the Premium fe configured and enabled, the IoCs are fetched from the remote feed and stored locally.

Enabling RedSense Premium Feed

You can subscribe to the Redsense feed using your own API key.

To enable the RedSense Premium feed:

1. Click the Edit icon ( ) on the row for the RedSense Premium feed. The EDIT PREMIUM FEED dialog displays.

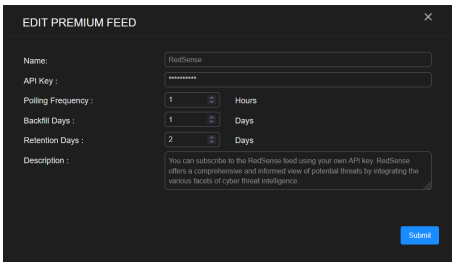

2. The **Name** cannot be changed.
3. Enter the **API Key**.
4. Select a **Polling Frequency**, in hours. This is how often the data is updated from the feed. The minimum value is 1 hour and the maximum is 24 hours.
5. Select the number of **Backfill Days**, in days. The minimum value is 1 day and the maximum is 30 days.
6. Select the number of **Retention Days**, in days, after which feed data is deleted. The minimum value is 1 day and the maximum is 360 days.
7. The **Description** cannot be changed.
8. Click **Submit**.
9. Click **Enabled** on the row for the RedSense Premium feed.

   When the Premium feed is configured and enabled, the IoCs are fetched from the remote feed and stored locally.


Enabling Recorded Future Premium Feed

You can subscribe to the Recorded Future feed using your own API key.

The Recorded Future data feed has a large IoC ingestion volume. Stellar Cyber ingests IoCs in a constant manner, therefore it may take up to a week to ingest all the IoCs. The retention period is fixed at 14 days.

To enable the Recorded Future Premium feed:

1. Click the Edit icon ( ) on the row for the Recorded Future Premium feed. The EDIT PREMIUM FEED dialog displays.

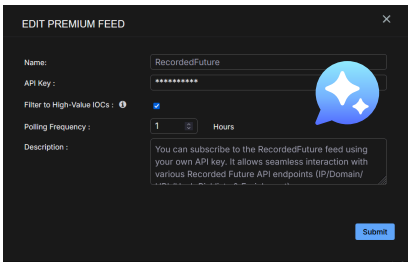

2. The **Name** cannot be changed.
3. Enter the **API Key**.
4. To ingest only the most malicious IoCs, select the checkbox for **Filter to High-Value IOCs**. When selected, only top-scoring IPv4 (labels: very-malicious and malicious) and top URLs are included, while lower value IPv4 and URL IoCs are excluded.
5. Select a **Polling Frequency**, in hours. This is how often the data is updated from the feed. The minimum value is 1 hour and the maximum is 24 hours.
6. The **Description** cannot be changed.
7. Click **Submit**.
8. Click **Enabled** on the row for the Recorded Future Premium feed.

   When the Premium feed is configured and enabled, the IoCs are fetched from the remote feed and stored locally.

Enabling SOCRadar Premium Feed

You can subscribe to the SOCRadar feeds using the API Endpoint URL from the SOCRadar platform.


You can configure multiple premium feeds for SOCRadar. You can have different feeds for different use cases, such as by industry or by geo.

The following is supported:

- Up to 10 SOCRadar premium feeds.
- Up to 50,000 IoCs per poll.
- Up to 100 MB input file size.

To enable the SOCRadar Premium feed:

1. Click **Create** and select **Premium Feed** or click the Edit icon () on the row for the SOCRadar Premium feed. The EDIT PREMIUM FEED dialog displays.

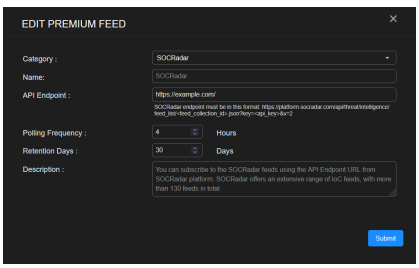

2. Select a **Category** from the dropdown menu. The only selection in this release is SOCRadar.

3. Enter a **Name**. It will have a prefix, for example, SOCRadar -.
4. Enter an **API Endpoint**. The SOCRadar endpoint must be in the following format:

   https://platform.socradar.com/api/threat/intelligence/feed_list/<feed_collection_id>.json?key=<api_key>&v=2

   You can copy and paste this from the SOCRadar platform.
5. Select a **Polling Frequency**, in hours. This is how often the data is updated from the feed. The minimum value is 1 hour and the maximum is 24 hours.
6. Select the number of **Retention Days**, in days, after which feed data is deleted. The minimum value is 1 day and the maximum is 360 days.
7. The **Description** cannot be changed.
8. Click **Submit**.
9. Click **Enabled** on the row for the SOCRadar Premium feed.

   When the Premium feed is configured and enabled, the IoCs are fetched from the remote feed and stored locally.


Enabling CrowdStrike Premium Feed

You can subscribe to the CrowdStrike feed using your own client ID and secret. The CrowdStrike feed supports the CrowdStrike Falcon Intel service collection.

Up to 50,000 IoCs per poll is supported.

To enable the CrowdStrike Premium feed:

1. Click the Edit icon ( ) on the row for the CrowdStrike Premium feed. The EDIT PREMIUM FEED dialog displays.

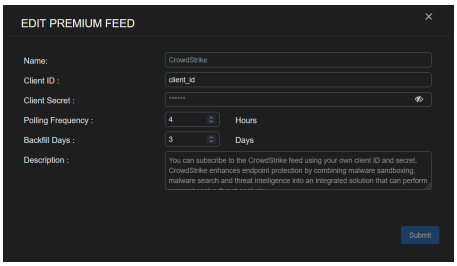

2. The **Name** cannot be changed.
3. Select a **Polling Frequency**, in hours. This is how often the data is updated from the feed. The minimum value is 1 hour and the maximum is 24 hours.
4. Select the number of **Backfill Days**, in days. The minimum value is 1 day and the maximum is 30 days.
5. The **Description** cannot be changed.
6. Click **Submit**.
7. Click **Enabled** on the row for the CrowdStrike Premium feed.

   When the Premium feed is configured and enabled, the IoCs are fetched from the remote feed and stored locally.


Enabling ESET Premium Feed

You can subscribe to the ESET feed using your own username and password. The ESET feed is provided via a TAXII server, where the term *collection* refers to a TAXII collection.

The retention period is fixed at 2 days.

To enable the ESET Premium feed:

1. Click the Edit icon ( ) on the row for the ESET Premium feed. The EDIT PREMIUM FEED dialog displays.



2. The **Name** cannot be changed.
3. Select a **Polling Frequency**, in hours. This is how often the data is updated from the feed. The minimum value is 1 hour and the maximum is 24 hours.
4. The **Description** cannot be changed.
5. This premium feed has a two-step verification:
    a. Enter a **Username** and **Password**, which are verified.
    b. Click **Next**. The list of collections is fetched from the feed discovery.
    c. Select **Collections** from the drop-down. You can select multiple collections or **Select All**. The maximum number of collections is 10.



> If you select too many feeds from the drop-down, it may surpass the maximum threshold of IoCs, so some IoC might not be ingested.


6. Click **Submit**.
7. Click **Enabled** on the row for the ESET Premium feed, from the selected collections of the remote feed.

    When the Premium feed is configured and enabled, the IoCs are fetched from the remote feed and stored locally.

Resetting Premium Feeds

To reset a Premium feed:

1. Click the three dots ( ) to the right of the Trash icon under **Actions** on a **Premium** type of feed.
2. Select **Reset Premium Feed**. The following confirmation is displayed.

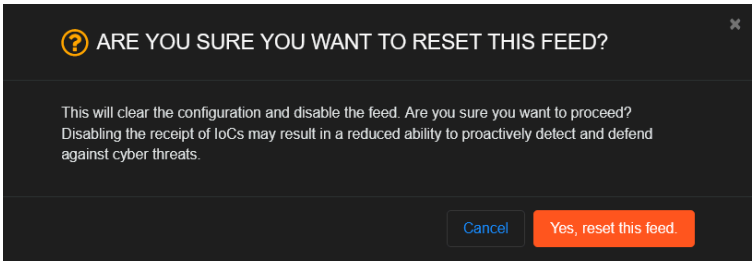


3. Click **Yes, reset this feed**.

Editing Feeds


You can edit Custom and Premium feeds.

Click the Edit icon ( ) on a row in the table. A sample **EDIT CUSTOM FEED** is as follows:

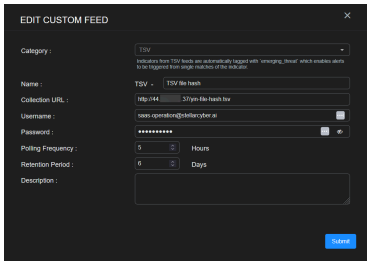

For Custom feeds, the **Category** cannot be changed. The other fields can be edited.

Click the Edit icon ( ) on a row in the table. A sample **EDIT PREMIUM FEED** is as follows:

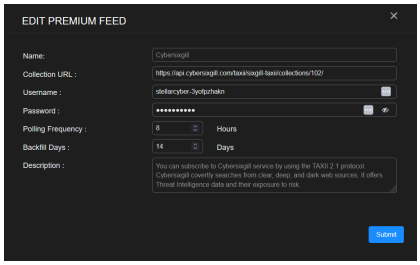

For Premium feeds, the **Name** and **Description** cannot be changed. The other fields can be edited.

About Feeds

The following sections provide more information about feeds.

Feed Descriptions

The following feeds are available, with their category and description.

Feed Name	Category	Description
AlienVault OTX	Built-in	The AlienVault OTX feed provides IoCs, including malicious IP addresses, domains, URLs, and hashes that can be used to detect and investigate cyber threats.

Feed Name	Category	Description
DHS	Built-in	The Department of Homeland Security (DHS) feed provides IP addresses, domains, URLs, and hashes. These IoCs help describe and identify potential cyber threats and incidents.
Emerging Threat Pro IP, Domain	Built-in	The Proofpoint Emerging Threat feed provides up-to-the minute IP address and domain reputation. It is the industry's most timely and accurate source of threat intelligence.
Emerging Threat Pro Rules	Built-in	The Proofpoint Emerging Threat feed provides a ruleset for detecting advanced threats using existing network security appliances, such as network Intrusion Detection/Prevention systems (IDS/IPS).
PhishTank	Built-in	The Phishtank feed provides a database of known phishing URLs. It is a collaborative clearing house for data and information about phishing attacks and fraudulent websites.
Abuse.ch (urlhaus and SSL certs)	Built-in	The Abuse.ch feed shares malicious URLs and hashes that are being used for malware distribution, and contains information about SSL certificates that have been associated with malicious activities.
OpenPhish	Built-in	The OpenPhish feed focuses on phishing threats. It identifies zero-day phishing URLs and provides comprehensive, actionable, real-time threat intelligence.
Emerging Threat	Built-in	The Emerging Threat feed provides IP addresses, domains, URLs, and file hashes. Emerging Threat is a type of threat or risk that is newly identified, rapidly evolving, or gaining prominence.
Cybersixgill	Premium	You can subscribe to the Cybersixgill service by using TAXII 2.1 protocol. Cybersixgill covertly searches from clear, deep, and dark web sources, and offers Threat Intelligence data and their exposure to risk.
Anomali	Premium	You can subscribe to the Anomali ThreatStream feed using your own username and API token. Anomali ThreatStream helps to aggregate, correlate, and analyze threat intelligence data from various sources to enhance cybersecurity posture.
RedSense	Premium	You can subscribe to the RedSense feed using your own API key. RedSense offers a comprehensive and informed view of potential threats by integrating the various facets of cyber threat intelligence.
Recorded Future	Premium	You can subscribe to the Recorded Future feed using your own API key. It allows seamless interaction with various Recorded Future API endpoints (IP/Domain/URL/Hash Risklists & Enrichment).
SOCRadar	Premium	You can subscribe to the SOCRadar feeds using the API Endpoint URL from the SOCRadar platform. SOCRadar offers an extensive range of IoC feeds, with more than 130 feeds in total.

Feed Name	Category	Description
CrowdStrike (CrowdStrike Falcon Intel service collection)	Premium	You can subscribe to the CrowdStrike feed using your own client ID and secret. CrowdStrike enhances endpoint protection by combining malware sandboxing, malware search and threat intelligence into an integrated solution that can perform comprehensive threat analysis.
ESET	Premium	You can subscribe to the ESET feed using your own username and password. ESET Threat Intelligence provides evidence-base information and actionable advice about an existing or emerging threat.

Feed Error Messages

The following error messages are displayed in the Status Message column for Premium and Custom feeds only.

Feed State	Detailed Error Message
Invalid Credentials	Please validate the credentials and then reconfigure the feed.
Invalid URL	Please validate the URL and credentials, and then reconfigure the feed.
Invalid collection URL	Please validate the URL and credentials, and then reconfigure the feed.
Connection Error	Failed to connect to feed source. Please validate the feed input.
Fetching Data Error	Please validate if the credentials are still valid or if the data source is still available.
Surpassed Query Limit	Reached the API rate limit. Please reduce the backfill day length.

Some premium feeds also display a detailed error message in the Status Message column, for example, if specific API URLs or collections are not working.

Setting Up Proxy for On-Premise Environments

The Threat Intelligence Platform supports HTTP/HTTPS proxy setup in on-premise environments. This lets you successfully enable and use threat intelligence feeds in on-premise environments with restricted Internet access.

Contact the Stellar Cyber Customer Support team if you need web proxy configured.

© 2026 Stellar Cyber . All rights reserved.