Stellar Cyber 6.6.0s is now live! Discover all the updates in the release notes!

Configuring Google Workspace Connectors

This connector allows Stellar Cyber to collect data from external sources and add the records to the data lake.

Integrating Google Workspace with Stellar Cyber provides real-time visibility into security events and alerts across cloud and on-premise environments, enabling organizations to effectively monitor and respond to security incidents. Stellar Cyber's advanced security analytics and machine learning algorithms provide real-time threat detection and response capabilities, while also providing advanced identity and access management capabilities to manage user access and security policies.

You must have one connector for every Google Workspace account to be monitored.

This connector is improved to use less memory. Under certain scenarios if there is an error reaching the third-party API, some duplicate messages may be sent.

Stellar Cyber connectors with the Collect function (collectors) may skip collecting some data when the ingestion volume is large, which potentially can lead to data loss. This can happen when the processing capacity of the collector is exceeded.

Connector Overview: Google Workspace

Capabilities

- Collect: **Yes**
- Respond: **No**
- Native Alerts Mapped: **Yes**
- Runs on: **DP**
- Interval: **Configurable**

Collected Data

Content Type	Index	Locating Records
Admin	Linux Events	msg_class:

Content Type	Index	Locating Records

Alert
Calendar
Chat
Drive
Gplus
Groups
Login
Mobile
Rules
SAML
Token
	 AWS Events (Cloudtrail)	`gsuite`
		`gsuite_alert`
		
		msg_origin.source:
		`gsuite`
		
		msg_origin.vendor:
		`gsuite`
		
		msg_origin.category:
		`office_suite` (for alerts, for all content types on SaaS)

Domain

N/A

Response Actions

N/A

Third Party Native Alert Integration Details

This connector ingests alerts from Google Workspace to get the raw alerts that are stored in the Linux Events index. Select the Alert content type.

Stellar Cyber maps Google Workspace alerts. The alerts are read from the Linux Events index, enriched with Stellar Cyber fields, and mapped (with deduplication) to the Alerts index.

Deduplication is by `org_id`, `tenantid`, `metadata.customerId`, `source`, `type`, and `metadata.alertId`.

For details, see Integration of Third Party Native Alerts.

Required Credentials and Configurations

- API Scopes and Service Account Key File

Locating Records

To search the alerts in the Alerts index or to search the Original Records in the Linux Events index, use the query: `msg_class:gsuite_alert AND _exists_: source`

Adding a Google Workspace Connector

To add a Google Workspace connector:


1. Enable the Google Admin SDK
2. Create a Google service account
3. Create an API key
4. Add the client ID with OAuth scopes
5. Add the connector in Stellar Cyber
6. Test the connector
7. Verify ingestion

Enabling the Google Admin SDK


Before you create a service account, you must enable the Admin SDK:

Use our example as a guideline, as you might be using a different software version.


1. Go to https://console.cloud.google.com.
2. Click ☰ to display the menu.
3. Choose **APIs & Services** > **Library**. The **API Library** page appears.

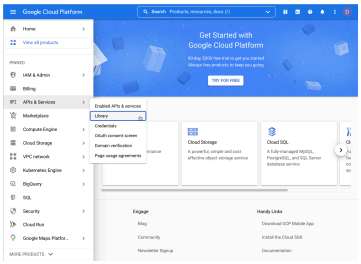


4. Search for **admin sdk**. The **Admin SDK** page should be at the top of the results.

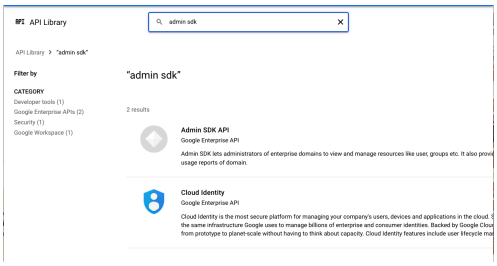

5. Click **Admin SDK**. The **Admin SDK** page appears.

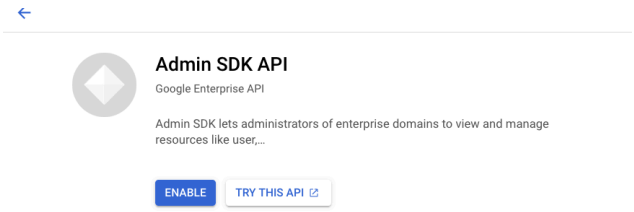

6. Click **Enable**. The SDK is enabled.
7. Search again, this time for **alert center api**. and enable that.

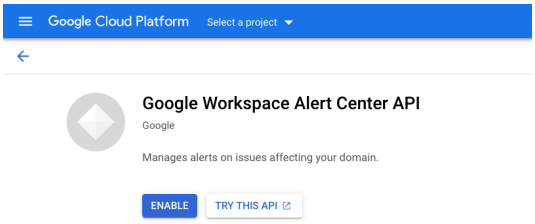


Creating a Google Service Account


With the SDK enabled, you can create a service account:

1. Navigate back to the main menu of https://console.cloud.google.com.
2. Click ☰ to display the navigation pane.


3. Choose **IAM & Admin** > **Service Accounts**. The service accounts appear.



4. Click **Create Service Account**. The **Service account details** page appears.

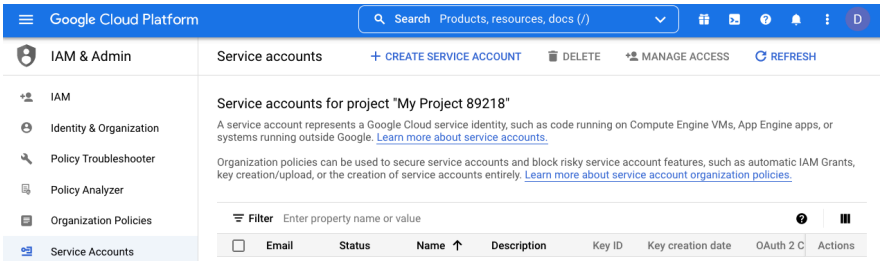

5. Enter a name for the account.
6. Enter a description.
7. Click **Create**.
8. Optionally, grant permissions.
9. Click **Continue**.
10. Optionally, grant access.
11. Click **Done**. The account is created and displayed on the **Service account details** page.

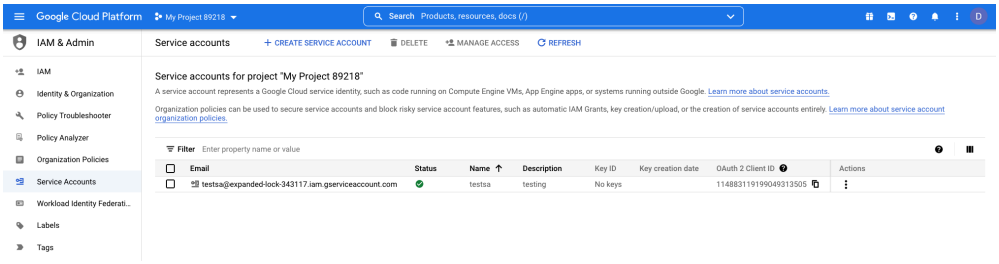


12. Copy the **Oath2 Client ID** You will use this as the **Client ID** when adding API scopes in the Stellar Cyber connector.


Creating an API Key

With a service account, you can now create an API key:


1. Go to https://console.cloud.google.com.
2. Click ☰ to display the menu.
3. Choose **IAM & Admin** > **Service Accounts**. The service accounts appear.




4. Select the service account you created.

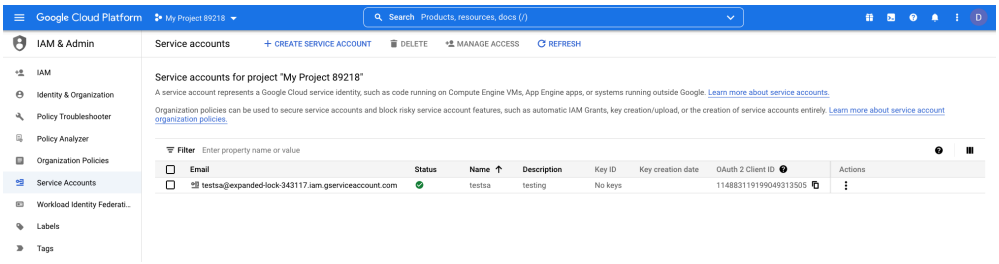


5. Click ⋮ for that account.
6. Select **Manage keys** from the menu. The **Keys** screen appears.

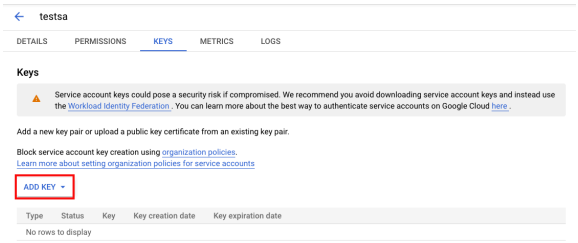

7. Click the **Add Key** menu and select **Create new key**.

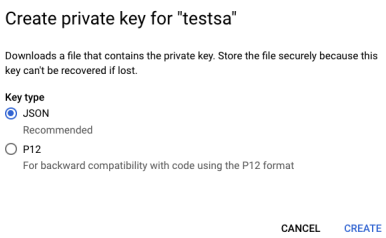


8. Select **JSON**.
9. Click **Create**. The JSON file is downloaded. Keep this file safe, as you cannot recover the key if this file is lost. You will upload this file to Stellar Cyber when configuring the connector.

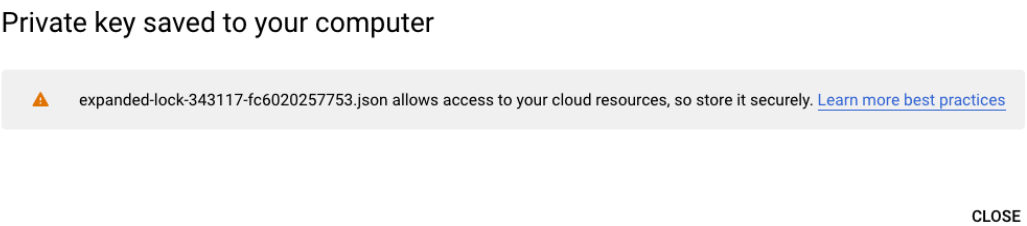

10. Click **Close**.
11. Exit the Keys screen and return to the Service Account Details page.
12. Click ⋮ for the account again, and select **Manage Details**.

13. The **Service Account details** screen appears.




14. Make note of the **Unique ID**. You will use this as the **Client Name** when adding the service account to Google Workspace.


Adding the Client ID with OAuth Scopes

To add the Client ID with OAuth scopes:


1. Go to https://admin.google.com/ac/home.
2. Click ☰ to display the menu.
3. Choose **Security > API Controls > Domain-wide Delegation**. The **API clients** appear.

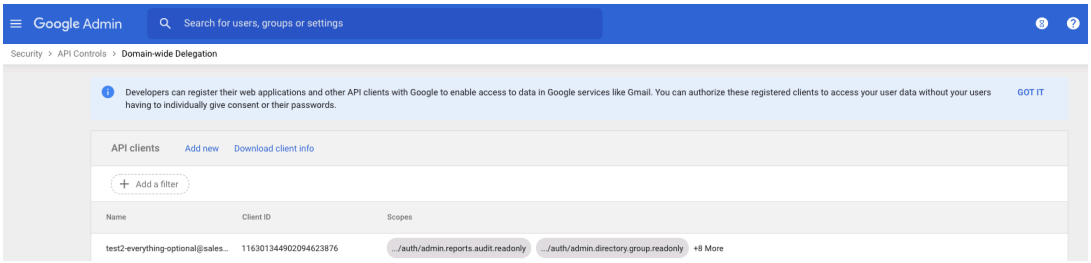

4. Click **Add New**. The **Add a new client ID** screen appears.



5. Enter the **Unique ID** that you copied earlier from the service account as the **Client ID**.
6. Enter the **OAuth scopes** to be used with the Stellar Cyber connector.



   - For **Alert** reports, include this scope: `https://www.googleapis.com/auth/apps.alerts`
   - For **Application** reports, include this scope: `https://www.googleapis.com/auth/admin.reports.audit.reado`

nly

(The applicat ypes are listed in the Stellar Cyber connector configuration dialog.)


7. Click **Authorize**.

You now have an authorized Client ID with OAuth scopes.


Adding the Connector in Stellar Cyber

With the Google service account set up and the API key ready, you can add a Google Workspace connector in Stellar Cyber:

1. Log in to Stellar Cyber.
2. Click **System | INTEGRATIONS | Connectors**. The **Connector Overview** appears.

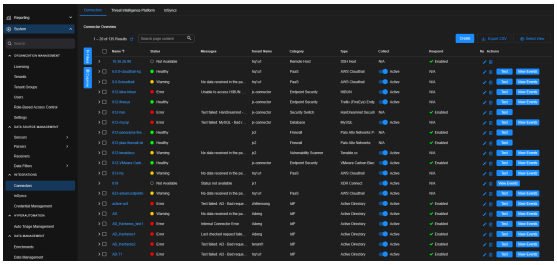


3. Click **Create** and select **Connector**.



The **General** tab of the **Add Connector** screen appears. The information on this tab cannot be changed after you add the connector.

4. Choose **SaaS** from the **Category** dropdown.
5. Choose **Google Workspace** (Gsuite) from the **Type** dropdown.

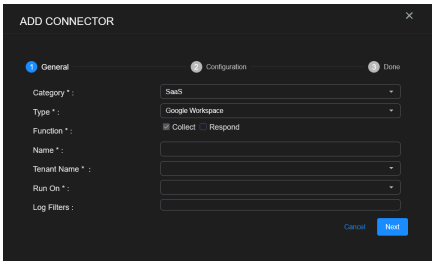

The asterisk (*) indicates a required field.


6. For this connector, the supported **Function** is **Collect**, which is enabled already.
7. Enter a **Name**.

Notes:

- This field does not accept multibyte characters.

- It is recommended that you follow a naming convention such as tenantname-connectortype.

8. Choose a **Tenant Name**. The Interflow records created by this connector include this tenant name.
9. Choose the device on which to run the connector.
10. (Optional) When the **Function** is **Collect**, you can apply **Log Filters**. For information, see Managing Log Filters.
11. Click **Next**. The **Configuration** tab appears.

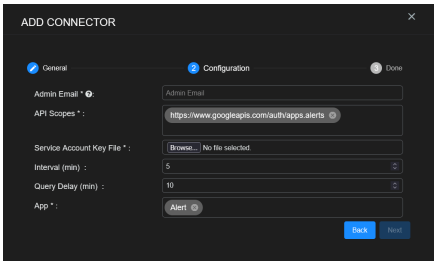

The asterisk (*) indicates a required field.

12. Enter the **Admin Email** for the account administrator (not the email created by Google for the service account).
13. For **API Scopes**, enter the OAuth scopes you added in Adding the Client ID with OAuth Scopes. Stellar Cyber provides the following scopes by default:
    - For **Alert** reports, include this scope: `https://www.googleapis.com/auth/apps.alerts`


      The alert scope is required if you would like Stellar Cyber to integrate the `Gmail Phishing` alert to the XDR Kill Chain.
    - For **Application** reports, include this scope: `https://www.googleapis.com/auth/admin.reports.audit.readonly`

    Separate additional scopes with commas.
14. Upload the **Service Account Key File**, which is the API file you downloaded in Creating an API Key.
15. Choose the **Interval (min)**. This is how often the logs are collected.
16. (Optional) Choose the **Query Delay (min)**.
17. Choose the **App** you want to collect by selecting them from the dropdown menu.

Content Type (App Name)	Report type	Required Scope
Admin	Admin Console activities of all of your account's administrator activity	https://www.googleapis.com/auth/admin.reports.audit.readonly

Content Type (App Name)	Report type	Required Scope
Alert	Google Alert Center reports	https://www.googleapis.com/auth/apps.alerts
Calendar	Google Calendar application's activity audit reports	
Chat	Chat activity audit reports	
Drive	Google Drive application's activity reports	
Gplus	Google+ / Currents application activity reports	
Groups	Google Groups audit reports	
Login	Login audit events	
Mobile	Device audit events	
Rules	Reports for rule related events	
SAML	SAML audit reports	
Token	OATH Token Audit events	

18. Click **Next**. The final confirmation tab appears.

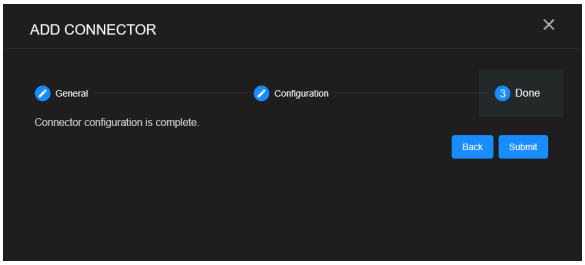

19. Click **Submit**.


The new connector is immediately active. It does not collect any historical logs.

Testing the Connector

When you add (or edit) a connector, we recommend that you run a test to validate the connectivity parameters you entered. The test validates authentication and connectivity.

For connectors running on a sensor, Stellar Cyber recommends that you allow 30-60 seconds for new or modified configuration details to be propagated to the sensor before performing a test.

1. Click **System | INTEGRATIONS | Connectors**. The **Connector Overview** appears.

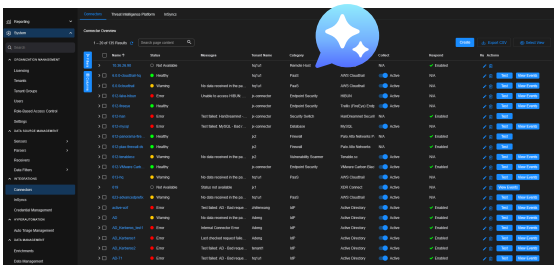

2. Locate the connector by name that you added, or modified, or that you want to test.
3. Click **Test** at the right side of that row. The test runs immediately.

Note that you may run only one test at a time.

Stellar Cyber conducts a basic connectivity test for the connector and reports a success or failure result. A successful test indicates that you entered all of the connector information correctly.

To aid troubleshooting your connector, the dialog remains open until you explicitly close it by using the **X** button. If the test fails, you can select the button from the same row to review and correct issues.

The connector status is updated every five (5) minutes. A successful test clears the connector status, but if issues persist, the status reverts to failed after a minute.


Repeat the test as needed.

Display sample messages...


Success !



Failure with summary of issue:



Show More example detail:

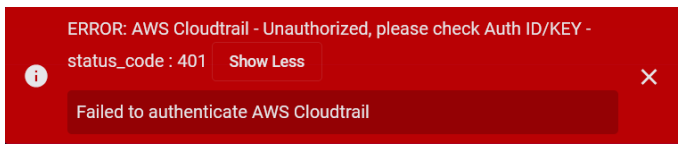

If the test fails, the common HTTP status error codes are as follows:

HTTP Error Code	HTTP Standard Error Name	Explanation	Recommendation
400	Bad Request	This error occurs when there is an error in the connector configuration.	Did you configure the connector correctly?
401	Unauthorized	This error occurs when an authentication credential is invalid or when a user does not have sufficient privileges to access a specific API.	Did you enter your credentials correctly? Are your credentials expired? Are your credentials entitled or licensed for that specific resource?

HTTP Error Code	HTTP Standard Error Name	Explanation	Recommendation
403	Forbidden	This error occurs when the permission or scope is not correct in a valid credential.	Did you enter your credentials correctly? Do you have the required role or permissions for that credential?
404	Not Found	This error occurs when a URL path does not resolve to an entity.	Did you enter your API URL correctly?
429	Too Many Requests	This error occurs when the API server receives too much traffic or if a user's license or entitlement quota is exceeded.	The server or user license/quota will eventually recover. The connector will periodically retry the query. If this occurs unexpectedly or too often, work with your API provider to investigate the server limits, user licensing, or quotas.

For a full list of codes, refer to HTTP response status codes.

An error displays If you use an email address that doesn't have privileges to add the connector, or if you created the service account but it is not yet authorized.

Verifying Ingestion

To verify ingestion:

1. Select **Threat Hunting**.

   The **Interflow Search** tab appears.

2. Change the **Indices** to **Linux Events** or **AWS Events**.

   The table immediately updates to show ingested Interflow records.

© 2026 Stellar Cyber . All rights reserved.