Stellar Cyber 6.6.0s is now live! Discover all the updates in the release notes!

Configuring Imperva Incapsula Connectors

This connector allows Stellar Cyber to ingest logs from Imperva Incapsula and add the records to the data lake. It integrates the log files (including security logs and access logs) that are downloaded from the Imperva log repository to the Stellar Cyber Data Processor.

The availability of this feature depends on your subscription. For subscription plans, contact an Imperva sales representative.

Stellar Cyber connectors with the Collect function (collectors) may skip collecting some data when the ingestion volume is large, which potentially can lead to data loss. This can happen when the processing capacity of the collector is exceeded.

Connector Overview: Imperva Incapsula

Capabilities

- Collect: **Yes**
- Respond: **No**
- Native Alerts Mapped: **No**
- Runs on: **DP**
- Interval: **Configurable**

Collected Data

Content Type	Index	Locating Records

N/A	Syslog
	Assets (for Logs)
		msg_class:
		`imperva_access_logs`
		`imperva_security_logs`
		
		msg_origin.source:
		`imperva`

Content Type	Index	Locating Records
		msg_origin.vendor: `incapsula` msg_origin.category: `waf`

Domain

<Log Server URL>

where <Log Server URL> is a variable from the configuration of this connector

Response Actions

N/A

Third Party Native Alert Integration Details

N/A

Required Credentials and Configurations

- Log Server URL, API ID, and API Key (generated by a user with the following permissions: Manage users and permissions, Manage API keys)

Adding a Imperva Incapsula Connector

To add a Imperva Incapsula connector:

1. Obtain credentials
2. Add the connector in Stellar Cyber
3. Test the connector
4. Verify ingestion

Obtaining Imperva Incapsula Credentials


Before you configure the connector in Stellar Cyber, you must obtain the following Imperva Incapsula credentials:

- Log Server URL—The URL of the Imperva log repository in the Imperva cloud.
- API ID and API Key—The unique identifier and secret key used for authentication.


Getting Credentials

Log in to Imperva as an account administrator (or a user with permissions to manage API keys, such as **Manage users and permissions** and **Manage API keys**).


1. In the Cloud Security Console, click **Account** at the top right of the page and select **Account Management**.

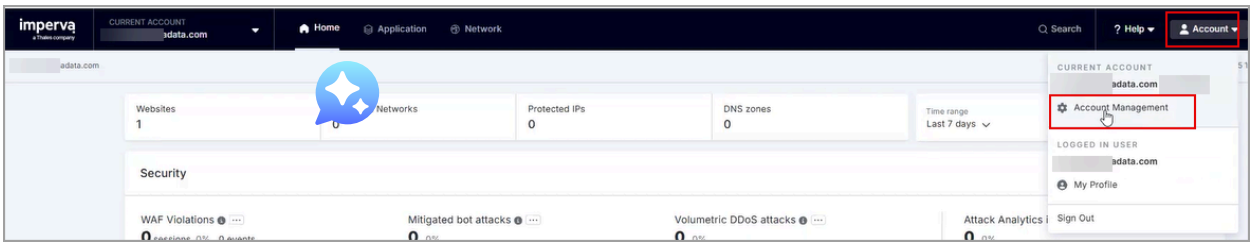


2. Select **SIEM Logs** and first select **Website Log Levels**. Make sure **Level: All logs**. This ensures you will be able to get logs.

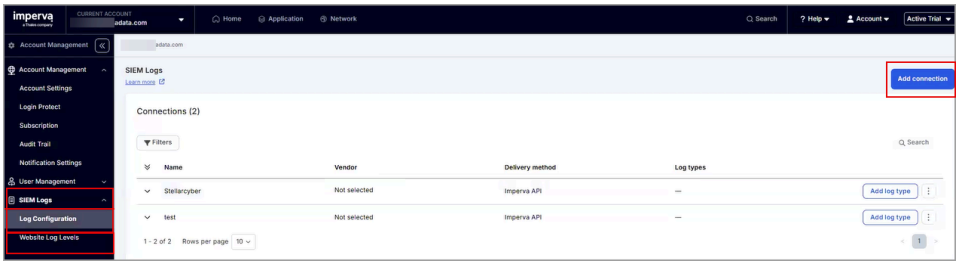


3. Next under **SIEM Logs**, select **Log Configuration**. Then click **Add Connection**.
4. Scroll down and select **Imperva API**.



5. In the **Add connection** page, enter a Connection name and click **Generate API keys**.

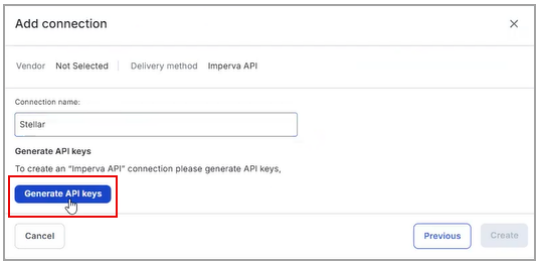

6. The API keys are successfully generated.



7. Copy the generated API ID, API key, and Log server URL, which will be used to add the connector in Stellar Cyber.


Store the API ID, API key, and Log server URL in a safe location.

8. Click **Close**.


Adding the Connector in Stellar Cyber

To add a Imperva Incapsula connector in Stellar Cyber:

1. Log in to Stellar Cyber.
2. Click **System | INTEGRATIONS | Connectors**. The **Connector Overview** appears.

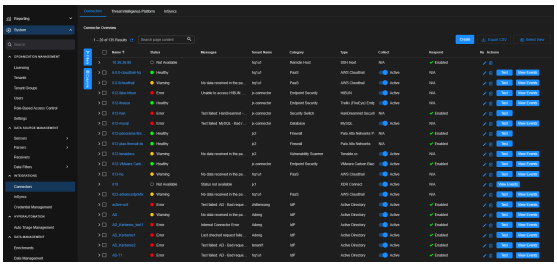


3. Click **Create** and select **Connector**.



The **General** tab of the **Add Connector** screen appears. The information on this tab cannot be changed after you add the connector.

4. Choose **Web Security** from the **Category** dropdown.
5. Choose **Imperva Incapsula** from the **Type** dropdown.

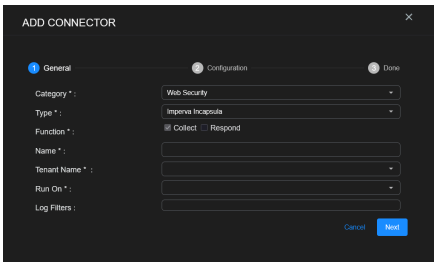

The asterisk (*) indicates a required field.


6. For this connector, the supported **Function** is **Collect**, which is enabled already.
7. Enter a **Name**.

Notes:

- This field does not accept multibyte characters.
- It is recommended that you follow a naming convention such as tenantname-connectortype.


8. Choose a **Tenant Name**. The Interflow records created by this connector include this tenant name.
9. Choose the device on which to run the connector.
10. (Optional) When the **Function** is **Collect**, you can apply **Log Filters**. For information, see Managing Log Filters.

11. Click **Next**. The **Configuration** tab appears.

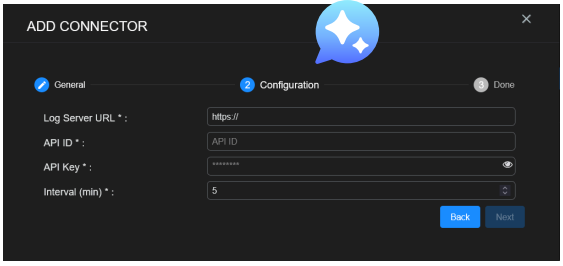

The asterisk (*) indicates a required field.

12. Enter the **Log Server URL** you noted above in [Obtaining Imperva Incapsula Credentials](#).
13. Enter the **API ID** you noted above.
14. Enter the **API Key** you noted above.
15. Choose the **Interval (min)**. This is how often Stellar Cyber checks the Imperva log server for new files to download.
16. Click **Next**. The final confirmation tab appears.

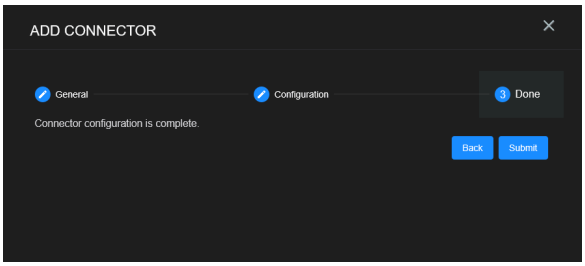

17. Click **Submit**.


The new connector is immediately active.

Testing the Connector

When you add (or edit) a connector, we recommend that you run a test to validate the connectivity parameters you entered. The test validates authentication and connectivity.

For connectors running on a sensor, Stellar Cyber recommends that you allow 30-60 seconds for new or modified configuration details to be propagated to the sensor before performing a test.

1. Click **System | INTEGRATIONS | Connectors**. The **Connector Overview** appears.

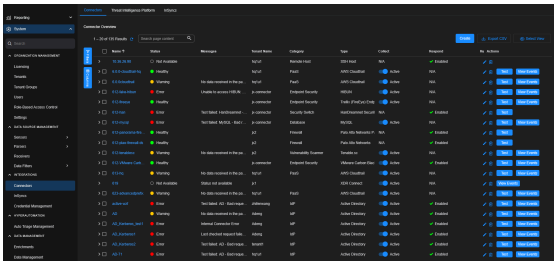

2. Locate the connector by name that you added, or modified, or that you want to test.
3. Click **Test** at the right side of that row. The test runs immediately.

Note that you may run only one test at a time.

Stellar Cyber conducts a basic connectivity test for the connector and reports a success or failure result. A successful test indicates that you entered all of the connector information correctly.

To aid troubleshooting your connector, the dialog remains open until you explicitly close it by using the **X** button. If the test fails, you can select the button from the same row to review and correct issues.

The connector status is updated every five (5) minutes. A successful test clears the connector status, but if issues persist, the status reverts to failed after a minute.


Repeat the test as needed.

Display sample messages...


Success !



Failure with summary of issue:



Show More example detail:



If the test fails, the common HTTP status error codes are as follows:

HTTP Error Code	HTTP Standard Error Name	Explanation	Recommendation
400	Bad Request	This error occurs when there is an error in the connector configuration.	Did you configure the connector correctly?
401	Unauthorized	This error occurs when an authentication credential is invalid or when a user does not have sufficient privileges to access a specific API.	Did you enter your credentials correctly? Are your credentials expired? Are your credentials entitled or licensed for that specific resource?
403	Forbidden	This error occurs when the permission or scope is not correct in a valid credential.	Did you enter your credentials correctly? Do you have the required role or permissions for that credential?
404	Not Found	This error occurs when a URL path does not resolve to an entity.	Did you enter your API URL correctly?
429	Too Many Requests	This error occurs when the API server receives too much traffic or if a user's license or entitlement quota is exceeded.	The server or user license/quota will eventually recover. The connector will periodically retry the query.

HTTP Error Code	HTTP Standard Error Name	Explanation	Recommendation
			If this occurs unexpectedly or too often, work with your API provider to investigate the server limits, user licensing, or quotas.

For a full list of codes, refer to HTTP response status codes.

Verifying Ingestion

To verify ingestion:

1. Select **Threat Hunting**.

   The **Interflow Search** tab appears.

2. Change the **Indices** for the type of content you collected:

   - For all content types, change the **Indices** to **Syslog**.
   - For **Logs** only, change the **Indices** to **Assets**.

   The table immediately updates to show ingested Interflow records.

© 2026 Stellar Cyber . All rights reserved.