Stellar Cyber 6.6.0s is now live! Discover all the updates in the release notes!

Managing IoCs in the Threat Intelligence Platform 5.2.0 6.0.0

You must have **Root** scope to use this feature.

Use the **IoCs** tab on the **Threat Intelligence Platform** page to manage Indicators of Compromise (IoCs). See Using the IoCs Tab.

To configure and manage **Feeds**, see Configuring Feeds in the Threat Intelligence Platform.


See also:

- Reputation-based ML Alert Types and Rules
- File Hash Data Sources
- Reputation Field Mapping

Using the IoCs Tab

The **IoCs** tab displays all the latest IoCs that are present in storage, along with data associated with each IoC, such as expiration date, source, and confidence score.

The IoCs table displays all IoCs ingested from all feeds, except those IoCs that are expired or revoked. In addition, the table displays IoCs imported by the user.

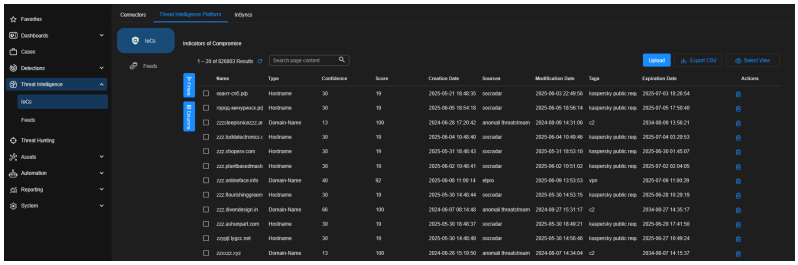

The IoCs table has the following columns:

- **Name**—name of the IoC
- **Type**—type of the IoC: IP address, URL, domain name, and file hash

The RedSense premium feed includes IoC types: Hostname and Network-Traffic.

- **Confidence**—confidence, provided by the source

Internally in the **Threat Intelligence Platform**, IoCs have priorities for ingestion. This means that when IoCs are imported, IoC operations with lower confidence scores cannot overwrite IoC operations with higher confidence scores.

- **Score**—score, provided by the source
- **Creation Date**—creation date of the IoC
- **Sources**—sources of the IoC, such as etpro, alienvault, or emerging_threat (an IoC could be ingested from multiple sources)
- **Modification Date**—modification date of the IoC
- **Tags**—shared attributes of IoCs, such as malware or CnC
- **Expiration Date**—expiration date of the IoC
- **Actions**—actions available on an IoC, such as **Delete this row**

Using Search


Use the Search box to search for an IoC by name.

Importing from a File

You can import new IoCs from a file. The supported IoC types are IP address, URL, domain name, and file hash (MD5, SHA1, and SHA256).


When you import file hash IoCs, if you select an expiration time of less than 90 days, it will be set to 90 days.

1. Click **Upload**.

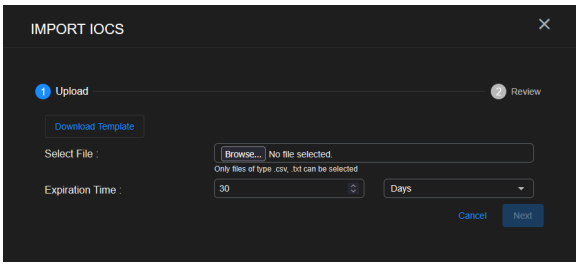

2. (Optional) Click **Download Template**.
    a. Select **Download CSV Template** or **Download Text Template**.
    b. Depending on your browser and system, the file is either immediately downloaded to your Downloads folder or you are prompted for a location. You can edit the template to add IoCs.
3. Browse to select a file. The file type must be either .csv or .txt.
4. Set an **Expiration Time** and select in **Hours**, **Days**, or **Months**.
5. Click **Next**.

6. The IoCs extracted from the file are displayed. Unselect any IoCs you would like to exclude from the import.

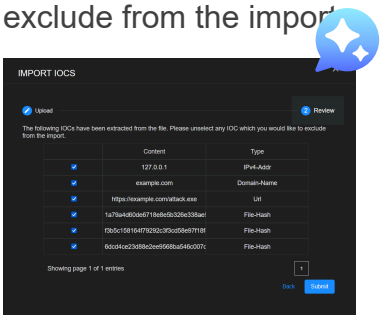

7. Click **Submit**.

Exporting CSV

Click **Export CSV** to export the table as a spreadsheet file.

You can export **Selected Columns** or **All Columns** to a maximum of 10,000 IoCs. If there are more than 10,000, use filters and sort to select the 10,000 you want to export.


The spreadsheet is downloaded to your Downloads folder.

Selecting View

Click **Select View** to preserve a table layout. See Saved View Configurations for details.


Using Filters

Click **Filters** to use defined filters.




To use defined filters:

- For **Type**, select a type using the check boxes or **Select All**.




  To see more **Type**, click **View More**.

- For **Score**, enter **Min** and **Max** using the up and down arrows.

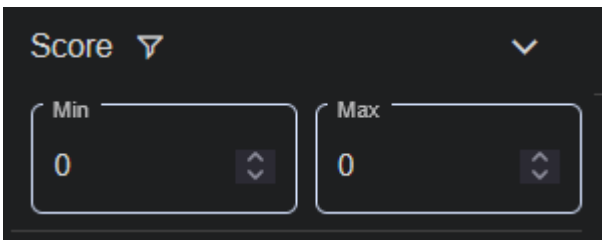


The limits are from 1 to 100. The **Min** must be less than the **Max**.


- For **Creation Date**, enter **From** and **To** dates and times using the calendars.

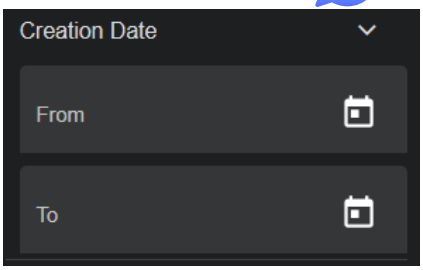

Select a date, select a time, then click the checkmark.




- For **Sources**, select a source using the check boxes or **Select All**.




To see more **Sources**, click **View More**.

- For **Tags**, select a tag using the check boxes or **Select All**.




To see more **Tags**, click **View More**.

- If a defined filter is unselected, you can click the search box under **Add new filter** to select a filter from the dropdown.



To exit, click **Filters** again. The configured filters are displayed at the top of the table.

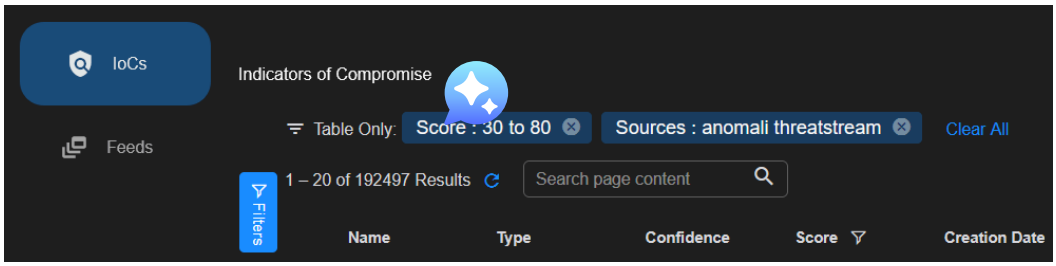


To clear an individual filter, click the icon to the right of the filter ( ).

To clear all filters, click **Clear All**.

Using Columns


Click **Columns** to add or remove columns using check boxes.



Click **Columns** again to exit.


Deleting IoCs

To delete an IoC, click the Trash icon ( ) in the **Actions** column for a row in the table. The following confirmation is displayed.

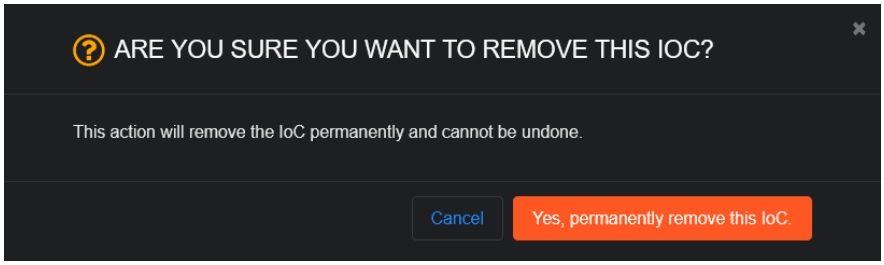

Click **Yes, permanently remove this IoC**.

You can also click a check box on the left to select an IoC and then click the Trash icon ( ).

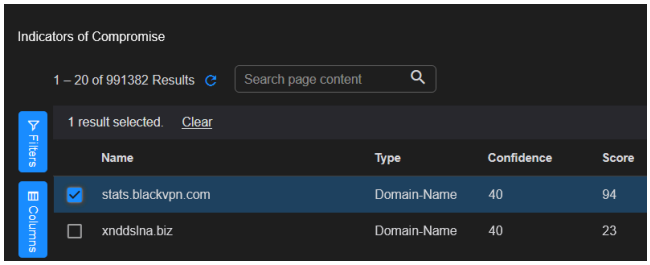

Reputation-based ML Alert Types and Rules

If there are IoCs in your domain, IP address, or URL-related fields, then fields such as **source_reputation** are enriched. The following IoC-based detection behavior is for Machine Learning (ML) alert types as well as rules.

See the following:

- ML Alert Types 
- Rules
- Handling Alerts when Bad Reputation is True

ML Alert Types

Bad Source Reputation Anomaly

This alert type detects generic bad source reputations, which are other than Brute_Forcer, Scanner, and Command and Control (CnC). For example, if there is a spike of records that have **srcip_reputation: malicious**, an ML alert is triggered.

The query is as follows:

```
_exists_:srcip_reputation AND (NOT srcip_reputation:Good AND NOT
srcip_reputation:Brute_Forcer AND NOT srcip_reputation:Scanner AND NOT
srcip_reputation:CnC) AND NOT _exists_:event_source
```

The IoC source is any feeds or user-ingested IoCs.

Bad Destination Reputation Anomaly

This alert type detects generic bad destination reputations. If there is a spike of records that have such bad destination reputations, an ML alert is triggered.

The query is as follows:

```
_exists_:dstip_reputation AND NOT dstip_reputation:Good
```

The IoC source is any feeds or user-ingested IoCs.

Command & Control Reputation Anomaly

This alert type detects Command and Control-related reputations. If there is a spike of records that have such reputations, an ML alert is triggered.

The query is as follows:

```
(dstip_reputation:CnC OR dstip_reputation:SpywareCnc OR
dstip_reputation:P2Pcnc OR dstip_reputation:Mobile_CnC OR
dstip_reputation:Mobile_Spyware_CnC) AND (state:Closed OR
state:Established)
```

The IoC source is Alienvault, ETPro IP, ETPro domain, or user-ingested IoCs that have the IoC tags that satisfy the query.

Scanner Reputation Anomaly

This alert type detects the Scanner, Phishing, or Spam reputations from the source IP address. If there is a spike of records that have such reputations, an ML alert is triggered.

The query is as follows:

```
(srcip_reputation:Scanner OR srcip_reputation:Phishing OR
srcip_reputation:Spam) AND (state:Closed OR state:Established OR
state:Aborted OR state:HalfOpened) AND NOT _exists_:event_source
```

The IoC source is Alienvault, DHS, ETPro IP, ETPro domain, Openphish (only Phishing), Phishtank (only Phishing), or user-ingested IoCs that have the IoC tags that satisfy the query.

Rules

Bad Reputation Login

This rule detects generic bad source reputations, which are other than Brute_Forcer and Scanner, under the condition of successful logins. For example, if a record has **srcip_reputation: malicious**, and has successfully logged in to some places, this rule is triggered.

The query is as follows:

```
'login_result:success AND (_exists_:srcip_reputation AND NOT
srcip_reputation:Good AND NOT srcip_reputation:Scanner AND NOT
srcip_reputation:Brute_Forcer)'
```

The IoC source is any feeds or user-ingested IoCs.

Emerging Threat

This rule detects the **emerging_threat** reputations that potentially come from domain, IP address, URL, or file hash IoCs.

The queries are as follows:

```
'srcip_reputation:emerging_threat', 'dstip_reputation:emerging_threat',
'domain_reputation:emerging_threat', 'url_reputation:emerging_threat'
```

File hash reputations may come from multiple potential fields, depending on the data sources such as:

`file.threat_indicator.labels:emerging_threat`,
`process.threat_indicator.labels:emerging_threat`,
`process.parent.threat_indicator.labels:emerging_threat`,
`file_list.threat_indicator.labels:emerging_threat`,
`process_list.threat_indicator.labels:emerging_threat`, and
`process_list.parent.threat_indicator.labels:emerging_threat`

The emerging threat file hash detection query will be OR combinations of the above conditions.

The IoC source is the Emerging threat feed, custom TSV feeds, or user-ingested IoCs that have the IoC tags that satisfy the query.

Using the source IP address emerging threat as an example:

```
"srcip_reputation": "EvilProxy_Phishing;emerging_threat;scanner",
```

```
"srcip_reputation_source": "emerging_threat;ETPro",
```

The alert description will be as follows:

The traffic from \"IP/name: <IP address>\" to \"IP/name: <IP address>\" has one or more emerging threats (Reputation: EvilProxy_Phishing;scanner. Extra sources: ETPro) on the source IP <IP address>.

where **Reputation: EvilProxy_Phishing;scanner. Extra sources: ETPro** is new in the description.

Malicious Site Access

This rule detects the **MalAccess** reputation that comes from the URL IoCs.

The query is as follows:

```
'url_reputation:"MalAccess"'
```

The IoC source is Abuse.ch (urlhaus) feed or user-ingested IoCs that have the IoC tags that satisfy the query.

Phishing URL

This rule detects the **phishing** reputation among HTTP records. The reputation could come from either the destination IP address or the URL IoCs.

The query is as follows:

```
'url_reputation:"Phishing" OR (dstip_reputation:"Phishing" AND
appid_name:"http")'
```

The IoC source is Alienvault, DHS, ETPro IP, ETPro domain, Openphish, Phishtank, or user-ingested IoCs that have the IoC tags that satisfy the query.

Handling Alerts when Bad Reputation is True

For the External/Internal User Login Failure Anomaly alert type, when the source IP address is flagged with a bad reputation, the system handles alerts as follows:

- **User Login Failure Anomaly Detection:**
  - The system evaluates incoming login events against known behavioral indicators of suspicious or excessive failures.
  - If the anomaly thresholds are met (for example, there is an unusually high failure rate), an alert is generated.
- **Parallel Reputation Check:**
  - In parallel, the system checks the source IP (or domain, URL, or file hash) against reputation databases, including Emerging Threat IoCs.
  - If the source IP is known to be malicious or bad, and it meets the criteria for a standalone Bad Reputation alert (such as the Bad Reputation Login alert type), that alert will also be raised.
- **Separate Alerts, Independent Scoring:**
  - The reputation-based finding does not adjust or boost the anomaly's existing score. Each detection type (behavior-based vs. reputation-based) retains its own logic and thresholds.

As a result, there may be two parallel alerts:

- User Login Failure Anomaly, reflecting the behavioral anomaly, and
- Bad Reputation Login, triggered by the IP's malicious reputation

In other words, a bad reputation source IP does not raise the score of the User Login Failure Anomaly alert, rather, it triggers its own separate Bad Reputation alert, if all requirements are satisfied.

File Hash Data Sources 5.4.0 6.1.0

The following data sources have file hash-related enrichment.

Alert Integrations

- Acronis Cyber Protect Cloud
- Avanan
- Broadcom SES
- Cato Networks
- CrowdStrike
- CyberArk EPM
- Deep Instinct
- ESET Protect
- Fortinet Lacework
- Halcyon
- LimaCharlie
- Microsoft Defender for Cloud
- Microsoft Defender for Cloud Apps
- Microsoft Defender for Endpoint
- Mimecast
- Netskope
- Proofpoint Targeted Attack Protection (TAP)
- SentinelOne Cloud
- SonicWall Endpoint Security
- Sophos Central
- Trellix MVISION
- Trend Micro Vision One
- VMware Carbon Black Cloud
- WithSecure Elements

Parsers

- Centos Audit
- Check Point Harmony Email & Collaboration

- Check Point Harmony Endpoint
- Cisco Umbrella
- GTB Data Loss Prevention (DLP)
- Linux Audit
- Scx SmartEDR
- ThreatLocker Zero Trust EPP
- Wallix Bastion

Windows Event Parser

- IBM WinCollect

Other

- Trend Micro Cloud App Security

Reputation Field Mapping 5.5.0

The following table shows reputation enrichment. It lists all source fields run against IoCs and mapped to reputation fields containing reputation metadata.

Source Field	Mapping of Fields	Reputation Field	Data Source
metadata.response.query	1:1	domain_reputation	Stellar Cyber sensor
metadata.request.query	1:1	domain_reputation	Stellar Cyber sensor
domain_list	1:1	domain_reputation	Multiple sources
dstip	1:1	dstip_reputation	Multiple sources
dstip_source	1:1	dstip_reputation_source	Multiple sources
hostip	1:1	hostip_reputation	Multiple sources
hostip_source	1:1	hostip_reputation_source	Multiple sources
remote_ip	1:1	remote_ip_reputation	Multiple sources
remote_ip_source	1:1	remote_ip_reputation_source	Multiple sources
srcip	1:1	srcip_reputation	Multiple sources
srcip_source	1:1	srcip_reputation_source	Multiple sources
url	1:1	url_reputation	Multiple sources

Source Field	Mapping fields	Reputation Field	Data Source
• file • file_list • process • process.parent • process_list (if found within the threat_indicator object)	many:1	See Enriched Threat Intelligence.	Multiple sources

Enriched Threat Intelligence

For every hash found in a file or process, the threat intelligence data is enriched using the `threat_indicator` field, which contains the following:

Name	Type	Description
threat_indicator	object	Can be a subfield of `file`, `file_list`, `process`, `process.parent`, or `process_list`.
threat_indicator.labels	list of strings	The categorization labels for the threat indicator.
threat_indicator.sources	list of strings	The provider or source of the threat intelligence.
threat_indicator.score	integer (optional)	The threat score, which is optional.
threat_indicator.file.hash	hash object	The file hash associated with the threat indicator.

JSON Structure

An example of the JSON structure is as follows:

```
{
  "file": {
    "hash": {
      "md5": "030753fb7a8eff726297c9dbd734c9ea",
      "sha1": "c57e03c5865290efb13ff3e8505e229790cea835",
      "sha256": "04ddd4cec63dfe1d221c8afa51306a5fcb92abdef70a7a18d1b2a8f11add625d"
    },
    "threat_indicator": {
      "labels": [],
      "sources": ["DHS"],
      "score": 90,
      "file": {
        "hash": {
          "md5": "030753fb7a8eff726297c9dbd734c9ea",
          "sha1": "c57e03c5865290efb13ff3e8505e229790cea835",
          "sha256":
"04ddd4cec63dfe1d221c8afa51306a5fcb92abdef70a7a18d1b2a8f11add625d"
        }
      }
```

```
      }
    }
}
```

Where `threat_indicator` is Found

The `threat_indicator` field may be present in the following:

- `file`
- `file_list` (a list of files)
- `process`
- `process.parent`
- `process_list` (a list of processes)

© 2026 Stellar Cyber . All rights reserved.