Stellar Cyber 6.6.0s is now live! Discover all the updates in the release notes!

Managing Traffic Filters: Applications

You must have **Root** scope to use this feature.

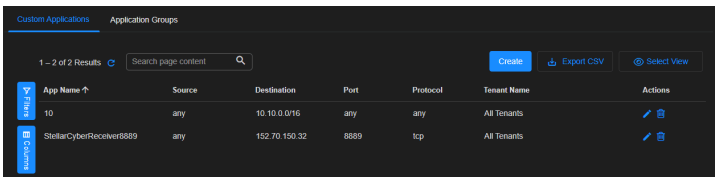
You can create traffic filters that sensor profiles use to filter applications before they're sent to the Stellar Cyber platform (also referred to as the Data Processor). You can apply filters to Linux server sensors and modular sensors to drop network traffic that matches your criteria. An application filter applies only to data intended for the Traffic index and has no impact on other traffic data (such as syslogs) or Windows server sensors. Filtered applications also still appear in Threat Hunting detection records for flood and scan detections. After you create these application filter definitions, you can group them for more efficient use when configuring your sensors for metadata filtering.

The table in this pane operates the same as all other tables in Stellar Cyber. You can sort, add, edit, and delete, and export the displayed list.


To create or edit an Application filter:

1. Navigate to **System | DATA SOURCE MANAGEMENT | Data Filters | Traffic Filters**.

   A panel for managing the traffic-based **Application** filters appears.

2. Select **Create** to add a filter (the **Add Custom Application** screen appears) or select the **Edit** icon to edit a row.

3. Enter the **Application Name**.

   This is the name of the filter that appears when you assign it in a sensor profile.

4. Choose the **Tenant Name**.

   You can choose a specific tenant or **All Tenants**.

5. Define the filter using a combination of **Protocol**, **Source** IP address, and **Destination** IP address.

   These fields are available as follows:

   - When **Matched on Protocol** is set to **HTTP** or **HTTPS**, you use the **Attribute**, **Operation**, and **Pattern** fields to define your filter.

     The **Matched on Source** and **Matched on Destination** options are not available when **Matched on Protocol** is set to **HTTP** or **HTTPS**.

   - When **Matched on Protocol** is set to **UDP** or **TCP**, you can use either one or both of the **Matched on Source** and **Matched on Destination** options to specify the address to match for the filter.

6. If you set **Matched on Protocol** to either **HTTPS** or **HTTP**, set up a pattern match as follows:

   a. For **HTTPS**, choose whether to match a pattern in a **Common name** or a **Server name**. You can match a pattern in any part or parts of a common name (CN) such as `www.yourdomain.ai`.

   For **HTTP**, choose whether to match a pattern in a **URI** or a **Server** name. HTTPS traffic requires certificate validation, and because certificates contain a CN, it's possible to filter by CN. In contrast, HTTP traffic is not encrypted, allowing for detailed URI filtering that includes all parts of a domain name plus URI components such as path, query, and fragment (for example, `http://www.yourdomain.com/path/to/resource?id=123&name=test#section1`).

For both **HTTPS** and **HTTP**, you can filter by matching server name patterns. These can be a partial or full server name (for example, `w` or `www`). Although it's not a strict rule, the server name is often the subdomain at the far left of a CN or domain name.

b. Specify whether the string to match **Begins with**, **Ends with**, or **Contains** the specified pattern.

c. Use the **Pattern** field to specify the string to match.

CN examples for HTTPS:

- "**Begins with** `www.yourdomain`" matches `www.yourdomain.com` and `www.yourdomain.ai`, but not `secure.yourdomain.ai`.
- "**Ends with** `yourdomain.ai`" matches `www.yourdomain.ai` and `web.yourdomain.ai` but not `www.yourdomain.com`.
- "**Contains** `yourdomain`" matches `www.yourdomain.com` and `web.yourdomain.ai` but not `www.mydomain.ai`.

URI examples for HTTP:

- "**Begins with** `www.yourdomain.ai/api/`" matches `www.yourdomain.ai/api/status` but not `www.yourdomain.ai/v1/api/`.
- "**Begins with** `/api/`" matches URIs with a path that begins with `/api/v1/users` and `/api/status` but not with `/v1/api/users`.
- "**Ends with** `#section`" matches all URIs that end with the fragment `#section` but not those that end with anything else.
- "**Contains** `?user=`" matches all URIs with the query `?user=` but not any URIs without it.

Server name examples for HTTPS and HTTP:

- "**Begins with** `w`" matches server names that start with `w` such as `www` and `web` but not `sww`.
- "**Ends with** `w`" matches server names that end with `w` such as `www` and `sww` but not `web`.
- "**Contains** `w`" matches server names with a `w` in any position (`www`, `web`, `sws`) but not server names that don't contain a `w` such as `secure`.

If two traffic filters are configured with the same pattern but use different operators (**Begins with**, **Ends with**, or **Contains**), Stellar Cyber prioritizes the operators as follows, from highest to lowest – **Begins with**, **Ends with**, **Contains**.
For example, if you create separate filters for a pattern that *ends with* **mydomain.com** and a pattern that *contains* **mydomain.com**, any network traffic with this string present will match the *ends with* filter because that filter has higher priority.

7. If you set **Matched on Protocol** to either **UDP** or **TCP**, use either one or both of the **Matched on Source** and **Matched on Destination** options to specify the address to match for the filter.
   - A **Matched on Source** filter matches based on the source IP address of the packet. Enter the **Source IP/Mask** in CIDR format.
   - A **Matched on Destination** filter matches based on the destination IP address and/or port of the packet. Use the **Define by specific IP** and/or **Define by specific Port** fields to define the filter.

   If you use one of the **Matched on Source/Destination** fields, but not the other, the other is presumed to be set to **Any**. For example, if you set **Matched on Source** to **192.168.1.25/24** and leave **Matched on Destination** unspecified, all traffic from **192.168.12.25/24** is matched.
8. Select **Submit**.

   The filter is immediately available, but is not active until you include it in a sensor profile.

Although the new filter is active as soon as it is bound to a sensor profile, it can take between 3-9 minutes before Stellar Cyber shows matching data under the new application name configured for the filter in **aella-adr-*** (for example, **My_Traffic_Filter**) instead of an internal name (for example, **HTTPS-20000**).

Applying Traffic Filters

- You can add the filter to a modular sensor profile under **Feature Customization | Network Traffic | Application Metadata | Exclude certain applications**.
- You can add the filter to a standard sensor profile under **Feature Customization | Network | Application Metadata | Exclude certain applications**.

© 2026 Stellar Cyber . All rights reserved.