Stellar Cyber 6.6.0s is now live! Discover all the updates in the release notes!

Configuring Microsoft Defender for Cloud Apps Connectors

This connector allows Stellar Cyber to ingest logs from Microsoft Defender for Cloud Apps and add the records to the data lake. This connector integrates with the Microsoft Defender for Cloud Apps API to query activities and alerts.

Microsoft Defender for Cloud Apps requires one of the following Microsoft 365 Enterprise Plan subscriptions: E5, E5 Security, or E5 Compliance. To learn about plans, refer to Microsoft 365 licensing datasheet under Next steps.

GCC Government Plan and GCC High Government Plan are not supported by this connector at this time.

Stellar Cyber connectors with the Collect function (collectors) may skip collecting some data when the ingestion volume is large, which potentially can lead to data loss. This can happen when the processing capacity of the collector is exceeded.

Connector Overview: Microsoft Defender for Cloud Apps

Capabilities

- Collect: **Yes**
- Respond: **No**
- Native Alerts Mapped: **Yes**
- Runs on: **DP**
- Interval: **Configurable**

Collected Data

Content Type	Index	Locating Records
Activities	Windows Events	msg_class:

Content Type	Index	Locating Records

Alerts		`microsoft_defender_for_cloud_apps_activities`
		`microsoft_defender_for_cloud_apps_alerts`
		
		msg_origin.source:
		`microsoft_defender_for_cloud_apps`
		
		msg_origin.vendor:
		`microsoft_defender`
		
		msg_origin.category:
		`saas`

If the Audit General content type is set up in the Office 365 connector with the same account, there may be duplicates when reporting Activities.

Domain

<API URL>

where <API URL> is a variable from the configuration of this connector

Response Actions

N/A

Third Party Native Alert Integration Details

This connector ingests logs from Microsoft Defender for Cloud Apps to get the raw alerts that are stored in the Windows Events index. Select the Alerts content type.

Stellar Cyber maps Microsoft Defender for Cloud Apps alerts. The alerts are read from the Windows Events index, enriched with Stellar Cyber fields, and mapped (with de-duplication) to the Alerts index.

Deduplication is by `tenantid` and `microsoft_defender_for_cloud_apps._id`.

For details, see Integration of Third Party Native Alerts.

Required Credentials and Configurations

- API URL, Tenant ID, Client ID, and Client Secret

Locating Records

To search the alerts in the Alerts index or to search the Original Records in the Windows Events index, use the query: `msg_class: microsoft_defender_for_cloud_apps_alerts AND msg_origin.source: microsoft_defender_for_cloud_apps`

Adding a Microsoft Defender for Cloud Apps Connector

To add a Microsoft Defender for Cloud Apps connector:

1. Obtain credentials
2. Add the connector in Stellar Cyber
3. Test the connector
4. Verify ingestion

Obtaining Microsoft Defender for Cloud Apps Credentials


Before you configure the connector in Stellar Cyber, you must obtain the following Microsoft Defender for Cloud Apps credentials:

- API URL
- Tenant ID
- Client ID
- Client Secret

Obtaining the API URL

To obtain the API URL for your tenant:

1. In the Microsoft Defender Portal (https://security.microsoft.com/), select **Settings** and then select **Cloud Apps**.

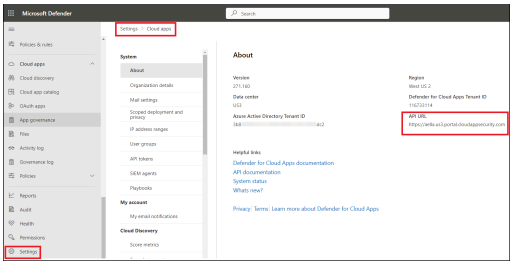

2. Under **System**, select **About**.
3. The **API URL** is displayed on the right side of the **About** screen.

Creating an App

Follow the procedure in the link below to create an app and grant permissions to the app:

https://learn.microsoft.com/en-us/defender-cloud-apps/api-authentication-application

Make note of the following:

- Client Secret


  Store the secret value in a safe location. It cannot be retrieved later.

- Directory (tenant) ID or Tenant ID
- Application (client) ID or Client ID


Adding the Connector in Stellar Cyber

To add a Microsoft Defender for Cloud Apps connector in Stellar Cyber:

1. Log in to Stellar Cyber.
2. Click **System | INTEGRATIONS | Connectors**. The **Connector Overview** appears.

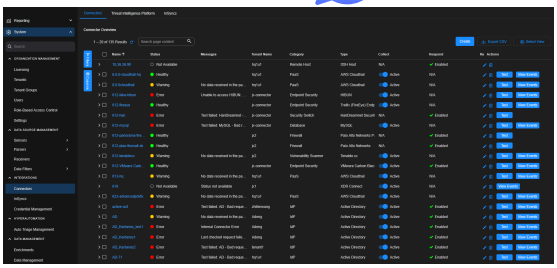


3. Click **Create** and select **Connector**.



   The **General** tab of the **Add Connector** screen appears. The information on this tab cannot be changed after you add the connector.

4. Choose **SaaS** from the **Category** dropdown.
5. Choose **Microsoft Defender for Cloud Apps** from the **Type** dropdown.

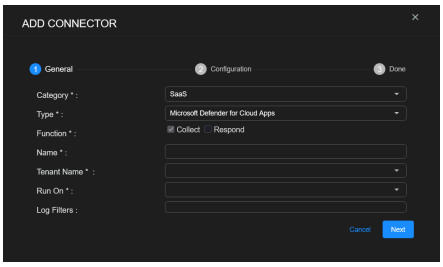


   The asterisk (*) indicates a required field.

6. For this connector, the supported **Function** is **Collect**, which is enabled already.
7. Enter a **Name**.


   Notes:
   - This field does not accept multibyte characters.
   - It is recommended that you follow a naming convention such as tenantname-connectortype.

8. Choose a **Tenant Name**. The Interflow records created by this connector include this tenant name.
9. Choose the device on which to run the connector.
10. (Optional) When the **Function** is **Collect**, you can apply **Log Filters**. For information, see Managing Log Filters.
11. Click **Next**. The **Configuration** tab appears.

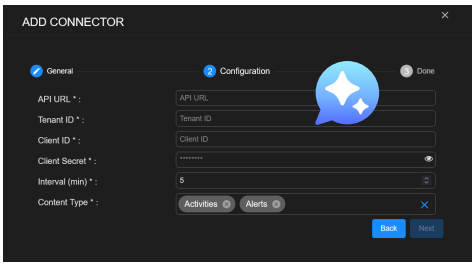

The asterisk (*) indicates a required field.

12. Enter the **API URL** you noted above in Obtaining the API URL.
13. Enter the **Tenant ID** you noted above in Creating an App.
14. Enter the **Client ID** you noted above.
15. Enter the **Client Secret** you noted above.
16. Choose the **Interval (min)**. This is how often the logs are collected.
17. Choose the **Content Type** you would like to collect. The logs for **Activities** and **Alerts** are supported.
18. Click **Next**. The final confirmation tab appears.

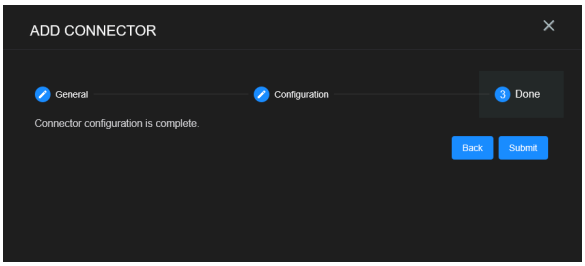

19. Click **Submit**.


The new connector is immediately active.

Testing the Connector

When you add (or edit) a connector, we recommend that you run a test to validate the connectivity parameters you entered. The test validates authentication and connectivity.

For connectors running on a sensor, Stellar Cyber recommends that you allow 30-60 seconds for new or modified configuration details to be propagated to the sensor before performing a test.

1. Click **System | INTEGRATIONS | Connectors**. The **Connector Overview** appears.

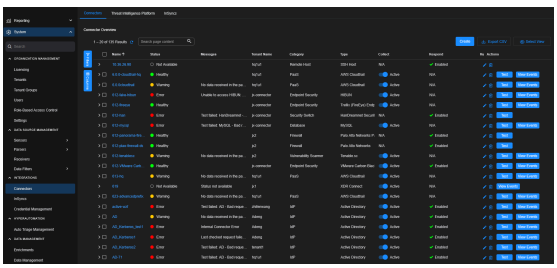

2. Locate the connector by name that you added, or modified, or that you want to test.
3. Click **Test** at the right side of that row. The test runs immediately.

Note that you may run only one test at a time.

Stellar Cyber conducts a basic connectivity test for the connector and reports a success or failure result. A successful test indicates that you entered all of the connector information correctly.

To aid troubleshooting your connector, the dialog remains open until you explicitly close it by using the **X** button. If the test fails, you can select the button from the same row to review and correct issues.

The connector status is updated every five (5) minutes. A successful test clears the connector status, but if issues persist, the status reverts to failed after a minute.


Repeat the test as needed.

Display sample messages...


Success !



Failure with summary of issue:



Show More example detail:



If the test fails, the common HTTP status error codes are as follows:

HTTP Error Code	HTTP Standard Error Name	Explanation	Recommendation
400	Bad Request	This error occurs when there is an error in the connector configuration.	Did you configure the connector correctly?
401	Unauthorized	This error occurs when an authentication credential is invalid or when a user does not have sufficient privileges to access a specific API.	Did you enter your credentials correctly? Are your credentials expired? Are your credentials entitled or licensed for that specific resource?
403	Forbidden	This error occurs when the permission or scope is not correct in a valid credential.	Did you enter your credentials correctly? Do you have the required role or permissions for that credential?
404	Not Found	This error occurs when a URL path does not resolve to an entity.	Did you enter your API URL correctly?
429	Too Many Requests	This error occurs when the API server receives too much traffic or if a user's license or entitlement quota is exceeded.	The server or user license/quota will eventually recover. The connector will periodically retry the query.

HTTP Error Code	HTTP Standard Error Name	Explanation	Recommendation
			If this occurs unexpectedly or too often, work with your API provider to investigate the server limits, user licensing, or quotas.

For a full list of codes, refer to HTTP response status codes.

Verifying Ingestion

To verify ingestion:

1. Select **Threat Hunting**.

   The **Interflow Search** tab appears.

2. Change the **Indices** to **Windows Events**.

   The table immediately updates to show ingested Interflow records.

© 2026 Stellar Cyber . All rights reserved.