Stellar Cyber 6.6.0s is now live! Discover all the updates in the release notes!

Configuring Microsoft Graph Message Trace Connectors 6.5.0

This connector allows Stellar Cyber to ingest logs from Microsoft Graph Message Trace and add the records to the data lake. This connector integrates with the messageTraces API to query email flow data (Message Trace).

It is recommended that you migrate any existing Office 365 Reporting Web Service connectors in Stellar Cyber to Microsoft Graph Message Trace connectors. Refer to Announcing General Availability (GA) of the New Message Trace in Exchange Online.

Microsoft Graph Message Trace requires a plan that includes Microsoft Exchange Online, such as Microsoft 365 Business Basic/Standard/Premium, Office 365 E1/E3/E5, and Exchange Online Plan 1 or 2. Refer to Exchange Online service description.

Note the following:

- The messageTraces API is currently only available on the Microsoft Graph global service (Enterprise Plan).
- The required permission is ExchangeMessageTrace.Read.All.
- The Exchange message trace service limit is 100 requests per 5 minutes.

Stellar Cyber connectors with the Collect function (collectors) may skip collecting some data when the ingestion volume is large, which potentially can lead to data loss. This can happen when the processing capacity of the collector is exceeded.

Connector Overview: Microsoft Graph Message Trace

Capabilities

- Collect: **Yes**
- Respond: **No**
- Native Alerts Mapped: **No**
- Runs on: **DP**

- Interval: **Configurable**

Collected Data

Content Type	Index	Locating Records
Message Trace	Windows Events	msg_class: `microsoft_graph_message_trace` msg_origin.source: `microsoft_graph` msg_origin.vendor: `microsoft` msg_origin.category: `email`

Domain

https://graph.microsoft.com/

Response Actions

N/A

Third Party Native Alert Integration Details

N/A

Required Credentials and Configurations

- Client Secret, Microsoft Subscription Plan, Tenant ID, and Client ID

Adding a Microsoft Graph Message Trace Connector

To add a Microsoft Graph Message Trace connector:

1. Obtain credentials
2. Add the connector in Stellar Cyber
3. Test the connector
4. Verify ingestion

Obtaining Microsoft Graph Message Trace Credentials

Before you configure the connector in Stellar Cyber, you must obtain the following Microsoft Graph Message Trace credentials. Follow the guidance in the Microsoft documentation in the Graph-based message trace API onboarding guide.

- Client Secret—The password that you generated for your app in the app registration portal

- Microsoft Subscription Plan—The available Microsoft Subscription Plan, which is **Enterprise Plan**.
- Tenant ID—The tenant from which to request permission, also known as the Directory ID.
- Client ID—The client ID, also known as the Application ID that the app registration portal assigned when the app was registered.

Registering an Application

To register an application, follow the guidance in the Microsoft documentation to Register an application with the Microsoft identity platform. Refer to the Prerequisites. You will need a Tenant ID in Microsoft Entra.

When you complete the registration of the application, the Microsoft Entra admin center displays the app registration's Overview pane. Make note of the Application (client) ID and Directory (tenant) ID.

To add a client secret, follow the guidance in the Microsoft documentation to Add credentials. Make note of the client secret's value.

Assigning API Permissions

To assign the required application permissions, follow the guidance in the Microsoft documentation to Configure Microsoft Graph permissions. Add the ExchangeMessageTrace.Read.All permission.

Creating the Service Principal


You can create the service principal in two ways:

- Use the Microsoft Graph Explorer. Follow the guidance in the Microsoft documentation to Create the service principal by using Microsoft Graph Explorer.
- Use the Microsoft Graph PowerShell SDK. Follow the guidance in the Microsoft documentation to Create the service principal by using Microsoft Graph PowerShell.


Adding the Connector in Stellar Cyber

To add a Microsoft Graph Message Trace connector in Stellar Cyber:

1. Log in to Stellar Cyber.
2. Click **System** | **INTEGRATIONS** | **Connectors**. The **Connector Overview** appears.

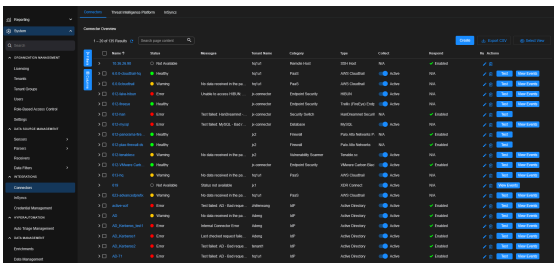


3. Click **Create** and select **Connector**.



The **General** tab of the **Add Connector** screen appears. The information on this tab cannot be changed after you add the connector.

4. Choose **Email** from the **Category** dropdown.
5. Choose **Microsoft Graph Message Trace** from the **Type** dropdown.

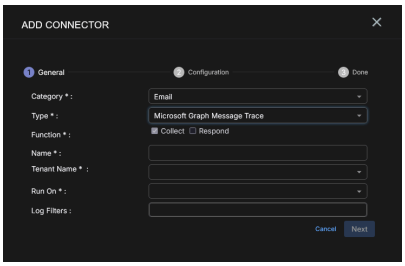


The asterisk (*) indicates a required field.

6. For this connector, the supported **Function** is **Collect**, which is enabled already.
7. Enter a **Name**.

Notes:

- This field does not accept multibyte characters.
- It is recommended that you follow a naming convention such as tenantname-connectortype.


8. Choose a **Tenant Name**. The Interflow records created by this connector include this tenant name.
9. Choose the device on which to run the connector.
10. (Optional) When the **Function** is **Collect**, you can apply **Log Filters**. For information, see Managing Log Filters.
11. Click **Next**. The **Configuration** tab appears.

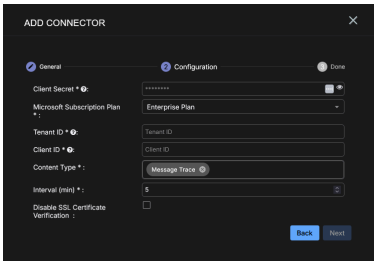

The asterisk (*) indicates a required field.

12. Enter the **Client Secret** you noted above in Obtaining Microsoft Graph Message Trace Credentials.
13. Select the available Microsoft Subscription Plan, which is **Enterprise Plan**.

14. Enter the **Tenant ID** you noted above.
15. Enter the **Client ID** you noted above.
16. Choose the **Content Type** you would like to collect. The logs for **Message Trace** are supported.
17. Choose the **Interval (min)**. This is how often the logs are collected.
18. (Optional) Click **Disable SSL Certificate Verification** if you want to disable SSL certificate verification. Only disable SSL certificates if you have a necessary reason to, otherwise, it is not a good security practice and may expose the connection to security risks.
19. Click **Next**. The final confirmation tab appears.

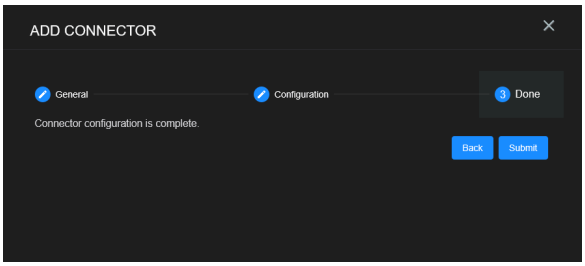

20. Click **Submit**.

The new connector is immediately active.


Testing the Connector

In addition to testing for connectivity, the **Test** button for the Microsoft Graph Message Trace connector tests that the Client Secret, Tenant ID, and Client ID are correct and data requests for the requested content type returns successful responses.

When you add (or edit) a connector, we recommend that you run a test to validate the connectivity parameters you entered. The test validates authentication and connectivity.

For connectors running on a sensor, Stellar Cyber recommends that you allow 30-60 seconds for new or modified configuration details to be propagated to the sensor before performing a test.

1. Click **System | INTEGRATIONS | Connectors**. The **Connector Overview** appears.

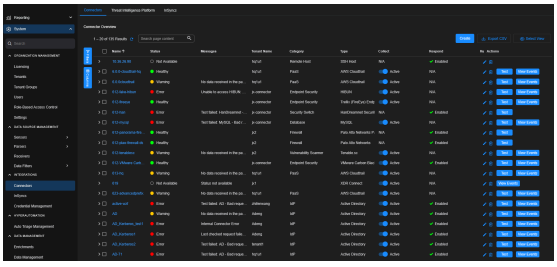

2. Locate the connector by name that you added, or modified, or that you want to test.
3. Click **Test** at the right side of that row. The test runs immediately.

Note that you may run only one test at a time.

Stellar Cyber conducts a basic connectivity test for the connector and reports a success or failure result. A successful test indicates that you entered all of the connector information correctly.

To aid troubleshooting your connector, the dialog remains open until you explicitly close it by using the **X** button. If the test fails, you can select the button from the same row to review and correct issues.

> The connector status is updated every five (5) minutes. A successful test clears the connector status, but if issues persist, the status reverts to failed after a minute.


Repeat the test as needed.

Display sample messages...


Success !



Failure with summary of issue:



Show More example detail:



If the test fails, the common HTTP status error codes are as follows:

HTTP Error Code	HTTP Standard Error Name	Explanation	Recommendation
400	Bad Request	This error occurs when there is an error in the connector configuration.	Did you configure the connector correctly?
401	Unauthorized	This error occurs when an authentication credential is invalid or when a user does not have sufficient privileges to access a specific API.	Did you enter your credentials correctly? Are your credentials expired? Are your credentials entitled or licensed for that specific resource?
403	Forbidden	This error occurs when the permission or scope is not correct in a valid credential.	Did you enter your credentials correctly? Do you have the required role or permissions for that credential?
404	Not Found	This error occurs when a URL path does not resolve to an entity.	Did you enter your API URL correctly?
429	Too Many Requests	This error occurs when the API server receives too much traffic or if a user's license or entitlement quota is exceeded.	The server or user license/quota will eventually recover. The connector will periodically retry the query. If this occurs unexpectedly or too often, work with your API provider to investigate the server limits,

HTTP Error Code	HTTP Standard Error Name	Explanation	Recommendation
			user licensing, or quotas.

For a full list of codes, refer to HTTP response status codes.

Verifying Ingestion

To verify ingestion:

1. Select **Threat Hunting**.

   The **Interflow Search** tab appears.

2. Change the **Indices** to **Windows Events**.

   The table immediately updates to show ingested Interflow records.

© 2026 Stellar Cyber . All rights reserved.