Stellar Cyber 6.6.0s is now live! Discover all the updates in the release notes!

Configuring Microsoft Graph Security API Connectors

6.0.0 6.6.0

This connector allows Stellar Cyber to ingest logs from Microsoft Graph Security API and add the records to the data lake. It integrates with the Microsoft Graph API to ingest alert data.

Refer to the rate limit information in the Microsoft documentation. The global usage rate limit is 130,000 requests per 10 seconds.

Stellar Cyber connectors with the Collect function (collectors) may skip collecting some data when the ingestion volume is large, which potentially can lead to data loss. This can happen when the processing capacity of the collector is exceeded.

Connector Overview: Microsoft Graph Security API

Capabilities

- Collect: **Yes**
- Respond: **No**
- Native Alerts Mapped: **Yes** 6.1.0
- Runs on: **DP**
- Interval: **Configurable**

Collected Data

Content Type	Index	Locating Records

Alert
Attack Simulation 6.2.0
Incident
	Windows Events	msg_class:
		`microsoft_graph_security_api_alert`
		`microsoft_graph_security_api_attack_simulation` 6.2.0
		`microsoft_graph_security_api_incident`
		
		msg_origin.source:
		`microsoft_graph_security_api`
		
		msg_origin.vendor:

Content Type	Index	Locating Records

		`microsoft_graph_security_api`
		
		msg_origin.category:
		`xdr`
		`email` (used for normalization of the Attack Simulation content type only) 6.2.0

Domain

https://graph.microsoft.com/

Response Actions

N/A

Third Party Native Alert Integration Details

Microsoft Defender XDR 6.1.0

This connector ingests logs from Graph Security API to get the raw alerts that are stored in the Syslog index. Select the Alert content type.

Stellar Cyber maps Microsoft Defender XDR alerts. The alerts are read from the Syslog index, enriched with Stellar Cyber fields, and mapped (with deduplication) to the Alerts index.

Deduplication uses the `microsoft_graph_security_api.id` field.

For details, see Integration of Third Party Native Alerts.

Microsoft Defender for Cloud (Graph Security API) 6.2.0

This connector ingests logs from Graph Security API to get the raw alerts that are stored in the Windows Events index. Select the Alert content type.

Stellar Cyber maps Microsoft Defender for Cloud alerts. The alerts are read from the Windows Events index, enriched with Stellar Cyber fields, and mapped to the Alerts index.

There is no deduplication of alerts between Microsoft Defender for Cloud and Microsoft Defender for Cloud (Graph Security API).

For details, see Integration of Third Party Native Alerts.

Microsoft Defender for Endpoint (Graph Security API) 6.2.0

This connector ingests logs from Graph Security API to get the raw alerts that are stored in the Windows Events index. Select the Alert content type.

Stellar Cyber maps Microsoft Defender for Endpoint alerts. The alerts are read from the Windows Events index, enriched with Stellar Cyber fields, and mapped to the Alerts index.

There is no deduplication of alerts between Microsoft Defender ATP and Microsoft Defender for Endpoint (Graph Security API).

For details, see Integration of Third Party Native Alerts.

Microsoft Defender for Cloud Apps (Graph Security API) 6.2.0

This connector ingests logs from Graph Security API to get the raw alerts are stored in the Windows Events index. Select the Alert content type.

Stellar Cyber maps Microsoft Defender for Cloud Apps alerts. The alerts are read from the Windows Events index, enriched with Stellar Cyber fields, and mapped to the Alerts index.

There is no deduplication of alerts between Microsoft Defender for Cloud Apps and Microsoft Defender for Cloud Apps (Graph Security API).

For details, see Integration of Third Party Native Alerts.

Microsoft App Governance (Graph Security API) 6.6.0

This connector ingests logs from Graph Security API to get the raw alerts are stored in the Windows Events index. Select the Alert content type.

Stellar Cyber maps Microsoft App Governance. The alerts are read from the Windows Events index, enriched with Stellar Cyber fields, and mapped to the Alerts index.

Deduplication is by `tenantid` and `microsoft_graph_security_api.id`.

For details, see Integration of Third Party Native Alerts.

Microsoft Data Loss Prevention (Graph Security API) 6.6.0

This connector ingests logs from Graph Security API to get the raw alerts are stored in the Windows Events index. Select the Alert content type.

Stellar Cyber maps Microsoft Data Loss Prevention alerts. The alerts are read from the Windows Events index, enriched with Stellar Cyber fields, and mapped to the Alerts index.

Deduplication is by `tenantid` and `microsoft_graph_security_api.id`.

For details, see Integration of Third Party Native Alerts.

Microsoft Defender for Identity (Graph Security API) 6.6.0

This connector ingests logs from Graph Security API to get the raw alerts are stored in the Windows Events index. Select the Alert content type.

Stellar Cyber maps Microsoft Defender for Identity alerts. The alerts are read from the Windows Events index, enriched with Stellar Cyber fields, and mapped to the Alerts index.

Deduplication is by `tenantid` and `microsoft_graph_security_api.id`.

For details, see Integration of Third Party Native Alerts.

Microsoft Defender for Office 365 (Graph Security API) 6.6.0

This connector ingests logs from Graph Security API to get the raw alerts are stored in the Windows Events index. Select the Alert content type.

Stellar Cyber maps Microsoft Defender for Office 365 alerts. The alerts are read from the Windows Events index, enriched with Stellar Cyber fields, and mapped to the Alerts index.

Deduplication is by `tenantid` and `microsoft_graph_security_api.id`.

For details, see Integration of Third Party Native Alerts.

Microsoft Threat Intelligence (Graph Security API) 6.6.0

This connector ingests logs from Graph Security API to get the raw alerts are stored in the Windows Events index. Select the Alert content type.

Stellar Cyber maps Microsoft Threat Intelligence alerts. The alerts are read from the Windows Events index, enriched with Stellar Cyber fields, and mapped to the Alerts index.

Deduplication is by `tenantid` and `microsoft_graph_security_api.id`.

For details, see Integration of Third Party Native Alerts.

Microsoft Entra ID Protection (Graph Security API) 6.6.0

This connector ingests logs from Graph Security API to get the raw alerts are stored in the Windows Events index. Select the Alert content type.

Stellar Cyber maps Microsoft Entra ID Protection alerts. The alerts are read from the Windows Events index, enriched with Stellar Cyber fields, and mapped to the Alerts index.

Deduplication is by `tenantid` and `microsoft_graph_security_api.id`.

For details, see Integration of Third Party Native Alerts.

Required Credentials and Configurations

- Tenant ID, Client ID, and Password

Locating Records

Microsoft Defender XDR 6.1.0

To search the alerts in the Alerts index or the Original Records in the Syslog index, use the query: `msg_class: microsoft_graph_defender_xdr_alert and _exists_: event.threat.name`

Microsoft Defender for Cloud (Graph Security API) 6.2.0

To search the alerts in the Alerts index or to search the Original Records in the Syslog index, use the query: `msg_class: microsoft_defender_for_cloud_alerts AND msg_origin.source: microsoft_graph_security_api AND`

exists: event.threat.name.

Microsoft Defender for Endpoint (Graph Security API) 6.2.0

To search the alerts in the Alerts index or to search the Original Records in the Syslog index, use the query: `msg_class: microsoft_defender_for_endpoint_alerts AND msg_origin.source: microsoft_graph_security_api AND _exists_: event.threat.name`.

Microsoft Defender for Cloud Apps (Graph Security API) 6.2.0

To search the alerts in the Alerts index or to search the Original Records in the Syslog index, use the query: `msg_class: microsoft_defender_for_cloud_apps_alerts AND msg_origin.source: microsoft_graph_security_api AND _exists_: event.threat.name`.

Microsoft App Governance (Graph Security API) 6.6.0

To search the alerts in the Alerts index or to search the Original Records in the Syslog index, use the query: `msg_class: microsoft_app_governance_alerts AND msg_origin.source: microsoft_graph_security_api AND _exists_: event.threat.name AND NOT microsoft_graph_security_api.status: resolved`.

Microsoft Data Loss Prevention (Graph Security API) 6.6.0

To search the alerts in the Alerts index or to search the Original Records in the Syslog index, use the query: `msg_class: microsoft_data_loss_prevention_alerts AND msg_origin.source: microsoft_graph_security_api AND _exists_: event.threat.name AND NOT microsoft_graph_security_api.status: resolved`.

Microsoft Defender for Identity (Graph Security API) 6.6.0

To search the alerts in the Alerts index or to search the Original Records in the Syslog index, use the query: `msg_class: microsoft_defender_for_identity_alerts AND msg_origin.source: microsoft_graph_security_api AND _exists_: event.threat.name AND NOT microsoft_graph_security_api.status: resolved`.

Microsoft Defender for Office 365 (Graph Security API) 6.6.0

To search the alerts in the Alerts index or to search the Original Records in the Syslog index, use the query: `msg_class: microsoft_defender_for_office365_alerts AND msg_origin.source: microsoft_graph_security_api AND _exists_: event.threat.name AND NOT microsoft_graph_security_api.status: resolved`.

Microsoft Threat Intelligence (Graph Security API) 6.6.0

To search the alerts in the Alerts index or to search the Original Records in the Syslog index, use the query: `msg_class: microsoft_threat_intelligence_alerts AND msg_origin.source: microsoft_graph_security_api AND _exists_: event.threat.name AND NOT microsoft_graph_security_api.status: resolved`.

Microsoft Entra ID Protection (Graph Security API) 6.6.0

To search the alerts in the Alerts index or to search the Original Records in the Syslog index, use the query: `msg_class: azure_ad_identity_protection_alerts AND msg_origin.source: microsoft_graph_security_api AND _exists_: event.threat.name AND NOT microsoft_graph_security_api.status: resolved`.

Adding a Microsoft Graph Security API Connector

To add a Microsoft Graph Security API connector:

1. Obtain credentials
2. Add the connector in Stellar Cyber
3. Test the connector
4. Verify ingestion

Obtaining Microsoft Graph Security API Credentials

Before you configure the connector in Stellar Cyber, you must obtain the following Microsoft Graph Security API credentials:


- Tenant ID—The tenant from which to request permission, also known as the Directory ID

- Client ID—The client ID, also known as the Application ID that the app registration portal assigned when the app was registered
- Password—The password that you generated for your app in the app registration portal, also known as the Client Secret


Registering an Application

To register an application, follow the guidance in the Microsoft documentation:


1. With an administrative account, log in to Microsoft Entra admin center and select **Entra ID** in the navigation pane.
2. Select **App registrations**. A page for adding and managing **App registrations** is displayed.

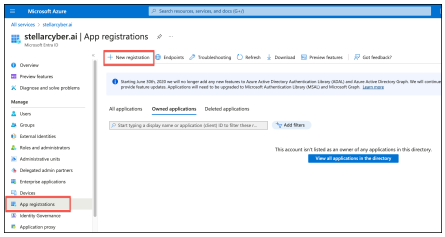

3. Click **New registration**. A pane is opened for your new parameters.



4. Enter a display **Name** for your application.
5. Choose a supported account type. **Accounts in this organizational directory only** is typical.
6. The **Redirect URI** setting is not required.
7. Click **Register**. The initial app registration is completed and a summary of it is displayed.

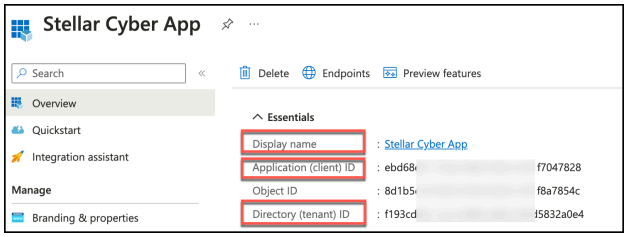


8. Copy the following details to a file:
    - **Display Name**
    - **Application (client) ID**, which is the **Client ID** you will use to add the connector in Stellar Cyber
    - **Directory (tenant) ID**, which is the **Tenant ID** you will use to add the connector in Stellar Cyber


Configuring the Application

To configure the application by setting permissions and obtaining the client secret, follow the guidance in the Microsoft documentation:

1. To set the **permissions** for your application, in the navigation pane under **Manage**, select **API Permissions**. Click **Add a permission**. The **Request API permissions** pane appears. Click **Microsoft Graph**.

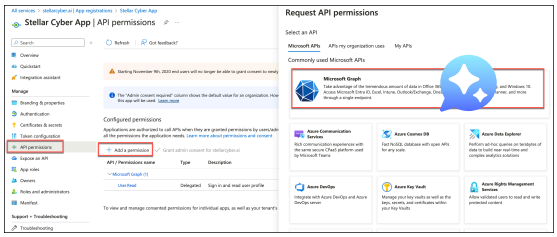

a. Click **Application permissions**.



You can type in the Search box to find permissions.

b. Set the following permissions for the logs you want to collect.


Permission	Description
SecurityAlert.Read.All	Read all security alerts
SecurityEvents.Read.All	Read your organization's security events
SecurityIncident.Read.All	Read all security incidents
AttackSimulation.Read.All	Read attack simulation data of an organization 6.2.0

c. Click **Add permissions**. The **API permissions** page redisplays with your added permissions.

d. If you are the super admin, grant the permissions. Select the checkmark to **Grant admin consent for <account name>**.


Otherwise, wait for the super admin to grant them.

Make sure that the permissions are granted. If you add the connector before permissions are granted, the process fails.

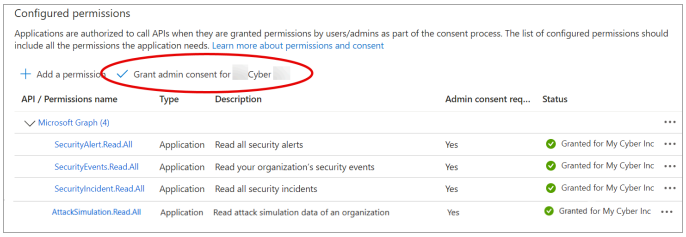


When the permissions are granted successfully, there will be green checkmarks in the **Status** column.

2. To add a client secret to the application, select **Certificates & secrets** and **New client secret**.

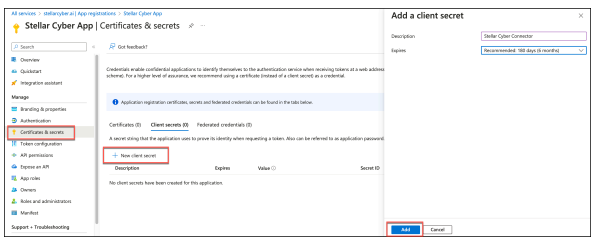

a. Add a Description and select an expiry.

b. Click **Add**. The client secret is displayed in the **Client secrets** list.

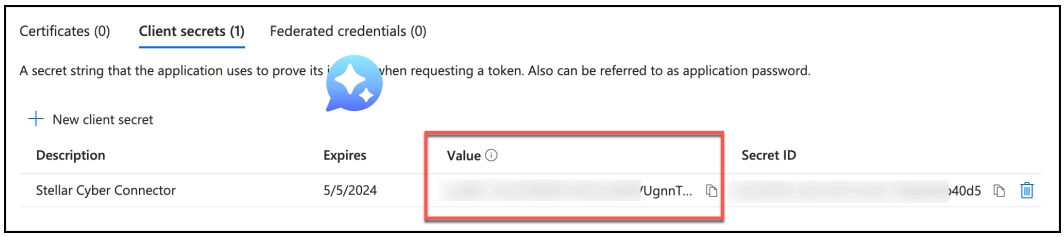

c. Copy the **Value**. This is the **Password** you will use to add the connector in Stellar Cyber.

Supporting Microsoft Defender for Identity

This connector also supports identity-based security alert and incident ingestion.

To get Microsoft Defender for Identity events from Microsoft Graph Security API, ensure that Microsoft Defender for Identity is properly configured or integrated with Microsoft 365 Defender. Refer to the section on alerts and incidents in Use the Microsoft Graph security API.

Alert ingestion needs the following permissions (refer to List alerts_v2):

- Least privileged permissions: SecurityAlert.Read.All
- Higher privileged permissions: SecurityAlert.ReadWrite.All


Incident ingestion needs the following permissions (refer to List incidents):

- Least privileged permissions: SecurityIncident.Read.All
- Higher privileged permissions: SecurityIncident.ReadWrite.All


Adding the Connector in Stellar Cyber

To add a Microsoft Graph Security API connector in Stellar Cyber:

1. Log in to Stellar Cyber.
2. Click **System | INTEGRATIONS | Connectors**. The **Connector Overview** appears.

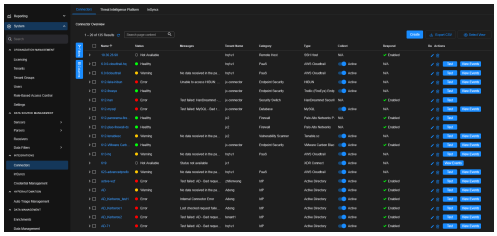


3. Click **Create** and select **Connector**.



The **General** tab of the **Add Connector** screen appears. The information on this tab cannot be changed after you add the connector.

4. Choose **Extended Detection & Response** from the **Category** dropdown.
5. Choose **Microsoft Graph Security API** from the **Type** dropdown.

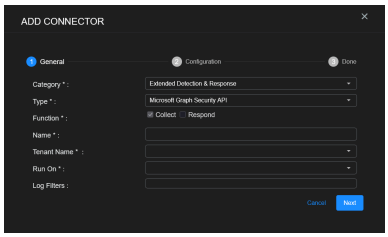


The asterisk (*) indicates a required field.

6. For this connector, the supported **Function** is **Collect**, which is enabled already.
7. Enter a **Name**.

   Notes:
   - This field does not accept multibyte characters.
   - It is recommended that you follow a naming convention such as tenantname-connectortype.


8. Choose a **Tenant Name**. The Interflow records created by this connector include this tenant name.
9. Choose the device on which to run the connector.
10. (Optional) When the **Function** is **Collect**, you can apply **Log Filters**. For information, see Managing Log Filters.
11. Click **Next**. The **Configuration** tab appears.



The asterisk (*) indicates a required field.

12. Select the applicable **Microsoft Subscription Plan** from the menu:
    - **Enterprise Plan**
    - **GCC Government Plan**
    - **GCC High Government Plan**
    - **DoD Government Plan**

    To learn about US government plans, refer to the following Microsoft documentation: Microsoft Defender XDR for US Government customers.
13. Enter the **Tenant ID** you noted above in Obtaining Microsoft Graph Security API Credentials.
14. Enter the **Client ID** you noted above.
15. Enter the **Password** you noted above.
16. Choose the **Content Type** you would like to collect. The logs for **Alert** , **Attack Simulation**, and **Incident** are supported.
17. Choose the **Interval (min)**. This is how often the logs are collected.
18. (Optional) Click **Disable SSL Certificate Verification** if you want to disable SSL certificate verification. Only disable SSL certificates if you have a necessary reason to, otherwise, it is not a good security practice and may expose the connection to security risks.
19. Click **Next**. The final confirmation tab appears.

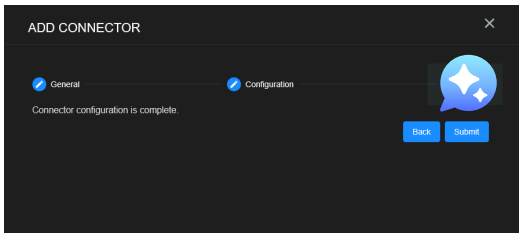

20. Click **Submit**.

The new connector is immediately active.


Testing the Connector

In addition to testing for connectivity, the **Test** button for the Microsoft Graph Security API connector tests that the Tenant ID, Client ID, and Password are correct and data requests for the requested content type returns successful responses.

When you add (or edit) a connector, we recommend that you run a test to validate the connectivity parameters you entered. The test validates authentication and connectivity.

For connectors running on a sensor, Stellar Cyber recommends that you allow 30-60 seconds for new or modified configuration details to be propagated to the sensor before performing a test.

1. Click **System | INTEGRATIONS | Connectors**. The **Connector Overview** appears.

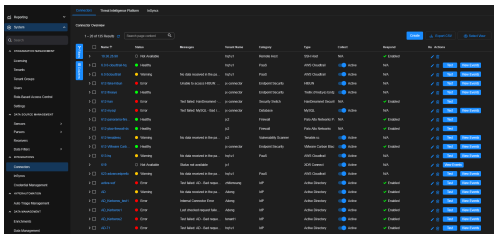

2. Locate the connector by name that you added, or modified, or that you want to test.
3. Click **Test** at the right side of that row. The test runs immediately.

   Note that you may run only one test at a time.

Stellar Cyber conducts a basic connectivity test for the connector and reports a success or failure result. A successful test indicates that you entered all of the connector information correctly.

To aid troubleshooting your connector, the dialog remains open until you explicitly close it by using the **X** button. If the test fails, you can select the button from the same row to review and correct issues.

The connector status is updated every five (5) minutes. A successful test clears the connector status, but if issues persist, the status reverts to failed after a minute.


Repeat the test as needed.

Display sample messages...


Success !



Failure with summary of issue:



Show More example detail:

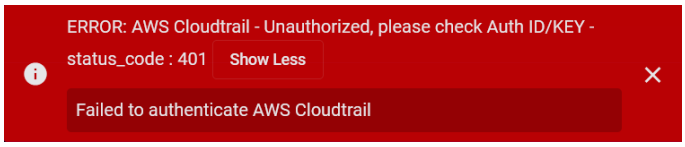

If the test fails, the common HTTP status error codes are as follows:

HTTP Error Code	HTTP Standard Error Name	Explanation	Recommendation
400	Bad Request	This error occurs when there is an error in the connector configuration.	Did you configure the connector correctly?
401	Unauthorized	This error occurs when an authentication credential is invalid or when a user does not have sufficient privileges to access a specific API.	Did you enter your credentials correctly? Are your credentials expired? Are your credentials entitled or licensed for that specific resource?
403	Forbidden	This error occurs when the permission or scope is not correct in a valid credential.	Did you enter your credentials correctly? Do you have the required role or permissions for that credential?
404	Not Found	This error occurs when a URL path does not resolve to an entity.	Did you enter your API URL correctly?
429	Too Many Requests	This error occurs when the API server receives too much traffic or if a user's license or entitlement quota is exceeded.	The server or user license/quota will eventually recover. The connector will periodically retry the query. If this occurs unexpectedly or too often, work with your API provider to investigate the server limits, user licensing, or quotas.

For a full list of codes, refer to HTTP response status codes.

Verifying Ingestion

To verify ingestion:

1. Select **Threat Hunting**.

   The **Interflow Search** tab appears.

2. Change the **Indices** to **Windows Events**.

   The table immediately updates to show ingested Interflow records.

© 2026 Stellar Cyber . All rights reserved.