Stellar Cyber 6.6.0s is now live! Discover all the updates in the release notes!

Configuring Office 365 Connectors 6.6.0

This connector allows Stellar Cyber to collect data from external sources and add the records to the data lake.

Integrating Office 365 with Stellar Cyber provides real-time visibility into security events and alerts, enabling organizations to effectively monitor and respond to security incidents across their cloud and on-premise environments.

There must be one connector for every Microsoft account to be monitored.

Stellar Cyber connectors with the Collect function (collectors) may skip collecting some data when the ingestion volume is large, which potentially can lead to data loss. This can happen when the processing capacity of the collector is exceeded.

Connector Overview: Office 365

Capabilities

- Collect: **Yes**
- Respond: **No**
- Native Alerts Mapped: **Yes**
- Runs on: **DP**
- Interval: **Configurable**

Collected Data

Content Type	Index	Locating Records

Audit General
Audit Exchange
Audit Sharepoint
Audit Azure Active Directory
DLP All
	Windows Events	msg_class:
		`office365_audit_general`
		`office365_audit_exchange`
		`office365_audit_sharepoint`

Content Type	Index	Locating Records

		`office365_audit_azureactivedirectory`
		`office365_dlp_all`
		
		msg_origin.source:
		`office365`
		
		msg_origin.vendor:
		`office365`
		
		msg_origin.category:
		`office_suite`

Domain

<Authentication Endpoint>

where <Authentication Endpoint> is a variable from the configuration of this connector and will be one of the following, based on the Subscription Plan:

- https://manage.office.com (Enterprise Plan)
- https://manage-gcc.office.com (GCC Government Plan)
- https://manage.office365.us (GCC High Government Plan)
- https://manage.protection.apps.mil (DoD Government Plan)

Response Actions

N/A

Third Party Native Alert Integration Details

Office 365 alerts contain events from the **AlertTriggered** operation, which are sent to the Alerts index. Select the Audit General content type.

The source records may also include related events in the **AlertEntityGenerated** operation. Some information (AlertEntityId and EntityType) from the **AlertEntityGenerated** operation is merged with the **AlertTriggered** operation for the same Alert ID. The information (AlertEntityId and EntityType) is stored in the `event_summary` field.

Deduplication is by `tenantid` and `AlertId`.

In addition, the **AlertEntityGenerated** operation can be queried in Original Records, which are sent to the Windows Events index.

For details, see Integration of Third Party Native Alerts.

For full alert integration of Office 365, including email-related alerts, the following licenses are required:

- Microsoft 365 E5
- Microsoft Defender for Office 365 P2 as an add-on to a non-E5 license

Required Credentials and Configurations

- Office 365 Subscription Plan, Authentication Endpoint, Directory ID, Application ID, and API Access Key
- Microsoft Entra ID App with permissions: ActivityFeed.Read, ActivityFeed.ReadDlp, ServiceHealth.Read

Locating Records

Use the following to query for re[illegible]:

- msg_origin.source: `office365`
- msg_class: `office365_audit_general`

To search the alerts in the Alerts index, use the query: `msg_class: office365_audit_general AND Operation:AlertTriggered`

To search the Original Records of the alerts in the Windows Events index, use the query: `msg_class: office365_audit_general AND Operation:AlertTriggered AND Operation:AlertEntityGenerated`

Adding an Office 365 Connector

To add an Office 365 connector:

1. Enable the audit log
2. Register the application
3. Add the connector in Stellar Cyber
4. Test the connector
5. Verify ingestion
6. About the query_window_start Field

Enabling the Audit Log

The procedure in this section is for enabling auditing through the Microsoft Purview portal.

The required permissions are:


- **Organization Management** or **Audit Logs** role in Exchange Online
- Global Admin or Compliance Admin in Microsoft 365

Notes:

- Audit logs can take up to 24 hours to start appearing after enabling
- Standard retention is 180 days (E3) or 365 days (E5)

To enable auditing:


1. Log on to https://purview.microsoft.com.
2. Navigate to **Solutions** > **Audit**.

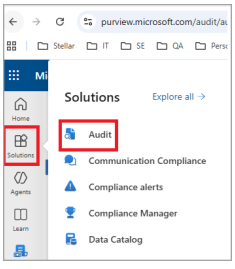

Or direct URL: https://purview.microsoft.com/audit

3. If auditing is not enabled, there will be a banner: **Start recording user and admin activity**.


4. Click **Start recording user and admin activity**.
5. When Audit is enabled, you can see the **Search** page.

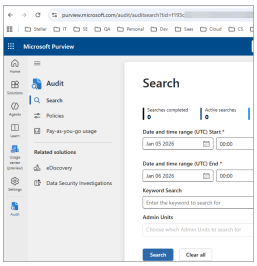


Registering the Application

To register the application in Microsoft Entra ID (formerly Azure Active Directory):


1. Log in to Microsoft Azure at https://portal.azure.com.
2. From **Azure services**, select **Microsoft Entra ID**.

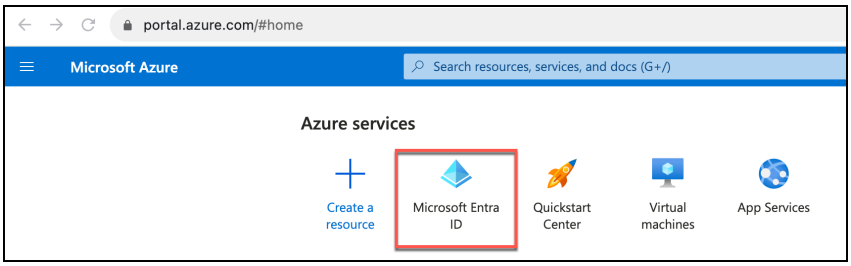


3. In the navigation pane, select **App registrations**.

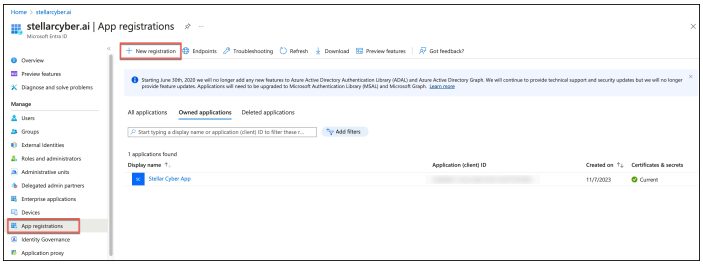


4. Click **New registration**.

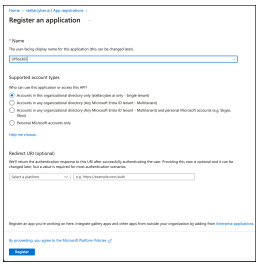


5. Enter a **Name**.
6. Choose a supported account type. **Accounts in this organizational directory only** is typical.
7. Click **Register**.

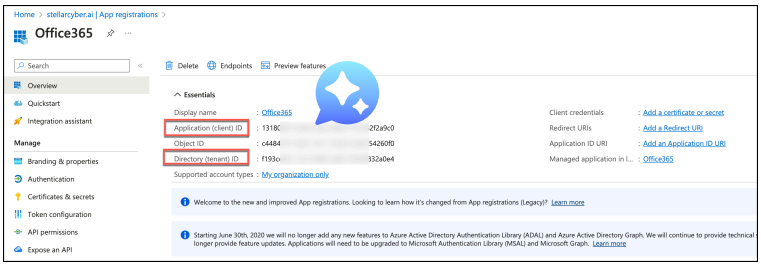

8. Copy the **Application (client) ID** and **Directory (tenant) ID**. You will use them to configure the connector in Stellar Cyber.
9. To set the permissions for your application, in the navigation pane, select **API Permissions**.

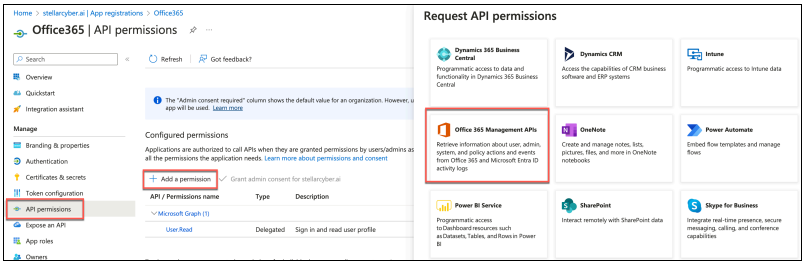


10. Click **Add a permission**.
11. Select **Office 365 Management APIs**.

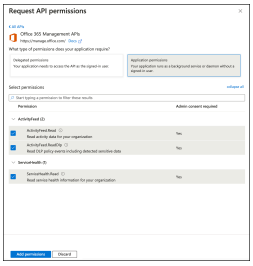


12. In **Request API permissions**, select **Application permissions**.
13. Select permissions for ActivityFeed.Read, ActivityFeed.ReadDlp, and ServiceHealth.Read.
14. Click **Add permissions**.
15. If you are the Office 365 super admin, grant the permissions. Select the checkmark to **Grant admin consent for <account name>**.

    Otherwise, wait for the super admin to grant them.


    Make sure that the permissions are granted. If you add the connector before permissions are granted, the process fails and you have to start over.

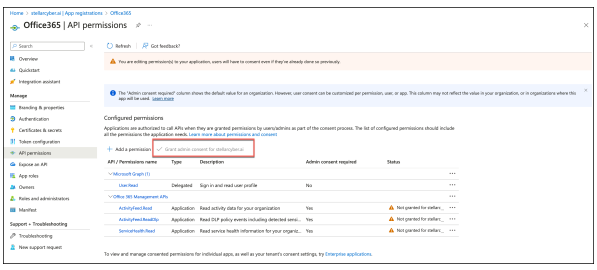

16. When the permissions are granted, in the navigation pane, click **Certificates & secrets**.

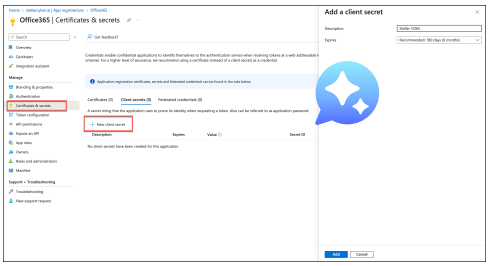

17. Click **New client secret**.
18. In **Add a client secret**, enter a **Description** and choose an expiration.
19. Click **Add**.

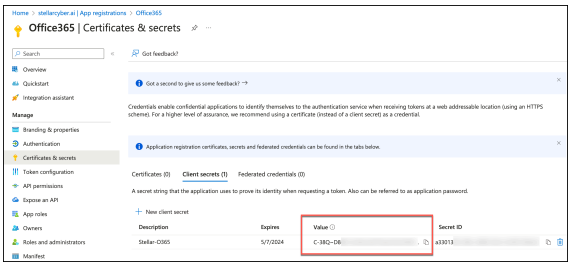


20. Copy the **Value**. You will use this as the **API Access Key** to configure the connector in Stellar Cyber.


Adding the Connector in Stellar Cyber

With the audit log enabled, the app registered, and the two IDs and secret handy, add the Office 365 connector in Stellar Cyber:

1. Log in to Stellar Cyber.
2. Click **System | INTEGRATIONS | Connectors**. The **Connector Overview** appears.

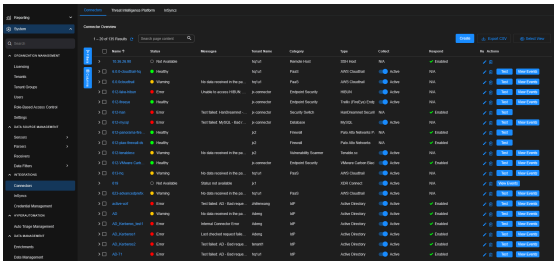


3. Click **Create** and select **Connector**.

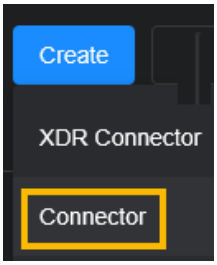

The **General** tab of the **Add Connector** screen appears. The information on this tab cannot be changed after you add the connector.

4. Choose **SaaS** from the **Category** dropdown.
5. Choose **Office 365** from the **Type** dropdown.

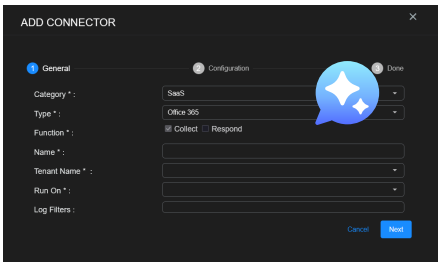


The asterisk (*) indicates a required field.

6. For this connector, the supported **Function** is **Collect**, which is enabled already.
7. Enter a **Name**.

> Notes:
> - This field does not accept multibyte characters.
> - It is recommended that you follow a naming convention such as tenantname-connectortype.

8. Choose a **Tenant Name**. The Interflow records created by this connector include this tenant name.
9. Choose the device on which to run the connector.
10. (Optional) When the **Function** is **Collect**, you can apply **Log Filters**. For information, see Managing Log Filters.
11. Click **Next**. The **Configuration** tab appears.

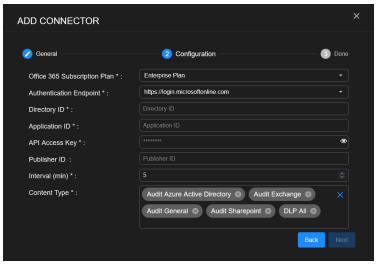

The asterisk (*) indicates a required field.


12. Select the applicable **Office365 Subscription Plan** from the menu:
    - **Enterprise Plan**
    - **GCC Government Plan**
    - **GCC High Government Plan**
    - **DoD Government Plan**

    To learn about Office 365 government environments and customer eligibility for the Office 365 government plans, refer to the following Microsoft documentation: https://learn.microsoft.com/en-us/office365/servicedescriptions/office-365-platform-service-description/office-365-us-government/office-365-us-government.
13. Select the Microsoft **Authentication Endpoint** you wish to use, the available selections are:
    - **https://login.microsoftonline.us**
    - **https://login.microsoftonline.de**

- **https://login.partner.microsoftonline.cn**
- **https://login.microsoftonline.com**

14. Enter the **Directory ID**. This is the **Directory (tenant) ID** you copied when you performed the application registration.
15. Enter the **Application ID**. This is the **Application (client) ID** you copied when you performed the application registration.
16. Enter the **API Access Key**. This is Value string you copied from **Certificates & secrets**.
17. (Optional) Enter a **Publisher ID**. This ID is used to identify the application querying the API. If there are no rate limits for querying the API, you can leave this blank.
18. Set the **Interval (min)**. This is how often the logs are collected.
19. Choose the **Content Type** you want to collect. The following logs are supported:
    - **Audit Azure Active Directory**
    - **Audit Exchange**
    - **Audit General**
    - **Audit Sharepoint**
    - **DLP ALL**

    The same content types are collected for all **Office365 Subscription Plans**.
20. Click **Next**. The final confirmation tab appears.

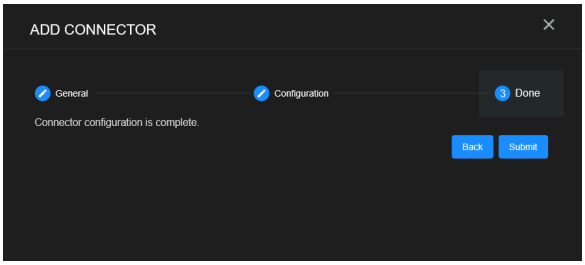

21. Click **Submit**.

The new connector is immediately active, but the Office 365 APIs might not be active, especially if this is the first time you've enabled the Office 365 audit logs. Wait at least 30 minutes before testing the connector so that Office 365 can complete its background tasks.

The connector collects logs every 5 minutes, but does not collect any historical logs.

Testing the Connector


If you've just added this connector, wait 30 minutes before testing.

When you add (or edit) a connector, we recommend that you run a test to validate the connectivity parameters you entered. The test validates authentication and connectivity.

For connectors running on a sensor, Stellar Cyber recommends that you allow 30-60 seconds for new or modified configuration details to be propagated to the sensor before

performing a test.

1. Click **System | INTEGRATIONS | Connectors**. The **Connector Overview** appears.

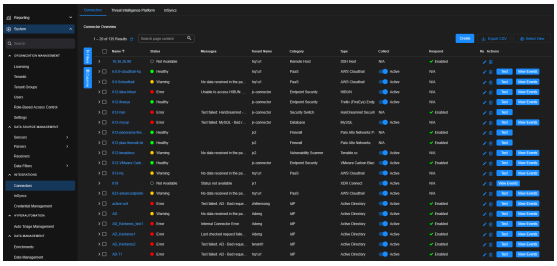

2. Locate the connector by name that you added, or modified, or that you want to test.
3. Click **Test** at the right side of that row. The test runs immediately.

Note that you may run only one test at a time.

Stellar Cyber conducts a basic connectivity test for the connector and reports a success or failure result. A successful test indicates that you entered all of the connector information correctly.

To aid troubleshooting your connector, the dialog remains open until you explicitly close it by using the **X** button. If the test fails, you can select the button from the same row to review and correct issues.

The connector status is updated every five (5) minutes. A successful test clears the connector status, but if issues persist, the status reverts to failed after a minute.


Repeat the test as needed.

Display sample messages...


Success !



Failure with summary of issue:



Show More example detail:

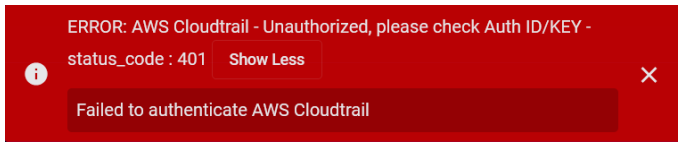


If the test fails, the common HTTP status error codes are as follows:

HTTP Error Code	HTTP Standard Error Name	Explanation	Recommendation
400	Bad Request	This error occurs when there is an error in the connector configuration.	Did you configure the connector correctly?
401	Unauthorized	This error occurs when an authentication credential is invalid or when a user does not have sufficient privileges to access a specific API.	Did you enter your credentials correctly? Are your credentials expired?

HTTP Error Code	HTTP Standard Error Name	Explanation	Recommendation
403	Forbidden	This error occurs when the permission or scope is not correct in a valid credential.	Are your credentials entitled or licensed for that specific resource? Did you enter your credentials correctly? Do you have the required role or permissions for that credential?
404	Not Found	This error occurs when a URL path does not resolve to an entity.	Did you enter your API URL correctly?
429	Too Many Requests	This error occurs when the API server receives too much traffic or if a user's license or entitlement quota is exceeded.	The server or user license/quota will eventually recover. The connector will periodically retry the query. If this occurs unexpectedly or too often, work with your API provider to investigate the server limits, user licensing, or quotas.

For a full list of codes, refer to HTTP response status codes.

If you see an error similar to below, verify that the appropriate permissions have been granted.

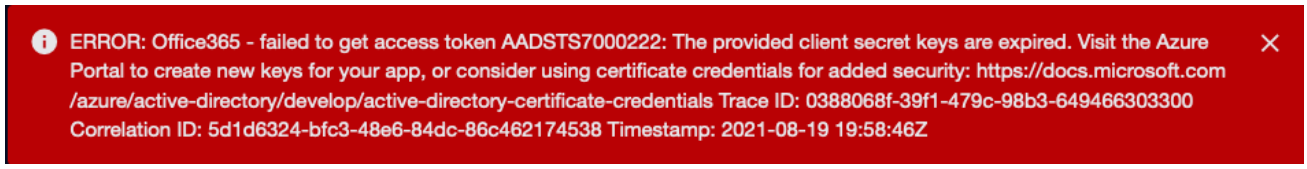

Verifying Ingestion

To verify ingestion:

1. Select **Threat Hunting**. The **Interflow Search** tab appears.
2. Change the **Indices** to **Windows Events** or **Alerts**. The table immediately updates to show ingested Interflow records.

About the query_window_start Field 6.6.0

The `query_window_start` field is a timestamp added to all Microsoft Office 365 connector events. It records the start of the polling window during which Stellar Cyber collected the event from Microsoft's API, reflecting when Microsoft made the event available for retrieval.

The field is stored as a Unix timestamp in milliseconds in the raw event, and is displayed as a datetime object in the Stellar Cyber user interface. The `query_window_start` field is consistent

with existing fields such as `timestamp` and `write_time`.

Background

Vendors do not always guarantee real-time delivery of events. Some events may be delayed hours or days before appearing in the vendor's API. The `query_window_start` field allows you to determine when the vendor published the event, making it straightforward to identify whether an ingestion delay originated on the vendor side.

© 2026 Stellar Cyber . All rights reserved.