Stellar Cyber 6.6.0s is now live! Discover all the updates in the release notes!

Parser Studio – Log Sources 6.3.0

Root-level users, partners, and tenant users

The **Log Sources** tab in Parser Studio (**System | DATA SOURCE MANAGEMENT | Parser Studio | Log Sources**) lets you map logs arriving from specified IP addresses on ports 514, 6514, or 443 to their matching vendor-specific parsers on the sensor.

The Log Sources page lists each log source you have already configured. Each entry shows its **Log Source Name**, **Tenant Name**, **Log Source Address**, **Ingestion Port**, and transport **Protocol**.

Why Configure Log Sources?

It's a best practice in Stellar Cyber to send logs to their vendor-specific parsers, when available. One approach is to refer to the list of supported vendor-specific ports, point your log source to the appropriate port on the sensor IP address, and open that port in your firewall.

As an alternative, you can use the **Log Sources** page to configure the sensor to relay traffic arriving on the generic syslog ports of **514** (non-TLS), **6514** (TLS), or **443** (TLS) to a specific log parser internally, based on the source IP address of the traffic. This approach minimizes the ports you need to open in your firewall while still ensuring that logs reach their native parser on the sensor.

Log source entries for TLS-encrypted logs override the Syslog TLS Enabled option set on a Modular Sensor.


Port Relay Prerequisites

Keep in mind the following prerequisites when configuring port relay:

- The sending log source must be on the same subnet as the receiving sensor.
- There must be no proxy between the sending log source and the receiving sensor that could change the source IP address.

Meeting these requirements ensures that the sending log source's IP address matches the entries in the Log Sources table.


Creating a Log Source Entry

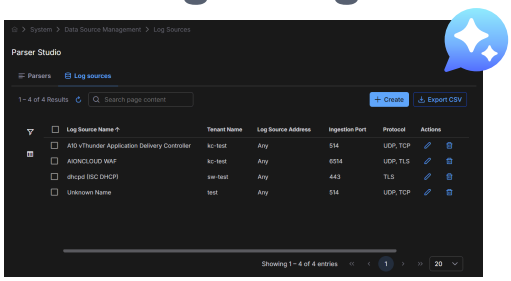

To add a new log source entry:

1. Determine the IP address of your log source.
2. Navigate to **System | DATA SOURCE MANAGEMENT | Parser Studio | Log Sources** and select **Create**.

   The **Add Log Source Configuration** dialog box appears.

3. Use the **Name** drop-down list to select the type of log source traffic arriving from this IP address.

   Refer to the **Log Parser Ports**topic for a detailed list of parsers available in Stellar Cyber, along with their native ports.
4. Use the **Tenant Name** drop-down list to associate this entry with a specific tenant.
5. Use the **Log Source Address** field to supply the IP addresses for this log source type.

   Note the following when configuring the IP addresses for a log source:

   - You can supply more than one IP address for a given log source type.
   - You can also use the special, catch-all **Any** address to direct log traffic from any IP address without an explicit entry in the Log Sources table to a specific parser.

     You typically use this as a catch-all for traffic arriving at sensors on port 514, 6514, or 443 from IP addresses without explicit entries. For example, Tenant X may have entries for logs sent from several specific IP addresses. You could create a final **Any** entry for Tenant X that routes any remaining logs arriving at the tenant's sensors to, for example, the generic CEF parser.

     The user interface does not prevent you from having a tenant with only a single **Any** entry in this table. In that scenario, all log traffic for the tenant on port 514, 6514, or 443 would be sent to a single parser.
6. Use the **Ingestion Port** drop-down list to specify whether this entry is for logs arriving on the standard syslog port of 514, the secure syslog port of 6514, or the secure

HTTP port of 443.

The read-only **Protocol** field updates automatically based on the selected port:

- **UDP, TCP** appears when you choose **514** as the ingestion port. The sensor listens for both UDP and TCP traffic from the specified source.
- **UDP, TLS** appears when you choose **6514** as the ingestion port. The sensor accepts both UDP and TLS protocols.
- **TLS** appears when you choose **443** as the ingestion port. The sensor accepts only TLS.


Notes on Configuring Log Sources

Be aware of the following when working with log sources:

- The Log Sources page does not let you create more than one entry for a given IP address for the same tenant.
- The `show logforwarder port-ingestion` CLI command is a useful tool for troubleshooting port relay entries. It shows packet and byte counts for relayed traffic, helping you determine whether traffic is reaching the sensor. You can run this command in a CLI session connected directly to the sensor or in the remote CLI available from the Sensor List. For example:

```
Sensor> show logforwarder port-ingestion
Port ingestion
seq   sessions   source           proto   ingest_port   parser_port              tls   hostname
1     0          5.5.3.18         udp     514           5535(monitor_app)        n/a   n/a
2     0          5.5.3.18         tcp     514           5535(monitor_app)        no    n/a
3     0          5.5.4.7          udp     514           5547(mako_fw)            n/a   n/a
4     0          5.5.4.7          tcp     514           5547(mako_fw)            no    n/a
5     4          10.33.5.10       udp     514           5515(palo_alto_networks) n/a   n/a
6     0          10.33.5.10       tcp     514           5515(palo_alto_networks) no    n/a
7     0          Any              udp     514           5516(juniper_ssg)        n/a   n/a
8     0          Any              tcp     514           5516(juniper_ssg)        no    n/a
9     0          147.154.45.210   udp     6514          5605(android)            n/a   dev2.stellarcyber.cloud
10    0          147.154.45.210   tcp     6514          5605(android)            yes   dev2.stellarcyber.cloud
```

- The Log Sources page supports standard Stellar Cyber table functionality, including edit and delete capabilities.
- You can perform bulk edits of the ingestion port by selecting the checkboxes for multiple log sources and then using the **Ingestion Port** drop-down list and **Apply** button that appear at the top of the table.

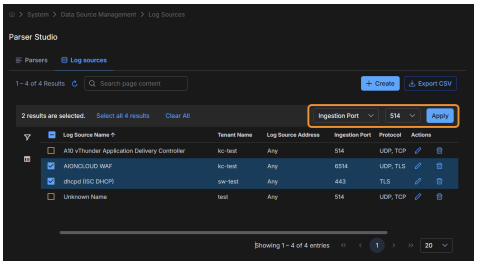

© 2026 Stellar Cyber . All rights reserved.