Stellar Cyber 6.6.0s is now live! Discover all the updates in the release notes!

Configuring Proofpoint on Demand Connectors

6.4.0

Use this Stellar Cyber connector to ingest Proofpoint on Demand email logs to the data lake. This connector uses Proofpoint's streaming API. It keeps an open WebSocket connection to get streaming data.

The following license is required: **Proofpoint On Demand's Remote Syslog**.

If your Stellar Cyber deployment is configured to use an HTTP proxy, be advised that this connector relies on Proofpoint's API, which uses the WebSocket protocol for log collection (WebSocket is not reliable over HTTP proxy connections).

In addition, you can use Proofpoint on Demand responders to configure Webhook actions that can be triggered manually or that can enhance Automated Threat Hunting (ATH) actions.

Proofpoint on Demand responders use Webhook templates that support actions. Each action is one responder, there are four actions, and hence there are four Proofpoint on Demand responders: Proofpoint on Demand Add to Org Block List, Proofpoint on Demand Add to Org Safe List, Proofpoint on Demand Delete From Org Block List, and Proofpoint on Demand Delete From Org Safe List.

This document describes how to configure a Proofpoint on Demand responder using the Universal Webhook Responder, how to add the respond function to a Proofpoint on Demand connector and how to manually trigger an action and perform ATH actions with a Proofpoint on Demand responder.

Stellar Cyber connectors with the Collect function (collectors) may skip collecting some data when the ingestion volume is large, which potentially can lead to data loss. This can happen when the processing capacity of the collector is exceeded.

Connector Overview: Proofpoint on Demand

Capabilities

- Collect: **Yes**
- Respond: **Webhook ac** 6.4.0
- Native Alerts Mapped: **No**
- Runs on: **DP**
- Interval: **Every hour**

Collected Data

Content Type	Index	Locating Records

Mail Log
Message
	Syslog	msg_class:
		`proofpoint_on_demand_maillog`
		`proofpoint_on_demand_message`
		
		msg_origin.source:
		`proofpoint_on_demand`
		
		msg_origin.vendor:
		`proofpoint`
		
		msg_origin.category:
		`email`

Domain

logstream.proofpoint.com:443

Response Actions

Webhook action templates: 6.4.0

- Proofpoint on Demand Add to Org Block List
- Proofpoint on Demand Add to Org Safe List
- Proofpoint on Demand Delete From Org Block List
- Proofpoint on Demand Delete From Org Safe List

Third Party Native Alert Integration Details

N/A

Required Credentials and Configurations

- For Collect: Cluster ID and API Key
- For Respond: Hostname, Protocol, Token URL, Client ID, Client Secret, and Cluster ID

Adding a Proofpoint on Demand Connector

To add a Proofpoint on Demand connector:

1. Obtain credentials (Collect)
2. Obtain credentials (Respond)
3. Adding the connector in Stellar Cyber (Collect)
4. Add the connector in Stellar Cyber (Respond)
5. Test the connector
6. Verify ingestion
7. Use actions

Obtaining Proofpoint on Demand Credentials (Collect)

> If your Stellar Cyber deployment is configured to use an HTTP proxy, be advised that this connector relies on Proofpoint's API, which uses the WebSocket protocol for log collection (WebSocket is not reliable over HTTP proxy connections).

Configuration of this connector requires your Proofpoint deployment be licensed for **Proofpoint On Demand's Remote Syslog**.


Before you configure the connector in Stellar Cyber, you must obtain and verify the following from your POD deployment:

- **Cluster ID** The Proofpoint Cluster ID. See Locating Cluster ID.
- **API Keys** as follows:
    - To configure collection of **maillog** and **message** together in one connector: One API key is needed.
    - To configure collection of **maillog** or **message** in two separate connectors: The same API key can be used for the two connectors.
    - To configure collection of **maillog** in more than one connector: You need a different API key for each connector.
    - To configure collection of **message** in more than one connector: You need a different API key for each connector.

  See Generating API Keys.

Locating Cluster ID


The Cluster ID is assigned by Proofpoint. It is located at the top of the Proofpoint on Demand deployment management interface.

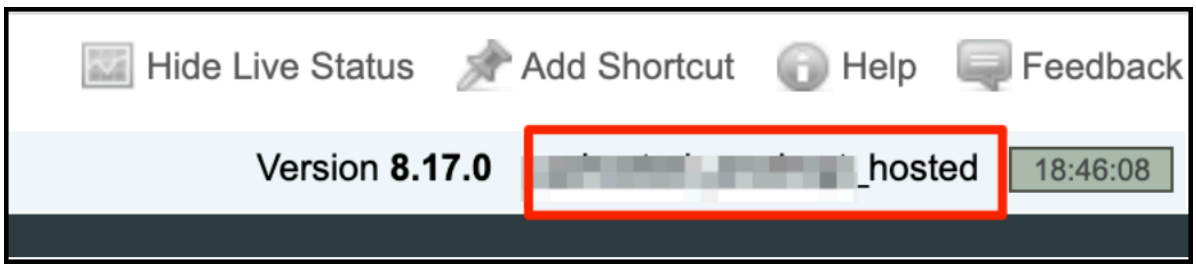

Generating API Keys

To configure API keys:

1. Log in to the Proofpoint Admin portal at https://admin.proofpoint.com.
2. Navigate to **Settings** > **API Key Management**.

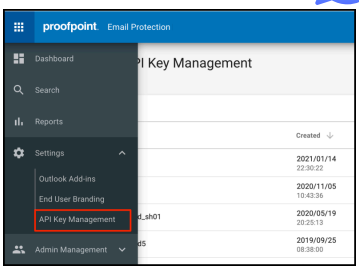

3. Click **Create New**.
4. On the Create New API Key dialog, enter any unique **Name** for the key.
5. Generate the **API Key**.
6. Click the new **API Key** and select **View Details** from the ellipsis menu.
7. Copy the **API Key**.

Obtaining Proofpoint on Demand Credentials (Respond)


Before you configure the connector in Stellar Cyber, you must obtain the following Proofpoint on Demand credentials:

- Hostname—The Hostname for API access. The default is: threatprotection-api.proofpoint.com. Do not include http or https in the Hostname.
- Protocol—The protocol used by the hostname. The options are HTTP or HTTPS.
- Token URL—The URL for the token. The default is: Default: https://auth.proofpoint.com/v1/token.
- Client ID and Client Secret—The generated API key and secret key. Follow the guidance in the Proofpoint documentation for API Key Management. Also refer to Generating API Keys.
- Cluster ID—The Proofpoint Cluster ID. See Locating Cluster ID.


Adding the Connector in Stellar Cyber (Collect)

To add a Proofpoint on Demand connector with the Collect function in Stellar Cyber:

1. Log in to Stellar Cyber.
2. Click **System** | **INTEGRATIONS** | **Connectors**. The **Connector Overview** appears.

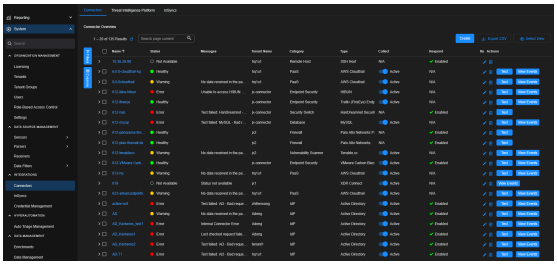


3. Click **Create** and select **Connector**.



The **General** tab of the **Add Connector** screen appears. The information on this tab cannot be changed after you add the connector.

4. Choose **Email** from the **Category** dropdown.
5. Choose **Proofpoint on Demand** from the **Type** dropdown.

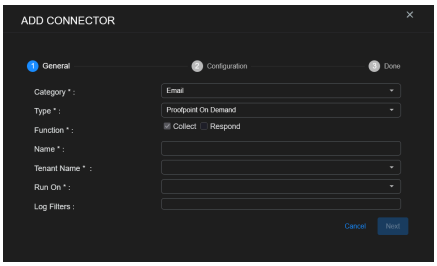


The asterisk (*) indicates a required field.

6. For this connector, the supported **Function** is **Collect**, which is enabled already.
7. Enter a **Name**.

Notes:

- This field does not accept multibyte characters.
- It is recommended that you follow a naming convention such as tenantname-connectortype.


8. Choose a **Tenant Name**. The Interflow records created by this connector include this tenant name.
9. Choose the device on which to run the connector.
10. (Optional) When the **Function** is **Collect**, you can apply **Log Filters**. For information, see Managing Log Filters.
11. Click **Next**. The **Configuration** tab appears.

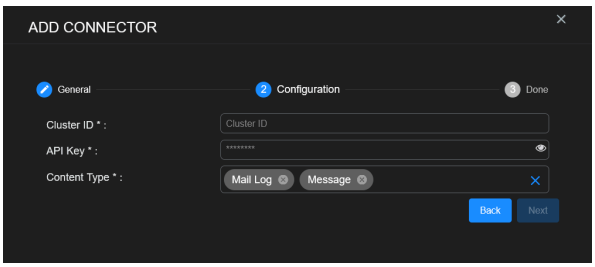

The asterisk (*) indicates a required field.

12. Enter the **Cluster ID** you noted above in Locating Cluster ID.
13. Enter the **API Key** you noted above in Generating API Keys.

14. Choose the **Content Type** you would like to collect. The logs for **Mail Log** and **Message** are supported.
15. Click **Next**. The final confirmation tab appears.

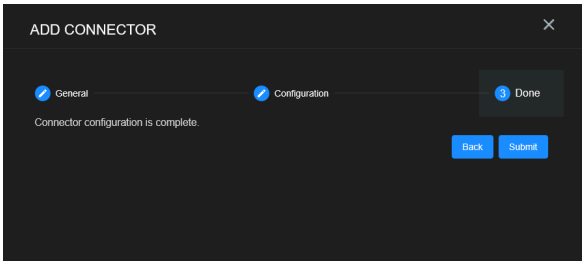

16. Click **Submit**.


The new connector is immediately active.

A new Proofpoint on Demand connector automatically collects logs for the last 7 days. It can take a few days for the logs to be current.


Adding the Connector in Stellar Cyber (Respond) 6.4.0

To add the respond function for a Proofpoint on Demand connector in Stellar Cyber:

1. Log in to Stellar Cyber.
2. Click **System | INTEGRATIONS | Connectors**. The **Connector Overview** appears.

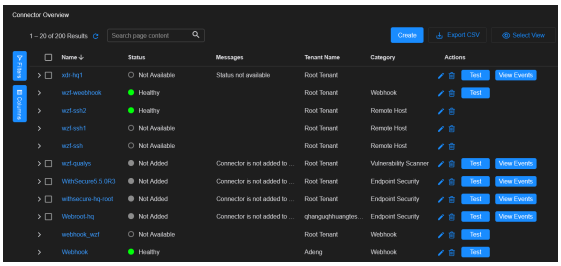


3. Click **Create** and select **Connector**.



The **General** tab of the **Add Connector** screen appears. The information on this tab cannot be changed after you add the connector.

4. Choose **Webhook** from the **Category** dropdown.
5. Choose one of the predefined templates from the **Type** dropdown: **Proofpoint on Demand Add to Org Block List**, **Proofpoint on Demand Add to Org Safe List**, **Proofpoint on Demand Delete From Org Block List**, or **Proofpoint on Demand Delete From Org Safe List**.

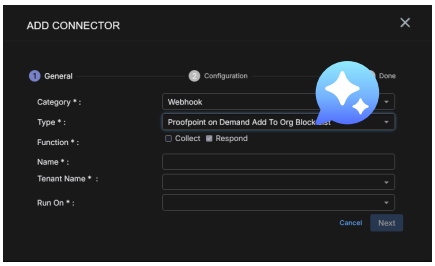

The asterisk (*) indicates a required field.


6. For this connector, the supported **Function** is **Respond**, which is enabled already.
7. Enter a **Name**.

   Notes:
   - This field does not accept multibyte characters.
   - It is recommended that you follow a naming convention such as tenantname-connectortype.

8. Choose a **Tenant Name**. This identifies which tenant is allowed to use the connector. In addition to specific tenants, this connector supports **All Tenants**, which means that a Proofpoint on Demand responder can be used across tenants.
9. Choose the device on which to run the connector.

   - Certain connectors can be run on either a Sensor or a Data Processor. The available devices are displayed in the **Run On** menu. If you want to associate your collector with a sensor, you must have configured that sensor prior to configuring the connector or you will not be able to select it during initial configuration.
   - If the device you're connecting to is on premises, we recommend you run on the local sensor. If you're connecting to a cloud service, we recommend you run on the DP.

10. Click **Next**. The **Configuration** tab appears.

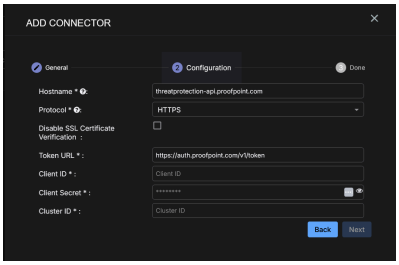


The asterisk (*) indicates a required field.

11. Enter the **Hostname**. The default is threatprotection-api.proofpoint.com.

    Do not include http or https in the Hostname.

12. Select the **Protocol**, either **HTTP** or **HTTPS**, which is used by the **Hostname**. If you select **HTTPS**, another field is available: **Disable SSL Certificate Verification**.

13. (Optional) Click **Disable SSL Certificate Verification** if you want to disable SSL certificate verification. Only disable SSL certificates if you have a necessary reason to, otherwise, it is not a good security practice and may expose the connection to security risks.
14. Enter the **Token URL**. The default is https://auth.proofpoint.com/v1/token.
15. Enter the **Client ID** and **Client Secret** you noted above in Generating API Keys.
16. Enter the **Cluster ID** you noted above in Locating Cluster ID.
17. Click **Next**. The final confirmation tab, **Done**, appears.

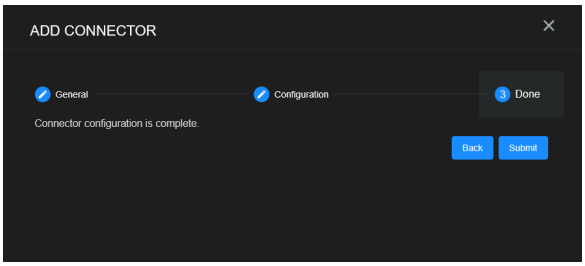


18. Click **Submit**.

Testing the Connector

When you add (or edit) a connector, we recommend that you run a test to validate the connectivity parameters you entered. The test validates authentication and connectivity.

For connectors running on a sensor, Stellar Cyber recommends that you allow 30-60 seconds for new or modified configuration details to be propagated to the sensor before performing a test.

1. Click **System | INTEGRATIONS | Connectors**. The **Connector Overview** appears.

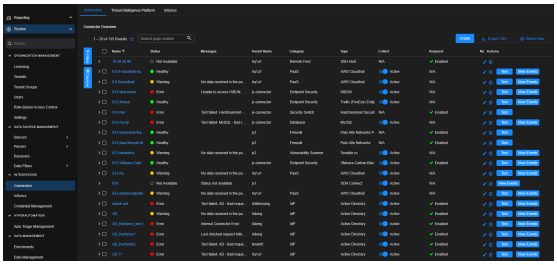

2. Locate the connector by name that you added, or modified, or that you want to test.
3. Click **Test** at the right side of that row. The test runs immediately.

Note that you may run only one test at a time.

Stellar Cyber conducts a basic connectivity test for the connector and reports a success or failure result. A successful test indicates that you entered all of the connector information correctly.

To aid troubleshooting your connector, the dialog remains open until you explicitly close it by using the **X** button. If the test fails, you can select the button from the same row to review and correct issues.

The connector status is updated every five (5) minutes. A successful test clears the connector status, but if issues persist, the status reverts to failed after a minute.


Repeat the test as needed.

Display sample messages...


Success !



Failure with summary of issue:



Show More example detail:



If the test fails, the common HTTP status error codes are as follows:

HTTP Error Code	HTTP Standard Error Name	Explanation	Recommendation
400	Bad Request	This error occurs when there is an error in the connector configuration.	Did you configure the connector correctly?
401	Unauthorized	This error occurs when an authentication credential is invalid or when a user does not have sufficient privileges to access a specific API.	Did you enter your credentials correctly? Are your credentials expired? Are your credentials entitled or licensed for that specific resource?
403	Forbidden	This error occurs when the permission or scope is not correct in a valid credential.	Did you enter your credentials correctly? Do you have the required role or permissions for that credential?
404	Not Found	This error occurs when a URL path does not resolve to an entity.	Did you enter your API URL correctly?
429	Too Many Requests	This error occurs when the API server receives too much traffic or if a user's license or entitlement quota is exceeded.	The server or user license/quota will eventually recover. The connector will periodically retry the query. If this occurs unexpectedly or too often, work with your API provider to investigate the server limits, user licensing, or quotas.

For a full list of codes, refer to HTTP response status codes.

Verifying Ingestion

To verify ingestion:

1. Select **Threat Hunting**.

   The **Interflow Search** appears.

2. Change the **Indices** to **Syslog**.

   The table immediately updates to show ingested Interflow records.

Using Actions 6.4.0

With a Proofpoint on Demand responder, you can:

- Manually trigger an action
- View action status
- Perform an ATH action


Manually Triggering an Action

To manually trigger an action with a Proofpoint on Demand responder:

1. Select **Threat Hunting**.


   The **Interflow Search** tab appears.

2. Change the **Indices** for the record type, for example, **Syslog**.
3. Scroll down the page and click the icon for **More Info** in the **Actions** column.
4. Click the **Actions** tab. Webhook actions appear under **External Actions**.

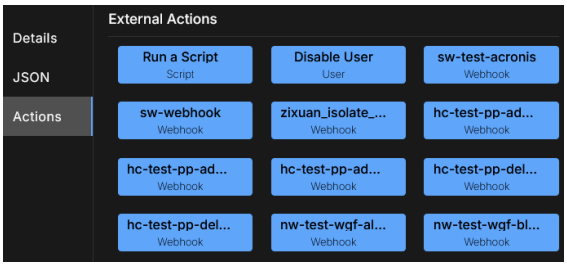

5. Click a Proofpoint on Demand Webhook action.

   The template populates the fields in the **Path and Query** and the **JSON Body**.




6. You can modify the **JSON Body** by entering string values or curly brace expressions. Fill in any empty fields, such as **value**.
7. To perform the action, click **Submit**.

Viewing Action Status

To view action status:

1. Click **Automation | Action History**.

2. Click **Webhook Actions**.

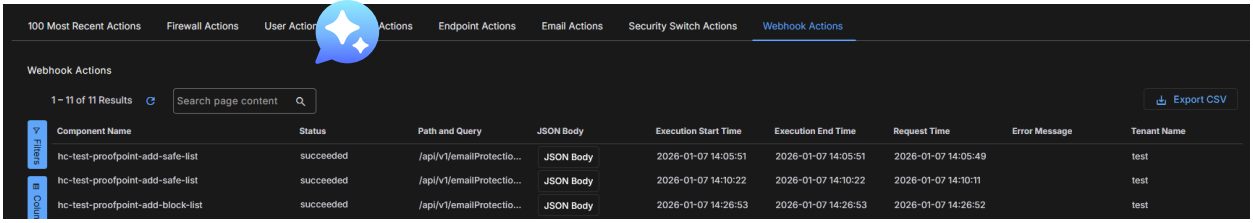


You can view the action status or error message in the table.

Performing an ATH Action

To perform an ATH action with a Proofpoint on Demand responder:

1. Click **Automation | Automation**.
2. Click **Create**.
3. Scroll down to **Actions**.

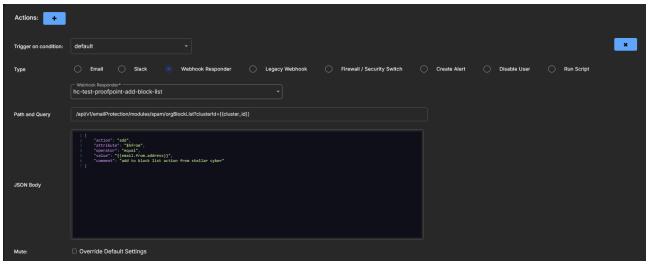

4. Click the **+** button to add an action. Another action appears below the existing action.
5. Select the **Trigger on condition**.
6. Select **Webhook Responder** for the **Type**.
7. Select a previously configured Proofpoint on Demand responder from the dropdown menu for the **Webhook Responder**.

   The template populates the fields in the **Path and Query** and **JSON Body**.
8. You can modify the **JSON Body** by entering string values or curly brace expressions.
9. (Optional) Click **Override Default Settings** to override the playbook's mute settings and mute just this action.
10. Click **Submit**

© 2026 Stellar Cyber . All rights reserved.