Stellar Cyber 6.6.0s is now live! Discover all the updates in the release notes!


Rule-Based Alert Type Details

Rule-based detection detects anomalies by observing events in the system and applying a set of rules that lead to a decision.


Certain Stellar Cyber alert types are based on specific rules. This topic describes information relating to rule-based alert types as well as some differences between rule-based and Machine Learning (ML) alert types.

Rule-Based Alerts Kill Chain Mapping

Rule-based alerts have general kill chain mapping information such as Stage, Tactic, and Technique, as follows:

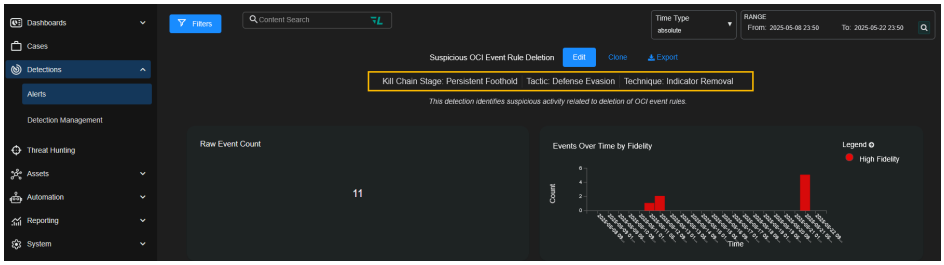


Based on what the rule detects, each rule can have a different Stage, Tactic, and Technique, as follows:

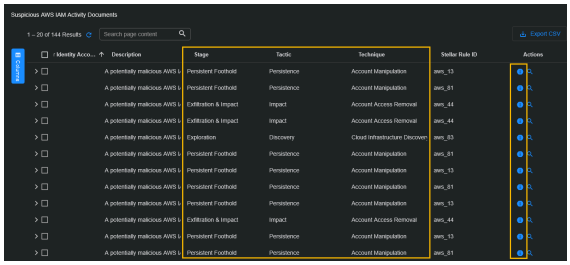

Getting Rule-Based Alerts Details

In the Actions column of the table, click **i** or **More Info** to display details on an individual rule-based alert.



To get the Knowledge Base description for an individual rule-based alert, in the **Key Fields** tab, click the **Stellar Rule ID** link, for example, **process_creation_17**.

For links to the Knowledge Base description for all rule-based alert types, see Rule-Based Alert Types.

Rule Matching in Queries

Rule matching in queries includes both case-sensitive matching and case-insensitive matching. Whether to use case-sensitive or case-insensitive matching depends on the rule as well as the relevant fields specified in the rule.

For example, case-sensitive matching means using the exact query string. For example, if **get** is expected, Stellar Cyber will not trigger an alert for **Get** or **GET**.

For case-insensitive matching, Stellar Cyber will trigger an alert for **get**, **Get**, and **GET**.

In general, rule matching is case-sensitive, but there are exceptions. For the following rules and fields, case-insensitive matching is being used on:


- Suspicious PowerShell Script: `event_data.ScriptBlockText`
- Suspicious Process Creation Commandline (currently Windows only): `event_data.CommandLine` and `event_data.ParentCommandLine`
- Suspicious Windows Network Connection: `event_data.Image`
- Suspicious LSASS Process Access: `event_data.CallTrace` and `event_data.TargetImage` and `event_data.SourceImage`
- Abnormal Parent / Child Process: `parent_proc_name` and `process_name`
- Miscellaneous IDS rules: `ids.signature`

Windows Rule-Based Alerts

Windows rule-based alerts require the updated Windows Detection Profile (Low Volume) in the sensor profile settings.

Metadata for Rule-Based Alerts

For alert types from rule-based detection, the **Rules** tab displays the rule's metadata.



The **Rules** tab displays metadata about the rule itself, such as the name of the rule, description, status, rule ID, and other fields. It also displays the rule configuration in YAML format, which you can download.

Maturity Status

In the YAML format in the Rules tab, there is a maturity status, for example, `maturity: test`. Stellar Cyber passes any status from Sigma or other open source rule sources. It also develops rules internally.

The following are the maturity statuses for both Sigma and non-Sigma rules:

- Production—for rules that are reliable in a production environment
- Stable—for rules that have had one year of use
- Test—for rules that have had months of use
- Experimental—for new rules

The status of a rule may be updated in the future based on observations made.

Number of Rule-Based Alerts 6.5.0

The number of rule-based alerts of each type are as follows:

Rule-Based Alert Types	# of Rules
PowerShell Script	133
Process Creation Commandline	239
Process Creation Parent/Child	66
Active Directory (AD)	2
AWS	102
DNS	5
Microsoft Entra (formerly Azure AD)	71
Microsoft Office 365	6
Oracle Cloud Infrastructure (OCI)	28
Traffic (see Limitations of Rule-Based Traffic Alert Types)	13
Windows, including: • Identity and Threat Detection Rules (ITDR) (3) • Windows Security (113) • Process Creation Image (25) • Windows Network Connection (5)	159

Rule-Based Alert Types	# of Rules
• Windows Process Access (6) • Windows Registry Set (2) • certutil.exe Certificate Extraction (1) • Mimikatz Credential Dump (1) • Encoded PowerShell (1) • PowerShell Remote Access (2)	
Total	824

For links to the Knowledge Base description for all rule-based alert types, see Rule-Based Alert Types.

Limitations of Rule-Based Traffic Alert Types

- Stellar Cyber parses the ICMP/SMB traffic and gathers all necessary information related to the attack activities into one record to perform Sigma rule matching on these records. However, sometimes the SMB traffic is split by the network sensor into different records and this will potentially cause false negatives.
- SMB/SMB2 protocols are supported, as well as SMB 3.0 when SMB Multichannel is not in use. Stellar Cyber only performs detection with these protocols AND when SMB encryption is not enabled.

© 2026 Stellar Cyber . All rights reserved.