Stellar Cyber 6.6.0s is now live! Discover all the updates in the release notes!

Configuring Salesforce Connectors

Salesforce connectors allow Stellar Cyber to ingest Salesforce logs and add them to the data lake. There can be any number of Salesforce connectors active.

Stellar Cyber connectors with the Collect function (collectors) may skip collecting some data when the ingestion volume is large, which potentially can lead to data loss. This can happen when the processing capacity of the collector is exceeded.

Connector Overview: Salesforce

Capabilities

- Collect: **Yes**
- Respond: **No**
- Native Alerts Mapped: **No**
- Runs on: **DP**
- Interval: **Configurable**

Collected Data

Content Type	Index	Locating Records

Login History
Setup Audit Trail
User Cache (not configurable in the user interface)
	Syslog	msg_class:
		`salesforce_LoginHistory`
		`salesforce_SetupAuditTrail`
		
		msg_origin.source:
		`salesforce`
		
		msg_origin.vendor:
		`salesforce`
		
		msg_origin.category:

Content Type	Index	Locating Records
		saas

Domain

https://<Hostname>:<Port>

where <Hostname> and <Port> are variables from the configuration of this connector

Response Actions

N/A

Third Party Native Alert Integration Details

N/A

Required Credentials and Configurations

- For Client ID / Client Secret Auth Method: Token Endpoint URL, Username, Password, Client ID, Client Secret, and Security Token
- For Certificate Auth Method: Token Endpoint URL, Certificate, Consumer Key, and JWT User

Adding a Salesforce Connector

Salesforce Lightning View

To add a Salesforce connector in the Lightning view, follow the instructions in **Lightning View: Building a Connected App** and then:

1. Add the connector in Stellar Cyber
2. Test the connector
3. Verify ingestion

Salesforce Classic View

To add a Salesforce connector in the Classic view, follow the instructions in **Classic View: Building a Connected App** and then:

1. Add the connector in Stellar Cyber
2. Test the connector
3. Verify ingestion

Lightning View: Building a Connected App 6.2.0

The following steps are based on the Lightning view of the salesforce.com console, not the Classic view. See **Classic View: Building a Connected App** if you are using the Classic view.

You will need to collect the following salesforce.com information:

- User login name and password, and the Security Token for that user

The password should not include non-ASCII special characters.

- Client ID (for OAuth2) or Consumer Key
- Client Secret (for OAuth2) or Consumer Secret
- Redirect URL (for example: `https://login.salesforce.com/services/oauth2/token`)

If you need to reset your Security Token, refer to the following article: https://salesforce.stackexchange.com/questions/321186/how-to-reset-security-token-of-api-only-user.

To add a Salesforce connector in the Lightning view:

1. Create a connected app
2. Add a profile
3. Add a user
4. Use a Certificate Authentication Method (Optional)


Creating a Connected App

To create a connected app:

1. Navigate to **PLATFORM TOOLS | External Client Apps | Settings**.

   Type **External Client Apps** in the Quick Find box if you are having trouble finding these options.

2. Enable the **Allow creation of connected apps** option and click the **New Connected App** button.

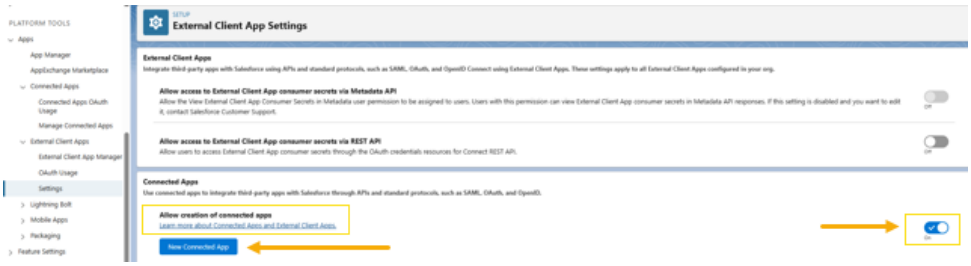

3. Under **Basic Information**, enter a **Connected App Name**, an **API Name**, and a **Contact Email**.
4. Under **API (Enable OAuth Settings)**, set the following options:
   - Check the **Enable OAuth Settings** box.
   - Supply the following **Callback URL**:


     `https://login.salesforce.com/services/oath2/token`

   - Check the **Use digital signatures** box.
5. Scroll down to **Selected OAuth Scopes**. Use the **Add** and **Remove** arrows to move **Available** and **Selected OAuth Scopes**. Choose the following:
   - **Access Lightning applications (lightning)**
   - **Manager user data via APIs (api)**


Perform requests at any time (refresh_token, offline_access).

6. Enable the following checkboxes:
   - **Require Secret for Web Server Flow**
   - **Require Secret for Refresh Token**
   - **Enable Client Credentials Flow**


   Here's how things look so far:

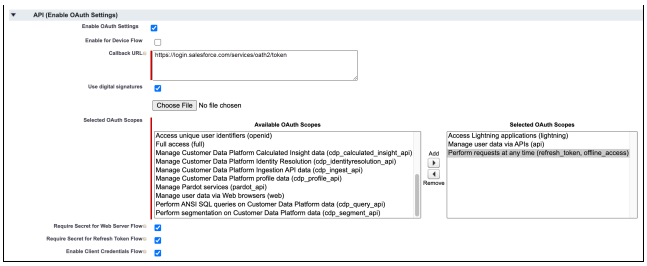


7. Scroll down and click **Save**. Changes can take up to 10 minutes to take effect.
8. Click **Continue**.
9. Under **API (Enable OAuth Settings)**, for **Consumer Key and Secret**, click **Manage Consumer Details**.

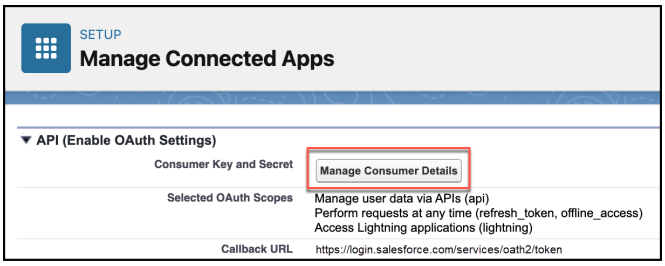


10. Click the **Copy** buttons to copy and save the **Consumer Key** and **Consumer Secret**. You need these for the Stellar Cyber connector configuration,

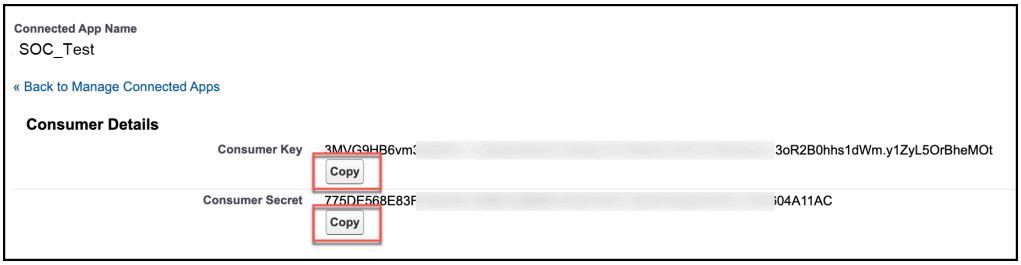

11. Under **PLATFORM TOOLS**, navigate to **Apps > Connected Apps > Manage Connected Apps** and click **Edit** for your app.

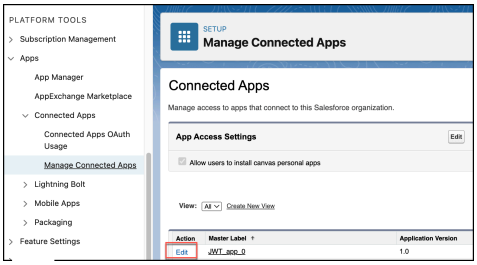

12. Under **OAuth Policies**, for **Permitted Users**, choose **Admin approved users are pre-authorized**.

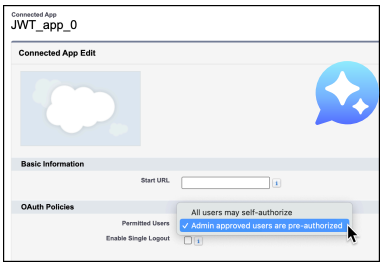


13. Scroll down and click **Save**.


Adding a Profile

To add a profile:

1. Under **ADMINISTRATION**, navigate to **Users | Profiles** and click **New Profile**.

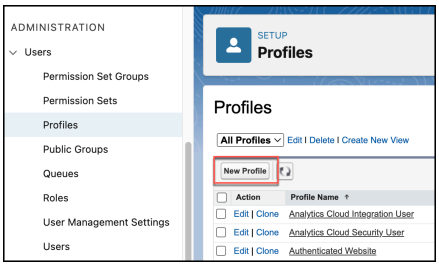

2. Select **Analytics Cloud Integration User** as an **Existing Profile** to clone from, enter a new **Profile Name**, and click **Save**.

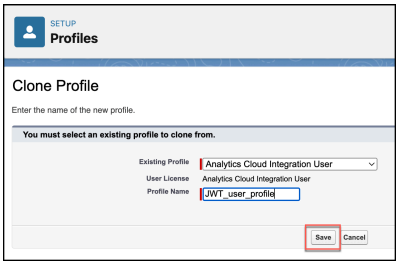

3. In the new profile, under **Profile Detail**, click **Assigned Connected Apps**.



4. Click **Edit**.
5. Under **Connected App Access**, add the connected app you created in [Creating a Connected App](#).




6. Click **Save**.

Adding a User

To add a user:

1. Under **ADMINISTRATION**, navigate to **Users | Users**, click **New User**, and click **Edit**.

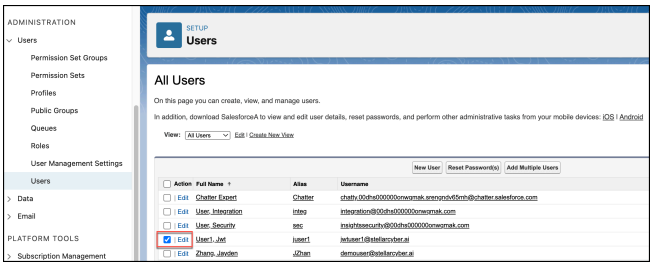

2. Add general information for the user.
3. For the **User License**, choose **Analytics Cloud Integration User**.
4. For **Profile**, choose the profile you created in **Adding a Profile**.
5. Click **Save**.

Using a Certificate Authentication Method (Optional)

Before adding the connector in Stellar Cyber, note that there are two authentication methods. The first uses Client ID / Client Secret. The second uses a certificate.

For the certificate authentication method, generate the certificate in Salesforce and upload it to the Stellar Cyber platform.

To generate the certificate in Salesforce, there are two options for the certificate and private key, **self signed** or **public signed**. The private key (.key) is used to sign the JWT claim generated by your code. The certificate (.crt) is uploaded to Salesforce to validate your signed JWT assertions.

Self-Signed Certificate

For a self signed certificate, create an RSA x509 private key/certification pair, as follows:

```
openssl req -x509 -sha256 -nodes -days 36500 -newkey rsa:2048 -keyout salesforce.key -out salesforce.crt
```

Public-Signed Certificate

For a public-signed certificate, you give the public CA signed certificate and private key to Stellar Cyber.

For either the self signed or public signed certificate, upload the certificate when you create the **Manage Connected App**. In the previous procedure, Adding a Connected App, make sure to select **Use digital signatures** under **API (Enable OAuth Settings)**.

When you have the certificate, upload it to the Stellar Cyber platform on the **System | Saved Objects | Certificates** page by clicking **Upload**. Refer to Managing Certificates for details. When you upload the certificate and private key, click **Server Certificate**.

Classic View: Building a Connected App

You must build a connected app in Salesforce. You must use v51 (or later) of the API. As you build this app, you will need to collect the following salesforce.com information:

- User login name, password, and the Security Token for that user

  The password sh not include non-ASCII special characters.

- Client ID (for OAuth2) or Consumer Key
- Client Secret (for OAuth2) or Consumer Secret
- Redirect URL (for example, `https://login.salesforce.com/services/oauth2/token`)

The following steps are based on the Classic view of the salesforce.com console, not the Lightning view. See Using the Lightning View if you are using the Lightning view.

Verifying the User Requirements


This section verifies that the app's user permissions are sufficient, and that the user Security Token can be obtained. These two procedures should be completed before creating the app.

User Role


This user must have a role that includes the permission for **View Setup and Configuration**, so that the created app is permitted to access these needed data types:

- **SetupAuditTrail**: discover new connections being configured or established
- **LoginHistory**: Salesforce logins

1. Log in as an administrative user to your salesforce.com account.
2. Select the **Setup** menu option.

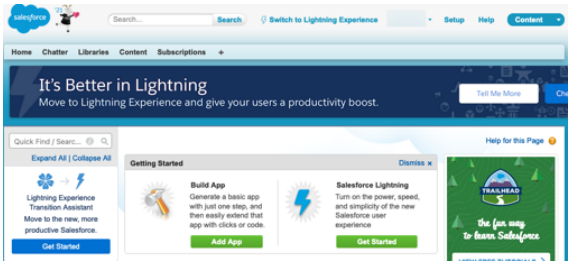


3. Access the **Administer > Manage Users > Users** option from the left hand navigation pane.
4. When the user list displays, locate your username, and click the **Profile** description at the far right.
5. When the profile details display, locate the block for **Administrative Permissions** and ensure the check box for **View Setup and Configuration** is enabled. If it is not, then edit the profile and save the changes, or change the profile to one that has this permission enabled.

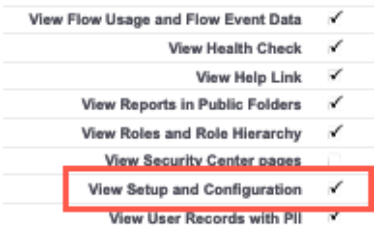

Security Token

The remaining user item is the **Security Token** associated with your user account. Salesforce.com does not provide a means to display this token, which is generated and emailed to you when you first created the account and password. If you do not know your token, and do not have other apps tied to this account, you can reset the Security Token with the following steps:


1. From the top banner of the salesforce.com home page, open the menu that shows your user name, then select **My Settings**.
2. The left hand navigation bar updates for your **Settings**. Expand the section for **Personal**.
3. Select the menu option to **Reset My Security Token**.




4. Since resetting the token invalidates any app using the previous token, a warning displays. To confirm that you are prepared for that result, click the **Reset Security Token** button. The new token is emailed to the address for the account.
5. Make note of the **Security Token** for use in the Stellar Cyber connector.

Creating a Connected App

1. Still logged in as the user above, click **Setup** to display the left hand navigation panel.
2. Select the menu option for s **Build > Create > Apps**.




3. The app management panel displays. Locate the section for **Connected Apps** and click **New**.



4. Complete the fields in the **Basic Information** section:
    - **Connected App Name**: note this for use in Stellar Cyber

5. Check the box for **API (Enable OAuth Settings)**, then complete the following:
    - **Callback URL** This is used in Stellar Cyber as the Token Endpoint URL (https://login.salesforce.com/services/oath2/token)
    - **Selected OAuth Scopes**: At a minimum, include **Provide access to your data via the Web** (in later versions, this is renamed to **Manage user data via Web browsers (web)**
    - Check the boxes for **Require Secret for Web Server Flow** and for **Require Secret for Refresh Token Flow**
6. Your application view should look similar to the one depicted below. Click **Save**, then click **Continue**.




7. The Connect App details screen displays, from where you can now collect the following information:
    - **Consumer Key** (or Client key for OAuth2) This is used in Stellar Cyber as the Client ID
    - **Consumer Secret** (or Client Secret for OAuth2) This is used in Stellar Cyber as the Client Secret




Adding the Connector in Stellar Cyber

With the access information handy, you can add a Salesforce connector in Stellar Cyber:

1. Log in to Stellar Cyber.
2. Click **System** | **INTEGRATIONS** | **Connectors**. The **Connector Overview** appears.

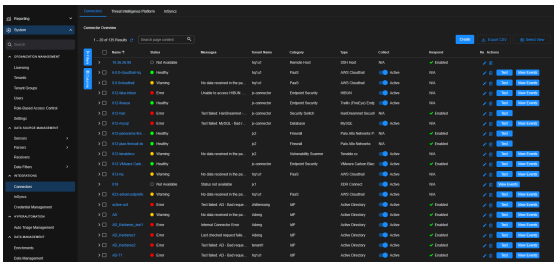


3. Click **Create** and select **Connector**.



The **General** tab of the **Add Connector** screen appears. The information on this tab cannot be changed after you add the connector.

4. Choose **SaaS** from the **Category** dropdown.
5. Choose **Salesforce** from the **Type** dropdown.

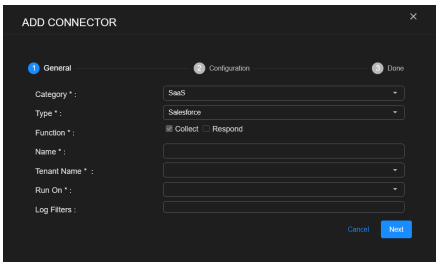


The asterisk (*) indicates a required field.

6. For this connector, the supported **Function** is **Collect**, which is enabled already.
7. Enter a **Name**. Enter the Connected App name of the app you created.

Notes:

- This field does not accept multibyte characters.
- It is recommended that you follow a naming convention such as tenantname-connectortype.

8. Choose a **Tenant Name**. The Interflow records created by this connector include this tenant name.
9. Choose the device on which to run the connector.
10. (Optional) When the **Function** is **Collect**, you can apply **Log Filters**. For information, see Managing Log Filters.
11. Click **Next**. The **Configuration** tab appears.

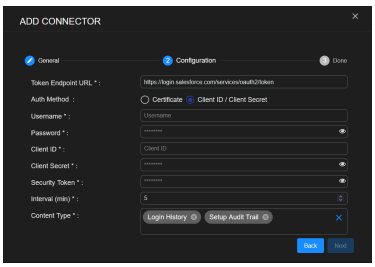

The asterisk (*) indicates a required field.

12. Enter the **Token Endpoint URL** you noted above.

For release versions prior to v4.3.4, ensure the URL does not include a trailing "/" symbol.

13. Choose the **Auth Method** to use **Client ID / Client Secret** or **Certificate**.

    For **Client ID / Client Secret** Auth Method:

    a. Enter the **Username** of the user associated with the app you created.


    b. Enter the **Password** for that user.

    c. Enter the **Client ID**. This is the **Consumer Key** you noted above.

    d. Enter the **Client Secret**. This is the **Consumer Secret** you noted above.

    e. Enter the **Security Token**.

    For **Certificate** Auth Method:

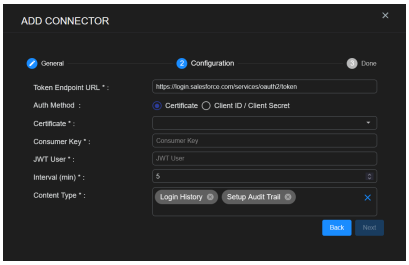    The asterisk (*) indicates a required field.

    a. Choose the **Certificate** to use from the dropdown list of uploaded certificates.

    b. Enter the **Consumer Key** you noted above.


    c. Enter the **JWT User**.

14. Choose the **Interval (min)**. This is how often the logs are collected.

15. Choose the **Content Type** you would like to collect. The logs for **Login History** and **Setup Audit Trail** are supported.

    There is also a User Cache content type that is always on. This content type is not configurable in the user interface.

16. Click **Next**. The final confirmation tab appears.

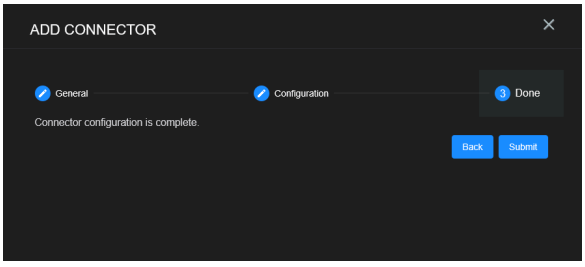17. Click **Submit**.

The new connector is immediately active.


Testing the Connector

The **Test** button for the Salesforce connector tests permissions as well as connectivity, such as if an administrator account is required.

When you add (or edit) a connector, we recommend that you run a test to validate the connectivity parameters you entered. The test validates authentication and connectivity.

For connectors running on a sensor, Stellar Cyber recommends that you allow 30-60 seconds for new or modified configuration details to be propagated to the sensor before performing a test.

1. Click **System | INTEGRATIONS | Connectors**. The **Connector Overview** appears.

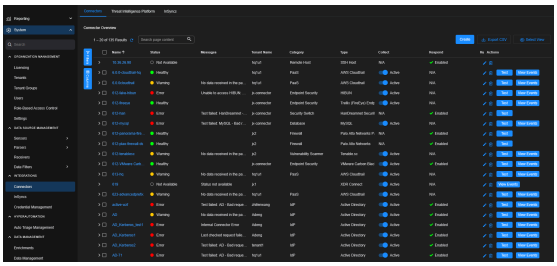

2. Locate the connector by name that you added, or modified, or that you want to test.
3. Click **Test** at the right side of that row. The test runs immediately.

   Note that you may run only one test at a time.

Stellar Cyber conducts a basic connectivity test for the connector and reports a success or failure result. A successful test indicates that you entered all of the connector information correctly.

To aid troubleshooting your connector, the dialog remains open until you explicitly close it by using the **X** button. If the test fails, you can select the button from the same row to review and correct issues.

The connector status is updated every five (5) minutes. A successful test clears the connector status, but if issues persist, the status reverts to failed after a minute.


Repeat the test as needed.

Display sample messages...


Success !



Failure with summary of issue:



Show More example detail:

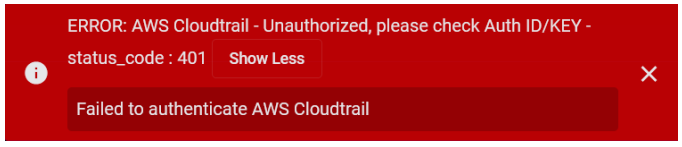

If the test fails, the common HTTP status error codes are as follows:

HTTP Error Code	HTTP Standard Error Name	Explanation	Recommendation
400	Bad Request	This error occurs when there is an error in the connector configuration.	Did you configure the connector correctly?
401	Unauthorized	This error occurs when an authentication credential is invalid or when a user does not have sufficient privileges to access a specific API.	Did you enter your credentials correctly? Are your credentials expired? Are your credentials entitled or licensed for that specific resource?
403	Forbidden	This error occurs when the permission or scope is not correct in a valid credential.	Did you enter your credentials correctly? Do you have the required role or permissions for that credential?
404	Not Found	This error occurs when a URL path does not resolve to an entity.	Did you enter your API URL correctly?
429	Too Many Requests	This error occurs when the API server receives too much traffic or if a user's license or entitlement quota is exceeded.	The server or user license/quota will eventually recover. The connector will periodically retry the query. If this occurs unexpectedly or too often, work with your API provider to investigate the server limits, user licensing, or quotas.

For a full list of codes, refer to HTTP response status codes.

Verifying Ingestion

To verify ingestion:

1. Select **Threat Hunting**.

   The **Interflow Search** tab appears.

2. Change the **Indices** for the type of content you collected:
   - For **Login History** and **Setup Audit Trail**, change the **Indices** to **Syslog**.
   - For **User Cache** only, change the **Indices** to **Sensor Monitoring**.

   The table immediately updates to show ingested Interflow records.

© 2026 Stellar Cyber . All rights reserved.