
Stellar Cyber 6.6.0s is now live! Discover all the updates in the release notes!

Searching

The search tool is often the first tool used when searching the Stellar Cyber data lake for specific information. Although it performs the same function as the Queries tool it is more convenient for quick operations. Its state is not saved across sessions or changes.

The search tool is one of the set of controls covered in the Filter page. This page provides more details on its function.



The search tool appears on the upper left corner of any page where it applies. Its operation is that of a text box where any text may be entered once it is selected.

In the search box, you can enter any text, such as the name of a connector or a key field.

When a search is active, a **Clear all** button appears. Clicking this button removes the filter and set the tool to an empty string. See the examples below.

As with the other filter tools, the effect of the search terms are combined with all others to produce the search results which is the set of all records being displayed on the screen. This means that any search term entered is only going to match records that match all the other filters.

The search tool uses the Lucene query syntax used in Kibana, a popular graph database system. See the Documentation for more information.

Simple Search



The easiest use of the search tool is to simply type a string of characters. The string is compared to all data in the record.

Because this type of search has to scan all record fields it may result in a long execution time for the search. Using a tagged search as described in the next section may be a better choice.

The search is not case sensitive.

Start Small

Searching a large amount of data can tie up the system for a significant length of time, especially text searches. Start with a short time interval, see what you get, then expand the interval and refine the search.

Use Quotes for Phrases and Special Characters

If you're searching with a phrase or special characters, enclose the search terms in quotes. For example, a search for `windows sensors` lists everything with either `windows` or `sensors`. A search for `"windows sensors"` returns only records with the specific phrase `windows sensors`.

Wildcards

In search strings the `*` can be used to match any string of characters and the `?` can be used to match any one character. So the string

```
Russia
```

and

```
Rus*
```

and

```
Ru??ia
```

will all match `Russia`.

Including Reserved Characters in a Search

The search tool uses standard rules for including reserved characters in your search and requires you to escape them with a leading backslash. This applies to any of the following characters that are reserved for use as operators in a query:

```
+ - = && || > < ! ( ) { } [ ] ^ " ~ * ? : \ /
```

For example, if you want to search for a file and path such as **C:\myfile.txt**, you must escape both the colon and the backslash in the path with a leading backslash, as follows:



Using Regular Expressions in a Search

You can use regular expressions (regex) in searches. For example, the following syntax searches for any username that ends with $:

`username: / .*$ /`

The regular expression is `.*$` a[illegible]must be enclosed in `/ /`.

For documentation about using regular expressions in Elasticsearch, see Elasticsearch Guide (v8.17).

Ranges

Some fields are not treated as strings for search purposes. Specifically, dates and IP addresses are numeric values which cannot be matched with wildcard characters. These fields can be used with a range syntax of the form `[x TO y]`. This is most useful when matching IP addresses within a subnet. For example:

```
srcip:[192.168.1.0 TO 192.168.1.255]
```

will match all source IP address in the 192.168.1.0/24 sub-net.

Tagged Search




A tagged search calls out specific keys within the records being searched. In this case only the `dstip` (destination IP address) field is being considered in the search, resulting in considerably less processing time.

There are a large number of keys that may be relevant to a specific search. See the Interflow overview page for more information about Interflow keys.

The red underline in the image above is a result of the spell-check feature of the browser. This may be disregarded if it appears.

Complex Search



For more precise searches, the search tool can also accept logical operations such as AND, OR, and NOT. The full search term is entered as

```
srcip:10.0.11.6 AND command:apt-get
```

By combining terms the results may be refined to a smaller set of records.


If a complex search is repetitively entered, it may save time to create a saved query instead. See the Queries page for more information.

Common Search and Filter Techniques

Stellar Cyber provides a variety of tools that help you find the data you need. Use the following summary of common search scenarios to help you perform your own searches, either globally, or in specific tables:

Filtering and Searching Interflow Data 5.2.0

You can apply quick filters to control which Interflow key-pairs are displayed and perform searches. You can apply quick filters to display only **detections**, only **TI (Threat Intelligence) enrichments**, 6.6.0 only **Enriched** fields, 6.6.0 only **Non-Enriched** fields, or any combination of these filters. When you don't apply a filter, you see all the key-value pairs for an event.



When you apply the **Detection** filter, Stellar Cyber displays only the key-value pairs with field names that begin with `xdr_event`.

When you apply the **TI Enrichments** filter, Stellar Cyber displays the following fields if the event has been enriched with this information:

- `srcip_reputation`
- `dstip_reputation`
- `srcip_reputation_source`
- `dstip_reputation_source`
- `srcip_geo` and all its subproperties
    - `srcip_geo.city`
    - `srcip_geo.countryCode`
    - `srcip_geo.countryName`
    - `srcip_geo.latitude`
    - `srcip_geo.longitude`
    - `srcip_geo.region`
- `dstip_geo.region` and all its subproperties
    - `dstip_geo.city`
    - `dstip_geo.countryCode`
    - `dstip_geo.countryName`
    - `dstip_geo.latitude`
    - `dstip_geo.longitude`
    - `dstip_geo.region`

If the above fields for an event have not been enriched with information, Stellar Cyber does not display them.

When you apply the **Enriched** filter, Stellar Cyber displays only fields that Stellar Cyber added to the record after ingestion. This filter is broader than TI enrichments because it includes all platform-added enrichment fields, not only threat intelligence and geolocation fields.

When you apply the **Non-Enriched** filter, Stellar Cyber displays only fields that came from the original detection or log record before Stellar Cyber enrichment. This filter is useful when you want to review the source facts separately from the context added by Stellar Cyber.

For example, if you're acting as an MSSP analyst and are preparing an alert summary for a customer, you can use **Non-Enriched** to focus on the original detection facts, then use **Enriched** to review the added platform context separately. To learn more about configured enrichments, see **Configuring Data Enrichment** .


When you apply multiple filters, Stellar Cyber displays key-value pairs that match any selected filter.

Search for any term that appears in a field key, name, or value and use commas to separate multiple terms. Stellar Cyber displays all results that match any of the search terms you enter. If you're applying a filter at the time of a search, then Stellar Cyber limits its search to just the filtered data. If no filter is applied, then it searches through all unfiltered data.


Searching for a Specific Interflow Key and Value

You can search for Interflow keys with specific values in a table in several ways:

- Expand an entry in the table to view key-value pairs and use the **Filter For** button for one of the key-value pairs to search for matching records. Once you add a term as a filter in this way, it automatically appears in the Filter Panel at the left of the display, too. For example, in the figure below, we're searching for Tactics matching the displayed value.

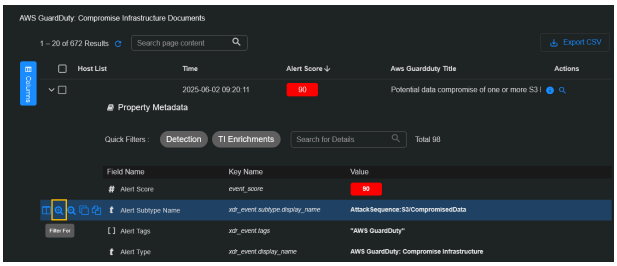

- Add the Interflow key directly in the Filter Panel. If the attribute you want to search for is not already listed in the panel, you can use the **Add new filter** functionality to add it. Then, supply the value in the field. For example:

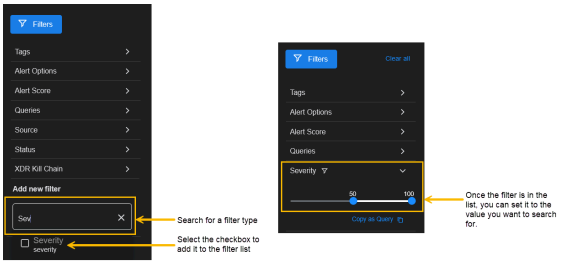


Searching for a Value Without a Key

If you know the value you want to search for but aren't certain of the Interflow key (for example, a number), your best route is the Content Search box at the top of all Stellar Cyber pages. Take advantage of the full Lucene syntax to search for partial matches, fuzzy matches, and so on.


Excluding Values from a Table

Sometimes, it can be useful to narrow a search by temporarily excluding all records with a certain Interflow key value. This is the perfect time to use the Filter Out button in a table cell. For example, in the figure below, we're excluding all records matching the selected Host IP address:

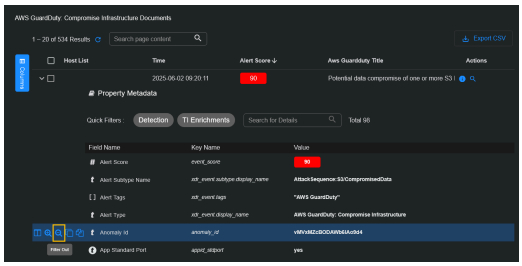


Removing Some Filter Criteria

You can remove individual filter criteria from the current search by deselecting the check box in the filter panel. For example:



Removing All Filter Criteria

You can remove all filter criteria by clicking the **Clear all** button at the top of the filter panel. For example:



Searching for a Specific Alert Type


You can search the Alerts table for all alerts of a specific type using either the Content Search box or a table filter in the Alert Type column:

- Use the Content Search box to search the Alerts table for all alerts of a specific type by including the name of the Alert Type you want to search for in quotation marks. For example, to search for the **Emerging Threat** alert type, you would enter the following in the search bar:



- Use a table filter in the **Alert Type** column as follows:
    1. Click the "hamburger" menu in the **Alert Type** column header.
    2. Navigate to the **Filter** tab in the context menu that appears.
    3. Start typing the name of the alert type for which you want to search in the text box.
    4. When the matching alert type appears, click its box to apply the filter.

       The filter appears at the top of the table, as in the figure below:

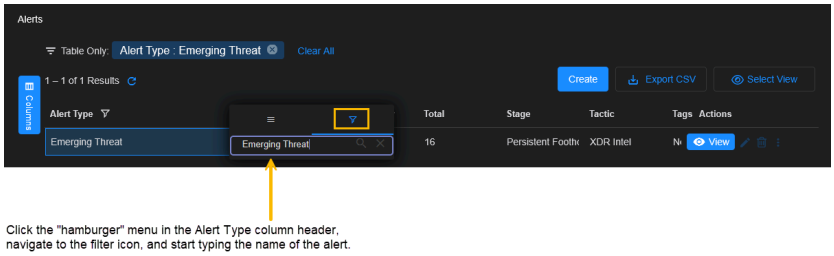

Search Tips

- When using table data as a filter, be aware of whether the data includes multiple values. For example, the figure below shows values of both **modular_sensor** and **Linux_agent** for the **data_sources** Interflow key. Rather than using the **Filter For** button to add this entire term as a search filter, try manually supplying one or the other in the Filters panel at the left of the display.



- If you encounter inconsistent results when using regular expressions in Lucene search, the underlying cause may be the computational cost of the generated query. Complex or overly broad regex patterns can produce resource-intensive queries that impact platform performance and result consistency.

  To ensure reliable and efficient execution, define regular expressions as narrowly and specifically as possible. Avoid overly generic patterns, and constrain the scope of matching wherever feasible.

- If you are searching for a string in a specific field and not receiving results, try including the field both with and without a `.keyword` suffix.

  For example, to search for a specific value in the `event_data.TargetUserName` field, try using a search for the string in both the `event_data.TargetUserName` and `event_data.TargetUserName.keyword` fields. For example:

  ```
  event_data.TargetUserName: "W2K16N527164H51$" OR
  event_data.TargetUserName.keyword: "W2K16N527164H51$"
  ```



© 2026 Stellar Cyber . All rights reserved.