Stellar Cyber 6.6.0s is now live! Discover all the updates in the release notes!

Configuring Trend Micro Cloud App Security Connectors 5.5.0 6.4.0

This connector allows Stellar Cyber to ingest logs from Trend Micro Cloud App Security and add the records to the data lake. This connector integrates with the Log Retrieval API to get events for the Exchange, OneDrive, Sharepoint Log, and Teams content types.

Cloud App Security (CAS) provides advanced protection for the following cloud applications and services: Microsoft Office 365 services (Exchange Online, SharePoint Online, OneDrive, and Microsoft Teams), Box, Dropbox, and Google Workspace (Google Drive and Gmail). CAS searches for security risks and undesirable data sent through email services, or saved in cloud storage applications by performing real-time scanning on files in supported cloud applications and services.

Trend Micro Cloud App Security has a rate limit of approximately 20 requests per minute. The rate limit will impact ingestion of data by this connector when the following occurs:

- There is a data spike
- The connector is set to ingest too many log event types
- The connector stopped and needs to do a long backfill*
- Two or more connectors were created with the same credential

*Due to the rate limit, the initial backfill will only get data for the last 10 minutes.

The rate limit is tied to the API key. The workaround is to create multiple connectors with different API keys.

Stellar Cyber connectors with the Collect function (collectors) may skip collecting some data when the ingestion volume is large, which potentially can lead to data loss. This can happen when the processing capacity of the collector is exceeded.

Connector Overview: Trend Micro Cloud App Security

Capabilities

- Collect: **Yes**
- Respond: **No**
- Native Alerts Mapped: **Yes** 6.4.0
- Runs on: **DP**
- Interval: **5 minutes**

Collected Data

Content Type	Index	Locating Records

Exchange 6.3.0
OneDrive 6.3.0
Sharepoint Log
Teams 6.3.0
	Syslog	msg_class:
		`trendmicro_cas_logs_exchange` 6.3.0
		`trendmicro_cas_logs_onedrive` 6.3.0
		`trendmicro_cas_logs_sharepoint`
		`trendmicro_cas_logs_teams` 6.3.0
		
		msg_origin.source:
		`trendmicro_cloud_app_security`
		
		msg_origin.vendor:
		`trendmicro`
		
		msg_origin.category:
		`cloudsecurity`

Domain

<Base URL>

where <Base URL> is a variable from the configuration of this connector

Response Actions

N/A

Third Party Native Alert Integration Details 6.4.0

This connector ingests logs from Trend Micro Cloud App Security to get the raw alerts that are stored in the Syslog index. Select the Exchange, OneDrive, Sharepoint Log, and Teams content types.

Stellar Cyber maps Trend Micro Cloud App Security events. The events are read from the Syslog index, enriched with Stellar Cyber fields, and mapped (with deduplication) to the Alerts index.

Deduplication is by `trendmicro_cloud_app_security.log_item_id`.

For details, see Integration of Third Party Native Alerts.

Required Credentials and Configurations

- Base URL and API Key

Locating Records 6.4.0

To search the alerts in the Alerts index or the Original Records in the Syslog index, use the query: `msg_class:(trendmicro_cas_logs_sharepoint OR trendmicro_cas_logs_exchange OR trendmicro_cas_logs_onedrive OR trendmicro_cas_logs_teams) AND trendmicro_cloud_app_security.event:(\"virtual_analyzer\" OR \"security_risk_scan\" OR \"ransomware\" OR \"data_protection\") AND NOT trendmicro_cloud_app_security.message.risk_level.keyword:(\"No Risk\" OR \"Safe\") AND NOT trendmicro_cloud_app_security.message.threat_type.keyword:(\"\" OR \"Unscannable files/URLs\" OR \"Unusual signal\" OR \"Spam/Graymail\")`

Adding a Trend Micro Cloud App Security Connector

To add a Trend Micro Cloud App Security connector:

1. Obtain credentials
2. Add the connector in Stellar Cyber
3. Test the connector
4. Verify ingestion

Obtaining Trend Micro Cloud App Security Credentials

Before you configure the connector in Stellar Cyber, you must obtain the following Trend Micro Cloud App Security credentials:

- Base URL—The base URL for API access. Refer to the Trend Micro documentation for Understanding the URL Structure.


  The full format is `<serviceURL>/v1/siem/security_events`. For the Base URL value, you must input the value for `<serviceURL>`, which identifies the root of the Cloud App Security service. For example, `<serviceURL>` in the US is https://api.tmcas.trendmicro.com.

- API Key—To generate an API Key, follow the guidance in the Trend Micro documentation for Generating an Authentication Token.


Adding the Connector in Stellar Cyber

To add a Trend Micro Cloud App Security connector in Stellar Cyber:

1. Log in to Stellar Cyber.
2. Click **System | INTEGRATIONS | Connectors**. The **Connector Overview** appears.

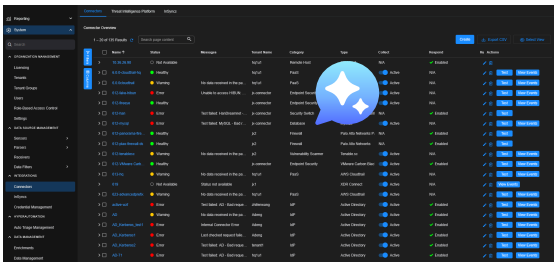


3. Click **Create** and select **Connector**.

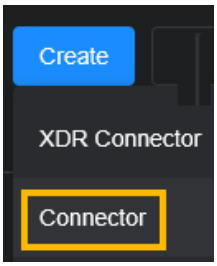

The **General** tab of the **Add Connector** screen appears. The information on this tab cannot be changed after you add the connector.

4. Choose **Cloud Security** from the **Category** dropdown.
5. Choose **Trend Micro Cloud App Security** from the **Type** dropdown

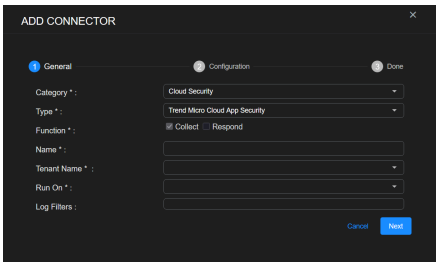


The asterisk (*) indicates a required field.

6. For this connector, the supported **Function** is **Collect**, which is enabled already.
7. Enter a **Name**.

Notes:


- This field does not accept multibyte characters.
- It is recommended that you follow a naming convention such as tenantname-connectortype.

8. Choose a **Tenant Name**. The Interflow records created by this connector include this tenant name.
9. Choose the device on which to run the connector.
10. (Optional) When the **Function** is **Collect**, you can apply **Log Filters**. For information, see Managing Log Filters.
11. Click **Next**. The **Configuration** tab appears.

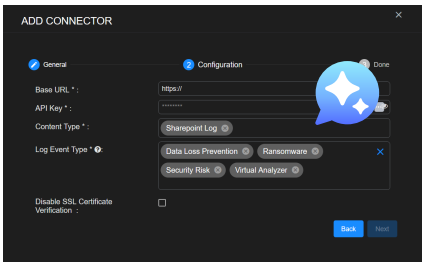

The asterisk (*) indicates a required field.

12. Enter the **Base URL** you noted above in Obtaining Trend Micro Cloud App Security Credentials.
13. Enter the **API Key** you noted above.
14. Choose the **Content Type** you would like to collect. The logs for **Exchange**, **OneDrive**, **Sharepoint Log**, and **Teams** are supported.
15. Choose the **Log Event Type** you would like to collect. This is the event type for ingesting logs data. The event types for **Data Loss Prevention**, **Ransomware**, **Security Risk**, and **Virtual Analyzer** are supported.
16. (Optional) Click **Disable SSL Certificate Verification** if you want to disable SSL certificate verification. Only disable SSL certificates if you have a necessary reason to, otherwise, it is not a good security practice and may expose the connection to security risks.
17. Click **Next**. The final confirmation tab appears.

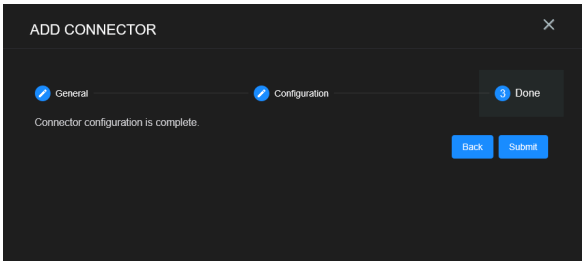

18. Click **Submit**.

The new connector is immediately active.


Testing the Connector

In addition to testing for connectivity, the **Test** button for the Trend Micro Cloud App Security connector tests that the Base URL and API Key are correct and data requests for the requested content type returns successful responses.

When you add (or edit) a connector, we recommend that you run a test to validate the connectivity parameters you entered. The test validates authentication and connectivity.

For connectors running on a sensor, Stellar Cyber recommends that you allow 30-60 seconds for new or modified configuration details to be propagated to the sensor before performing a test.

1. Click **System | INTEGRATIONS | Connectors**. The **Connector Overview** appears.

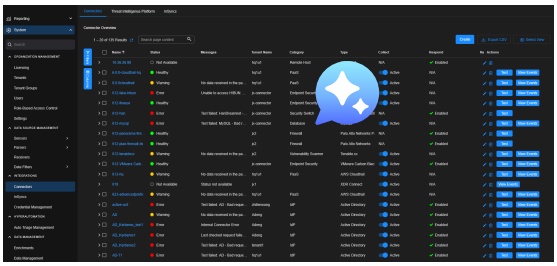

2. Locate the connector by name that you added, or modified, or that you want to test.
3. Click **Test** at the right side of that row. The test runs immediately.

Note that you may run only one test at a time.

Stellar Cyber conducts a basic connectivity test for the connector and reports a success or failure result. A successful test indicates that you entered all of the connector information correctly.

To aid troubleshooting your connector, the dialog remains open until you explicitly close it by using the **X** button. If the test fails, you can select the button from the same row to review and correct issues.

The connector status is updated every five (5) minutes. A successful test clears the connector status, but if issues persist, the status reverts to failed after a minute.


Repeat the test as needed.

Display sample messages...


Success !



Failure with summary of issue:



Show More example detail:

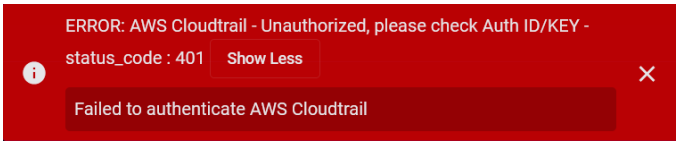

If the test fails, the common HTTP status error codes are as follows:

HTTP Error Code	HTTP Standard Error Name	Explanation	Recommendation
400	Bad Request	This error occurs when there is an error in the connector configuration.	Did you configure the connector correctly?
401	Unauthorized	This error occurs when an authentication credential is invalid or when a user does not have sufficient privileges to access a specific API.	Did you enter your credentials correctly? Are your credentials expired? Are your credentials entitled or licensed for that specific resource?

HTTP Error Code	HTTP Standard Error Name	Explanation	Recommendation
403	Forbidden	This error occurs when the permission or scope is not correct in a valid credential.	Did you enter your credentials correctly? Do you have the required role or permissions for that credential?
404	Not Found	This error occurs when a URL path does not resolve to an entity.	Did you enter your API URL correctly?
429	Too Many Requests	This error occurs when the API server receives too much traffic or if a user's license or entitlement quota is exceeded.	The server or user license/quota will eventually recover. The connector will periodically retry the query. If this occurs unexpectedly or too often, work with your API provider to investigate the server limits, user licensing, or quotas.

For a full list of codes, refer to HTTP response status codes.

Verifying Ingestion

To verify ingestion:

1. Select **Threat Hunting**.

   The **Interflow Search** tab appears.

2. Change the **Indices** to **Syslog**.

   The table immediately updates to show ingested Interflow records.

© 2026 Stellar Cyber . All rights reserved.