Stellar Cyber 6.6.0s is now live! Discover all the updates in the release notes!

Configuring Universal Webhook Responder Connectors 6.6.0

Use the Universal Webhook Responder connector to configure a Webhook action that can be triggered manually or that can enhance Automated Threat Hunting (ATH) actions.

You can configure the Universal Webhook Responder in two ways, either by using predefined templates or by configuring your own Custom type. Each Universal Webhook Responder supports a single response action.

The Universal Webhook Responder can be customized for API integrations with various vendors. Using the Custom type, you can define your own responder. For example, if you want to configure a firewall with a Block IP action, you define an API request for the action.

Universal Webhook templates can be used to dynamically create new responders. Contact Stellar Cyber Customer Support to assist with templates. There are predefined templates available for ESET, WithSecure Elements, Blackberry Cylance, WatchGuard Firebox, Acronis, Proofpoint on Demand, Netskope, and Trend Micro Vision One.

You can also reuse a Universal Webhook Responder in ATH rules.

This document describes how to configure the Universal Webhook Responder connector. To manually trigger an action with the Universal Webhook Responder, refer to External Actions: Webhook on the Threat Hunting page. To perform ATH actions with the Universal Webhook Responder, refer to Webhook Responder Action on the ATH Playbook page.

For the best practices, refer to Best Practices for Universal Webhook Responder.

Connector Overview: Universal Webhook Responder

Capabilities

- Collect: **No**
- Respond: **Webhook actions**
- Native Alerts Mapped: **No**
- Runs on: **DP** or **Sensor**
- Interval: **N/A**

Collected Data

N/A 

Domain

N/A

Response Actions

Webhook actions: created from a Custom type or predefined from a template file:

- For ESET, refer to ESET Responder Connectors.
- For WithSecure Elements, refer to WithSecure Elements Connectors.
- For Blackberry Cylance, refer to BlackBerry Cylance Connectors. 5.5.0
- For WatchGuard Firebox, refer to WatchGuard Firebox Responder Connectors 6.1.0
- For Acronis, refer to Acronis Cyber Protect Cloud Connectors 6.2.0
- For Proofpoint on Demand, refer to Proofpoint on Demand Connectors 6.4.0
- For Netskope, refer to Netskope Connectors 6.5.0
- For Trend Micro Vision One, refer to Trend Micro Vision One Connectors 6.5.0

Third Party Native Alert Integration Details

N/A

Required Credentials and Configurations

Hostname, Port, Protocol, and Authentication Type, for all authentication methods (including None), plus:

- For Basic authentication: Username and Password
- For Header authentication: Header Name and Header Value
- For OAuth2 authentication: Token URL, Client ID, and Client Secret
- For Stellar Cyber API Token authentication: Platform URL and API Token 6.6.0

Adding a Webhook Connector

To add a Webhook connector:

1. Have authentication credentials
2. Add the connector in Stellar Cyber
3. Test the connector
4. Use actions


Authentication Credentials

Depending on the **Authentication Type** that is used in a predefined template or that you plan to configure with **Custom**, you need to have the credentials for that type of authentication, (**Basic**, **OAuth2**, **Header**, or **Stellar Cyber API Token**), handy for the next section.


Adding the Connector in Stellar Cyber

To add a Universal Webhook connector in Stellar Cyber:

1. Log in to Stellar Cyber.
2. Click **System | INTEGRATIONS | Connectors**. The **Connector Overview** appears.

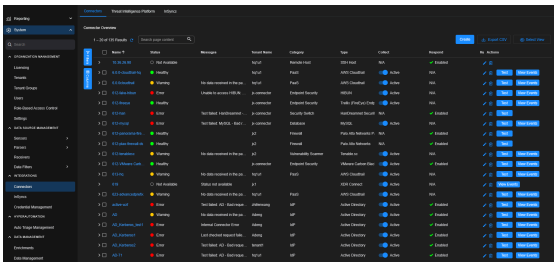


3. Click **Create** and select **Connector**.



The **General** tab of the **Add Connector** screen appears. The information on this tab cannot be changed after you add the connector.

4. Choose **Webhook** from the **Category** dropdown.
5. Choose **Custom** from the **Type** dropdown. If there are template files, the dropdown may also contain predefined template options that you can choose.

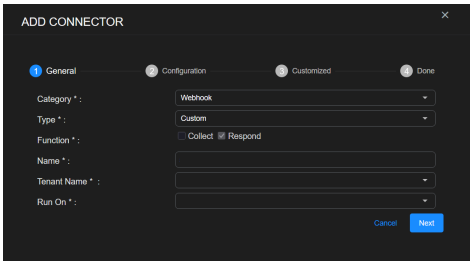

The asterisk (*) indicates a required field.

6. For this connector, the supported **Function** is **Respond**, which is enabled already.
7. Enter a **Name**. This is both the responder name and the action name.


Notes:

- This field does not accept multibyte characters.
- It is recommended that you follow a naming convention such as tenantname-connectortype.

8. Choose a **Tenant Name**. This identifies which tenant is allowed to use the connector. In addition to specific tenants, this connector supports **All Tenants**, which means that the Universal Webhook Responder connector can be used across tenants.
9. Choose the device on which to run the connector.

- Certain connectors can be run on either a Sensor or a Data Processor. The available devices are displayed in the **Run On** menu. If you want to associate your collector with a sensor, you must have configured that sensor prior to configuring the connector or you will not be able to select it during initial configuration.
- If the device you're connecting to is on premises, we recommend you run on the local sensor. If you're connecting to a cloud service, we recommend you run on the DP.

10. Click **Next**. The **Configuration** tab appears.

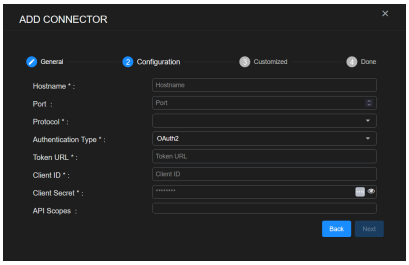


The asterisk (*) indicates a required field.

The configuration differs depending on the **Type** you selected in the **General** tab.

11. When the **Type** selected is a predefined template:
    a. Enter the **Hostname**.

    Do not enter http or https in the **Hostname** field.

    b. (Optional) Enter the **Port**.
    c. Choose a **Protocol**. The **HTTP** and **HTTPS** protocols are supported. If you select **HTTPS** as the **Protocol**, depending on the **Authentication Type** for the predefined template, another field may be available: **Disable SSL Certificate Verification**.
    d. (Optional) Click **Disable SSL Certificate Verification** if you want to disable SSL certificate verification. Only disable SSL certificates if you have a necessary reason to, otherwise, it is not a good security practice and may expose the connection to security risks.

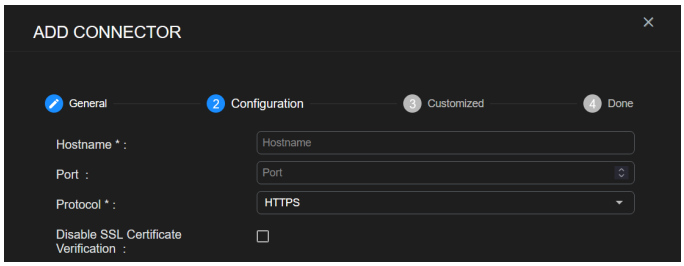

    e. The **Authentication Type** for a predefined template is preselected. Enter the credentials for that **Authentication Type**: **Basic**, **OAuth2**, or **Header**. Refer to the next step for details of each authentication type.

f. Click **Next**. When the **Type** selected is a predefined template, the **Done** tab appears.

g. Skip to the last step in this procedure. (Click **Submit**.)

12. When the **Type** selected is **Custom**:


a. Enter the **Hostname**.

> Do not enter http or https in the **Hostname** field.

b. (Optional) Enter the **Port**.


c. Choose a **Protocol**. The **HTTP** and **HTTPS** protocols are supported. If you select **HTTPS** as the **Protocol**, another field is available: **Disable SSL Certificate Verification**.

d. (Optional) Click **Disable SSL Certificate Verification** if you want to disable SSL certificate verification. Only disable SSL certificates if you have a necessary reason to, otherwise, it is not a good security practice and may expose the connection to security risks.

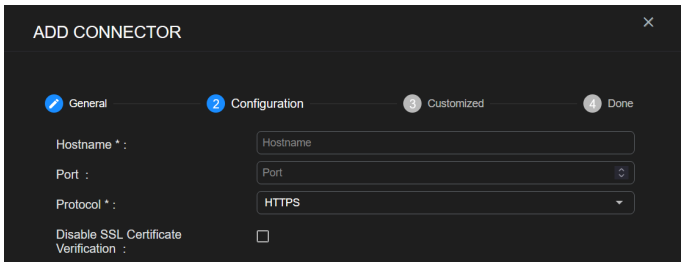

e. Choose an **Authentication Type**. The **Basic**, **OAuth2**, **Header**, **Stellar Cyber API Token**, and **None** authentication types are supported. The authentication fields differ depending on the selection of **Authentication Type**.

i. If you choose **None**, there are no more fields on the Configuration tab to configure, so you can click **Next** to go to the next step in this procedure.

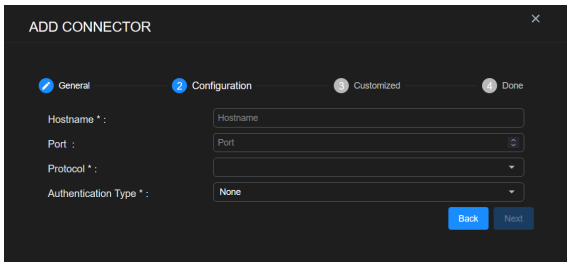


The asterisk (*) indicates a required field.

ii. If you choose **Basic**, in addition to **Hostname**, **Port**, and **Protocol**:

- Enter a **Username**.
- Enter a **Password**.


> The password should not include non-ASCII special characters.

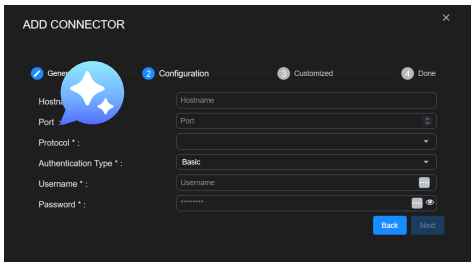

The asterisk (*) indicates a required field.

iii. If you choose **Header**, in addition to **Hostname**, **Port**, and **Protocol**:


- Enter a **Header Name**.
- Enter a **Header Value**.

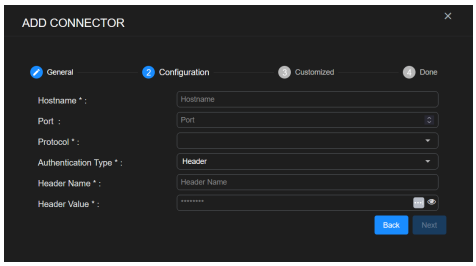

The asterisk (*) indicates a required field.

iv. If you choose **OAuth2**, in addition to **Hostname**, **Port**, and **Protocol**:


- Enter a **Token URL**.
- Enter a **Client ID**.
- Enter a **Client Secret**.
- (Optional) Enter **API Scopes**.

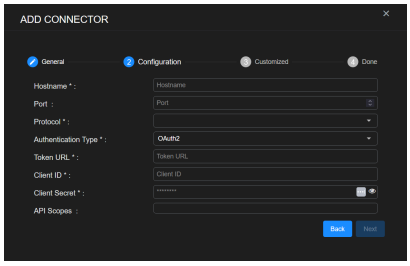

The asterisk (*) indicates a required field.


v. If you choose **Stellar Cyber API Token**, in addition to **Hostname**, **Port**, and **Protocol**: 6.6.0

- Enter a **Platform URL**. This is the public Application Programming Interface (API) endpoint.
- Enter a **API Token**. This is the user-scoped API key.

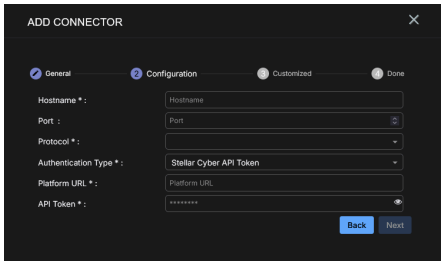

The asterisk (*) indicates a required field.

13. Click **Next**. When the [redacted] selected is **Custom**, the **Customized** tab appears.




The asterisk (*) indicates a required field.

a. (Optional) Enter **Custom Headers**. Enter **Name** and **Value**. Click the **+** button to add multiple pairs of **Name** and **Value**.

> The **Name** must be unique. For example, you cannot configure two Content-Type header names with different values.

b. Choose a **Method**. The **GET**, **POST**, **PUT**, **PATCH**, and **DELETE** methods are supported.

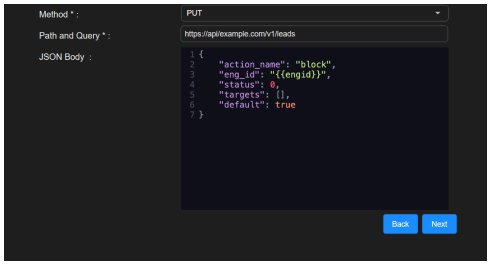

The asterisk (*) indicates a required field.

c. Enter a **Path and Query**. The notation for double curly braces is supported. Use the notation as a placeholder for fields that are later replaced with values.


d. (Optional) Enter the **JSON Body** in JSON body format. You can leave the **JSON Body** empty or you can enter string values or curly brace expressions.

The notation for double curly braces is supported. Use the notation as a placeholder for fields that are later replaced with values. For example, use double curly braces as follows, **"name": "{{name}}"**, to fetch the **name** field from a log. The name can be complex, such as nameA.nameB.nameC. Complex name searches in nested JSON objects are supported. For example, use **{{microsoft_defender.id}}** in the path to retrieve the nested **id** field from **{"microsoft_defender": {"id": "123456"}}**.

To send the raw Interflow record as the payload of the webhook request as a JSON object, use the following syntax in the **JSON Body**: **{"source": "{{interflow_raw}}"}**.


> The **{{interflow_raw}}** syntax is supported in ATH and external actions. See Using Actions.

The Interflow contains the _source, _index, and _id fields in the Elasticsearch record. For field definitions, refer to Metadata fields.

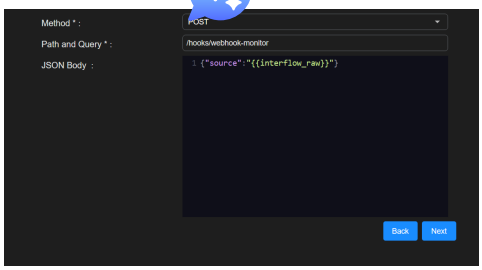

To send the Interflow record as the payload of the webhook request as a JSON string, use the following syntax in the **JSON Body**: **{"source": "{{interflow_str}}"}**.

The **{{interflow_str}}** syntax is supported in ATH and external actions. See Using Actions.

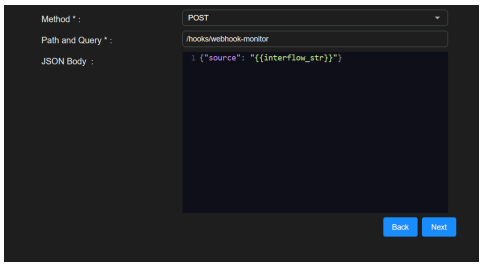


If the JSON format is incorrect, an error message, Invalid JSON Body, is displayed. In the following example, there is a semi-colon (;) instead of a comma (,) at the end of the "comment" line.



When the Universal Webhook Responder is triggered manually or through the ATH Playbook, you can edit the **Path and Query** and the **JSON Body** when you issue the action.

14. Click **Next**. The final confirmation tab, **Done**, appears.

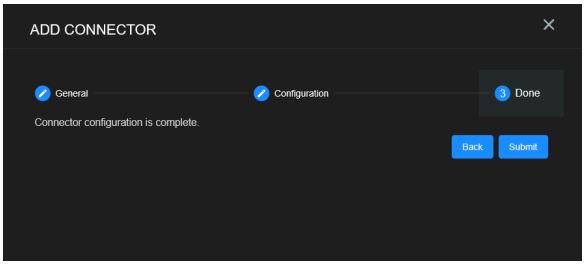


15. Click **Submit**.

Testing the Connector

When you define a Universal W ook Responder, we recommend that you run a test to validate the connectivity parameters you entered. The test validates authentication / connectivity.

For connectors running on a sensor, Stellar Cyber recommends that you allow 30-60 seconds for new or modified configuration details to be propagated to the sensor before performing a test.


1. Click **System | INTEGRATIONS | Connectors**. The **Connector Overview** appears.

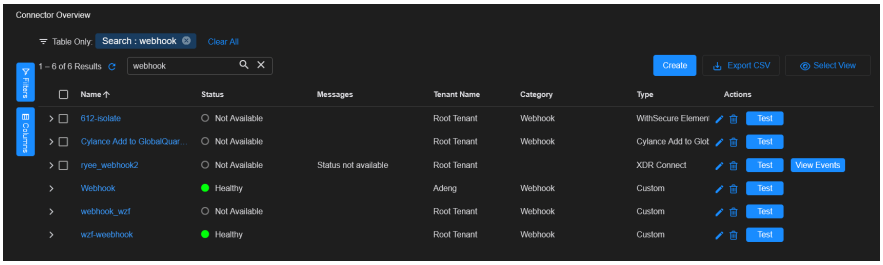

2. Locate the connector that you want to test.
3. Click **Test** at the right side of that row. The test runs immediately.

   Note that you may run only one test at a time.

4. When you click **Test**, the Webhook Test dialog box opens. It is pre-populated with the original configuration of the custom webhook responder. You can modify the **Path and Query** and the **JSON Body** for testing purposes. You can replace a field in double curly braces, {{ }}, with a real value.



   Click **Test** in the Webhook Test dialog.

Stellar Cyber conducts a basic connectivity test for the connector and reports a success or failure result. A successful test indicates that you entered all of the connector information correctly.

To aid troubleshooting your connector, the dialog remains open until you explicitly close it by using the **X** button. If the test fails, you can select the button from the same row to review and correct issues.

The connector status is updated every five (5) minutes. A successful test clears the connector status, but if issues persist, the status reverts to failed after a minute.

Repeat the test as needed.

If the test fails, the common HTTP status error codes are as follows:

HTTP Error Code	HTTP Standard Error Name	Explanation	Recommendation
400	Bad Request	This error occurs when there is an error in the connector configuration.	Did you configure the connector correctly?
401	Unauthorized	This error occurs when an authentication credential is invalid or when a user does not have sufficient privileges to access a specific API.	Did you enter your credentials correctly? Are your credentials expired? Are your credentials entitled or licensed for that specific resource?
403	Forbidden	This error occurs when the permission or scope is not correct in a valid credential.	Did you enter your credentials correctly? Do you have the required role or permissions for that credential?
404	Not Found	This error occurs when a URL path does not resolve to an entity.	Did you enter your API URL correctly?
429	Too Many Requests	This error occurs when the API server receives too much traffic or if a user's license or entitlement quota is exceeded.	The server or user license/quota will eventually recover. The connector will periodically retry the query. If this occurs unexpectedly or too often, work with your API provider to investigate the server limits, user licensing, or quotas.

For a full list of codes, refer to HTTP response status codes.

Using Actions

With the Universal Webhook Responder, you can:

- Manually trigger an action
- View a performed action
- Perform an ATH action


Manually Triggering an Action

To manually trigger an action with the Universal Webhook Responder, refer to External Actions: Webhook on the Threat Hunting page:


1. Select **Threat Hunting**.

   The **Interflow Search** tab appears.

2. Change the **Indices** for the record type, for example, **Syslog**.
3. Scroll down the page and click the icon for **More Info** in the **Actions** column.
4. Click the **Actions** tab. Webhook actions appear under **External Actions**.

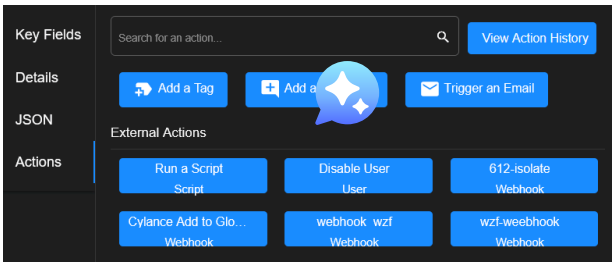

5. Click a configured Webhook action.




6. (Optional) Modify the **Path and Query** or **JSON Body**.
7. To perform the action, click **Submit**.

Viewing a Performed Action

To view a performed action, refer to [Viewing Webhook Actions.]

1. Click **Automation | Action History**.
2. Click **Webhook Actions**.

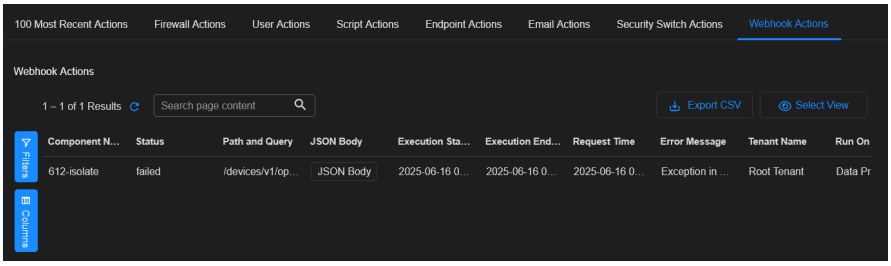


You can view the action status or error message in the table.

Performing an ATH Action

To perform an ATH action with the Universal Webhook Responder, refer to [Webhook Responder Action] on the Automated Threat Hunting page:

1. Select **Automation | Automation** and then select **Create**.
2. Configure the ATH playbook and scroll down to **Actions**.

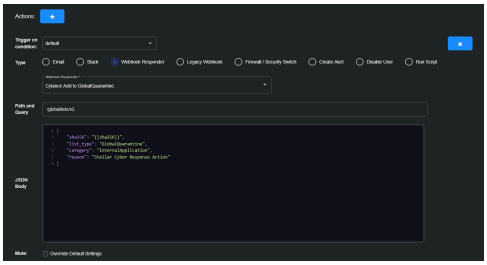

3. Select the ➕ button to add an action.

   Another action appears below the existing action.

4. Select the **Trigger on condition**.
5. Select **Webhook Responder** for the **Type**.
6. Choose a previously configured Custom Webhook, Acronis, Cylance, ESET, Netskope, Proofpoint on Demand, Trend Vision One, WatchGuard Firebox, or WithSecure Elements Responder from the drop-down menu.

   The **Path and Query** and **JSON Body** fields populate.
7. (Optional) Modify the **Path and Query** or **JSON Body**.

   When you select a preconfigured Custom Webhook Responder, the system prepopulates the JSON Body field with a structure designed to match the expectations of the receiver. You can modify this body to include additional fields if needed.

   When you do modify it, use direct field references with Mustache syntax. Do not use iteration tags such as `{{#ctx.payload.filtered}}` and `{{/ctx.payload.filtered}}`. Webhook Responders process one result at a time and do not require iteration. The system automatically flattens field names, so you do not include `_source.` in any field reference.

   The Webhook Responder differs from other playbook actions that operate on a list of results. This action triggers once per result, typically one alert at a time, such as when used from the Alerts page. Because Stellar Cyber already loops through each record automatically, you do not iterate over `ctx.payload.filtered`. Instead, reference fields from the current record directly using Mustache syntax, like `{{dstip}}` or `{{stellar_uuid}}`.

   You can reference event fields such as `{{dstip}}`, `{{dstip_host}}`, `{{appid_name}}`, and `{{metadata.request.server_name}}`, and enriched fields such as `{{_id}}`, `{{_index}}`, and `{{stellar_uuid}}`.

   The system deduplicates webhook requests. If multiple results render the same JSON body, the responder sends only the first and skips the rest.

   Example: Basic Custom Format

   Use this format when defining a simple JSON payload:

```
{
  "DST-IP": "{{dstip}}",
  "Host": "{{dstip_host}}",
  "Reputation": "{{dstip_reputation}}",
  "Link": "https://your-
tenant.stellarcyber.cloud/alerts/alert/{{_index}}/_doc/{{_id}}",
  "UniqueID": "{{stellar_uuid}}"
}
```

   Example: Adding Fields to a Prepopulated Ticket Structure

   If the prepopulated JSON defines a helpdesk ticket structure, you can insert additional event data into the comment body:

```
{
  "ticket": {
    "comment": {
      "body": "Alert link: https://poc-
eu.stellarcyber.cloud/alerts/alert/{{_index}}/_doc/{{_id}}. Unique ID:
{{stellar_uuid}}. DST-IP: {{dstip}}. Host: {{dstip_host}}. Reputation:
{{dstip_reputation}}."
    },
```

```
    "priority": "urgent",
    "subject": "Criticality: Critical {{xdr_event.display_name}}"
  }
}
```

Use this format when enriching a service ticket with alert details while preserving the expected structure of the receiving system.

8. Select the **Override Default Settings** option to override the playbook mute settings and mute just this action.
9. Select **Submit**.

© 2026 Stellar Cyber . All rights reserved.