Stellar Cyber 6.6.0s is now live! Discover all the updates in the release notes!

User Behavior Analytics

Learn more at Stellar Cyber Academy.

The following link takes you to a course on the Stellar Cyber Academy technical training portal where you can learn more about this topic by watching the suggested lessons.

J02 Introduction to Features in the User Interface (02h:24m)

User Behavior and Asset Analytics (45m:00s)

Explore the User Behavior and Asset Analytics tools in the Stellar Cyber Platform to add context to your security investigations. Learn to assess user activity and analyze assets for behavioral anomalies using machine learning-driven insights from the data lake. Follow a demonstration on monitoring user activity and asset interactions, and discover how to investigate unusual behavior patterns using toolbar filters and the search tool. Leverage Interflow data and threat intelligence to support threat detection and enhance your security operations workflow.

The first time you access a link on the portal during a session, you must log in to access content.

The **Assets I User Behavior Analytics** page displays security-related information on individual users via its sensors and connectors. Stellar Cyber user behavior analytics (UBA) is based on machine learning to analyze traffic and produce security status and event information. Details for how data is selected in the individual tabs and charts are described below.

The data displayed by the components described below is subject to the Filter settings at the top of the screen.

Tabs

Select one of the tabs to see the following sections:

- **Overview** – A summary of user analytics.

- **Users** – Data on specific users. This also provides access to **User Details** for individual users.
- **Real ID** – A display of users with their various identities.

The **Overview** page lets you perform actions on the dashboard.

Dashboard Actions

You can perform the following actions on this dashboard:


- Edit
- Clone
- Export

See the Dashboard Actions page for details on each action.

Overview

The overview dashboard provides a visual perspective of top users for aspects that may be of interest for further analysis.

The data in these charts differ from the **Users** table (described below) in that these are specific queries, while the user list is all observed users in the selected time period.

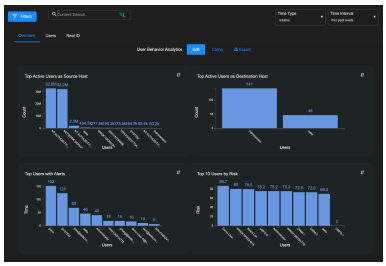


The charts are based on the following queries, subject to the Filter settings at the top of the screen.

- The **Top Active Users by Source Host** chart queries the **Traffic** and **Windows** indices for `srcip_username`.
- The **Top Active Users by Destination Host** chart queries the **Traffic** and **Windows** indices for `dstip_username`.
- The **Top Users with Alert** chart queries the **Alert** index for `srcip_username` or `dstip_username`.
- The **Top 10 Users by Risk** chart queries the Stellar Cyber mongodb for the top 10 users that have largest risk score values.

Users

The **Users** dashboard lists the users that have been found through IdP connectors, such as Active Directory, Microsoft Entra ID (formerly Azure AD), Okta, and Duo Security, as well as via events seen by a Windows Server Sensor. In addition, users are also discovered through GSuite and Office365.

The data in this table differs from the **Overview** (described above) in that these are all observed users with a last s timestamp occurring within the filtered time period.

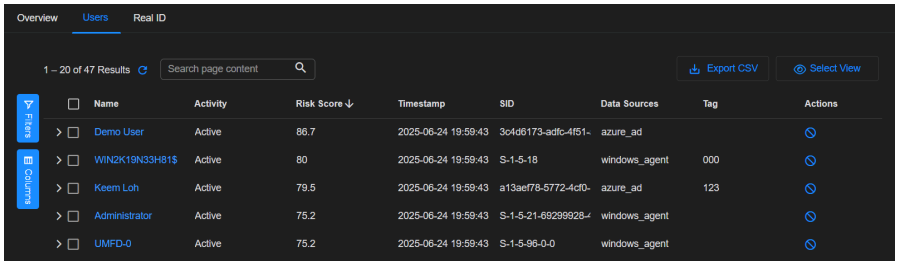

The columns are:

- **Name** – The name of the user as seen on the host. You can select the name to view the User Details page described in the following section.
- **Activity** – The activity status of the user (**Active**, **Inactive**, **Idle**).
- **Risk Score** – The risk associated with the user.

  The calculated user risk score is an overall assessment of how likely the user is going to be involved in a security breach. The user risk score:


  - is calculated every 10 minutes
  - includes open security events from the last 24 hours (if you close an event, it is removed from the next calculation)
  - considers the privilege level of users
  - weights the presence of many different alert types more highly than large numbers of the same alert
- **Timestamp** – The time of the last event seen .
- **Last Profile Changed** – The time the user record was last updated.
- **Logon Time** – If available, the time the user last logged in.
- **SID** – The system ID detected for the user.
- **Data Sources** – The different data sources from which information about this user was obtained (for example, **windows_agent**, **active_directory**, and so on).

  User data is found through Identity Provider connectors, such as Active Directory, Microsoft Entra ID (formerly Azure AD), Okta, and Duo Security, as well as via events seen by a Windows Server Sensor. In addition, users are also discovered through GSuite and Office365.
- **Last Logoff Time** – If available, the time the user last logged off the system.
- **Logon Count** – The number of times a user has logged in.
- **Expires** – The date and time that the user's authorization expires.
- **Last Bad Password Time** – If it occurred, the last time that a login with this user name was attempted with a bad password.
- **Bad Password Count** – The number of times this user name was attempted with a bad password.

- **Tenant Name** – The name of the tenant associated with this user.
- **Sensor** – The sensor that detected the activity.
- **Action** – A button labeled "Details" that, when selected, brings up the User Detail display.

Disable a User Action

1. Select the icon to the right of a user in the table .

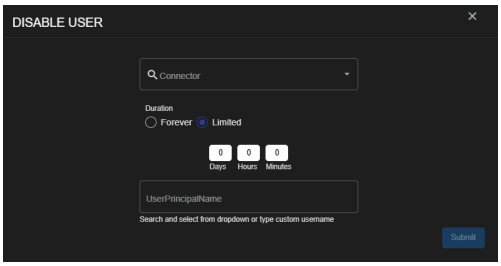

2. Choose a Connector from the drop-down list.

   You can select either **Active Directory** or **Microsoft Entra ID** connectors.

3. Set a **Duration** of either **Forever** or **Limited**.

   If you choose **Limited**, then enter **Days**, **Hours**, and **Minutes**.

4. Choose a user name from the UserPrincipalName drop-down list or type the name of the user to disable him or her.

5. Select **Submit**.

   The request to disable the user is sent.

Bulk Actions

You can perform bulk actions on a group of users. Select the check boxes next to the users you want to modify. You can:

- Add a tag
- Add a location
- Change privilege level
- Add a description

Adding a Tag

To tag a group of users:

1. Select the check boxes next to the users to which you want to add a tag.
2. Choose **tag** in the bulk actions drop-down list above the table.
3. Choose the tag to apply.

   You can also enter a new tag. The tag replaces an existing tag.

4. Select **Apply**.

   The tag is immediately applied.

To remove a tag, simply apply a blank tag.

Adding a Location

To add a location to a group of users:

1. Select the check boxes next to the users to which you want to add a location.
2. Choose **location** in the bulk actions dropdown.
3. Choose the location to apply.

   You can also enter a new location. The location replaces an existing location.
4. Select **Apply**.

   The location is immediately applied.

To remove a location, simply apply a blank location.

Changing Privilege Level

The default privilege level is **Medium**. A higher privilege level increases the risk score. For example, if two users have the same events, the user with a higher privilege level will have a higher risk score. To change the privilege level of a group of users:

1. Select the check boxes next to the users whose privilege level you want to change.
2. Choose **privilege level** in the bulk actions dropdown.
3. Choose the privilege level to apply.
4. Select **Apply**.

   The privilege level is immediately applied.

Adding a Description

To add a description to a group of users:


1. Select the check boxes next to the users to which you want to add a description.
2. Choose **description** in the bulk actions dropdown.
3. Enter the description.
4. Select **Apply**.

   The description is immediately applied.

To remove the description, simply apply a blank description.

User Details

Select a user's name on the **Assets | User Behavior Analytics** page to see the **User Details** screen.



You can see the details Stellar Cyber has collected about the user, including what's been ingested from connected sources.

You can:

- Add as Including Filter
- Add as Excluding Filter
- Copy to Clipboard
- See the user's activities

Adding as an Including Filter

To see only those events with this user:

1. Click ••• next to the **Name** field.

   The **Actions** list appears.

2. Click .

   The filter is immediately applied and the events table is updated.

Adding as an Excluding Filter

To see only those events without this user:

1. Click ••• next to the **Name** field.

   The **Actions** list appears.

2. Click .

   The filter is immediately applied and the events table is updated.

Copying to Clipboard

To copy the user's name to your clipboard:

1. Click ••• next to the **Name** field.

   The **Actions** list appears.

2. Click **Copy to Clipboard**.


Seeing the User's Activities

To see the user's activities, scroll to the bottom of the page. The section at the bottom provides additional details on the user's activities, summarized in both tiles and a multi-tabbed table. The tiles display the number of events in the corresponding category. You can select the tabs or tiles to see a table of the events.

- Alerts
- Related Assets
- Commands
- Authentications
- Login Failures
- Files

Real ID

The Real ID dashboard shows a table of users with all of their various identities. The identities are imported from Active Directory and correlated with a single SID. That SID is used to link all user identities.

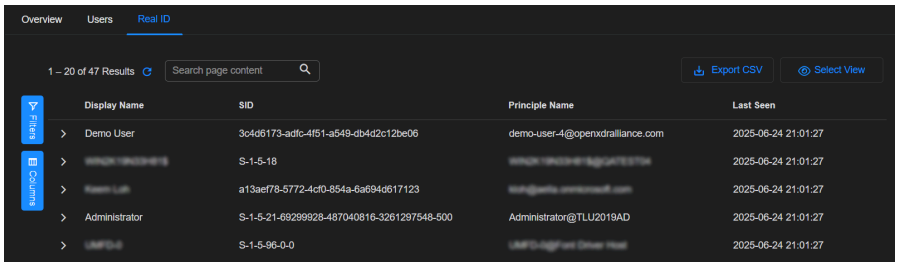

© 2026 Stellar Cyber . All rights reserved.