Stellar Cyber 6.6.0s is now live! Discover all the updates in the release notes!

Using Chart Builder

This topic describes how to access a table of all previously created charts and tables used in Dashboards or Reports. It also describes how to edit or delete existing charts using the Chart Builder, as well as how to create new charts for later use.

Access the Chart Builder as follows:

- From the System | Saved Objects | Charts menu, create or edit from the displayed list of existing charts.
- From within Dashboards, you can create and modify charts in that dashboard.


Query Behavior Notes

The following points clarify how queries behave when used in charts created with the Chart Builder, including important scoping and filtering rules that may affect your results.

- **Query scope**: The scope of a query determines which tenants can use it. Whether it's possible to create a query for **All Tenants** depends on the scope of the object being queried, such as charts, correlations, and Automated Threat-Hunting (ATH) rules. In short, the scope of a queried object cannot be more restrictive than the scope of the query itself. For example, if you create an ATH rule for **All Tenants**, then the query for this ATH rule can either be **All Tenants** or just a single tenant, such as "Tenant A" for example. However, if you create an ATH rule for Tenant A, then the query cannot be for **All Tenants** because the other tenants won't have this ATH rule and won't be able to query it. In this case, the query can only be for Tenant A.
- **Filter behavior for IP address fields**: Beginning in version 6.0.0, the Chart Builder restricts filter operators for IP address fields (such as `srcip` and `dstip`) to only those that are semantically valid. Specifically, only the operators `is`, `field exists`, and `field does not exist` are supported. Operators like `starts with`, `ends with`, and `contains` are no longer available for these fields, as they are incompatible with IP data types. Dashboards using unsupported operators must be updated to ensure correct filtering behavior.

Working with the Charts List


When you launch charts from the **System | Saved Objects | Charts** menu, a list of existing charts is displayed. From here, you can manage charts, and create new ones, either from scratch or by cloning an existing chart. These are displayed in a table that can be sorted, searched and exported in the same way as other tables in Stellar Cyber.

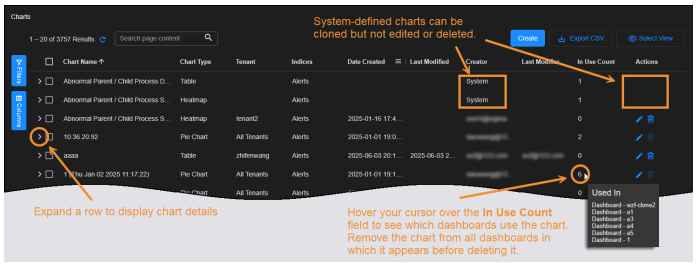

Use the charts list to manage the charts available for display in dashboards throughout the Stellar Cyber product. Note the following:

- Dashboards created by **System** cannot be modified or deleted. Instead, clone the chart and modify the copy.
- The **In Use** field lets you see which dashboards are affected by changes you make to the chart.
- Before you are permitted to delete a chart, you must remove it from any associated dashboards. Hover your mouse over the **In Use** field to identify dashboards using that chart. Navigate to **Dashboards | CREATION | Dashboards** to open the Dashboards Hub, where you can locate and open the affected dashboards to modify them.
- When cloning a chart, make sure that the source chart does not include any special characters in its name. Chart Builder prevents you from creating new charts with disallowed special characters but does not prevent cloning of existing charts with disallowed special characters. Letters, underscores, spaces, dashes, numbers and periods are permitted.


The charts list, like many tables in Stellar Cyber, supports export, sorting, edit, and delete operations. You can filter which charts to display based on chart attributes. Expand a row, select an attribute, and then select a filter based on whether you want to view charts that include the attribute (**Filter For**) or if you want to view charts that exclude it (**Filter Out**).

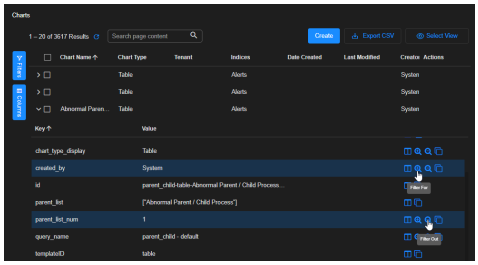

Creating and Editing Charts

When you select create or edit from the **System | Saved Objects | Charts** page or from **Dashboards | Custom |** <custom_dashboard_name>, the chart builder tool opens.

Launched from Charts page

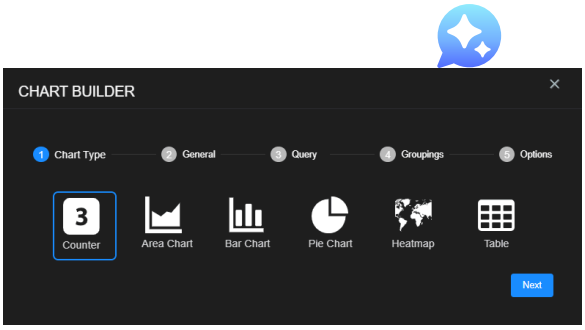

Launched from a dashboard



From either launch point you can use the following features to create or modify a chart:


- Counter – Use this to add a dynamic count.
- Area chart – Use this to visualize change over time.
- Bar chart – Use this to compare several categories.
- Pie chart – Use this to see the distribution of items compared to the total.
- Heatmap – Use this to see a geographic distribution.
- Table – Use this to add a simple table of data.

About the "Filter by event status" Option

Regardless of the type of chart you are creating, the Chart Builder's last step lets you configure the **Filter by event status** option. This feature specifies whether data in this chart is subject to the global Status filter available in the main toolbar:

- **Enabled** (default) – Chart data can be filtered using the global Status filter in the main toolbar.
- **Disabled** – Chart data is displayed regardless of the current setting of the global Status filter in the main toolbar.

The figure below summarizes how this option works:

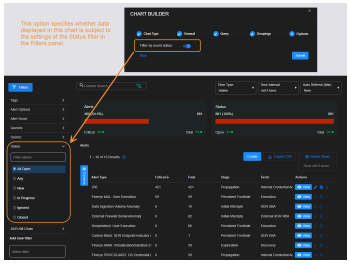


Adding a Count


To add a count:

1. Select **New counter**.

   The **Chart Builder** dialog box appears with **Counter** selected.

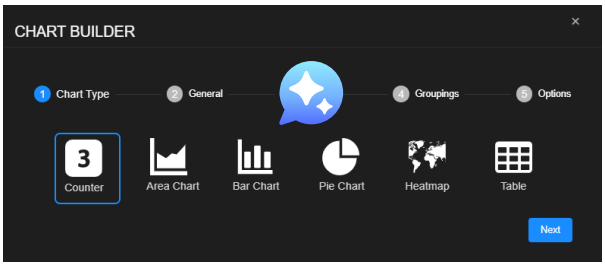

2. Select **Next** to view settings for the chart name, tenant whose data the chart displays, and the indices from which the chart retrieves data.

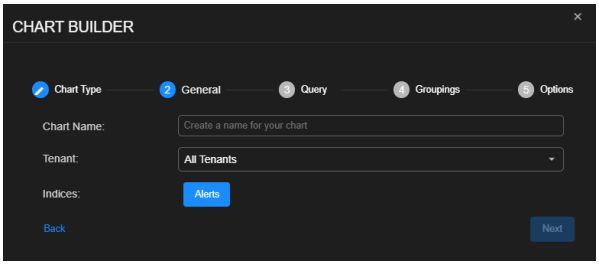

3. Enter a **Chart Name**, choose a **Tenant**, choose one or more **Indices**, and then select **Next**.


   The **Chart Name** field supports alphanumeric characters, spaces, underscores, dashes, periods, parentheses, colons, and ampersands. You can also use 2-byte characters such as Japanese, Chinese, or Korean. Some languages, such as Hindi or Thai, are partially supported. If you encounter issues, use only the supported characters listed above.

4. Choose a saved **Query** or create a new query and then select **Next**.


   The query is optional.

   > To remove a selected query, set the query value to **None**. Deleting it completely removes it.

5. Choose the **Metric** you want the chart to use—**Average**, **Count**, **Max**, **Min**, or **Sum**—and then select **Next**.

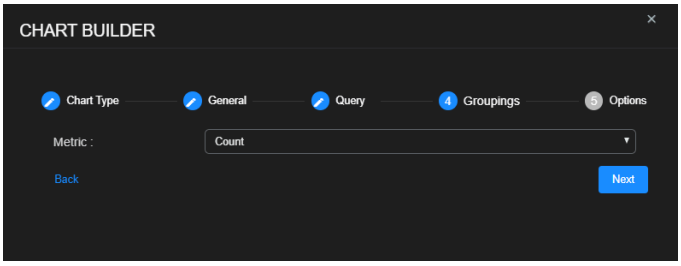

6. Use the **Filter by event status** option to specify whether data in the chart is subject to the global Status filter available in the main toolbar:
   - **Enabled** (default) – Chart data is filtered using the global Status filter in the main toolbar.
   - **Disabled** – Chart data is displayed regardless of the current setting of the global Status filter in the main toolbar.
7. Select **Submit**.

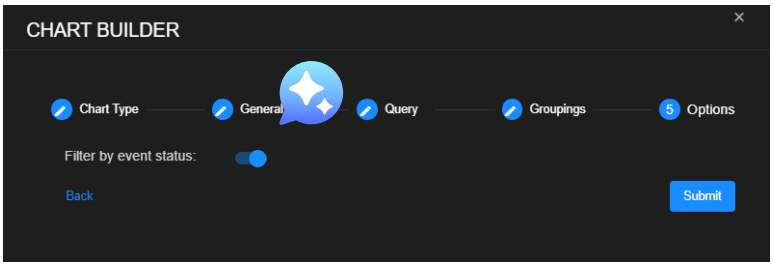


Adding an Area Chart


To add an area chart:

1. Select **New area chart**.

   The **Chart Builder** dialog box appears with **Area Chart** selected.

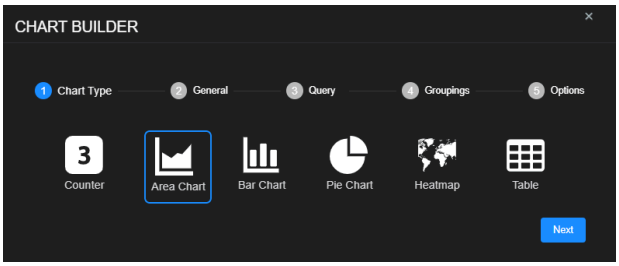

2. Select **Next** to view settings for the chart name, tenant whose data the chart displays, and the indices from which the chart retrieves data.

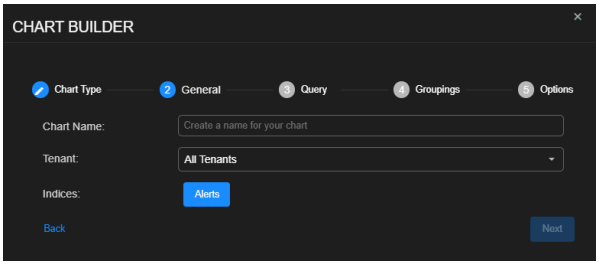

3. Enter a **Chart Name**, choose a **Tenant**, choose one or more **Indices**, and then select **Next**.


   The **Chart Name** field supports alphanumeric characters, spaces, underscores, dashes, periods, parentheses, colons, and ampersands. You can also use 2-byte characters such as Japanese, Chinese, or Korean. Some languages, such as Hindi or Thai, are partially supported. If you encounter issues, use only the supported characters listed above.

4. Choose a saved **Query** or create a new query and then select **Next**.


   The query is optional.

   ! To remove a selected query, set the query value to **None**. Deleting it completely removes it.

5. Choose the **Field** by which to group data, an **Interval Time**, an **Interval Unit** (from **Millisecond** to **Year**), and the **Metric** you want the chart to use—**Average**, **Count**, **Max**, **Min**, **Sum**, or **Unique Count**.

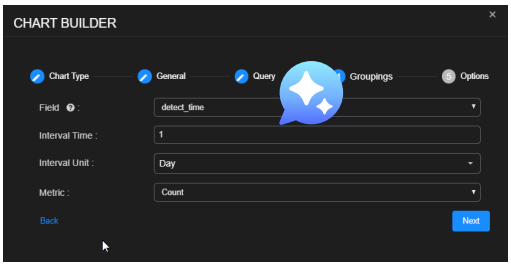

6. If you choose any **Metric** other than **Count**, also choose a **Metric Field**.
7. Select **Next** and then enter a **Y-Axis Label** for the area chart; for example, `Events`.
8. Use the **Filter by event status** option to specify whether data in the chart is subject to the [global Status filter available in the main toolbar]:
    - **Enabled** (default) – Chart data is filtered using the global Status filter in the main toolbar.
    - **Disabled** – Chart data is displayed regardless of the current setting of the global Status filter in the main toolbar.
9. Select **Submit**.

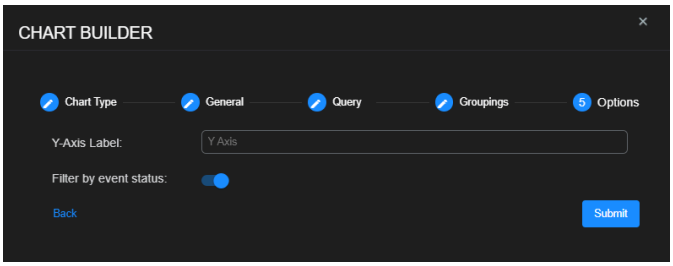


Adding a Bar Chart


To add a bar chart:

1. Select **New bar chart**.

   The **Chart Builder** dialog box appears with **Bar Chart** selected.

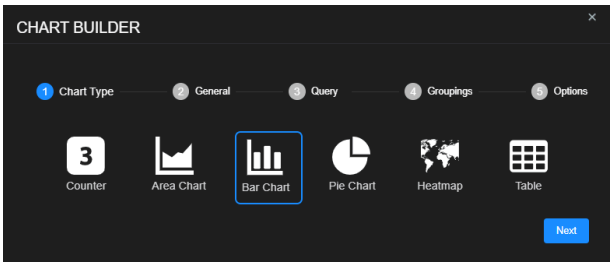

2. Select **Next** to view settings for the chart name, tenant whose data the chart displays, and the indices from which the chart retrieves data.

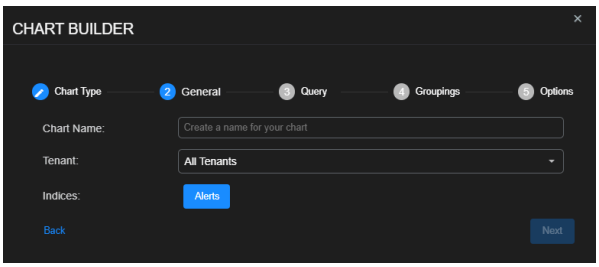

3. Enter a **Chart Name**, choose a **Tenant**, choose one or more **Indices**, and then select **Next**.

The **Chart Name** field supports alphanumeric characters, spaces, underscores, dashes, periods, parentheses, colons, and ampersands. You can also use 2-byte characters such as Japanese, Chinese, or Korean. Some languages, such as Hindi or Thai, are partially supported. If you encounter issues, use only the supported characters listed above.

4. Choose a saved **Query** or create a new query and then select **Next**.

   The query is optional.


   > To remove a selected query, set the query value to **None**. Deleting it completely removes it.

5. Define the parameters of the data that you want the bar chart to display:


   Aggregation: Choose the form of data aggregation that you want the chart to use.

   - Choose **Term** to group data by the text in the fields. This is useful when your data is text, such as tenant names.
   - Choose **Range** to group data by ranges. This is useful when your data is numeric, such as severity.
   - Choose **Filter** to define one or more filters for the data groups.

   Then, configure the necessary settings, which differ based on your choice of aggregation.

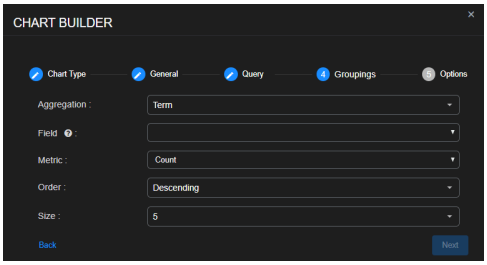

6. Select **Next** and then define the orientation and x- and y-axis labels of the bar chart.
   - By default, the bars in the chart are displayed vertically. Choose **Horizontal** to display the bars horizontally.
   - Enter optional labels for the X and Y axes.
7. Use the **Filter by event status** option to specify whether data in the chart is subject to the global Status filter available in the main toolbar:
   - **Enabled** (default) – Chart data is filtered using the global Status filter in the main toolbar.
   - **Disabled** – Chart data is displayed regardless of the current setting of the global Status filter in the main toolbar.
8. Select **Submit**.

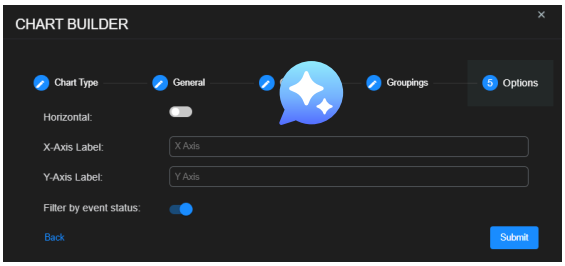


Adding a Pie Chart


To add a pie chart:

1. Select **New pie chart**.

   The **Chart Builder** dialog box appears with **Pie Chart** selected.

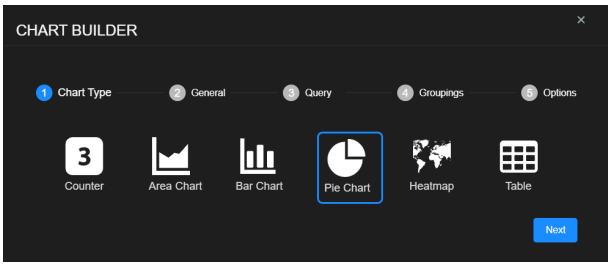

2. Select **Next** to view settings for the chart name, tenant whose data the chart displays, and the indices from which the chart retrieves data.

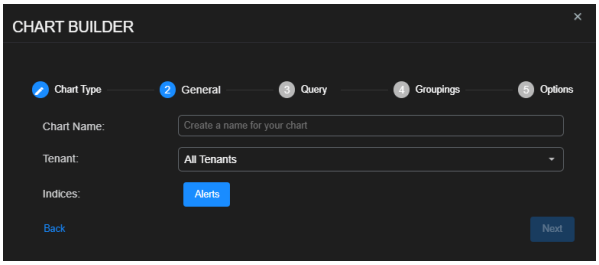

3. Enter a **Chart Name**, choose a **Tenant**, choose one or more **Indices**, and then select **Next**.

   The **Chart Name** field supports alphanumeric characters, spaces, underscores, dashes, periods, parentheses, colons, and ampersands. You can also use 2-byte characters such as Japanese, Chinese, or Korean. Some languages, such as Hindi or Thai, are partially supported. If you encounter issues, use only the supported characters listed above.

4. Choose a saved **Query** or create a new query and then select **Next**.

   The query is optional.

   ! To remove a selected query, set the query value to **None**. Deleting it completely removes it.


5. Define the parameters of the data that you want the pie chart to display and then select **Next**:

   Aggregation: Choose the form of data aggregation that you want the chart to use.


   - Choose **Term** to group data by the text in the fields. This is useful when your data is text, such as tenant names.

- Choose **Range** to group data by ranges. This is useful when your data is numeric, such as severity.
- Choose **Filter** to define one or more filters for the data groups.

Then, configure the necessary settings, which differ based on your choice of aggregation.

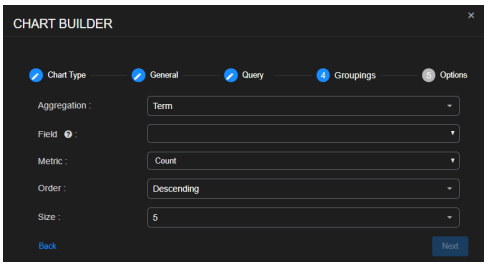

6. Use the **Filter by event status** option to specify whether data in the chart is subject to the global Status filter available in the main toolbar:
    - **Enabled** (default) – Chart data is filtered using the global Status filter in the main toolbar.
    - **Disabled** – Chart data is displayed regardless of the current setting of the global Status filter in the main toolbar.
7. Select **Submit**.

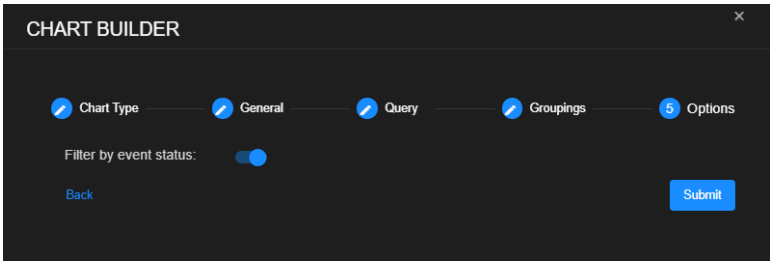


Adding a Heatmap


To add a heatmap:

1. Select **New heatmap**.

    The **Chart Builder** dialog box appears with **Heatmap** selected.

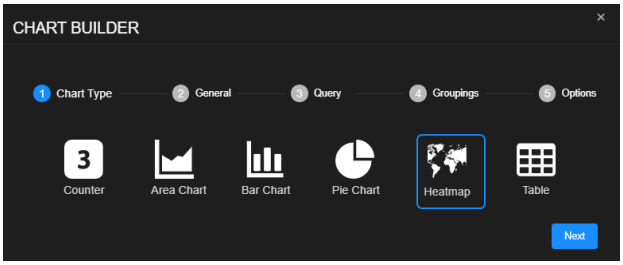

2. Select **Next** to view settings for the chart name, tenant whose data the chart displays, and the indices from which the chart retrieves data.

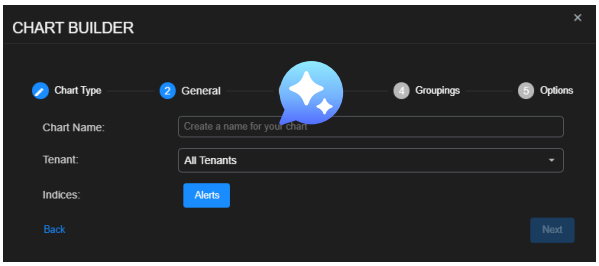

3. Enter a **Chart Name**, choose a **Tenant**, choose one or more **Indices**, and then select **Next**.

   The **Chart Name** field supports alphanumeric characters, spaces, underscores, dashes, periods, parentheses, colons, and ampersands. You can also use 2-byte characters such as Japanese, Chinese, or Korean. Some languages, such as Hindi or Thai, are partially supported. If you encounter issues, use only the supported characters listed above.

4. Choose a saved **Query** or create a new query and then select **Next**.

   The query is optional.

   > To remove a selected query, set the query value to **None**. Deleting it completely removes it.

5. Choose the **Field** type by which you want to group the data in the pie chart:


   - **dstip_geo_point** – Visualizes data using geographic locations derived from destination IP addresses that match the query in the previous steps and plots points for them on a heatmap. This helps identify where outbound traffic is targeting.
   - **hostip_geo_point** – Visualizes data using geographic locations derived from internal host IP addresses and plots points for them on a heatmap. This can help map internal systems, though private IPs may not always yield meaningful geo-locations.
   - **location_geo_point** – Visualizes data using geographic locations derived from enriched or user-defined location fields and plots points for them on a heatmap. This offers flexibility when using connector-enriched or metadata-based geographic data.
   - **remote_ip_geo_point** – Visualizes data using geographic locations derived from remote system or user IP addresses and plots points for them on a heatmap. This is useful for visualizing connections from remote users, such as VPNs or cloud access.
   - **srcip_geo_point** – Visualizes data using geographic locations derived from source IP addresses that match the query in the previous steps and plots points for them on a heatmap. This helps track where connections originate.

6. Choose the type of **Metric** to use for the **Field**. You can choose from **Average**, **Count**, **Max**, **Min**, or **Sum**.

7. If you choose any **Metric** other than **Count**, also choose a **Metric Field**.

8. Select **Next** and then name and set your thresholds.

   The thresholds specify at what value the heatmap changes the color codes of geopoints shown in the display. This way, geopoints with a higher count are displayed, for example, in red.

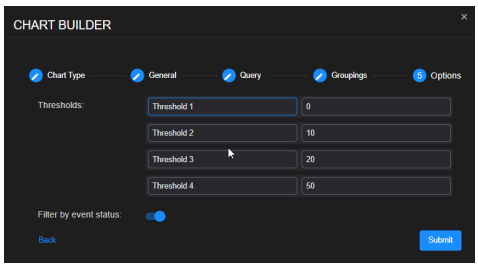

9. Use the **Filter by event status** option to specify whether data in the chart is subject to the global Status filter available in the main toolbar:

   - **Enabled** (default) – Chart data is filtered using the global Status filter in the main toolbar.
   - **Disabled** – Chart data is displayed regardless of the current setting of the global Status filter in the main toolbar.

10. Select **Submit**.


For more on heatmaps and converting them from previous releases, refer to the related Dashboard component topic.

Adding a Table

To add a table:

1. Select **New table**.


   The **Chart Builder** dialog box appears with **Table** selected.

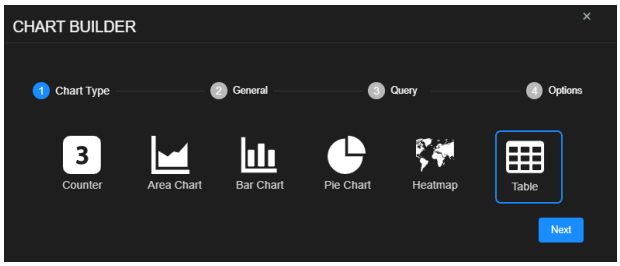

   This section of the chart builder is titled **Chart Type**.

2. Select **Next** to view settings for the chart name, tenant whose data the chart displays, and the indices from which the chart retrieves data.

   This section of the chart builder is titled **General**.

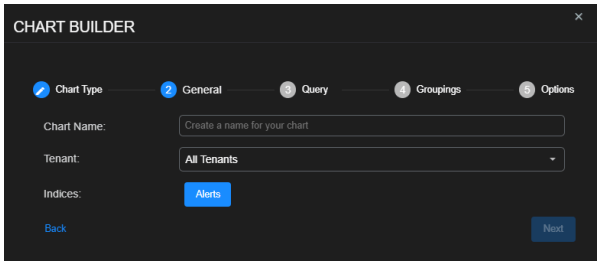

3. Enter a **Chart Name**, choose a **Tenant**, and then choose one or more **Indices**.

The **Chart Name** field supports alphanumeric characters, spaces, underscores, dashes, periods, parentheses, colons, and ampersands. You can also use 2-byte characters such as Japanese, Chinese, or Korean. Some languages, such as Hindi or Thai, are partially supported. If you encounter issues, use only the supported characters listed above.

4. Choose the **Table Type**—either **Per record** or **Groupings**—and then select **Next**.

   Per record: This table type displays individual Interflow records exactly as they appear in the dataset, without any aggregation. Use this option when you want detailed, event-level visibility, such as examining specific alerts, logs, or user actions in raw form.

   Groupings: This table type summarizes data by aggregating records based on selected fields. It is best suited for identifying patterns or trends, such as total event counts per IP address or average session duration per user, enabling higher-level analysis.

   The Table Type determines how many sections are in the chart builder.

   - When the table displays data per record, there are four sections: **Chart Type**, **General**, **Query**, and **Options**.
   - When the table displays data in groupings, there is an additional section for a total of five: **Chart Type**, **General**, **Query**, **Groupings**, and **Options**.

   After you select **Next**, the chart builder advances to the **Query** section.

5. Choose a saved **Query** or create a new query and then select **Next**.

   The query is optional.

   > ❗ To remove a selected query, set the query value to **None**. Deleting it completely removes it.

   The next section of the chart builder depends on the table type you selected in the **General** section. If the table type is **Per record**, the next section is **Options** (skip the next step). If the table type is **Groupings**, the next section is **Groupings** and then **Options** after that.

6. If you chose **Groupings** as the table type, configure a grouping for Column 1 in the **Groupings** tab.

   Each column in a Groupings table defines how to group and summarize data from Interflow records. You can add multiple columns, and the groupings will be processed sequentially from left to right.

   Below is a detailed explanation of each **Aggregation** type and the dynamic options that appear for each.

   - **Term**: Use this to group records based on exact values of a field. A possible use case might be to show the top ten destination IP addresses by event count.
     - **Field**: Choose a text-based field such as `srcip`, `event.name`, or `tenant_name`.

        - **Metric**: Select a summary operation: **Average**, **Count** (the default), **Max**, **Min**, or **Sum**.
        - **Metric Field**: If you choose any **Metric** other than **Count**, also choose a **Metric Field**.
        - **Order**: Choose **Ascending** or **Descending** to control the sort order of group results.
        - **Size**: Specify how many top groups to show.
    - **Range**: Use this to group numeric values into named ranges. For example, you might categorize severity into low (0-30), medium (31-70), and high (71-100).
        - **Field**: Choose a numeric field such as `severity`, `fidelity`, or `totalbytes`.
        - **+ Range**: Select to add one or more custom ranges.
        - **Custom name for a range** (optional): Enter a label for the range; for example, `Low`, `Medium`, and `High`.
        - **≥**: Enter an inclusive lower bound to start the range.
        - **<**: Enter an upper bound to end the range.
    - **Filter**: Use this to group data into logical buckets defined by filters. Use either **+ Filter** or **+ Query String Filter**. For detailed information about configuring filters, see **Queries and Filters**.
    - **Metric**: Use this to compute a single value over all matching records. It does not group records but simply returns a summary value. You might use this, for example, to display the average fidelity across all Interflow records.
        - **Metric**: Chose **Average**, **Count**, **Max**, **Min**, or **Sum**.
        - **Field**: If the **Metric** is not **Count**, choose a numeric field to summarize the data; for example, `totalbytes`, `duration`, or `fidelity`.
    - **Date histogram**: Use this to group records into fixed time intervals. For example, you might group events by day to show trends over time.
        - **Field**: Choose a time-based field, such as `event.timestamp`.
        - **Interval Time**: Enter a numeric value.
        - **Interval Unit**: Select the time unit: **Millisecond**, **Second**, **Minute**, **Hour**, **Day**, **Week**, **Month**, or **Year**.

    You can add another column to the table with another grouping of data by selecting **+ Add Grouping** and repeating the previous instructions to configure Column 2.

    When you select **Next**, the next section is **Options**.

7. If you chose **Per record** as the table type in the **General** section of the chart builder, configure the following in the **Options** section:
    - Select **+ Column** to add one or more columns to the table.

- Choose the field name for the data to display in each column and enter a title for each column.
- Enter the field to **Sort By** and choose the **Rows per Page** to define how many rows to display for each page.

If you chose **Groupings** as the table type in the **General** section of the chart builder, choose how many **Rows per Page** to display.

8. Use the **Filter by event status** option to specify whether data in the chart is subject to the global Status filter available in the main toolbar:
    - **Enabled** (default) – Chart data is filtered using the global Status filter in the main toolbar.
    - **Disabled** – Chart data is displayed regardless of the current setting of the global Status filter in the main toolbar.
9. Select **Submit**.

© 2026 Stellar Cyber . All rights reserved.